




Customer :

Peerless Pump Company

Project :		Contact :	
Quote No. : US-2222-13	Page No. : 1	Phone :	Fax :
		Date : Wednesday, April 09, 2003	

Pump Model: Peerless - 10A20B-Bottom Suction	Nom. Speed: 1175 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: A - Horizontal Split Case Single Stage	Impeller Dia.: 20/15 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 2881776b	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.: 35-10A20-1	Fluid: Water	Peak Power:	159.58 hp
Item : 1		Closed Valve Pressure	207.145 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

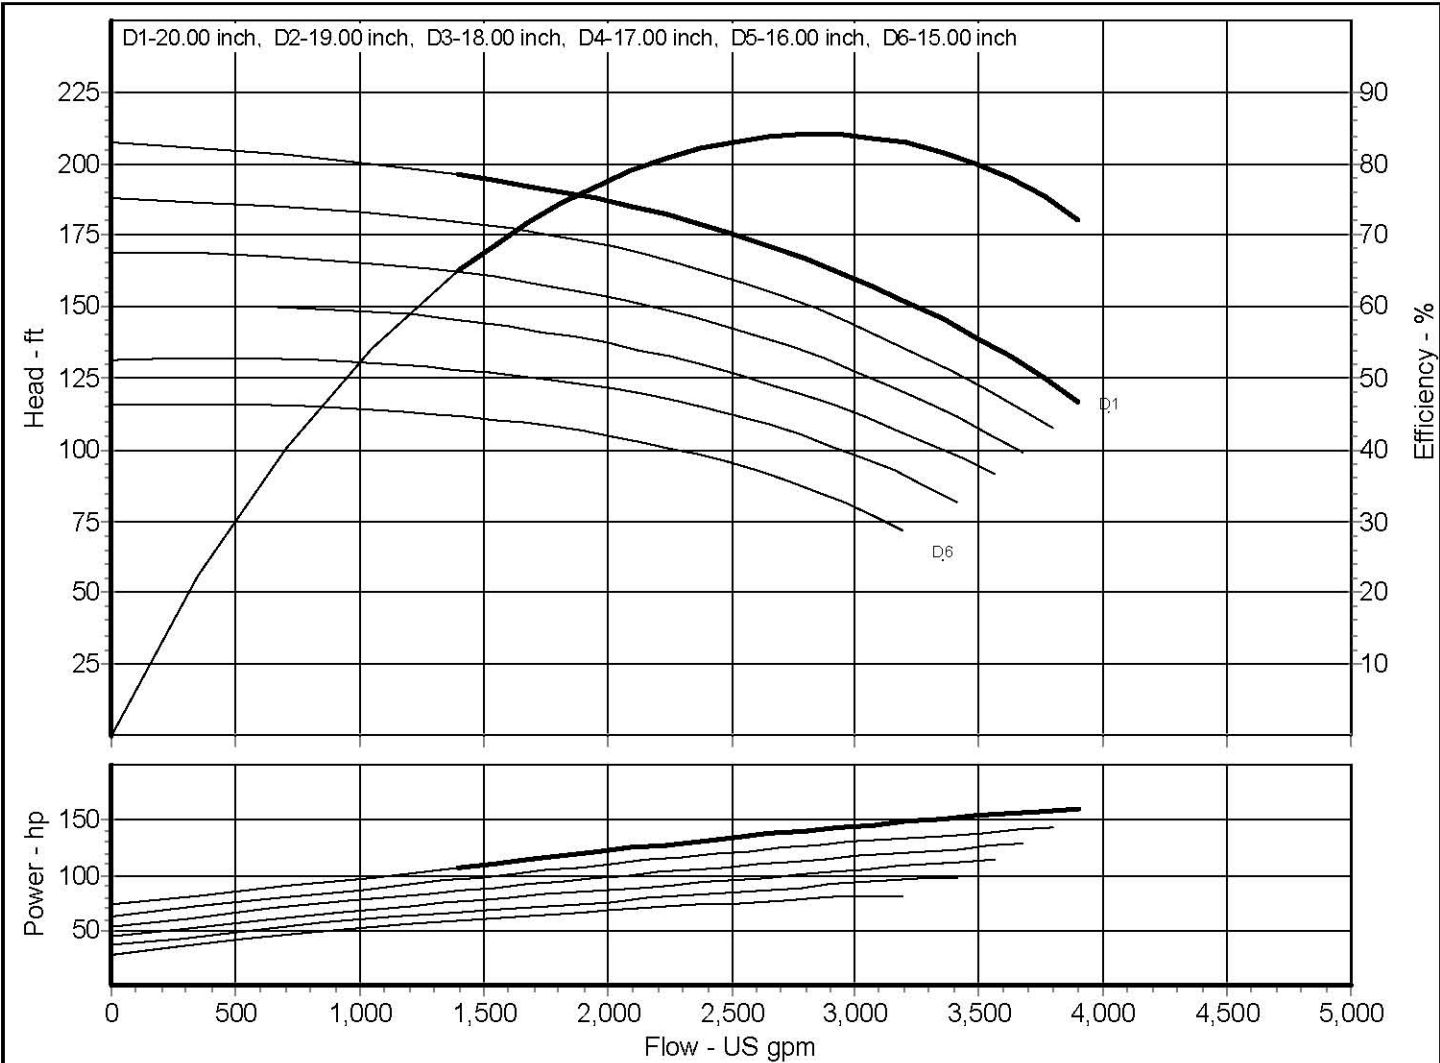

Comments:
 Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.