




# VERTICAL CAN TURBINE PUMPS Types VTM, VTP

## UNIT OUTLINE DIMENSIONS

APPROXIMATE MOTOR HEIGHTS  
BASED ON US OR GE WP1 3600  
rpm VHS 3 PH., 60 HZ MOTORS

Motor hp	Motor Height
3-15	23
20-25	27
30	29
40	30
50	36
60	39
75	41
100	42


X	VTM or VTP MODEL NO.	A	B	C	D	APPROX. WEIGHT (LBS)		
						PUMP	MOTOR	TOTAL
	6LB 1	49.50	38.88	4x150 LB	8	455	165	620
	6LB 2	49.50	38.88	4x150 LB	8	475	165	640
	6LB 3	49.50	38.88	4x150 LB	8	497	180	677
	6LB 4	59.50	48.88	4x150 LB	8	519	205	724
	6LB 5	59.50	48.88	4x150 LB	8	597	310	907
	6LB 6	69.50	58.88	4x150 LB	8	619	330	949
	6LB 7	69.50	58.88	4x150 LB	8	641	355	996
	7LB 1	52.50	41.88	6x150 LB	10	517	180	697
	7LB 2	52.50	41.88	6x150 LB	10	546	310	856
	7LB 3	52.50	41.88	6x150 LB	10	575	355	930
	7LB 4	66.50	55.88	6x150 LB	10	661	460	1121
	7LB 5	66.50	55.88	6x150 LB	10	690	510	1200
	8LB 1	52.50	41.88	6x150 LB	10	569	310	879
	8LB 2	52.50	41.88	6x150 LB	10	621	330	951
	8LB 3	52.50	41.88	6x150 LB	10	673	600	1273
	8LB 4	66.50	55.88	6x150 LB	10	782	600	1382
	8LB 5	66.50	55.88	6x150 LB	10	834	650	1484

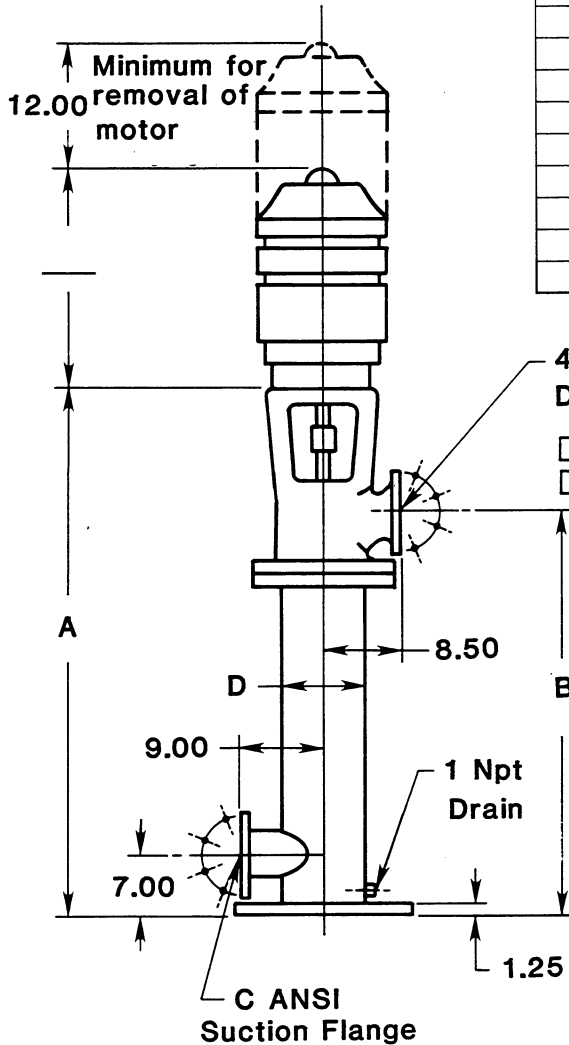

4 inch ANSI Discharge Flange

- 125 LB.
- 250 LB.

All Dimensions are in inches

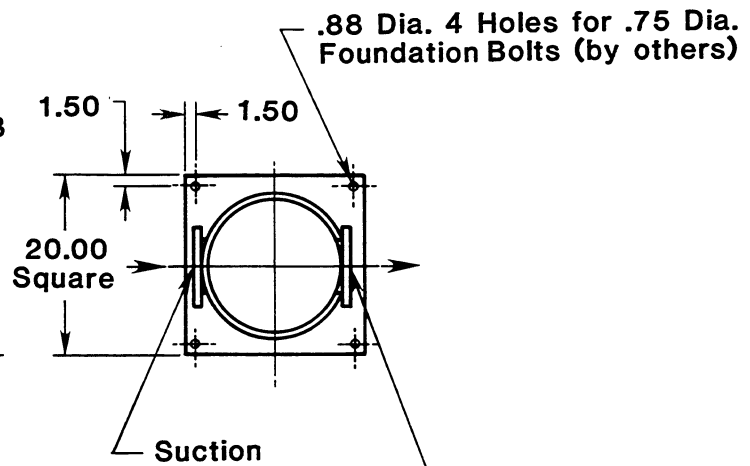

Discharge may be field rotated in increments of 45°

CUSTOMER \_\_\_\_\_ JOB NAME \_\_\_\_\_  
 P.O. NO. \_\_\_\_\_ ITEM NO. \_\_\_\_\_  
 S.O. NO. \_\_\_\_\_ SERIAL NO. \_\_\_\_\_  
 MOTOR MFR. \_\_\_\_\_ ENCL. \_\_\_\_\_ FRAME \_\_\_\_\_ H.P. \_\_\_\_\_ VOLTS \_\_\_\_\_ PH. \_\_\_\_\_ HZ. \_\_\_\_\_  
 PUMP MODEL \_\_\_\_\_ NO. OF STGS. \_\_\_\_\_ RPM \_\_\_\_\_ G.P.M. \_\_\_\_\_ TOTAL HD. FT. \_\_\_\_\_  
 CERTIFIED FOR  APPROVAL  CONSTRUCTION BY \_\_\_\_\_ DATE \_\_\_\_\_

Subject to change unless certified for construction