


Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 2x3-8 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/5.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-014	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	4.75 hp
Item : 1		Closed Valve Pressure	76.813 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

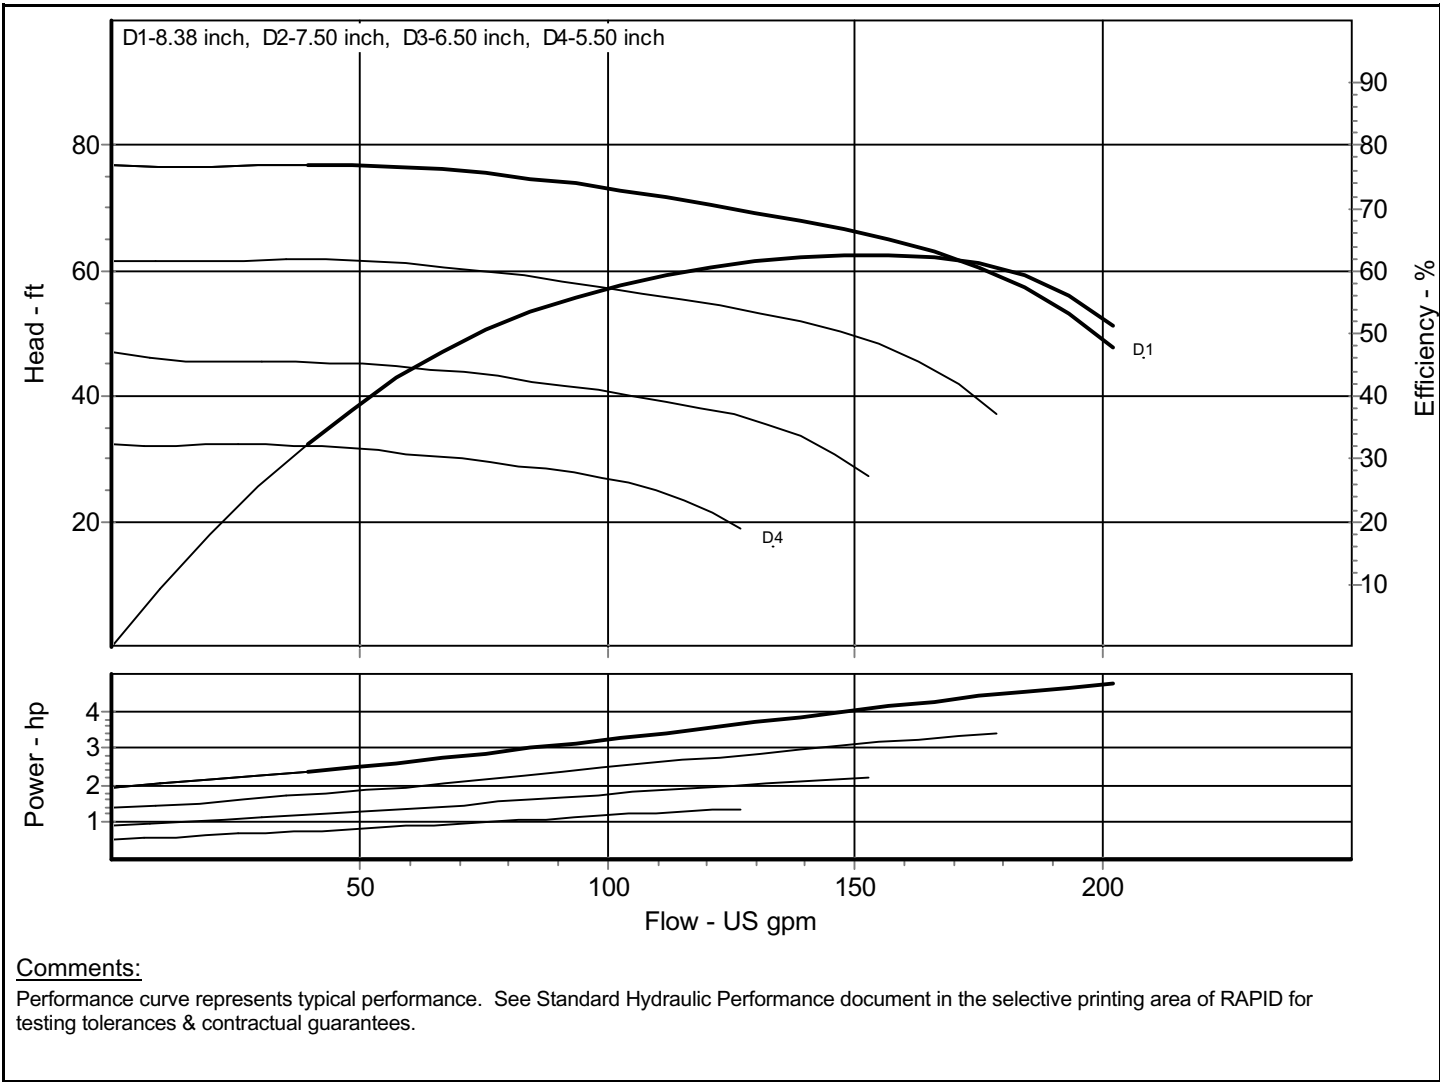

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 2x3-8 MTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/5.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-013	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	37.27 hp
Item : 1		Closed Valve Pressure	316.092 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

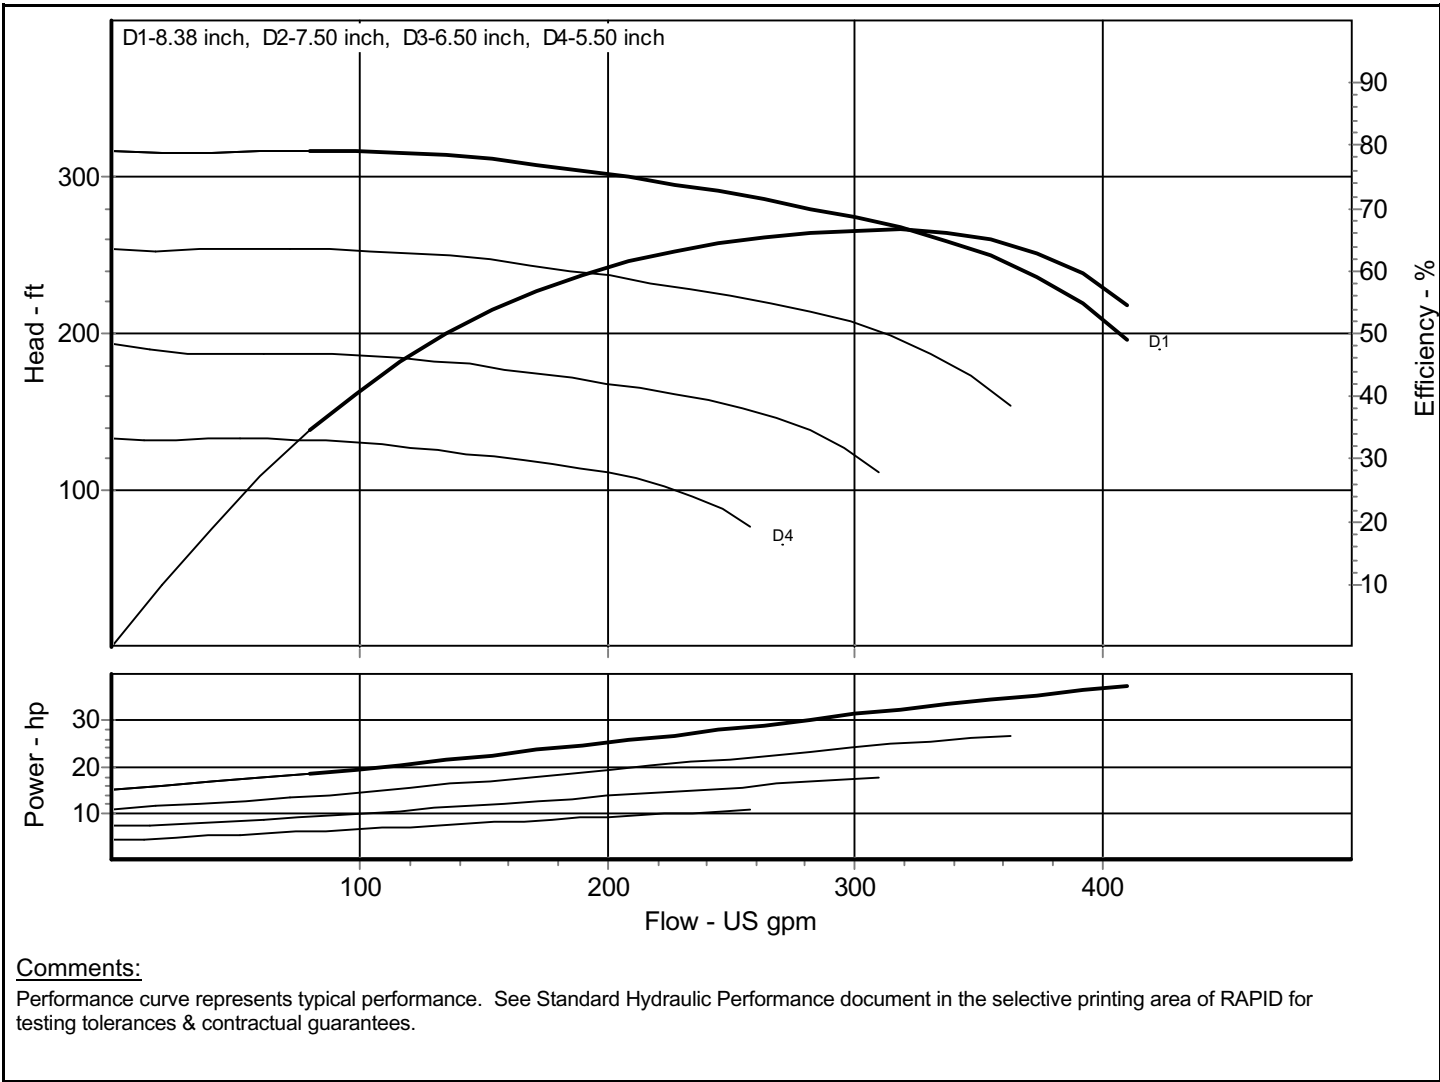

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.

