


VERTICAL TURBINE PUMPS
 Model 6MA - 3460 Rpm



2 POLE 60 HERTZ
 PERFORMANCE

EFFICIENCY ADJUSTMENT FOR STAGING	
STAGES	NUMBER OF POINTS
1	Lower 6
2	Lower 5
3	Lower 4
4	Lower 3
5	Lower 2.5
6	Lower 2

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSEPOWER CORRESPONDINGLY

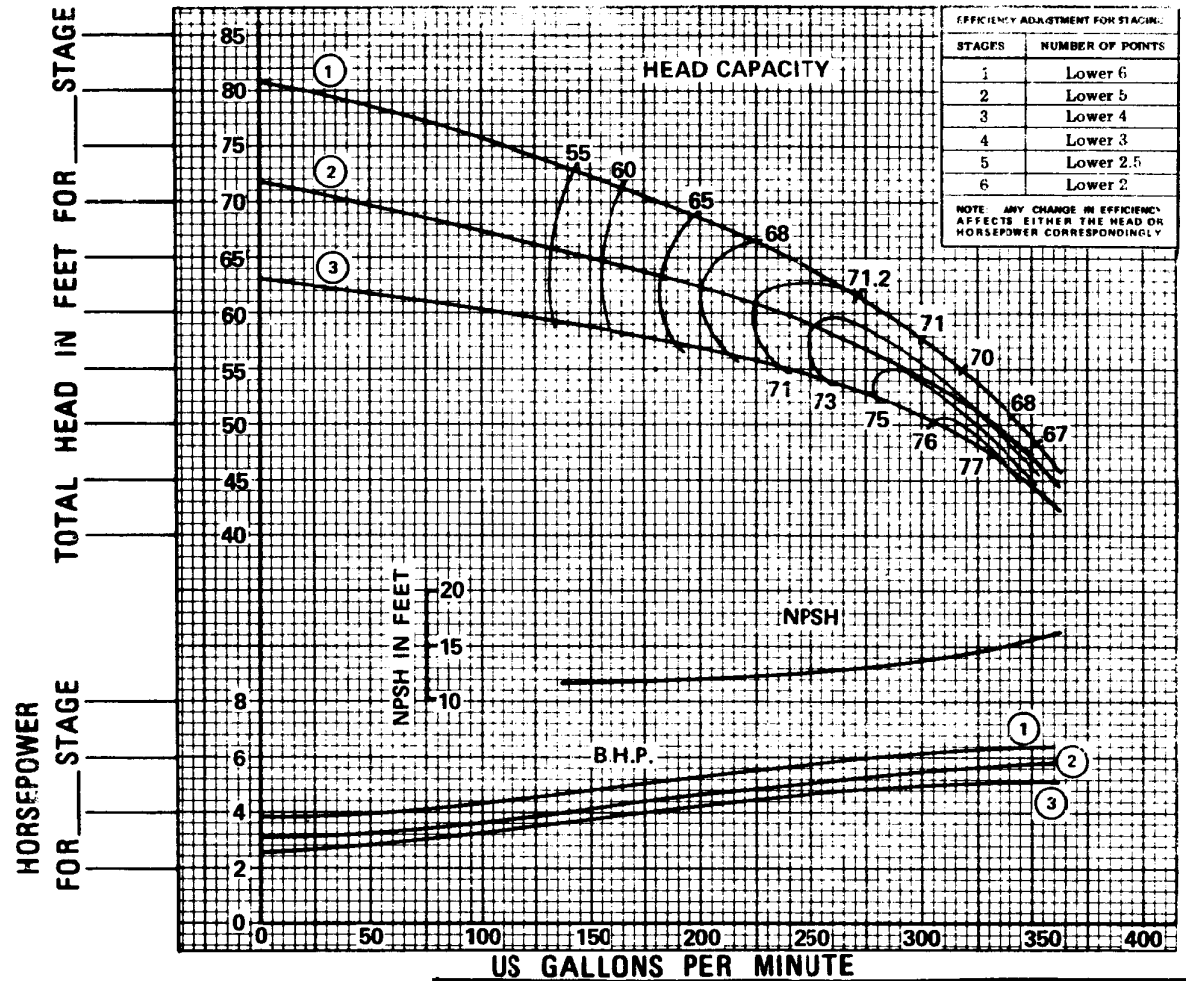

Capacity _____ gpm
 Head _____ Feet
 BHP _____
 EFFICIENCY _____ %
 DRIVER _____
 HEAD _____
 COLUMN _____

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	Customer _____
1	V850	4-7/16	55746	Item _____
2	V850	4-5/16	55755	Peerless Ref. No: _____
3	V850	4-3/16	55757	Laboratory Performance
4				SIZE 6MA RPM 3460 BOWL V847 CIE
				CURVE 4806262

VERTICAL TURBINE PUMPS
Model 6MA - 1760 Rpm




Peerless Pump Company
Indianapolis, IN 46207-7026

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
Lower	2	6
"	3	4
"	4	3
"	5	2
"	6	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

Total Head in Feet for _____ Stages

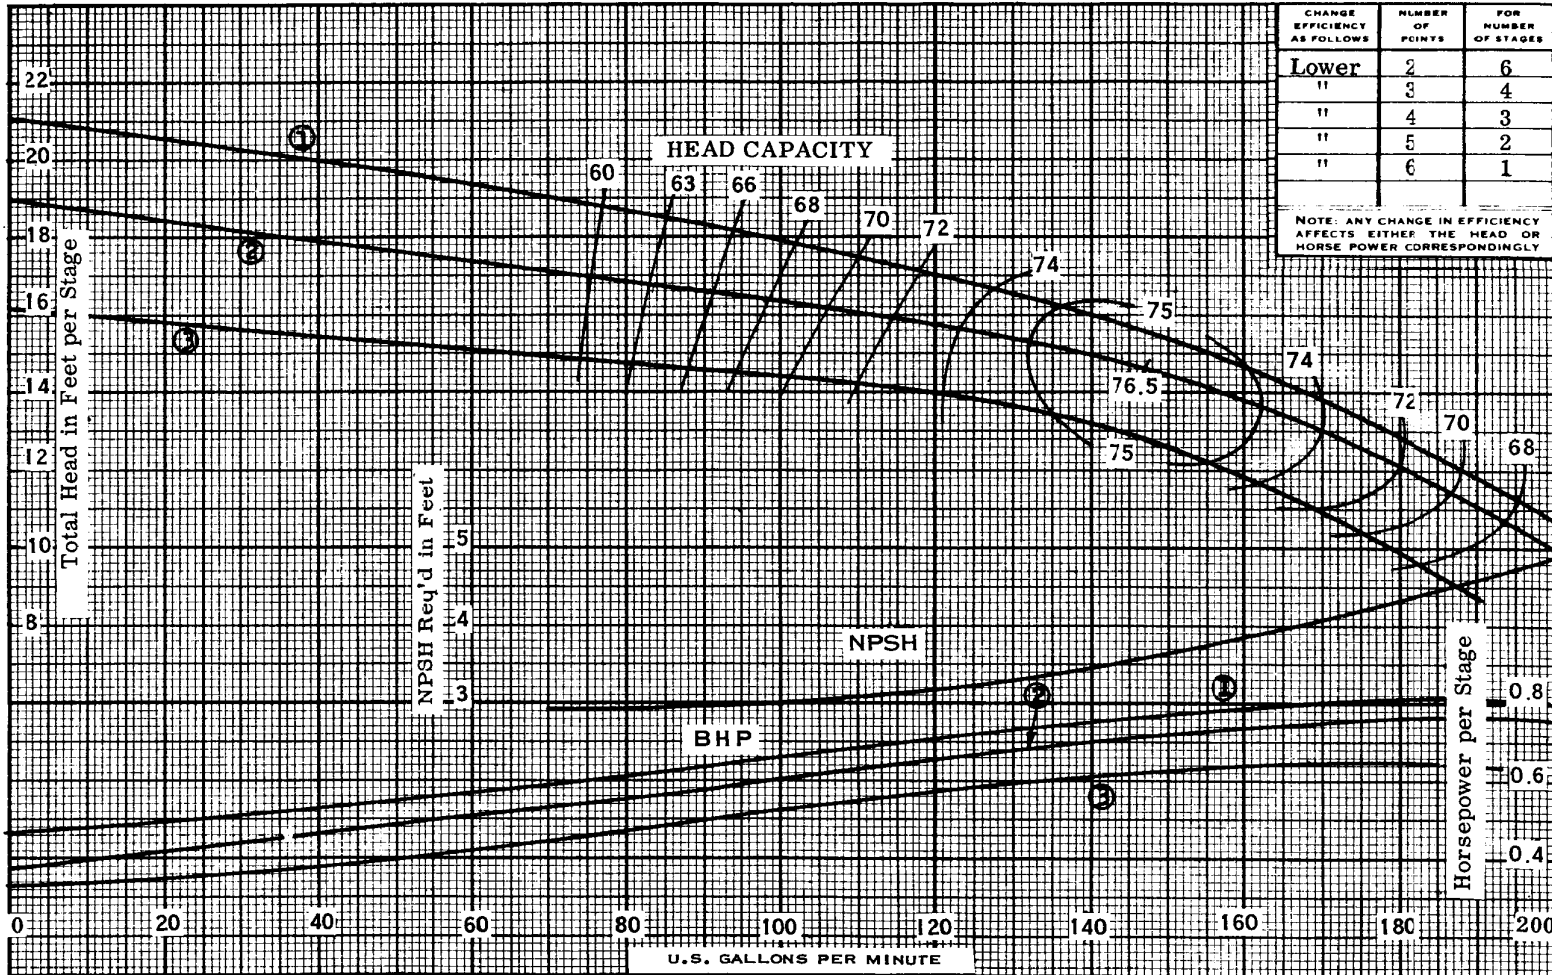


_____ Stages for _____ horsepower

HYDRAULIC PERFORMANCE WARRANTY Guaranteed at designated point only, and contingent on: Proper flow to pump suction Proper submergence Fluid free of gas, air & abrasives Proper lateral setting of impeller	CURVE NO.	IMPELLER NC.	IMPELLER DIA.	TAKEN FROM	Customer _____
	1	V850B	4 ⁷ / ₁₆ "	27997	Item _____
	2	V850B	4 ⁵ / ₁₆ "	28007	Peerless Ref. No: _____
	3	V850B	4 ³ / ₁₆ "		Laboratory Performance
4					SIZE 6 MA RPM 1760 BOWL V847B-E CURVE 2813812R

PUMP DESCRIPTION: Driver _____; Head _____; Column _____
GUARANTEED BOWL PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____
FIELD

VERTICAL TURBINE PUMPS

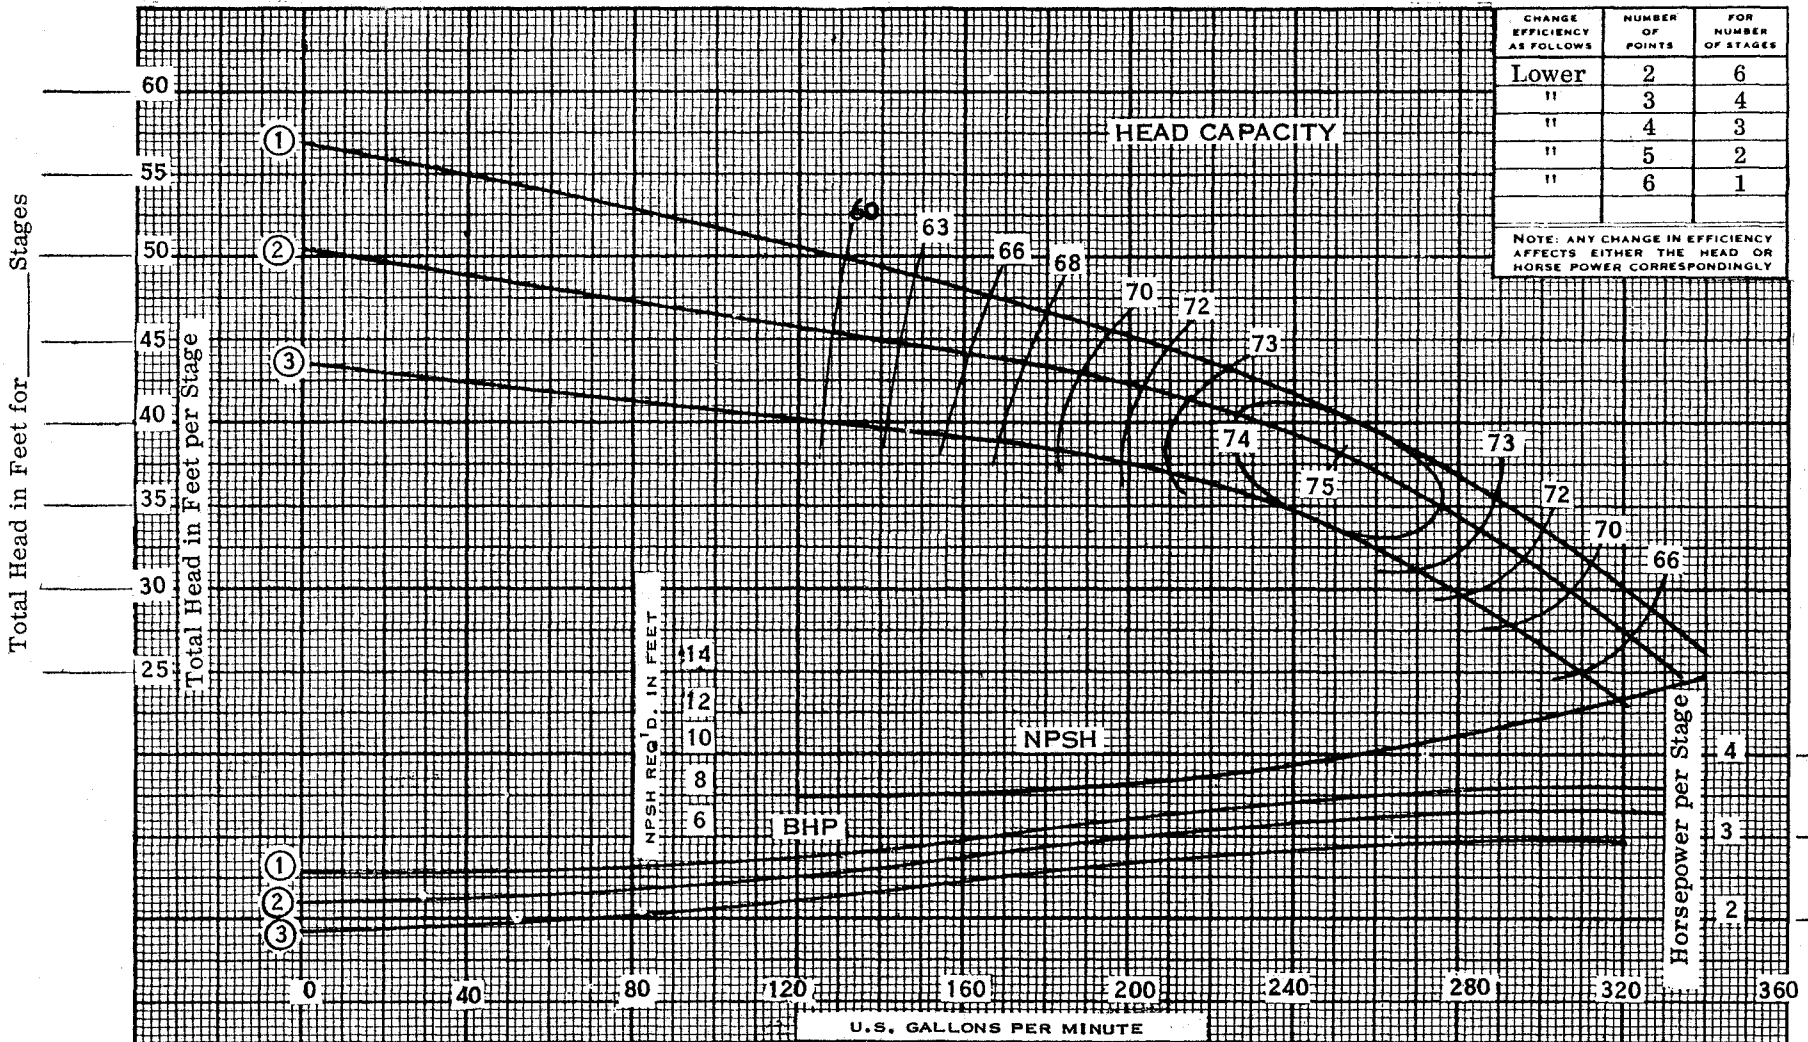

Total Head in Feet for _____ Stages

Horsepower for _____ Stages


HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	Customer _____
	1	V850B	4 ⁷ / ₁₆	28005	Item _____
Efficiency must be reduce for bronze & special material bowls - See Application Section	2	V850B	4 ⁵ / ₁₆	28008	Peerless Ref. No: _____
	3	V850B	4 ³ / ₁₆		Laboratory Performance
	4				SIZE 6 MA RPM 2900 BOWL V847B - E CURVE 2813825R

PUMP DESCRIPTION: Driver _____; Head _____; Column _____
 BOWL PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____
 FIELD

VERTICAL TURBINE PUMPS



Peerless Pump Company
Indianapolis, IN 46207-7025

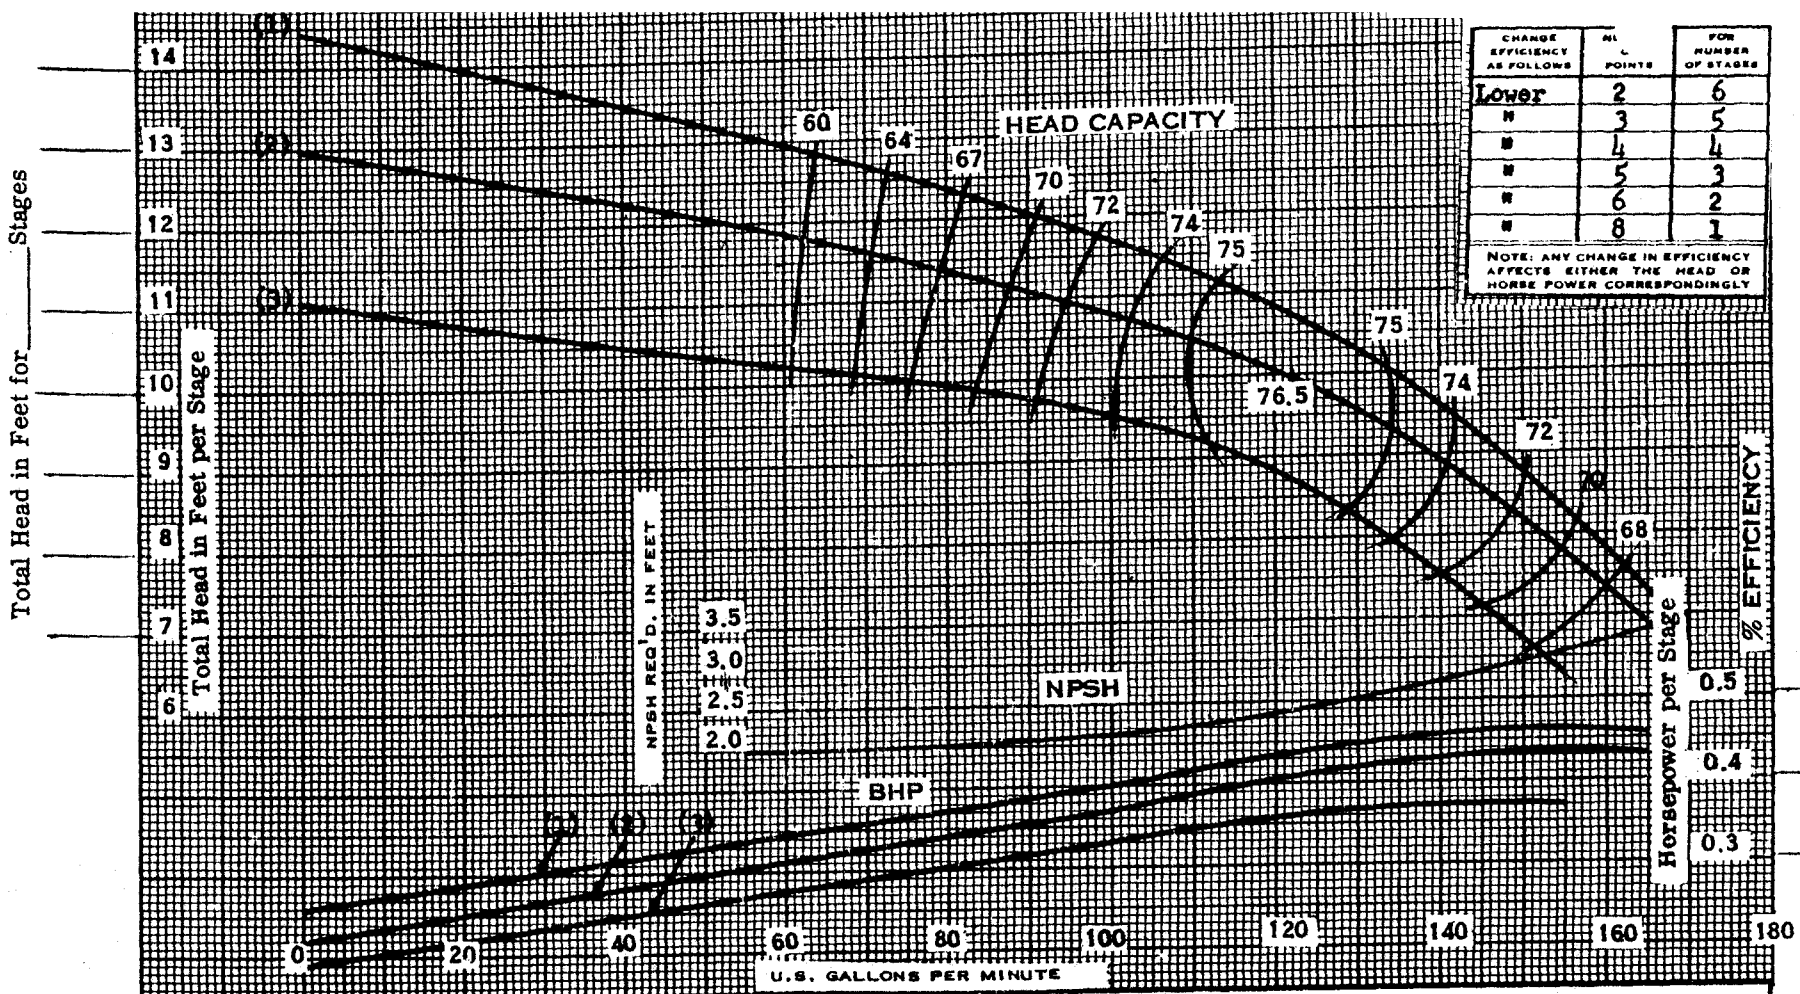

CHANGE EFFICIENCY AS FOLLOWS	NO. OF POINTS	FOR NUMBER OF STAGES
Lower	2	6
"	3	5
"	4	4
"	5	3
"	6	2
"	8	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

Total Head in Feet for _____ Stages

Horsepower for _____ Stages

HYDRAULIC PERFORMANCE WARRANTY at designated point only, and contingent on: Proper flow to pump suction Proper submergence Fluid free of gas, air & abrasives Proper lateral setting of impeller	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	Customer _____
	1	V850B	4 ⁷ / ₁₆	27997	Item _____
	2	V850B	4 ⁵ / ₁₆	28007	Peerless Ref. No: _____
	3	V850B	4 ³ / ₁₆		Laboratory Performance
	4				BOWL V847B-E CURVE 2813826R SIZE 6 MA RPM 1460

PUMP DESCRIPTION: Driver _____; Head _____; Column _____
 BOWL FIELD PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____