






Peerless Pump Company  
Indianapolis, IN 46207-7026

VERTICAL TURBINE PUMPS

Stages \_\_\_\_\_ of horsepower

Section 140  
10-74

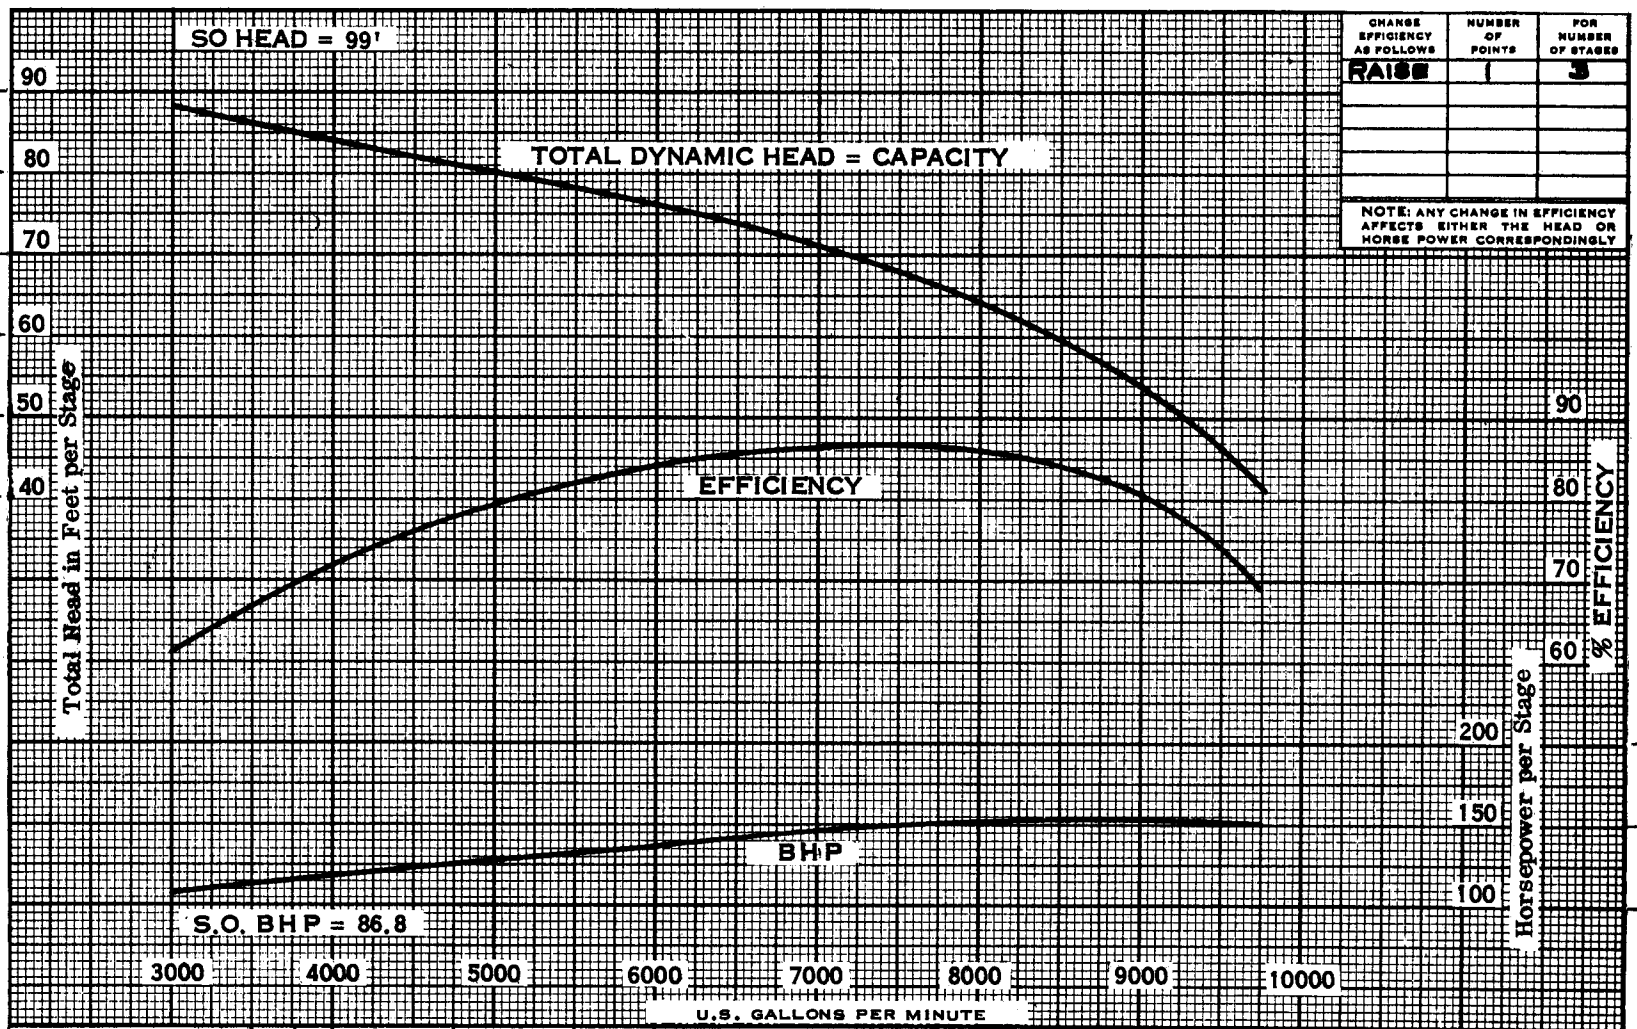

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RAISE	1	3
NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY		

<b>HYDRAULIC PERFORMANCE WARRANTY</b> at designated point only, and contingent on: Proper flow to pump suction Proper submergence Fluid free of gas, air & abrasives Proper lateral setting of impeller	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	Customer _____												
	1	T-84305	22 <sup>7</sup> / <sub>8</sub>	4224	Item _____												
	2				Peerless Ref. No: _____												
	3				<b>Laboratory Performance</b>												
4					<table border="1"> <tr> <td>SIZE</td> <td>30 LA</td> <td>RPM</td> <td>730</td> <td>CURVE</td> <td>R-1180</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>BOWL</td> <td>T-84306 CJ PLASTIC COATED</td> </tr> </table>	SIZE	30 LA	RPM	730	CURVE	R-1180					BOWL	T-84306 CJ PLASTIC COATED
SIZE	30 LA	RPM	730	CURVE	R-1180												
				BOWL	T-84306 CJ PLASTIC COATED												

Total Head in Feet for \_\_\_\_\_ Stages

140-50Hz Page 177

PUMP DESCRIPTION: Driver \_\_\_\_\_; Head \_\_\_\_\_; Column \_\_\_\_\_  
 BOWL  PERFORMANCE: Capacity \_\_\_\_\_ gpm; Head \_\_\_\_\_ ft; Eff \_\_\_\_\_ %; BHP \_\_\_\_\_  
 FIELD