


HYDRAULIC PERFORMANCE WARRANTY
 Guaranteed at designated point only, and contingent on:
 Proper sump configuration
 Proper submergence
 Fluid free of gas, air & abrasives
 Proper lateral setting of impeller

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
AS SHOWN	---	5'
RAISE	0.2	6'
"	0.3	7'
"	0.4	8'
"	0.5	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

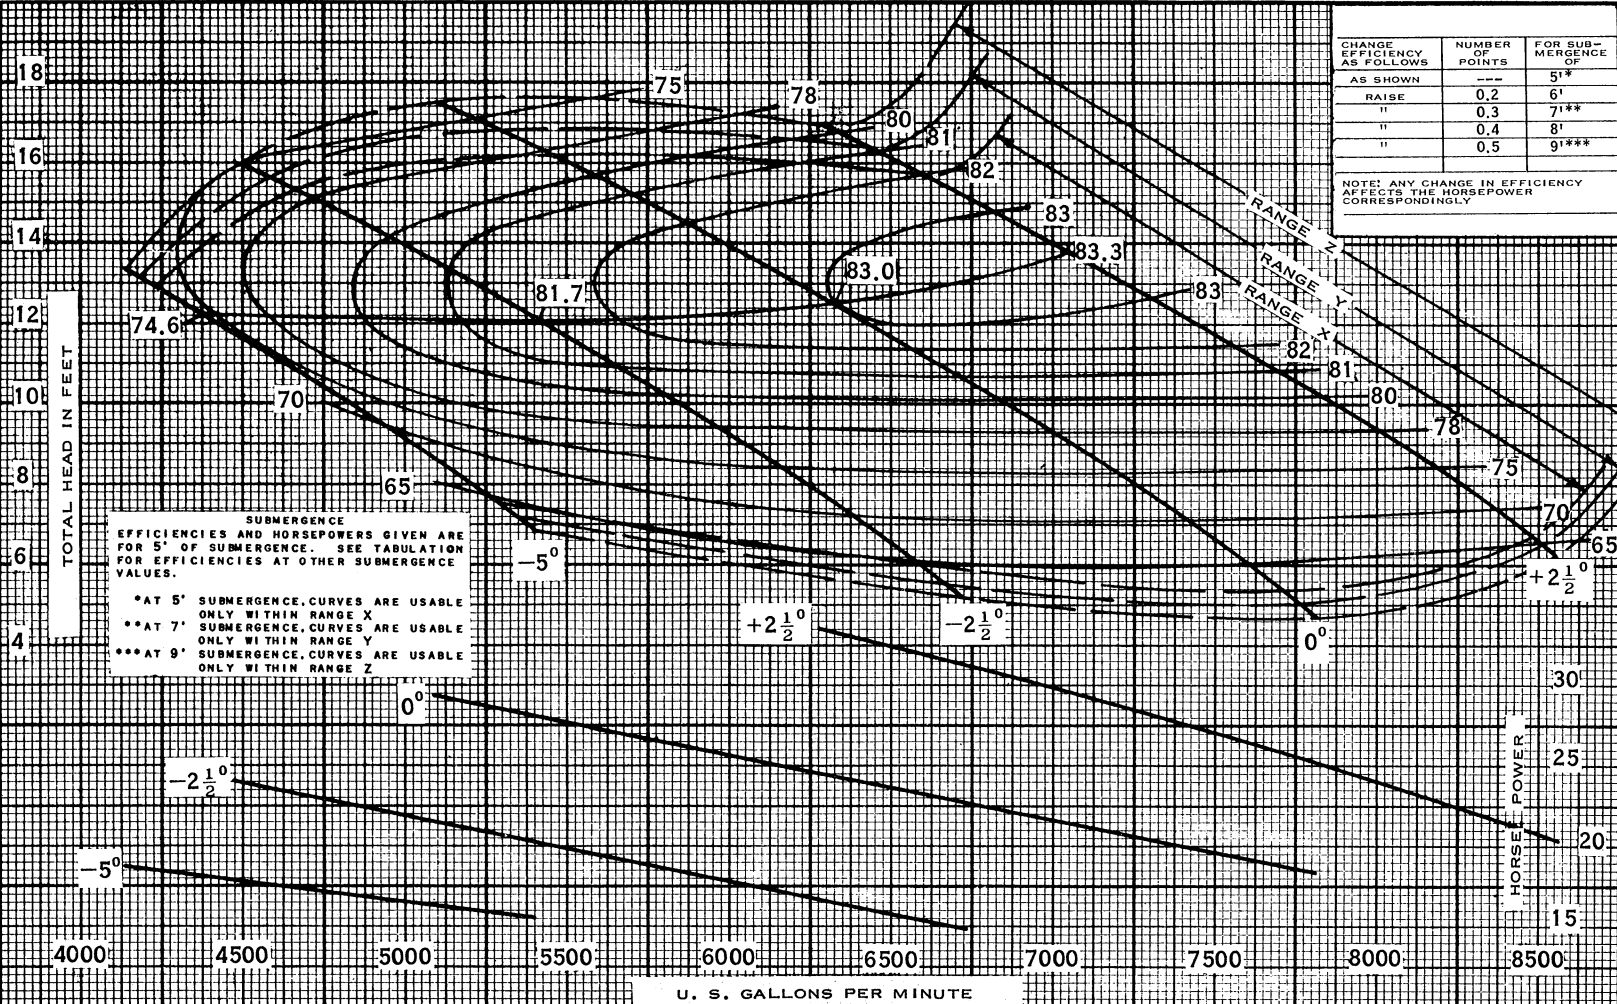

SUBMERGENCE
 EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 5' OF SUBMERGENCE. SEE TABULATION FOR EFFICIENCIES AT OTHER SUBMERGENCE VALUES.

- *AT 5' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE X
- **AT 7' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Y
- ***AT 9' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Z

BOWL
 FIELD

PERFORMANCE

CAPACITY _____ GPM

TOTAL DYNAMIC HEAD _____ FT

EFFICIENCY _____

BRAKE HORSEPOWER _____ BHP



LABORATORY PERFORMANCE

SIZE 18 PL

RPM 1160

CURVE NUMBER V4127A

DESCRIPTION: Hydro-Foil Pump with; Bowl T83845 ; Propeller T83846

Elbow above below base dia with x inner column

Driver: _____

Customer _____


Item _____

Peerless Ref. No. _____ Pump No. _____

HYDRAULIC PERFORMANCE WARRANTY
 Guaranteed at designated point only, and contingent on:
 Proper sump configuration
 Proper submergence
 Fluid free of gas, air & abrasives
 Proper lateral setting of impeller

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
AS SHOWN	---	5'
RAISE	0.2	6'
"	0.3	7'***
"	0.4	8'
"	0.5	9'****

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY.

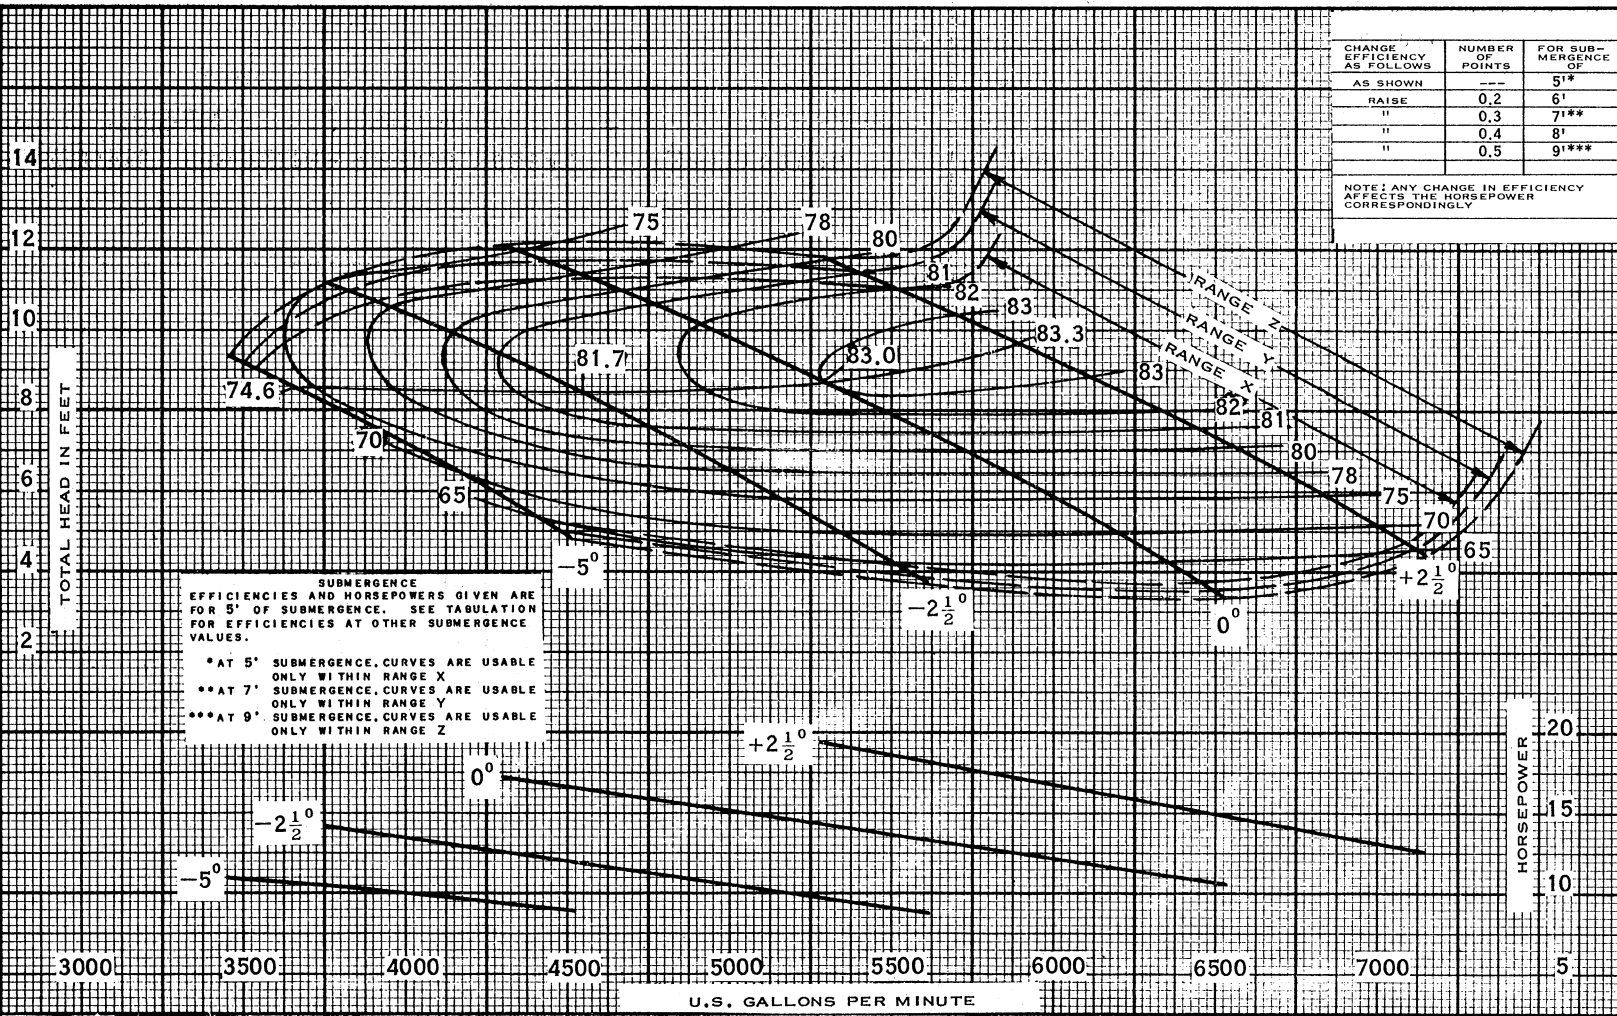

SUBMERGENCE
 EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 5' OF SUBMERGENCE. SEE TABULATION FOR EFFICIENCIES AT OTHER SUBMERGENCE VALUES.

- * AT 5' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE X
- ** AT 7' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Y
- *** AT 9' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Z

BOWL
 FIELD

PERFORMANCE

CAPACITY _____ GPM

TOTAL DYNAMIC HEAD _____ FT

EFFICIENCY _____

BRAKE HORSEPOWER _____ BHP



LABORATORY PERFORMANCE

SIZE 18 PL

RPM 970

CURVE NUMBER V4272A

DESCRIPTION: Hydro-Foil Pump with: Bowl T83845 ; Propeller T83846

Elbow above below base dia with _____ x _____ inner column

Driver: _____

Customer _____


Item _____

Peerless Ref. No. _____ Pump No. _____

HYDRAULIC PERFORMANCE WARRANTY
 Guaranteed at designated point only, and contingent on:
 Proper sump configuration
 Proper submergence
 Fluid free of gas, air & abrasives
 Proper lateral setting of impeller

CHANGE OF EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.3	3'
RAISE	0.1	6'
"	0.2	7'
"	0.4	8'
"	0.5	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

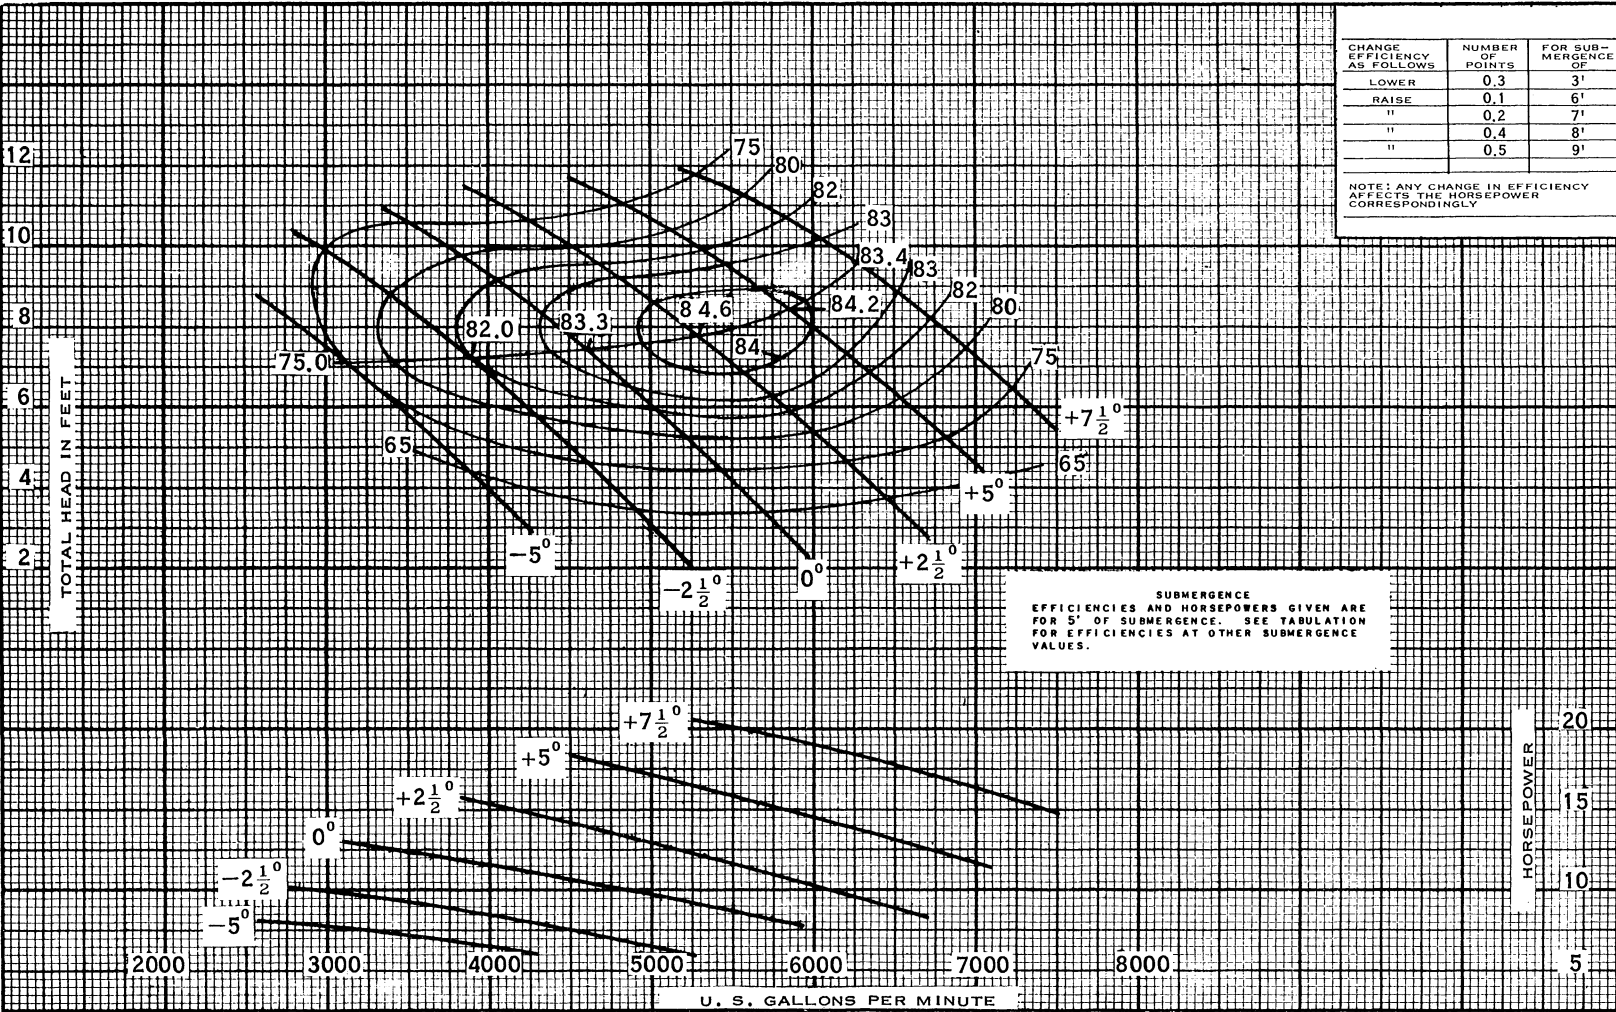

BOWL
 FIELD

PERFORMANCE

CAPACITY _____ GPM

TOTAL DYNAMIC HEAD _____ FT

EFFICIENCY _____

BRAKE HORSEPOWER _____ BHP

PEERLESS PUMP Peerless Pump Company
 Indianapolis, IN 46207-7026

LABORATORY PERFORMANCE

SIZE 18 PL

RPM 870

CURVE NUMBER V4131A

DESCRIPTION: Hydro-Foil Pump with; Bowl **T83845** ; Propeller **T83846**

Elbow above below base dia with _____ x _____ inner column

Driver: _____

Customer _____

Item _____

Peerless Ref. No. _____ Pump No. _____

HYDRAULIC PERFORMANCE WARRANTY
 Guaranteed at designated point only, and contingent on:
 Proper sump configuration
 Proper submergence
 Fluid free of gas, air & abrasives
 Proper lateral setting of impeller


<input type="checkbox"/> BOWL
<input type="checkbox"/> FIELD
PERFORMANCE
CAPACITY
GPM
TOTAL DYNAMIC HEAD
FT
EFFICIENCY
BRAKE HORSEPOWER
BHP



LABORATORY PERFORMANCE	
SIZE	18 PL
RPM	730
CURVE NUMBER	V 4260 A

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.3	3'
RAISE	0.1	6'
"	0.2	7'
"	0.4	8'
"	0.5	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

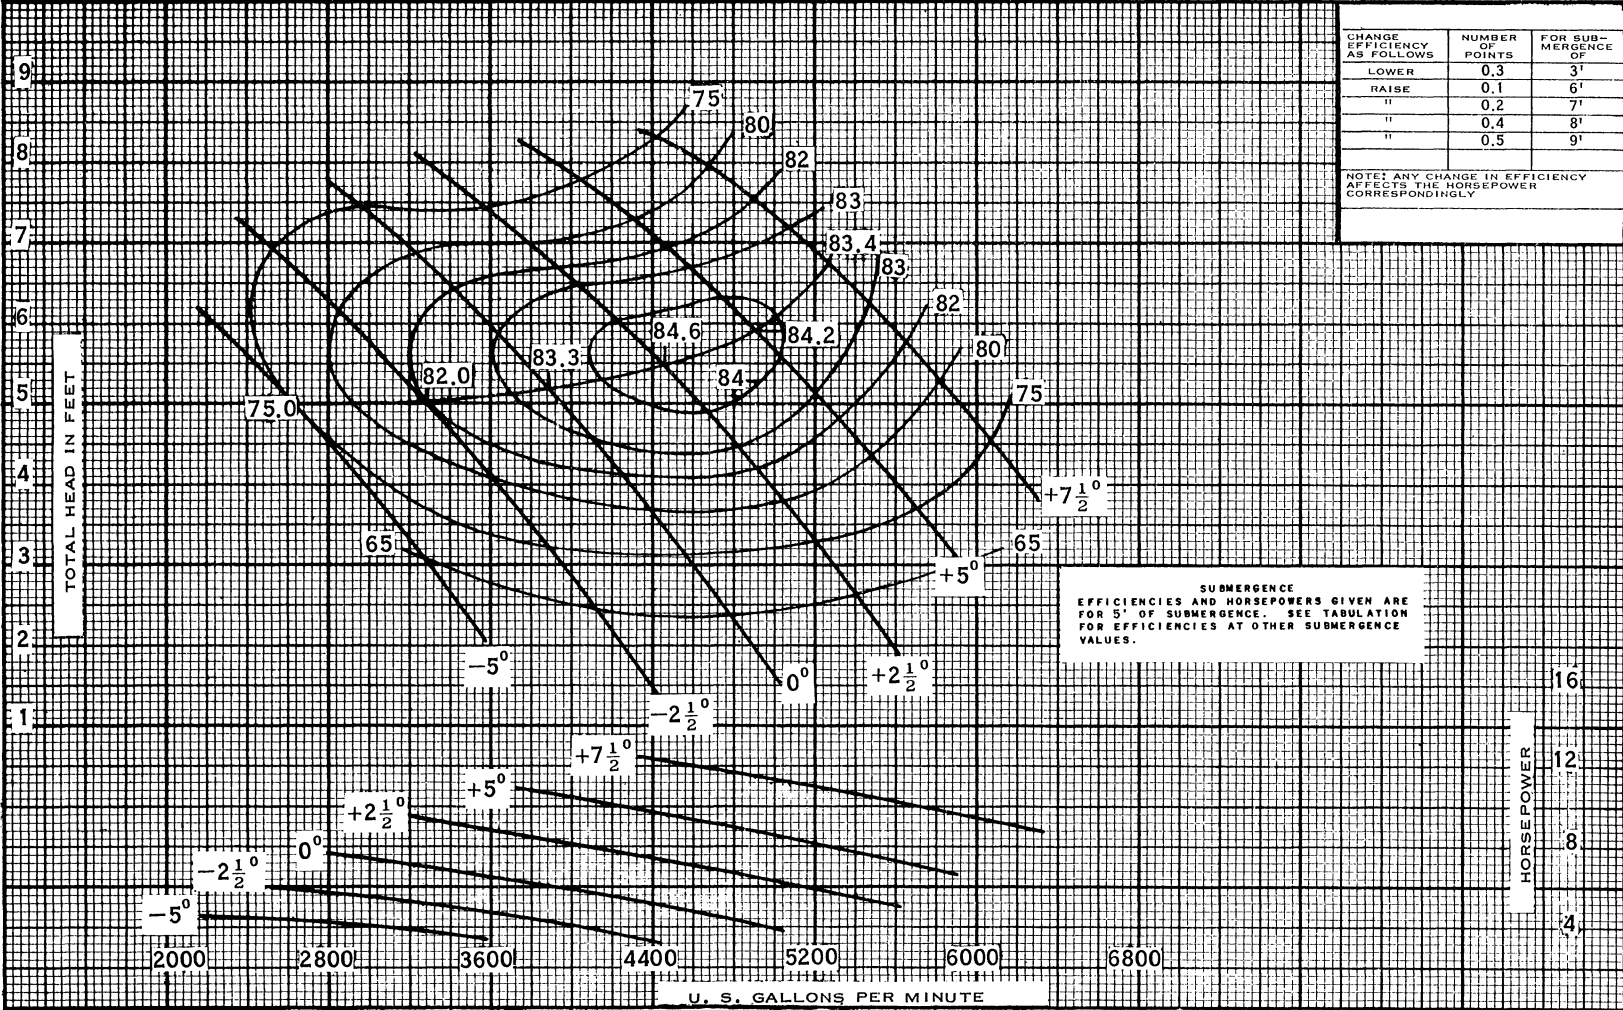

DESCRIPTION: Hydro-Foil Pump with: Bowl **T 83845** ; Propeller **T 83846**

Elbow above
 below base dia with x inner column

Driver: _____

Customer _____

Item _____

Peerless Ref. No. _____ Pump No. _____