

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.3	3'*
AS SHOWN	---	5'**
RAISE	0.3	7'***
"	0.4	8'
"	0.5	9'


NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

HYDRAULIC PERFORMANCE WARRANTY
 Guaranteed at designated point only, and contingent on:
 Proper sump configuration
 Proper submergence
 Fluid free of gas, air & abrasives
 Proper lateral setting of impeller

<input type="checkbox"/> BOWL
<input type="checkbox"/> FIELD
PERFORMANCE
CAPACITY GPM
TOTAL DYNAMIC HEAD FT
EFFICIENCY
BRAKE HORSEPOWER BHP



LABORATORY PERFORMANCE
SIZE : 24 PL
RPM 870
CURVE NUMBER V4120A

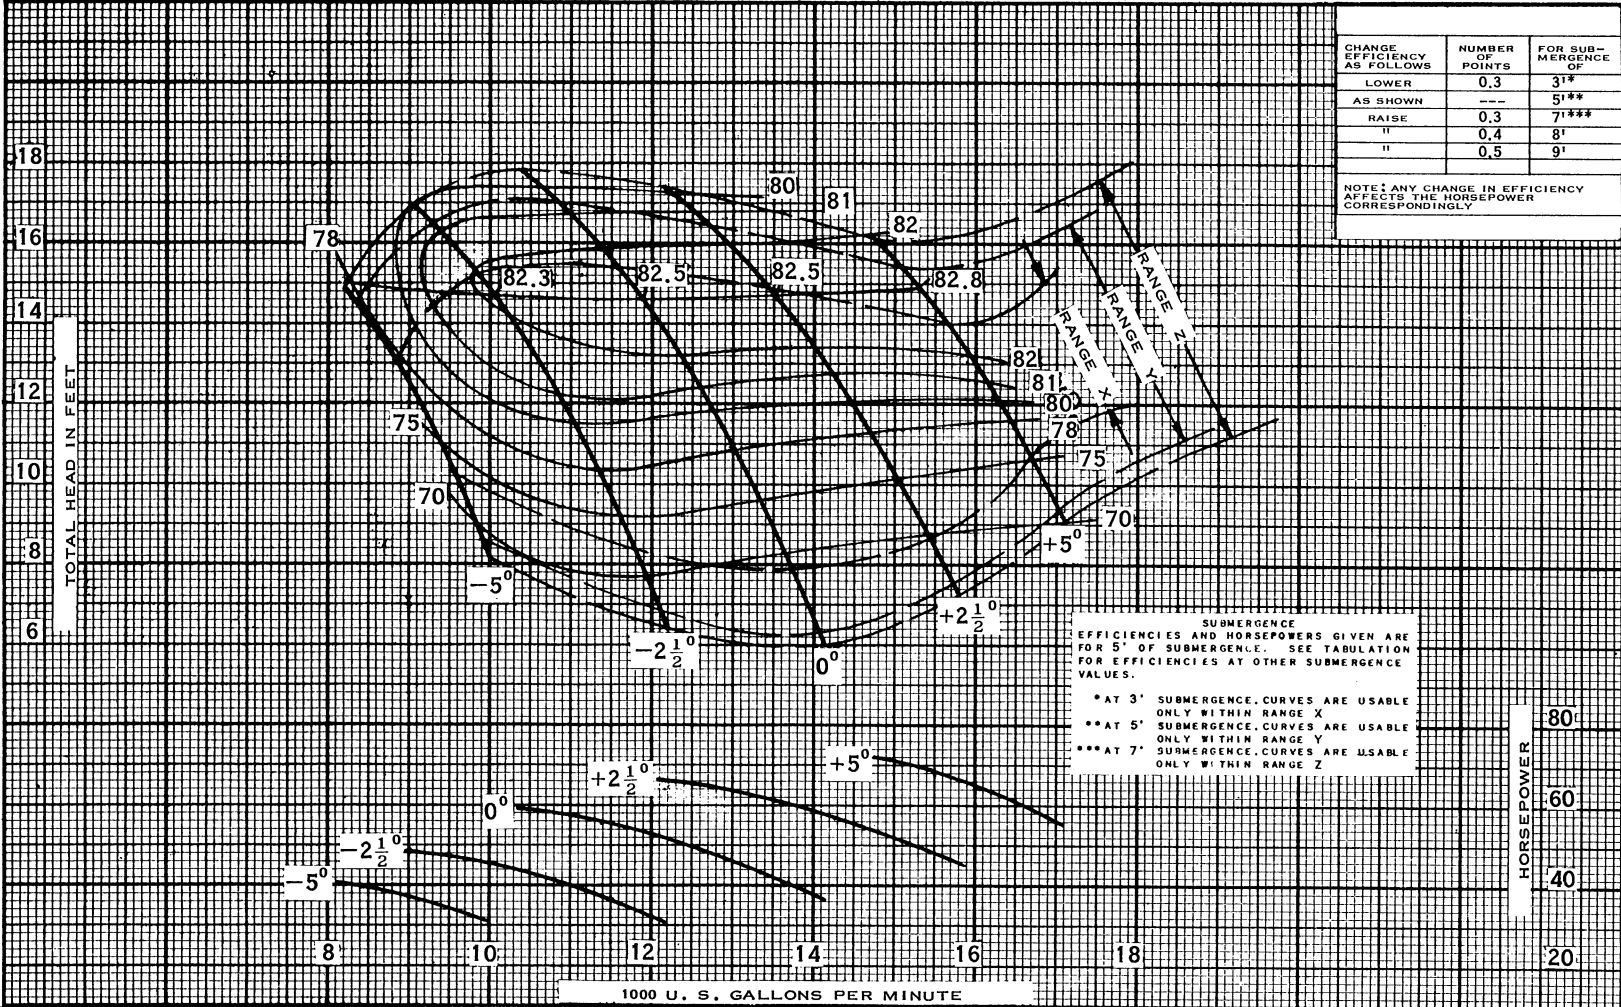

SUBMERGENCE
 EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 5' OF SUBMERGENCE. SEE TABULATION FOR EFFICIENCIES AT OTHER SUBMERGENCE VALUES.

- * AT 3' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE X
- ** AT 5' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Y
- *** AT 7' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Z

DESCRIPTION: Hydro-Foil Pump with; Bowl T83799 ; Propeller T83219

Elbow above below base dia with x inner column

Driver: _____

Customer: _____

Item: _____

Peerless Ref. No. _____ Pump No. _____

HYDRAULIC PERFORMANCE WARRANTY
 Guaranteed at designated point only, and contingent on:
 Proper sump configuration
 Proper submergence
 Fluid free of gas, air & abrasives
 Proper lateral setting of impeller


<input type="checkbox"/> BOWL	<input type="checkbox"/> FIELD
PERFORMANCE	
CAPACITY	GPM
TOTAL DYNAMIC HEAD	FT
EFFICIENCY	
BRAKE HORSEPOWER	BHP

 Peerless Pump Company
 Indianapolis, IN 46207-7026

LABORATORY PERFORMANCE	
SIZE	24 PL
RPM	730
CURVE NUMBER	V 4275A

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.3	3'*
AS SHOWN	---	5'***
RAISE	0.3	7'***
"	0.4	8'
"	0.5	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

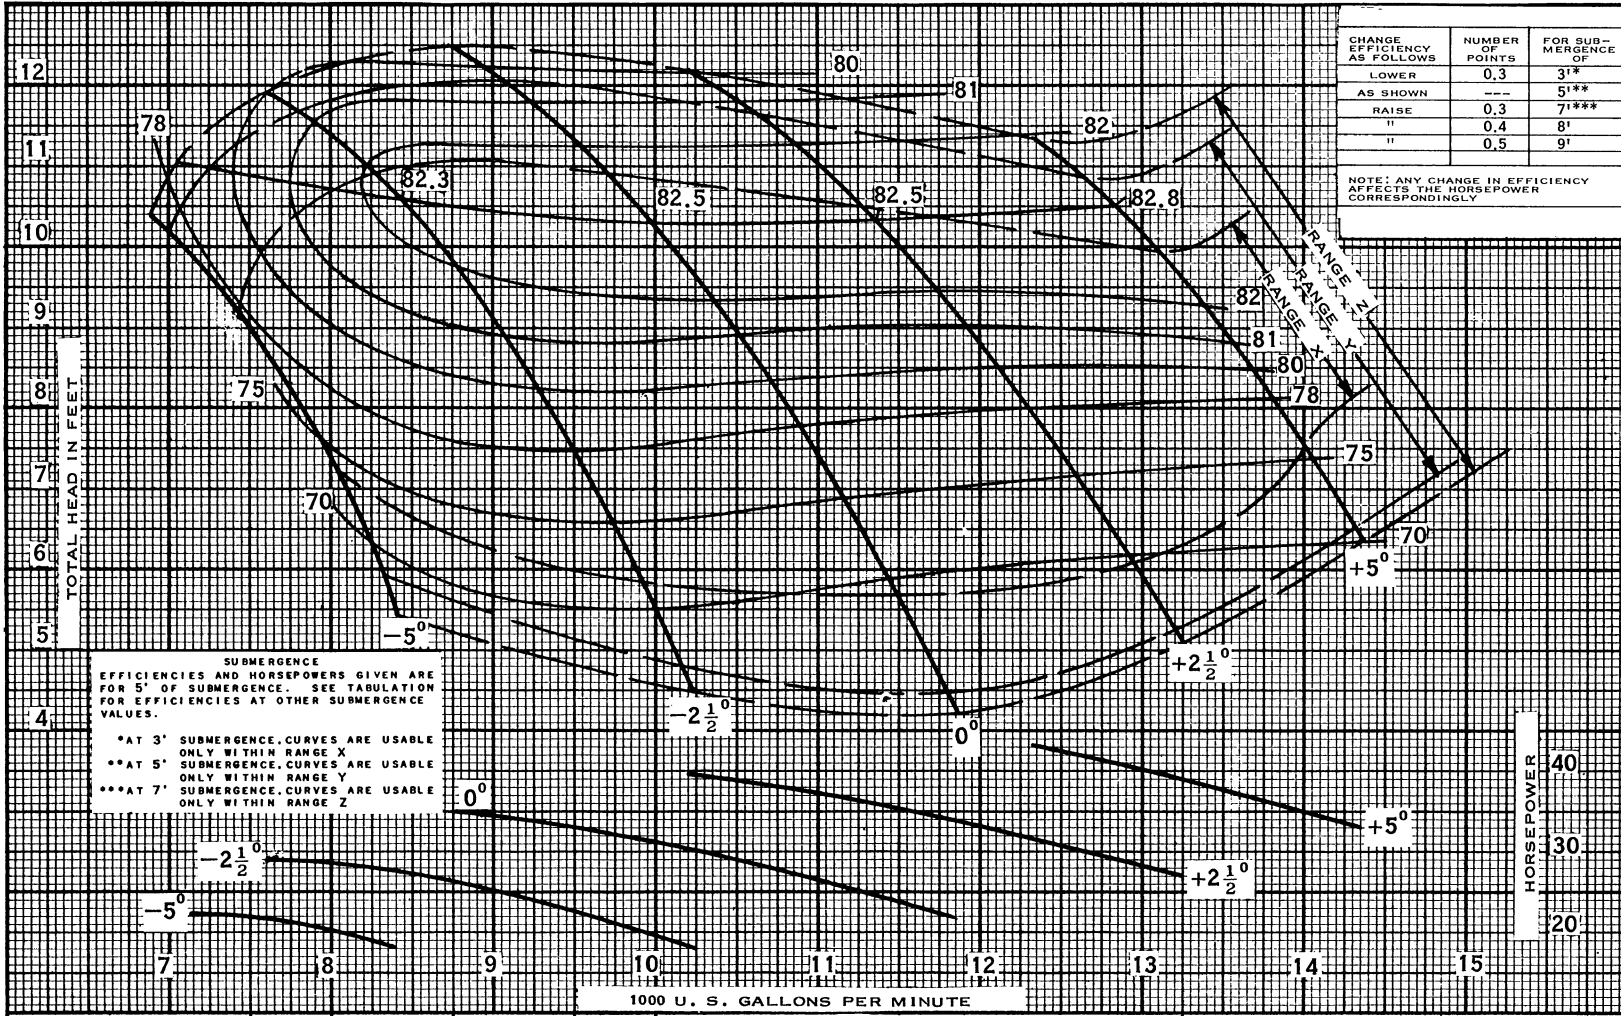

SUBMERGENCE
 EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 5' OF SUBMERGENCE. SEE TABULATION FOR EFFICIENCIES AT OTHER SUBMERGENCE VALUES.

- *AT 3' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE X
- **AT 5' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Y
- ***AT 7' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Z

DESCRIPTION: Hydro-Foil Pump with; Bowl T 83799 ; Propeller T 83219 -

Elbow above below base dia with x inner column

Driver: _____

Customer _____

Item _____

Peerless Ref. No. _____ Pump No. _____

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.3	3'*
AS SHOWN	---	5'**
RAISE	0.3	7'
"	0.4	8'
"	0.5	9'


NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

HYDRAULIC PERFORMANCE WARRANTY
 Guaranteed at designated point only, and contingent on:
 Proper sump configuration
 Proper submergence
 Fluid free of gas, air & abrasives
 Proper lateral setting of impeller

<input type="checkbox"/> BOWL <input type="checkbox"/> FIELD
PERFORMANCE
CAPACITY GPM
TOTAL DYNAMIC HEAD FT
EFFICIENCY
BRAKE HORSEPOWER BHP



LABORATORY PERFORMANCE
SIZE 24 PL
RPM 690
CURVE NUMBER V4121A

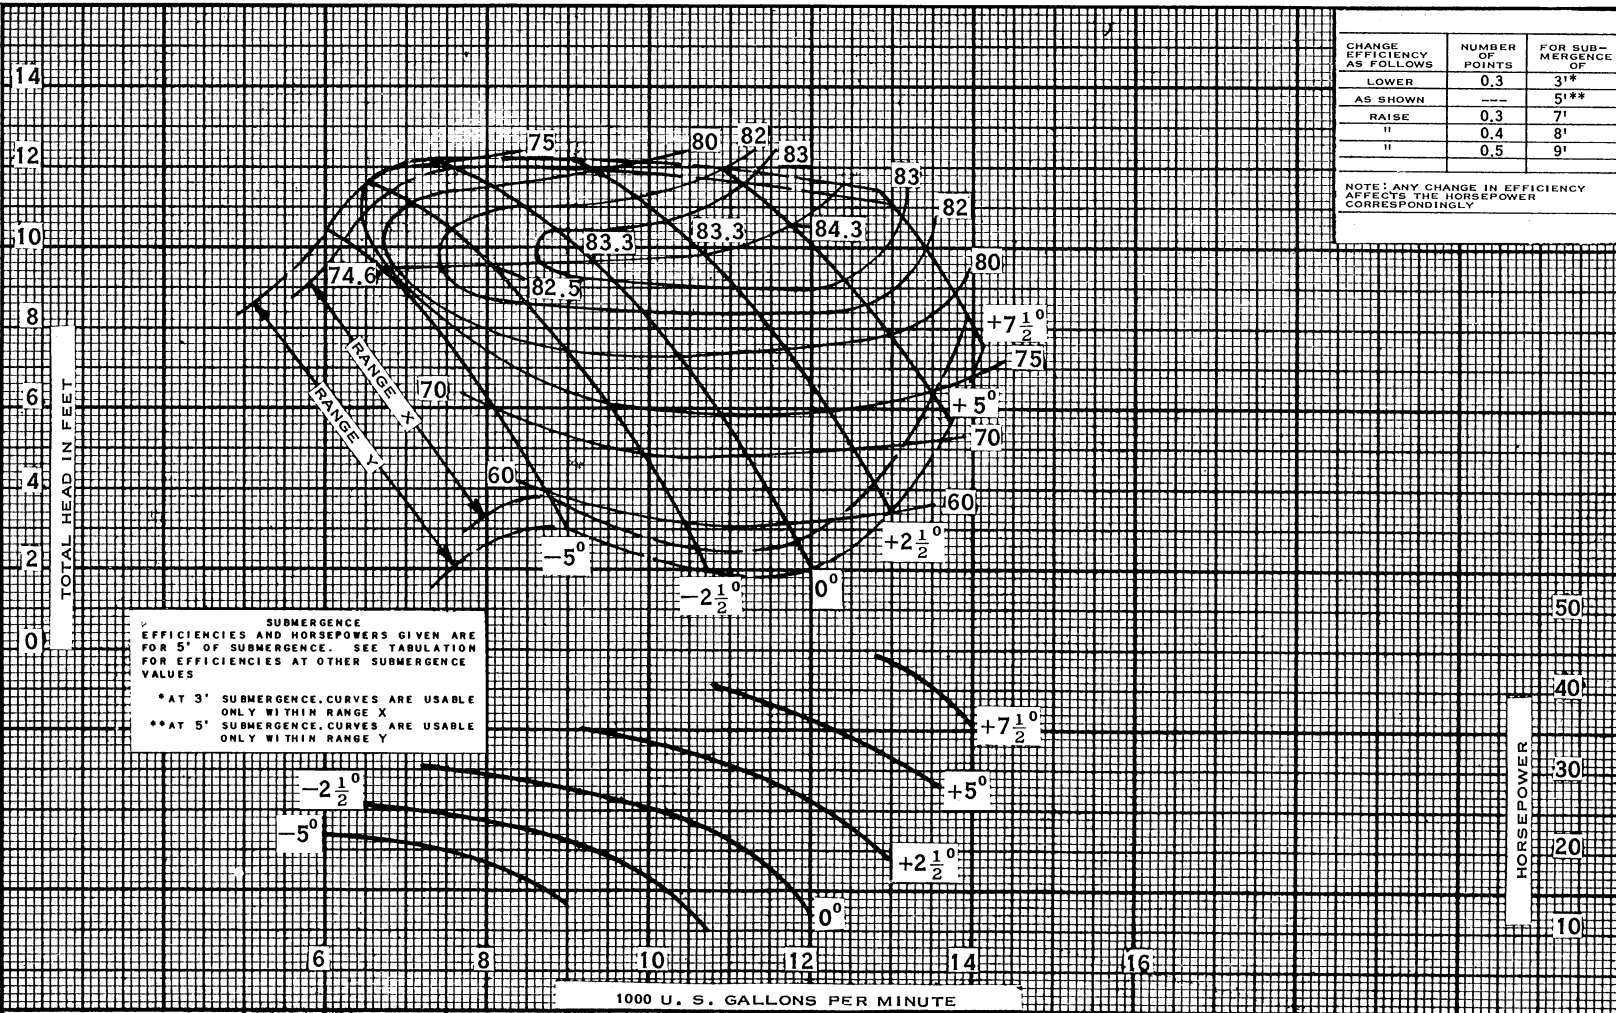

SUBMERGENCE
 EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 5' OF SUBMERGENCE. SEE TABULATION FOR EFFICIENCIES AT OTHER SUBMERGENCE VALUES

* AT 3' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE X
 ** AT 5' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Y

DESCRIPTION: Hydro-Foil Pump with; Bowl T83799 ; Propeller T83219 -

Elbow above below base dia with x inner column

Driver: _____

Customer _____

Item _____

Peerless Ref. No. _____ Pump No. _____