

**HYDRAULIC PERFORMANCE WARRANTY**  
 Guaranteed at designated point only, and contingent on:  
 Proper sump configuration  
 Proper submergence  
 Fluid free of gas, air & abrasives  
 Proper lateral setting of impeller


<input type="checkbox"/> BOWL
<input type="checkbox"/> FIELD
<b>PERFORMANCE</b>
CAPACITY _____ GPM
TOTAL DYNAMIC HEAD _____ FT
EFFICIENCY _____
BRAKE HORSEPOWER _____ BHP

 Peerless Pump Company  
 Indianapolis, IN 46207-7026

<b>LABORATORY PERFORMANCE</b>
SIZE 60 PL
RPM 390
CURVE NUMBER V4199A

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUBMERGENCE OF

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

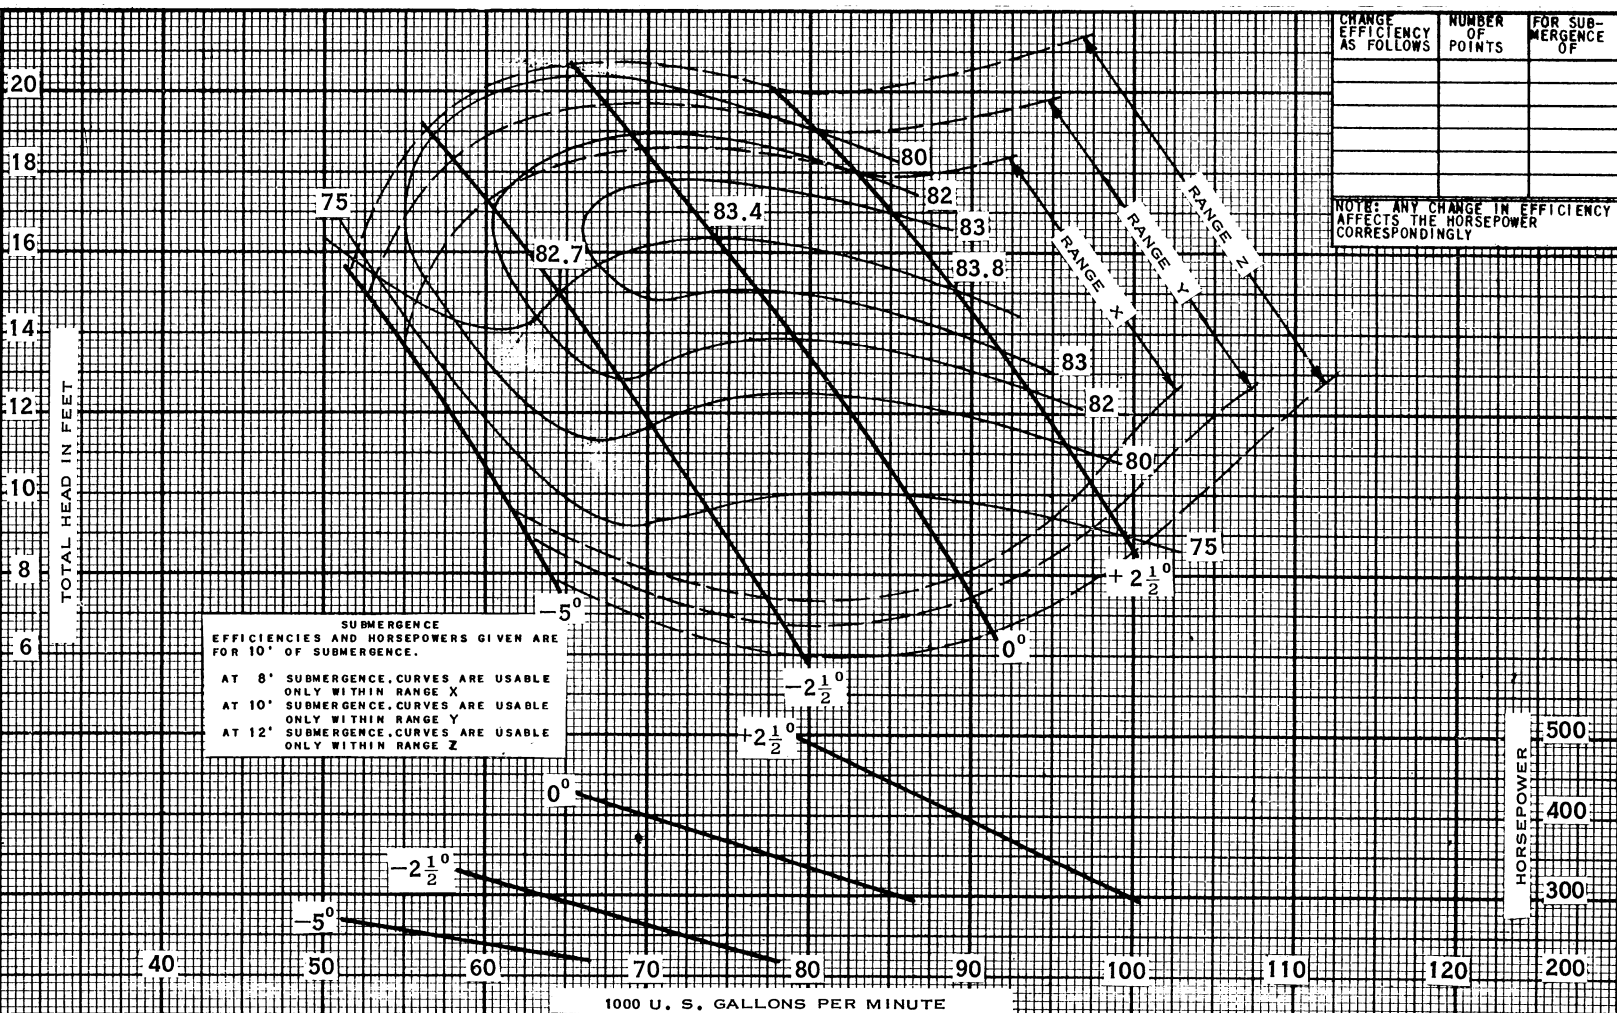

**SUBMERGENCE EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 10' OF SUBMERGENCE.**  
 AT 8' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE X  
 AT 10' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Y  
 AT 12' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Z

DESCRIPTION: Hydro-Foil Pump with: Bowl V 2431E ; Propeller V 2433D  
 Elbow  above  below base      dia with \_\_\_\_\_ x \_\_\_\_\_ inner column  
 Driver: \_\_\_\_\_

Customer \_\_\_\_\_  
 Item \_\_\_\_\_  
 Peerless Ref. No. \_\_\_\_\_ Pump No. \_\_\_\_\_




**HYDRAULIC PERFORMANCE WARRANTY**  
 Guaranteed at designated point only, and contingent on:  
 Proper sump configuration  
 Proper submergence  
 Fluid free of gas, air & abrasives  
 Proper lateral setting of impeller

<input type="checkbox"/> BOWL	<input type="checkbox"/> FIELD
<b>PERFORMANCE</b>	
CAPACITY	GPM
TOTAL DYNAMIC HEAD	FT
EFFICIENCY	
BRAKE HORSEPOWER	BHP

 Peerless Pump Company  
 Indianapolis, IN 46207-7026

<b>LABORATORY PERFORMANCE</b>	
SIZE	60 PL
RPM	320
CURVE NUMBER	V4063A

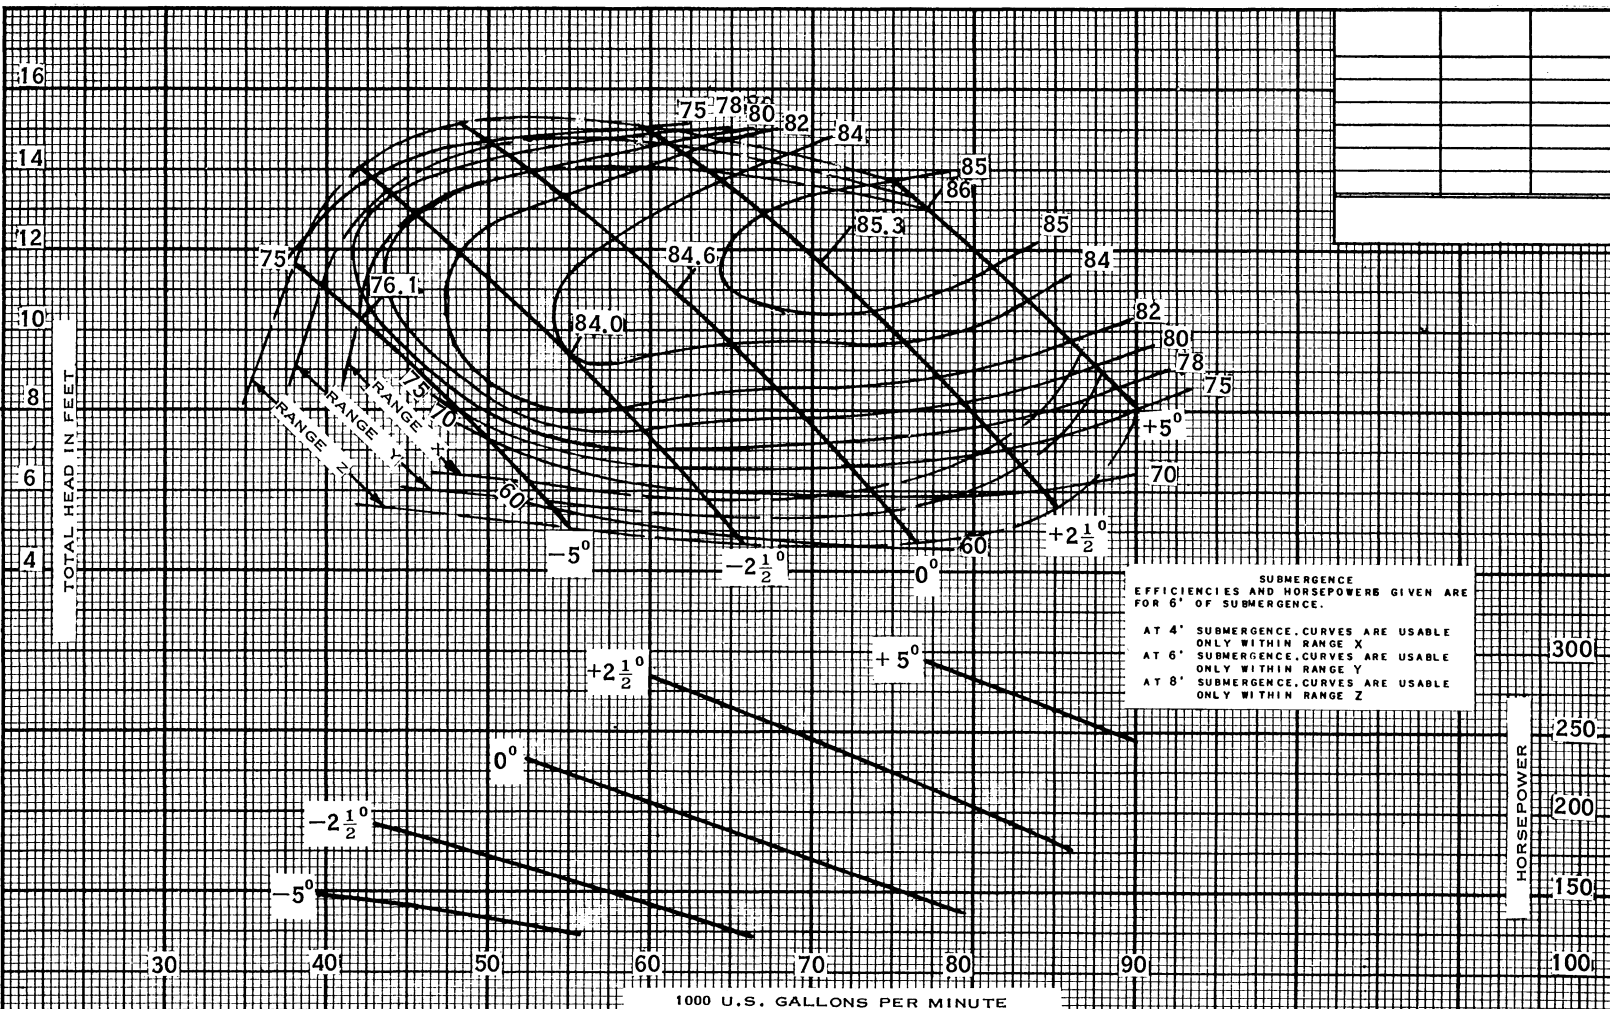

DESCRIPTION: Hydro-Foil Pump with; Bowl V2431E ; Propeller V2433D

Elbow  above  below base      dia with      x      inner column

Driver: \_\_\_\_\_

Customer \_\_\_\_\_

Item \_\_\_\_\_

Peerless Ref. No. \_\_\_\_\_ Pump No. \_\_\_\_\_

**HYDRAULIC PERFORMANCE WARRANTY**  
 Guaranteed at designated point only, and contingent on:  
 Proper sump configuration  
 Proper submergence  
 Fluid free of gas, air & abrasives  
 Proper lateral setting of impeller

BOWL  
 FIELD


**PERFORMANCE**

CAPACITY \_\_\_\_\_ GPM

TOTAL DYNAMIC HEAD \_\_\_\_\_ FT

EFFICIENCY \_\_\_\_\_

BRAKE HORSEPOWER \_\_\_\_\_ BHP



**LABORATORY PERFORMANCE**

SIZE \_\_\_\_\_


60 PL

RPM \_\_\_\_\_

290

CURVE NUMBER \_\_\_\_\_

V 4065A

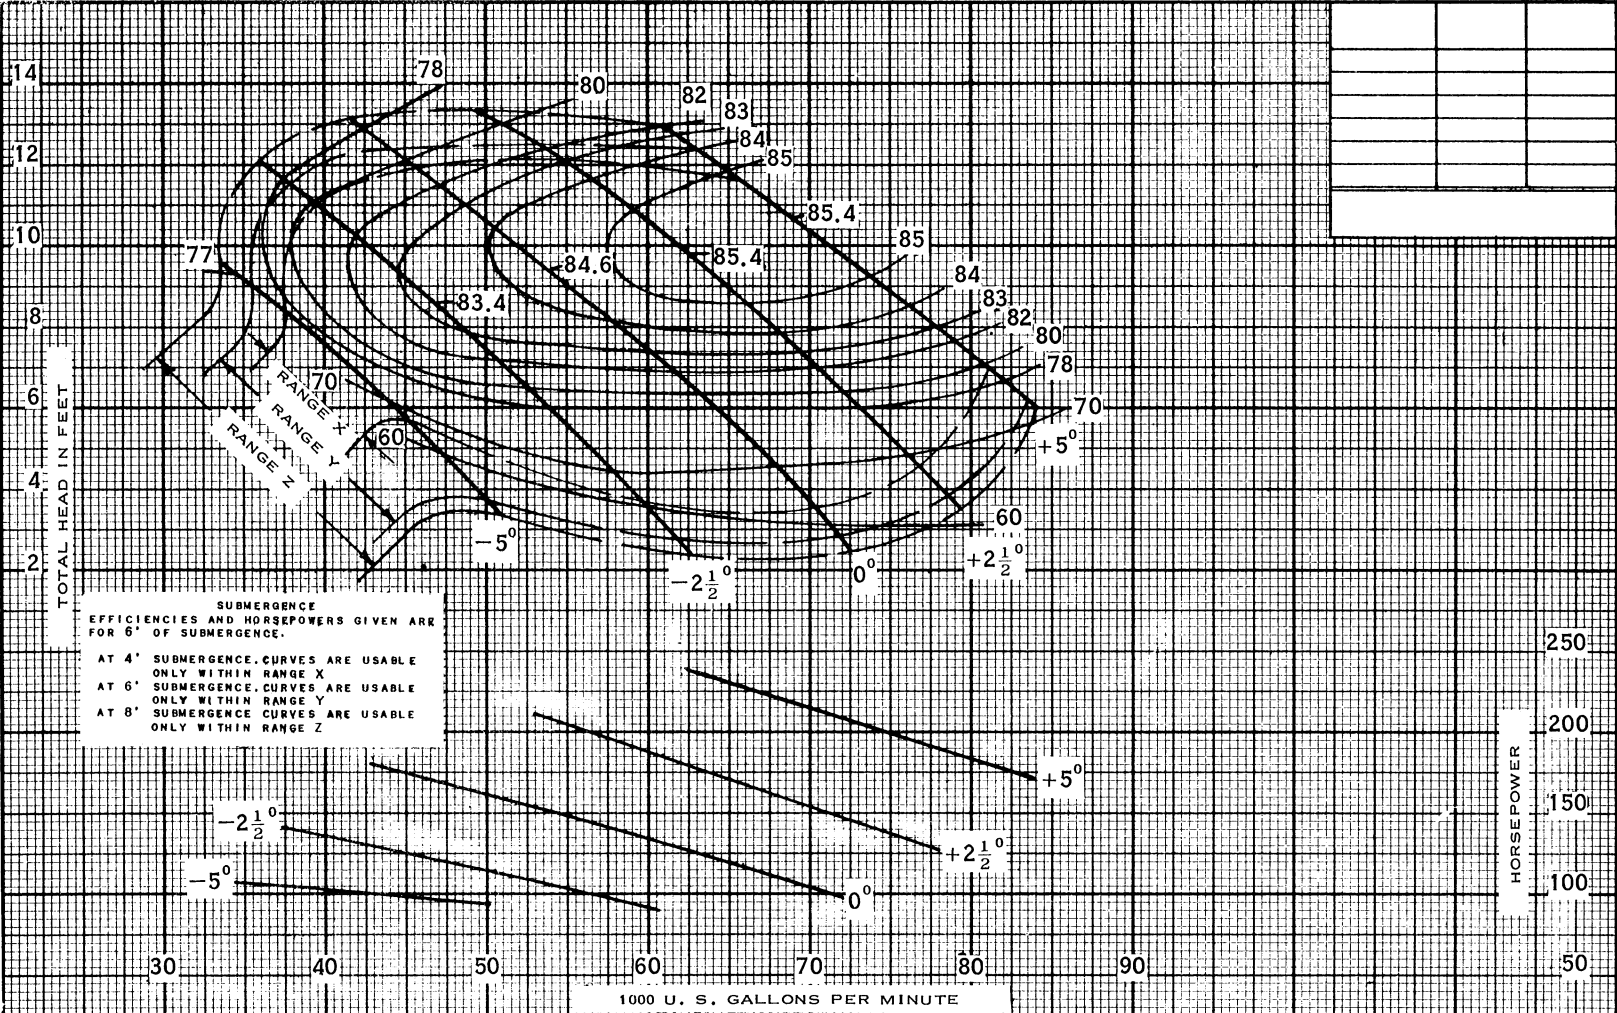

**SUBMERGENCE EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 6' OF SUBMERGENCE.**

AT 4' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE X

AT 6' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Y

AT 8' SUBMERGENCE, CURVES ARE USABLE ONLY WITHIN RANGE Z

DESCRIPTION: Hydro-Foil Pump with; Bowl V 2431 E ; Propeller V 2433 D

Elbow  above  low base      dia with \_\_\_\_\_ x \_\_\_\_\_ inner column

Driver: \_\_\_\_\_

Customer \_\_\_\_\_

Item \_\_\_\_\_

Peerless Ref. No. \_\_\_\_\_ Pump No. \_\_\_\_\_