








Technical specifications or safety instructions.



900





**Vertical Industrial and Process Pumps**



**Axial and Mixed Flow Pumps for Large Volume Pumping**



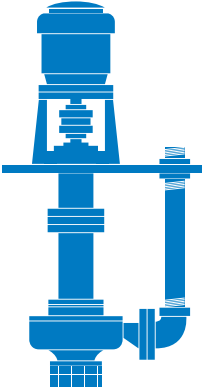




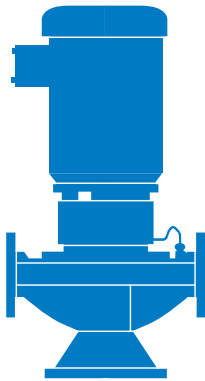


**Encased (Can Type) Water and Process Liquid Pumps**











**Vertical Turbine Pumps for Water Supply from Drilled Wells**

|   |  |   |  |   |
|---|--|---|--|---|
| <b>Type</b>                               | Vertical close coupled single or multi-stage turbine pumps.  | Vertical pumps for handling water in large volumes. Mixed flow types, in single and multi-stage designs and propeller types (axial flow). | Vertical lineshaft multi-stage close coupled pumps with pumping unit encased. Excellent for low NPSH conditions.                 | Vertical lineshaft deep well pumps. Options of oil lubrication or water lubrication, underground or surface discharge. Column size 2 1/2" to 24". |
| <b>Capacities</b>                         | Up to 150,000 gpm (34,091 m <sup>3</sup> /hr)  | Up to 220,000 gpm (50,000 m <sup>3</sup> /hr)   | Up to 150,000 gpm (34,091 m <sup>3</sup> /hr)  | Up to 10,000 gpm (2,273 m <sup>3</sup> /hr)   |
| <b>Head</b>                               | Up to 2,300 feet (701 meters)  | Up to 100 feet (30 meters)  | Up to 6,930 feet (2,112 meters)  | Up to 2,500 feet (760 meters)   |
| <b>Pressure</b>                           | To fit the application.  | To fit the application.   | To fit the application.  | Up to 1,500 feet (457 meters)   |
| <b>Horsepower</b>                         | Up to 5,000 hp (3,730 kW)  | Up to 5,000 hp (3,730 kW)   | Up to 5,000 hp (3,730 kW)  | Up to 5,000 hp (3,730 kW)   |
| <b>Drives</b>                             | Vertical electric motors, engines with right angle gears, combination gear drives, or vertical motors and variable speed drives. | Vertical electric motors, engines with right angle gears, combination gear drives, or vertical motors and variable speed drives.          | Vertical electric motors, engines with right angle gears, combination gear drives, or vertical motors and variable speed drives. | Vertical electric motors, engines with right angle gears, combination gear drives, or vertical motors and variable speed drives.                  |
| <b>Liquids Pumped</b>                     | Water, hydrocarbons, volatile liquids, and chemical solutions.   | Water, fresh or sea.  | Water, hydrocarbons, condensate and volatile liquids.  | Water and clear liquids.  |
| <b>Temperature</b>                        | Up to 450°F (232°C)  | Up to 140°F (60°C)  | Up to 450°F (232°C)  | Up to 180°F (82°C)  |
| <b>Materials of Construction</b>          | Machinable alloys and their combinations to suit the application and pumped liquid.  | Machinable alloys and their combinations to suit the application and pumped liquid.   | Machinable alloys and their combinations to suit the application and pumped liquid.  | Machinable alloys and their combinations to suit the application and pumped liquid.   |
| <b>For Additional Information Request</b> | Brochure B-110   | Brochure B-300  | Brochure B-400   | Brochure B-100  |

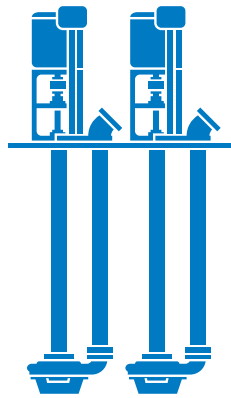
|   | <br><b>Vertical Submersible Pumps</b> | <br><b>Vertical Pre-Engineered Booster Pumps</b> | <br><b>Industrial Sump Pumps</b> | <br><b>Vertical Fire Pumps UL Listed, ULC Listed and FM Approved</b> |
|---|--|---|--|---|
| <b>Type</b>                               | Vertical deep well pumps with submerged motor.   | Pre-engineered, close-coupled vertical turbine pumps with fabricated steel suction barrels. Packing or mechanical seals.          | Heavy duty industrial sump pumps with interchangeability with the 8196 ANSI pump's wet ends. Series 8196 VSP.      | Vertical turbine pumps with appropriate fittings for providing water supply to fire protection systems in buildings, plants and yards.                  |
| <b>Capacities</b>                         | Up to 8,000 gpm (1,818 m <sup>3</sup> /hr)   | 80 to 500 gpm (18 to 114 m <sup>3</sup> /hr)  | 30 to 1,600 gpm (7 to 365 m <sup>3</sup> /hr)  | 250 to 5,000 gpm (57 to 1,136 m <sup>3</sup> /hr)   |
| <b>Head</b>                               | Up to 1,000 feet (305 meters)  | 69 to 474 feet (21 to 145 meters)   | 15 to 310 feet (5 to 95 meters)  | 92 to 1,176 feet (28 to 359 meters)   |
| <b>Pressure</b>                           | To fit the application.  | Up to 400 psi (28 kg/cm <sup>2</sup> , 2,758 kPa)   | To 20 feet sump depth in 6 inch increments.  | To fit the application.   |
| <b>Horsepower</b>                         | Up to 500 hp (373 kW)  | Up to 100 hp (75 kW)  | Up to 60 hp (45 kW)  | Up to 600 hp (448 kW)   |
| <b>Drives</b>                             | Submersible electric motors.   | Vertical electric motors.   | NEMA C faced electric motors, drip-proof and chemical and mill duty enclosures.                                    | Vertical electric motors and diesel engines with right angle gears.   |
| <b>Liquids Pumped</b>                     | Water and clear liquids.   | Water.  | Chemical and most process.   | Water.  |
| <b>Temperature</b>                        | Ambient within the limits for satisfactory equipment operation.  | Up to 115°F (46°C)  | Up to 180°F (82°C)   | Up to 115°F (46°C)  |
| <b>Materials of Construction</b>          | Cast iron, bronze fitted; all iron or bronze.  | Cast iron or bronze fitted.   | Ductile iron, 316 SS, 317 SS, CD4MCU fitted, or Alloy 20.  | Cast iron, bronze fitted as standard. Optional materials available for sea water and non-listed applications.   |
| <b>For Additional Information Request</b> | Brochure B-700   | Brochure B-2700   | Brochure B-9200  | Brochure B-1500<br>Brochure B-1510 (selection tables)   |

|   |   |  |  |  |
|---|---|--|--|--|
|   |    |   |    |   |
|   | <p><b>Horizontal Fire Pumps, UL Listed, ULC Listed and FM Approved</b></p>  | <p><b>In-Line Fire Pumps, UL and ULC Listed</b></p>  | <p><b>End Suction Fire Pumps, UL Listed and FM Approved</b></p>  | <p><b>Horizontal Split Case Single Stage Pumps</b></p>   |
| <b>Type</b>                               | Horizontal centrifugal pumps with appropriate fittings for providing water supply to fire protection systems in buildings, plants and yards. Types AF, ABF, AEF, TUF, TUTF. | Compact in-line centrifugal fire pumps with appropriate fittings for providing water supply to fire protection systems in buildings, plants and yards. Type PVF. | End suction centrifugal fire pumps with appropriate fittings for providing water supply to fire protection systems in buildings, plants and yards. Type UNF. | Horizontal split case single stage centrifugal pumps. Packed and sealed types. 2" to 24" discharge sizes. Types A, AE, BT. |
| <b>Capacities</b>                         | 250 to 5,000 gpm (57 to 1,136 m <sup>3</sup> /hr)   | 50 to 500 gpm (11 to 114 m <sup>3</sup> /hr)   | Up to 500 gpm (114 m <sup>3</sup> /hr)   | Up to 25,000 gpm (5,682 m <sup>3</sup> /hr)  |
| <b>Head</b>                               | 92 to 630 feet (28 to 192 meters)   | Up to 406 feet (123 meters)  | Up to 340 feet (104 meters)  | Up to 660 feet (201 meters)  |
| <b>Pressure</b>                           | Up to 640 psi (45 kg/cm <sup>2</sup> , 4,414 kPa)   | Up to 175 psi (12 kg/cm <sup>2</sup> , 1,207 kPa)  | Up to 147 psi (10 kg/cm <sup>2</sup> , 1,014 kPa)  | Up to 400 psi (28 kg/cm <sup>2</sup> , 2,758 kPa)  |
| <b>Horsepower</b>                         | Up to 800 hp (597 kW)   | Up to 75 hp (56 kW)  | Up to 75 hp (56 kW)  | Up to 1,500 hp (1,119 kW)  |
| <b>Drives</b>                             | Horizontal electric motors and diesel engines.  | Vertical close coupled electric motors.  | Horizontal electric motors and diesel engines.   | Electric motors, diesel engines, steam turbines, combinations.   |
| <b>Liquids Pumped</b>                     | Water.  | Water.   | Water.   | Water and clear liquids.   |
| <b>Temperature</b>                        | Ambient within the limits for satisfactory equipment operation.   | Ambient within the limits for satisfactory equipment operation.  | Ambient within the limits for satisfactory equipment operation.  | Up to 300°F (149°C)  |
| <b>Materials of Construction</b>          | Cast iron, bronze fitted as standard. Optional materials available for sea water and non-listed applications.   | Cast iron, bronze fitted.  | Cast iron, bronze fitted.  | Cast iron, bronze fitted as standard. Other materials available.   |
| <b>For Additional Information Request</b> | Brochure B-1500<br>Brochure B-1510 (selection tables)   | Brochure B-1500<br>Brochure B-1510 (selection tables)  | Brochure F-1900  | Brochure B-1200, Type AE<br>Brochure B-1300, Type A<br>Brochure F-2000, Type BT  |

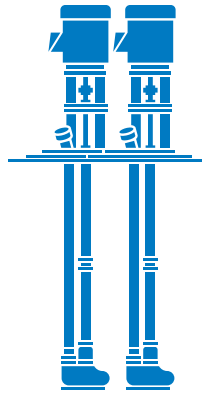
|   |  |   |   |   |
|---|--|---|---|---|
|   |             |    |   |    |
|   | <b>Horizontal Split Case Multi-Stage Pumps</b>   | <b>ANSI/ASME Standard Pumps</b>   | <b>Heavy Duty, Industrial, Paper Stock, Slurry Pumps</b>  | <b>Self-Priming Industrial Pumps</b>  |
| <b>Type</b>                               | Horizontal split case multi-stage centrifugal pumps. Packed and sealed types. Types TU, TUT. | Standard ANSI/ASME configuration, back pullout, heavy duty, industrial, process pumps. Packed and sealed types. Model 8196.     | Heavy duty, industrial, paper stock process pumps. Packed and sealed types. Model 8175.   | Integral self-priming pumps. Packed and sealed types. Model 8796.   |
| <b>Capacities</b>                         | Up to 4,500 gpm (1,023 m <sup>3</sup> /hr)   | Up to 4,500 gpm (1,023 m <sup>3</sup> /hr)  | Up to 21,000 gpm (4,823 m <sup>3</sup> /hr)   | Up to 700 gpm (159 m <sup>3</sup> /hr)  |
| <b>Head</b>                               | Up to 1,600 feet (488 meters)  | Up to 730 feet (222 meters)   | Up to 350 feet (107 meters)   | Up to 420 feet (128 meters)   |
| <b>Pressure</b>                           | Up to 700 psi (49 kg/cm <sup>2</sup> , 4,827 kPa)  | From full vacuum to 375 psi (26 kg/cm <sup>2</sup> , 2,586 kPa)   | Up to 285 psi (20 kg/cm <sup>2</sup> , 1,965 kPa)   | Suction lift to 20 feet (6 meters)  |
| <b>Horsepower</b>                         | Up to 800 hp (597 kW)  | Up to 300 hp (224 kW)   | Up to 750 hp (560 kW)   | Up to 60 hp (45 kW)   |
| <b>Drives</b>                             | Electric motors, diesel engines, steam turbines, combinations.                               | Electric motors, steam turbines and variable speed diesel engines.  | Electric motors, steam turbines and variable speed diesel engines.  | Electric motors, steam turbines and variable speed diesel engines.  |
| <b>Liquids Pumped</b>                     | Water and clear liquids.   | Chemical, pulp and paper, and all process.  | Chemical, pulp and paper, and all process.  | Clean liquid sumps, chemical transfers and petroleum transfers.   |
| <b>Temperature</b>                        | Up to 300°F (149°C)  | From -90°F to 500°F (-68°C to 260°C)  | Up to 450°F (232°C)   | Up to 500°F (260°C)   |
| <b>Materials of Construction</b>          | Cast iron, bronze fitted as standard. Other materials available.                             | Ductile iron, 316 SS, CD4MCU, 317 SS, Nickel, Alloy 20, Hastelloy(s), Titanium, Zirconium, plus virtually any machinable alloy. | Ductile iron, 316 SS, CD4MCU, 317 SS, Nickel, Alloy 20, Hastelloy(s), Titanium, Zirconium, plus virtually any machinable alloy. | Ductile iron, 316 SS, CD4MCU, 317 SS, Nickel, Alloy 20, Hastelloy(s), Titanium, Zirconium, plus virtually any machinable alloy. |
| <b>For Additional Information Request</b> | Brochure B-1400  | Brochure B-8196   | Brochure B-8175   | Brochure B-8796   |

|   | <br><b>General Purpose End Suction Pumps</b>                               | <br><b>Modular Multi-Stage Pumps</b> | <br><b>Hydroconstant® Variable Speed Pump Drives</b> | <br><b>General Purpose In-Line Centrifugal Pumps</b> |
|---|---|---|--|---|
| <b>Type</b>                               | Horizontal end suction single stage vertical split case centrifugal pumps. Packed and sealed types. Types C and PE (close coupled), Type F (frame mounted). | Horizontal modular multi-stage centrifugal pumps of ring section design. Packed and sealed types. Types MSL and MSM.  | Horizontal variable speed drives for control of pump flow and head. Types MP, M and MO.  | Centrifugal in-line, pipe supported, close coupled pumps and motor. Type PV.  |
| <b>Capacities</b>                         | Up to 3,400 gpm (773 m <sup>3</sup> /hr)  | Up to 1,100 gpm (255 m <sup>3</sup> /hr)  | Determined by pump selected.   | Up to 1,100 gpm (250 m <sup>3</sup> /hr)  |
| <b>Head</b>                               | Up to 430 feet (131 meters)   | Up to 2,130 feet (650 meters)   | Determined by pump selected.   | Up to 400 feet (122 meters)   |
| <b>Pressure</b>                           | Up to 175 psi (12 kg/cm <sup>2</sup> , 1,207 kPa)   | Up to 910 psi (63 kg/cm <sup>2</sup> )  | Determined by pump selected.   | Up to 175 psi (12 kg/cm <sup>2</sup> , 1,207 kPa)   |
| <b>Horsepower</b>                         | Series C: Up to 100 hp (75 kW), Series F: Up to 125 hp (93 kW), Series PE: Up to 15 hp (11 kW)  | Up to 453 hp (340 kW)   | Up to 250 hp (186 kW)  | Up to 100 hp (75 kW)  |
| <b>Drives</b>                             | Electric motors, close coupled or base mounted and engine drives.   | Horizontal electric motors.   | Horizontal electric motors.  | Vertical close coupled electric motors.   |
| <b>Liquids Pumped</b>                     | Water and clear liquids.  | Water and clear liquids.  | Liquids suitable for pump selected.  | Water and clear liquids.  |
| <b>Temperature</b>                        | Up to 250°F (121°C)   | Up to 356°F (180°C)   | Within limits of pump selected.  | Up to 250°F (121°C)   |
| <b>Materials of Construction</b>          | Cast iron, bronze fitted and all iron.  | Cast iron and bronze fitted. Other materials available.   | Compatible with pump selected.   | Cast iron, bronze fitted and all iron.  |
| <b>For Additional Information Request</b> | Brochure B-2300, Types F & C<br>Brochure B-2310, Type PE  | Brochure F-2800   | Brochure B-4100A   | Brochure B-2200   |

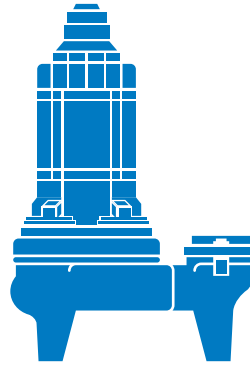




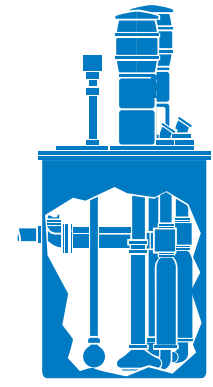
**Vertical Enclosed Shaft Sump Pumps**



**Vertical Enclosed Shaft Sewage Pumps**







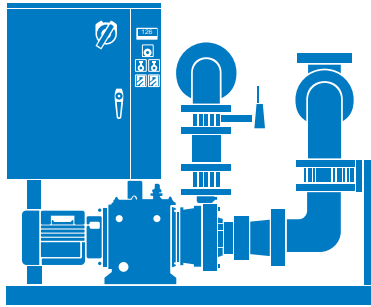
**Submersible Sewage Pumps**




**Flush-Kleen® Clog-Proof Sewage Systems**

|   |   |   |  |  |
|---|---|---|--|--|
| <b>Type</b>                               | Vertical enclosed shaft pumps for dewatering sump or bilge liquids. Type L. | Vertical enclosed shaft pumps for sewage and waste water. Type VCS. | Submersible solids handling close coupled pumps and motor for sewage and waste water. Type UW. | Flush-Kleen® strainers collect solids which are flushed from system when pumps are activated. Rags and paper won't clog pumps. (For vertical VCS and submersible UW sewage pumps.) |
| <b>Capacities</b>                         | Up to 250 gpm (63 m <sup>3</sup> /hr)                                       | Up to 900 gpm (204 m <sup>3</sup> /hr)                              | Up to 550 gpm (125 m <sup>3</sup> /hr)   | Up to 550 gpm (125 m <sup>3</sup> /hr)   |
| <b>Head</b>                               | Up to 100 feet (30 meters)  | Up to 110 feet (34 meters)  | Up to 130 feet (40 meters)   | As required for pumps.   |
| <b>Pressure</b>                           | Up to 43 psi (3 kg/cm <sup>2</sup> , 296 kPa)                               | Up to 55 psi (4 kg/cm <sup>2</sup> , 379 kPa)                       | Up to 65 psi (5 kg/cm <sup>2</sup> , 448 kPa)  | —  |
| <b>Horsepower</b>                         | Up to 30 hp (22 kW)   | Up to 30 hp (22 kW)   | Up to 20 hp (15 kW)  | As required by pumps.  |
| <b>Drives</b>                             | Vertical electric motors.   | Vertical electric motors.   | Submersible electric motors.   | Vertical or submersible electric motors.   |
| <b>Liquids Pumped</b>                     | Water and non-corrosive liquids.  | Sewage and non-corrosive liquids.                                   | Sewage and non-corrosive liquids.  | Sewage and non-corrosive liquids.  |
| <b>Temperature</b>                        | Up to 90°F (32°C)   | Up to 110°F (43°C)  | Up to 105°F (40°C)   | As required by pumps.  |
| <b>Materials of Construction</b>          | Cast iron, bronze fitted.   | Cast iron.  | Cast iron.   | Cast iron, bronze fitted.  |
| <b>For Additional Information Request</b> | Brochure B-6110   | Brochure B-6300   | Brochure B-6400  | Brochure B-6310  |

|   |  |   |   |   |
|---|--|---|---|---|
|   |                                     |                                |             |            |
|   | <b>Submersible Sump Pumps</b>  | <b>Sealrode® Floatless Pump Controllers</b>   | <b>Centrifugal Condensate, Boiler Feed Systems</b>  | <b>Centrifugal Condensate, Boiler Feed Systems</b>  |
| <b>Type</b>                               | Submersible centrifugal close coupled pumps and motor for dewatering and liquid removal from sumps and pits. Type U. | Sealed electrodes isolated from contaminants in pumped liquid. Eliminates need for conventional float switches. | Centrifugal simplex or duplex mounted integrally with steel or cast iron receivers. Series Q. | Centrifugal simplex or duplex mounted integrally with steel or cast iron receivers. Series P. |
| <b>Capacities</b>                         | Up to 72 gpm (16 m <sup>3</sup> /hr)   | —   | Up to 18 gpm (4 m <sup>3</sup> /hr)   | Up to 150 gpm (34 m <sup>3</sup> /hr)   |
| <b>Head</b>                               | Up to 74 feet (23 meters)  | —   | Up to 92 feet (28 meters)   | Up to 173 feet (53 meters)  |
| <b>Pressure</b>                           | —  | —   | Up to 40 psi (3 kg/cm <sup>2</sup> , 275 kPa)   | Up to 75 psi (5 kg/cm <sup>2</sup> , 517 kPa)   |
| <b>Horsepower</b>                         | Up to 1 <sup>1</sup> / <sub>2</sub> hp (1 kW)  | Up to 15 hp (11 kW)   | Up to 3 <sup>3</sup> / <sub>4</sub> hp (.56 kW)   | Up to 7 <sup>1</sup> / <sub>2</sub> hp (5.6 kW)   |
| <b>Drives</b>                             | Submersible electric motors.   | —   | Vertical close coupled electric motors.   | Vertical close coupled electric motors.   |
| <b>Liquids Pumped</b>                     | Seepage and drainage water.  | Water, sewage and waste liquids.  | Clean clear condensate or boiler feed water.  | Clean clear condensate or boiler feed water.  |
| <b>Temperature</b>                        | Up to 200°F (93°C)   | Up to 140°F (60°C)  | Up to 200°F (93°C)  | Up to 200°F (93°C)  |
| <b>Materials of Construction</b>          | Cast iron, bronze fitted.  | Steel terminal housing, aluminum die cast epoxy coated terminal head.   | Cast iron, bronze fitted.   | Cast iron, bronze fitted.   |
| <b>For Additional Information Request</b> | Brochure B-6200  | Brochure B-6610   | Brochure B-5400   | Brochure B-5400   |



**Peerless Package Pumping Systems**



**Peerless HC Plus<sup>®</sup> System**

**Type**

Experience in evaluating customer pump application requirements has led to the design and development of thousands of Peerless packaged pumping systems. Package systems, consisting of pre-piped and pre-wired pumps, drives and controls have been built to satisfy customer needs in agricultural irrigation, plant circulating service, municipal water distribution and fire protection applications.

The Peerless HC Plus variable frequency drive system uses state-of-the-art technology, with easy to operate controls. From start-up sequencing to shutdown logic, the Peerless system is designed to provide pump users with complete system control, as well as maximum operating efficiency.

**Features**

**You can take advantage of these important Peerless packaged system benefits:**

- Effective space utilization
- Accurate pre-determined cost
- Simplified installation
- Complete equipment capability
- Single source service and warranty
- Equipment tailored to your requirements

**Features of the Peerless HC Plus include:**

- Works with new installations and retrofits
- Designed specifically for pumps
- Pre-wired, easy to install
- Displays gpm and psi
- Reduces energy consumption
- Touch pad controls
- Saves operating costs
- Microprocessor based
- Simplex, duplex and multiplex units

**For Additional Information Request**

Brochure F-1530

Brochure F-4800

