


**MHL/MPL SELF-PRIMING SEALLESS PUMPS
HORIZONTAL WITH METAL CONSTRUCTION**

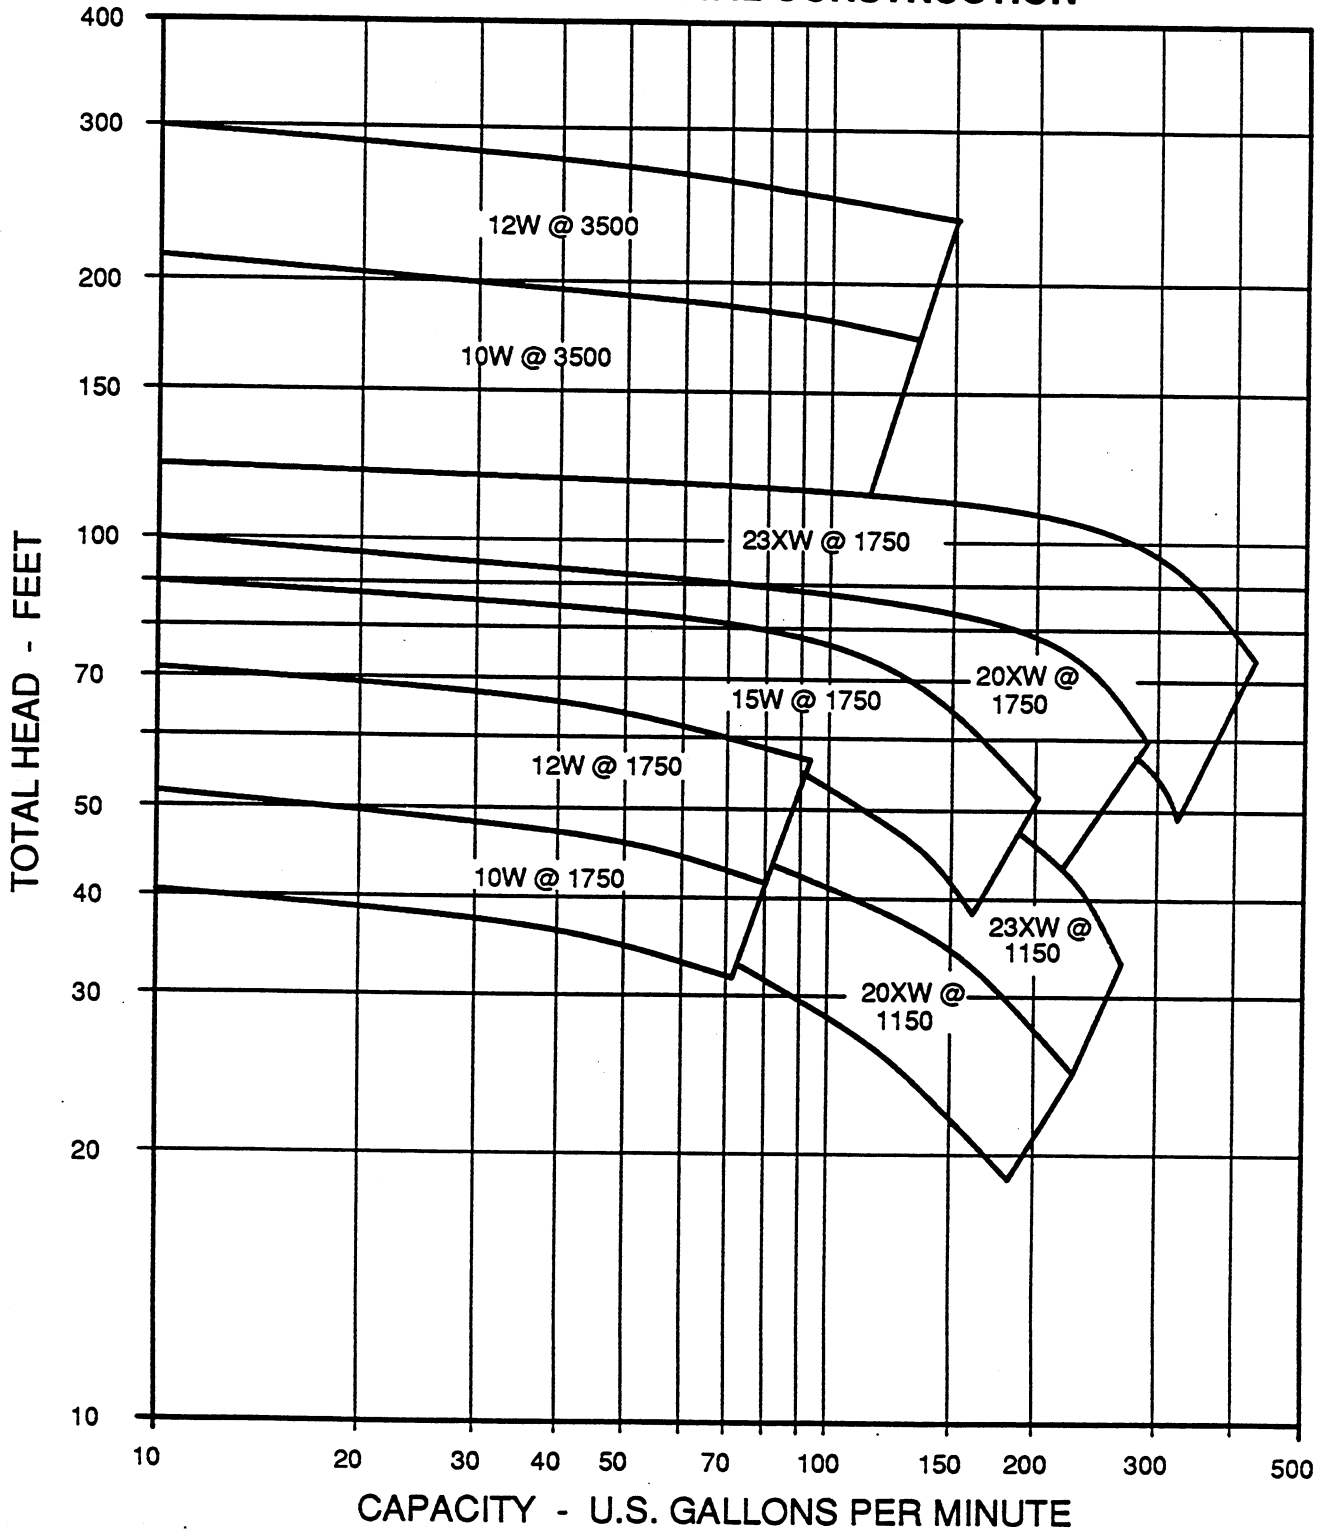

The LHL/LPL performance curves are being modified in accordance with test data utilizing the magnetic drive power end. Estimated performance may be obtained by referring to the existing LHL/LPL curves by multiplying priming times by 1.5 (limit applications to those requiring a maximum 2 minute priming time and 10' suction lift), adding 3' to NPSHR values, and adjusting the BHP: for 1150 RPM add 2 HP, 1750 RPM add 3 HP, and for 3500 RPM add 9 HP. The test program involves the model numbers above. Please contact the factory for any other operating conditions.