


Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5- 6 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/3.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-002	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	7.06 hp
Item : 1		Closed Valve Pressure	154.842 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

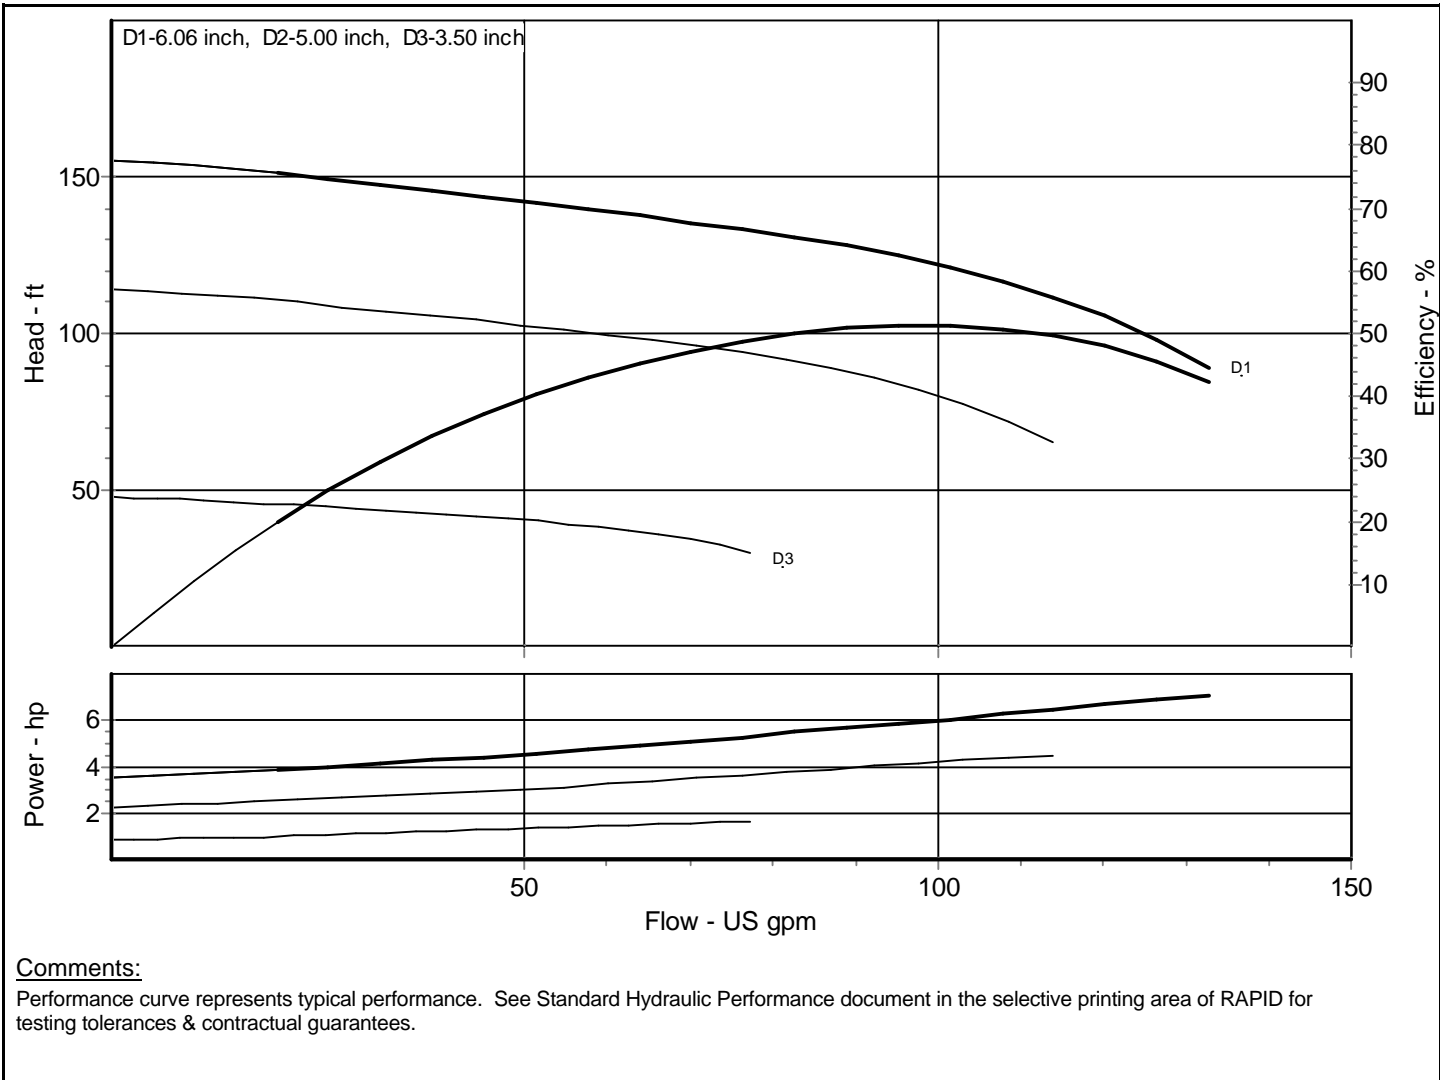


Comments:
Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5- 6 STP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/3.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-001	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	0.98 hp
Item : 1		Closed Valve Pressure	37.628 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

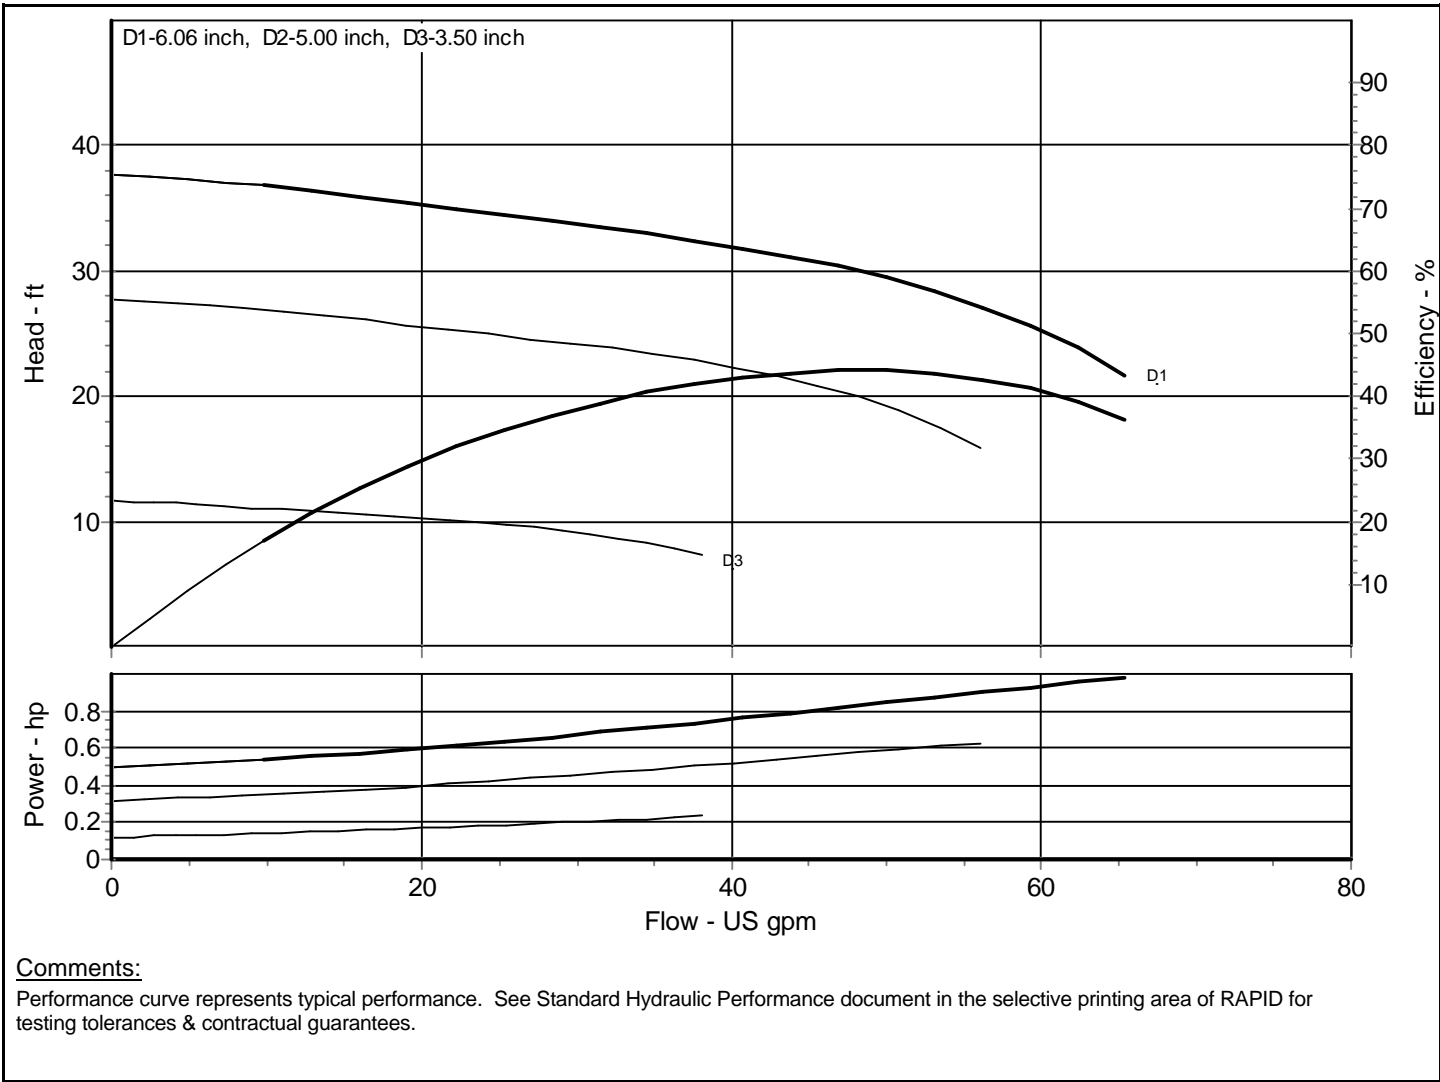


Comments:
Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-6 STP 8196LF	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-001	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	4.62 hp
Item : 1		Closed Valve Pressure	157.922 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

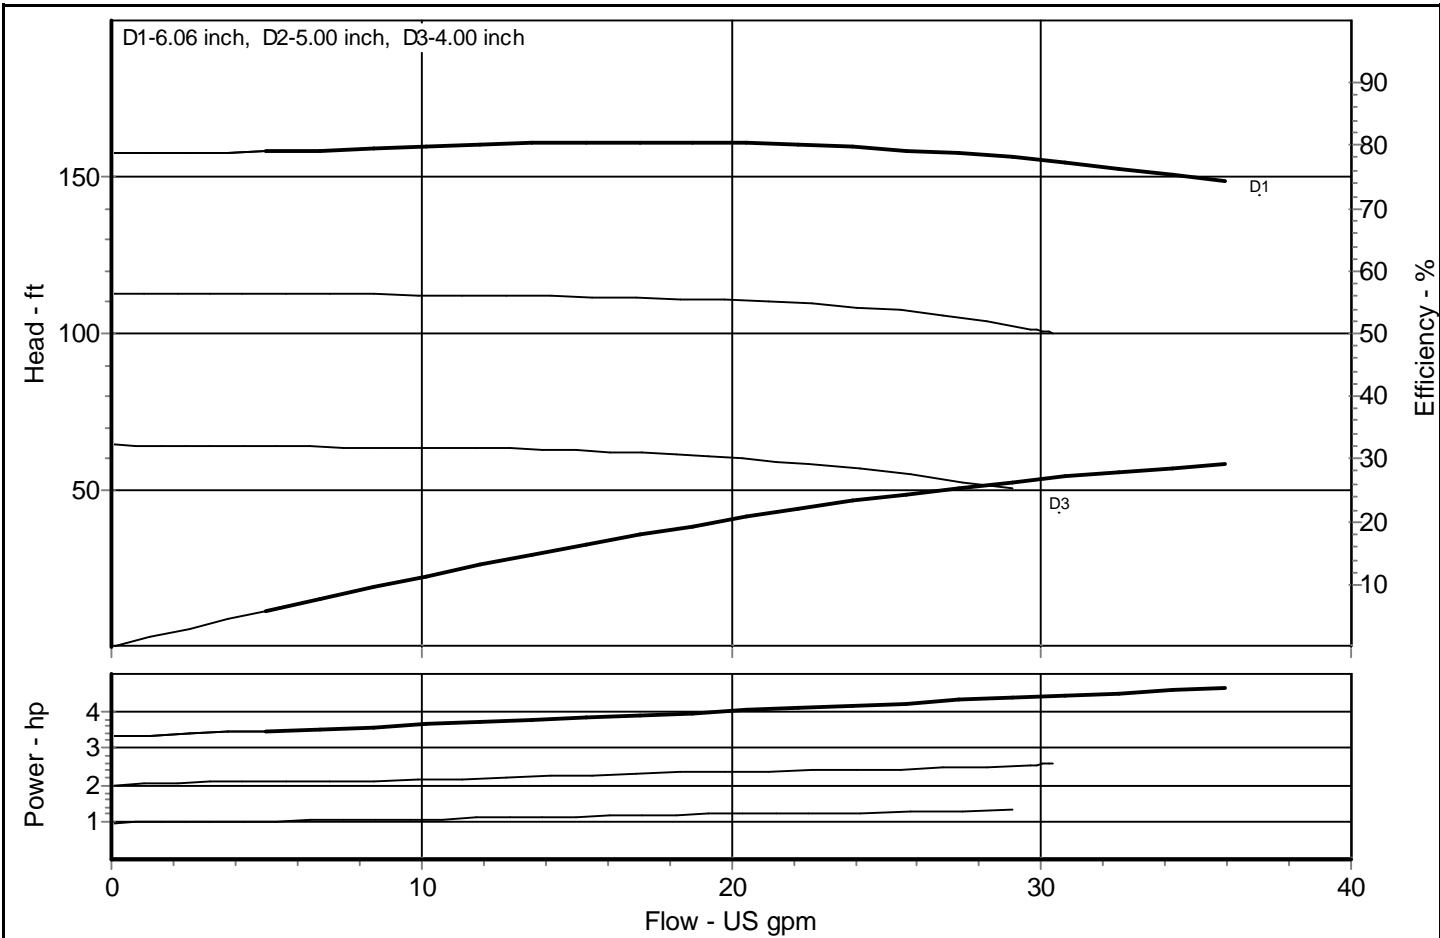


Comments:
Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-6 STP 8196LF	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-001	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	4.62 hp
Item : 1		Closed Valve Pressure	157.922 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

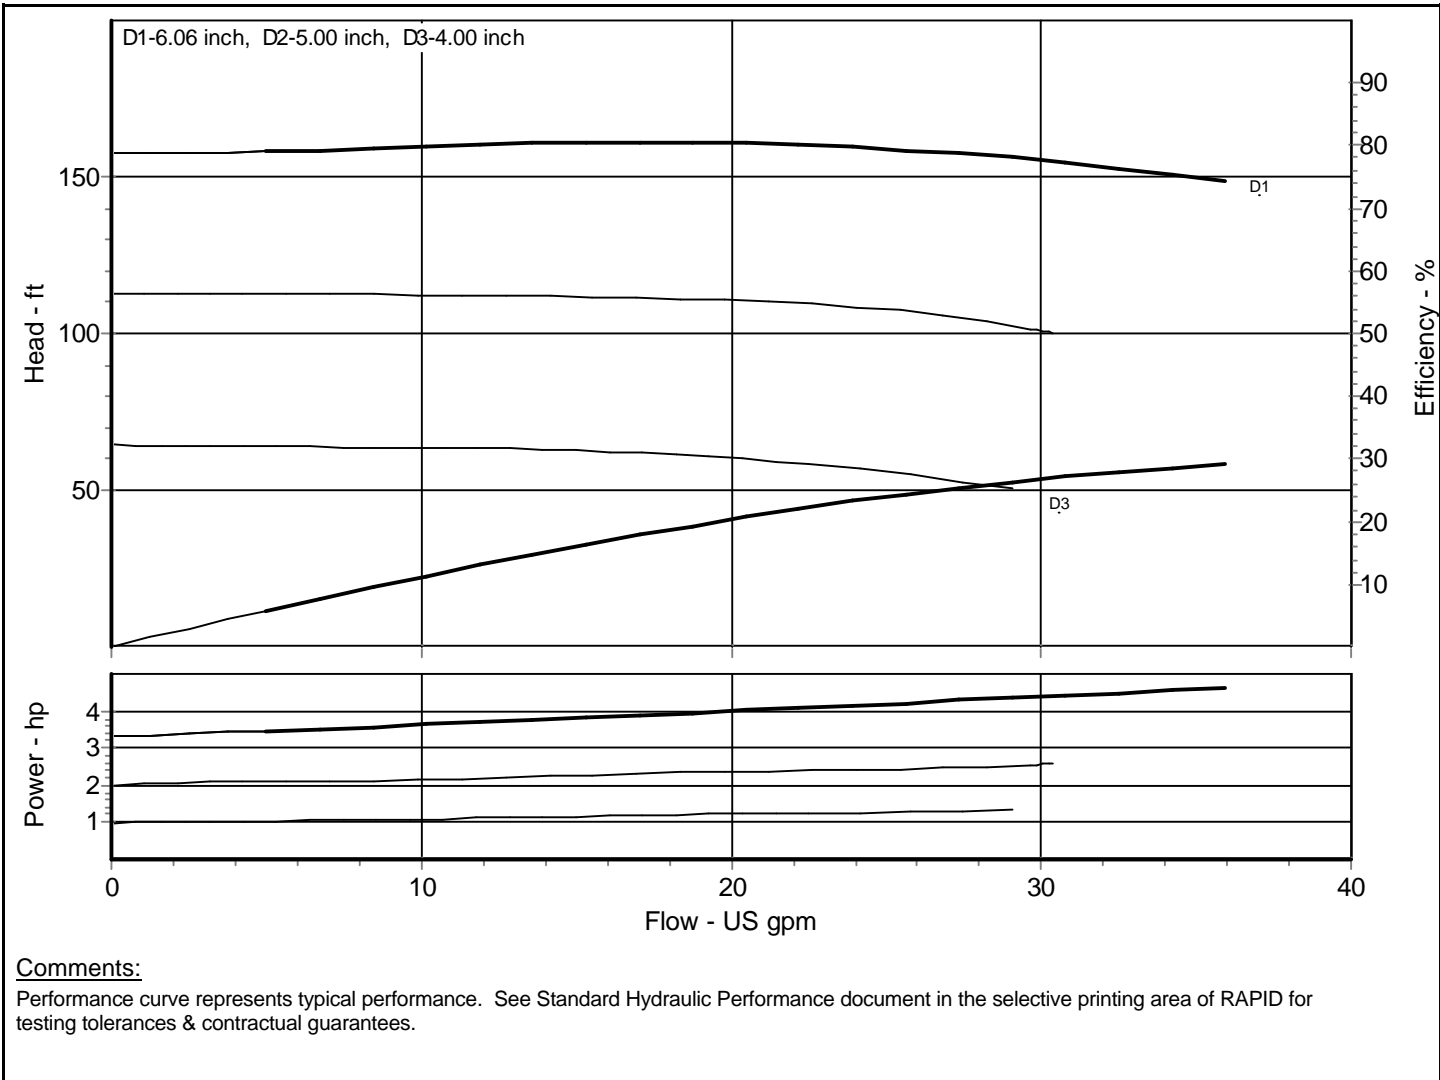

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-8 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-006	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	19.09 hp
Item : 1		Closed Valve Pressure	301.676 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

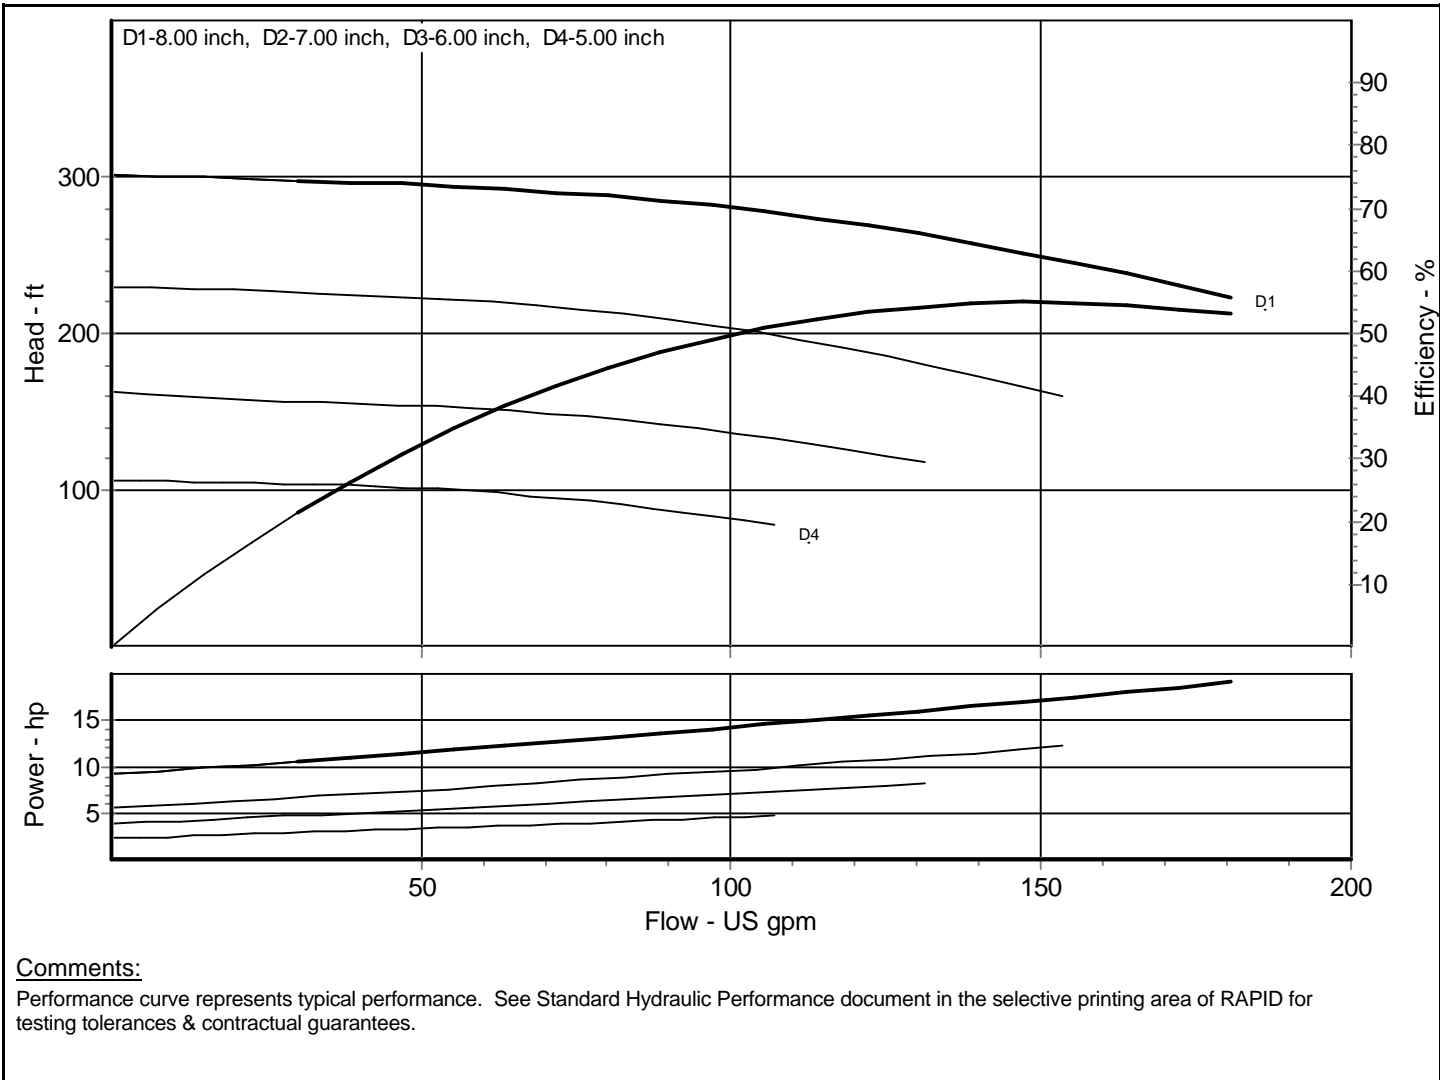

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-8 STP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-005	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	2.41 hp
Item : 1		Closed Valve Pressure	73.206 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

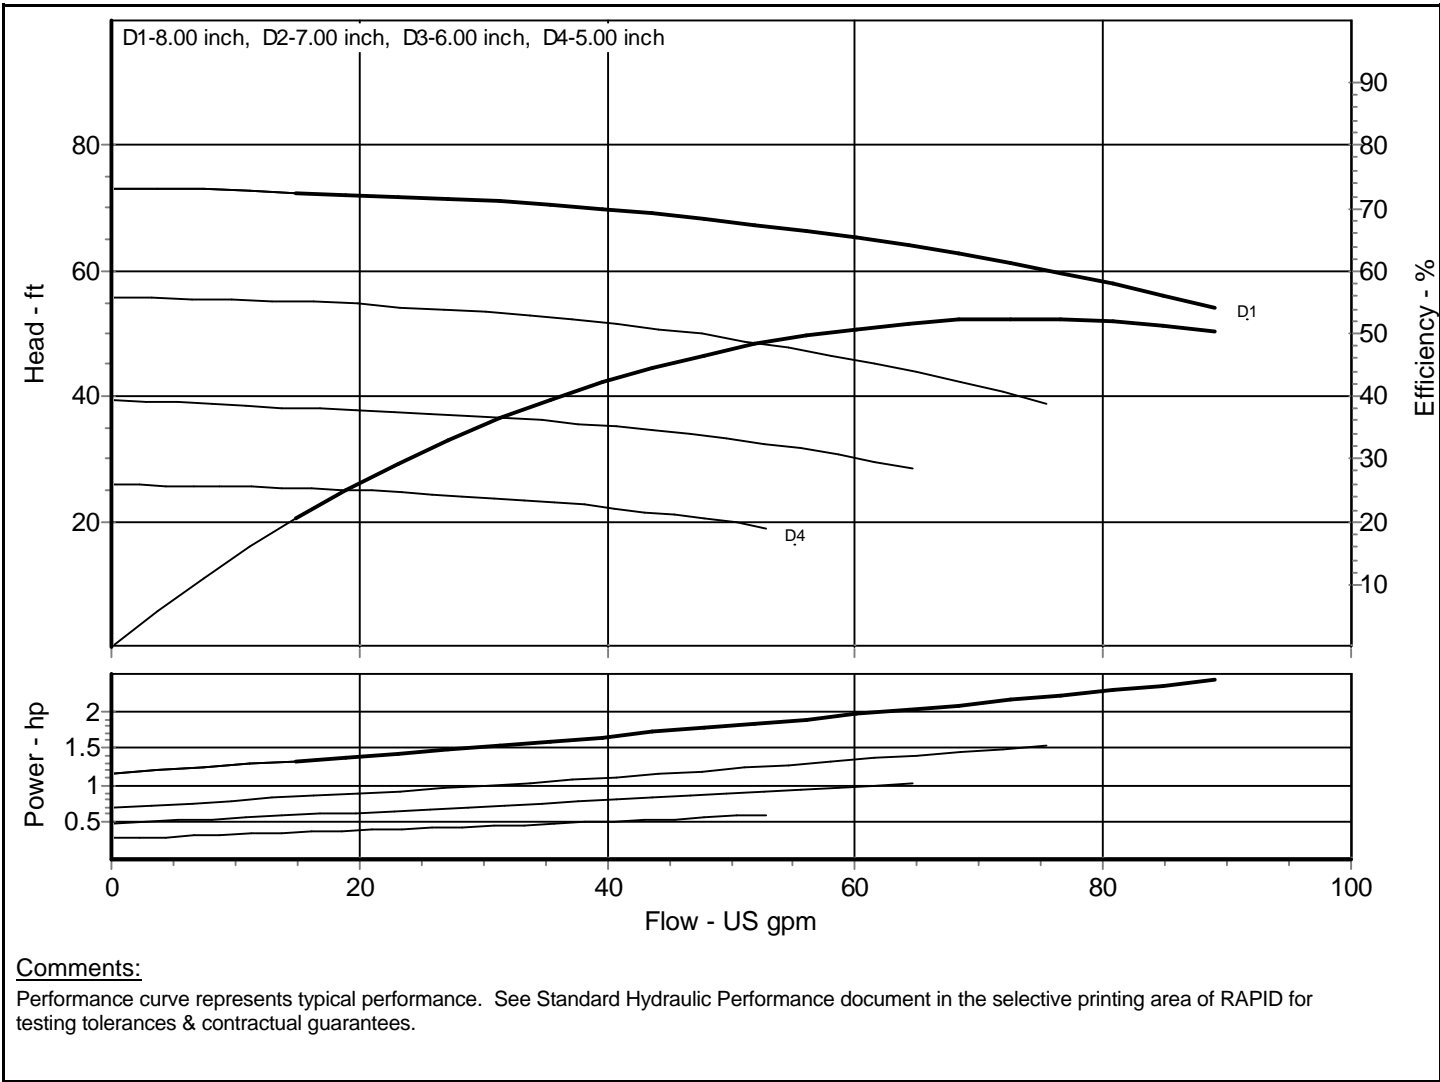

Comments:


Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-8 STP 8196LF	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-003	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	11.12 hp
Item : 1		Closed Valve Pressure	257.983 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

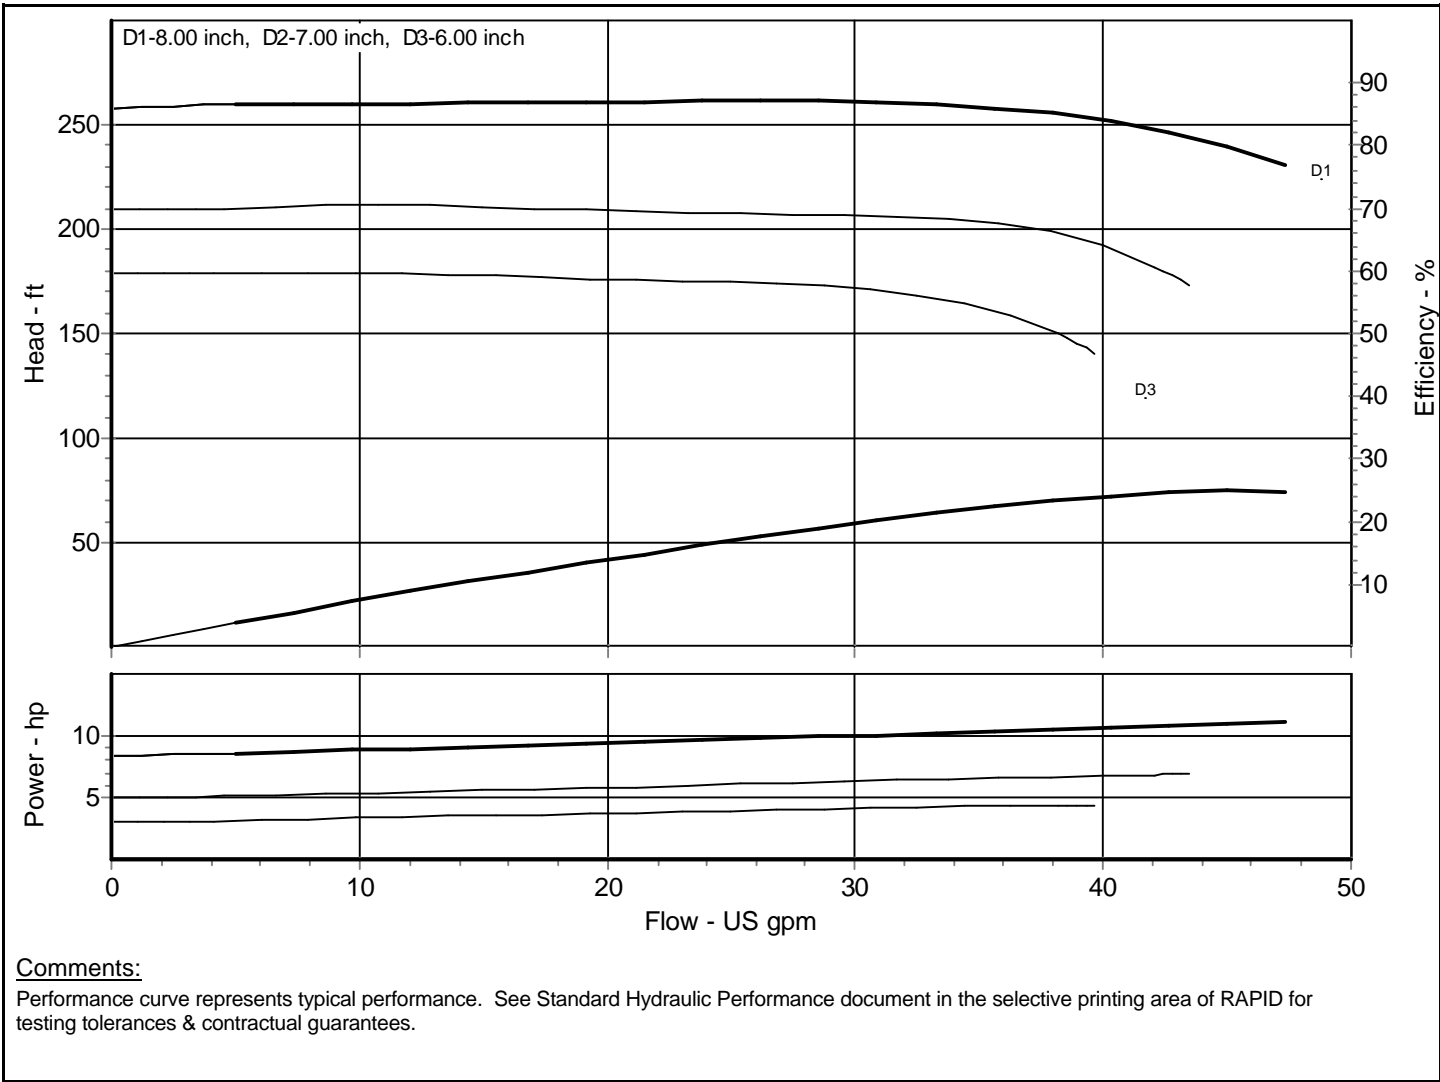

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-8 STP 8196LF	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-004	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	1.56 hp
Item : 1		Closed Valve Pressure	63.018 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

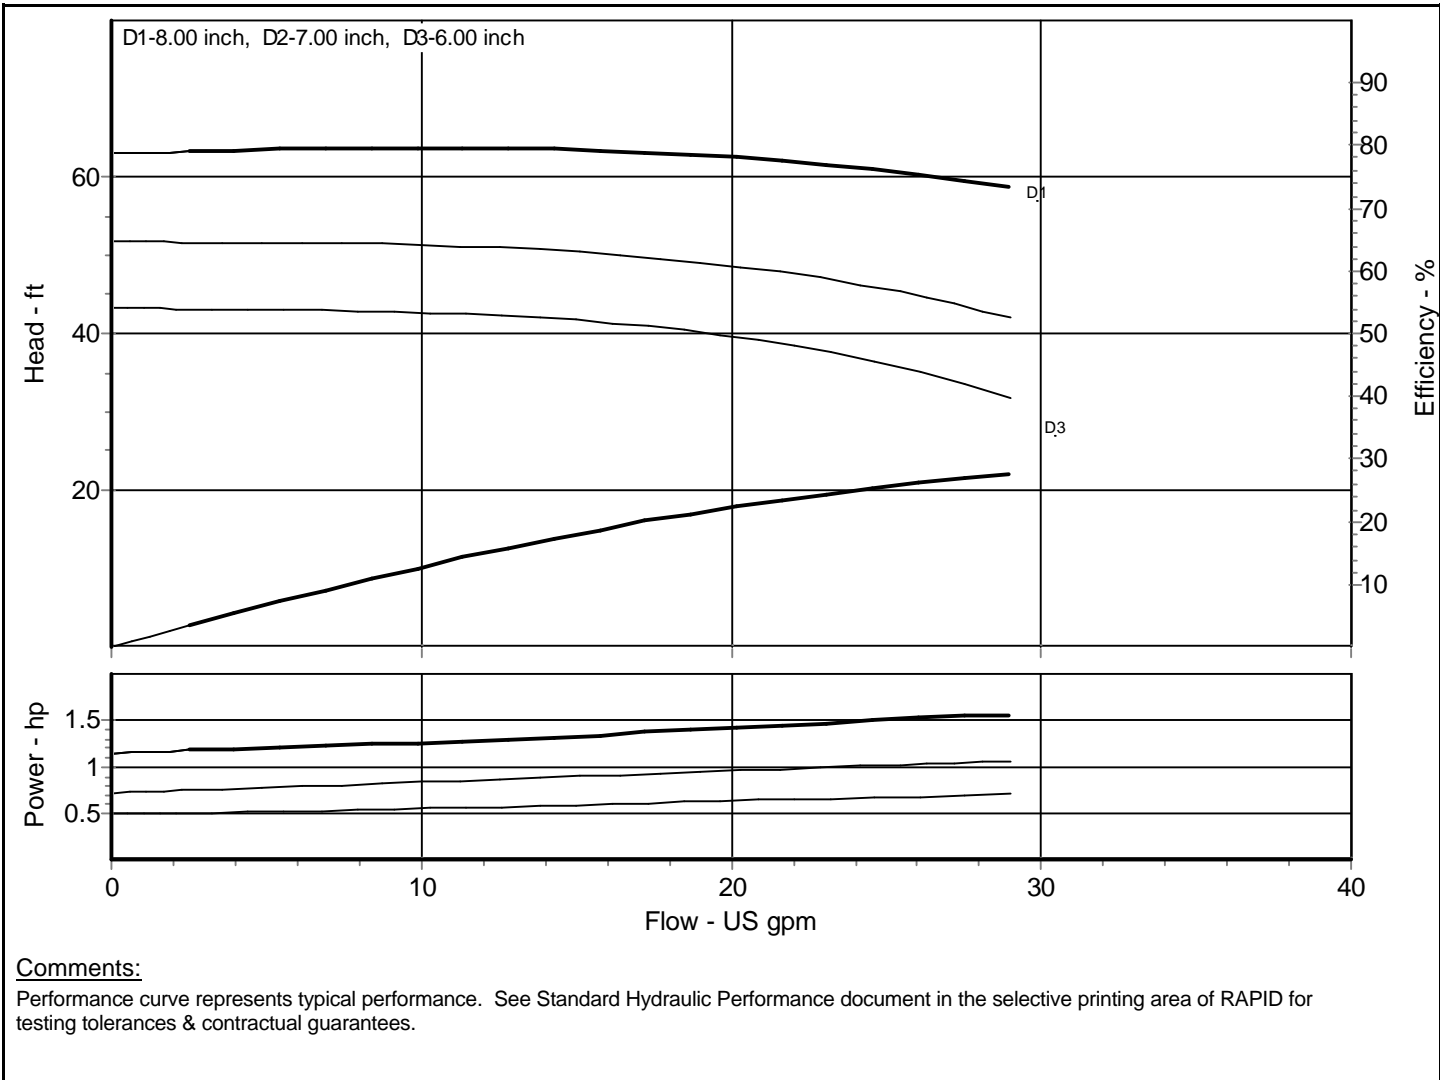

Comments:


Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x2-10 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-020	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	5.47 hp
Item : 1		Closed Valve Pressure	119.075 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

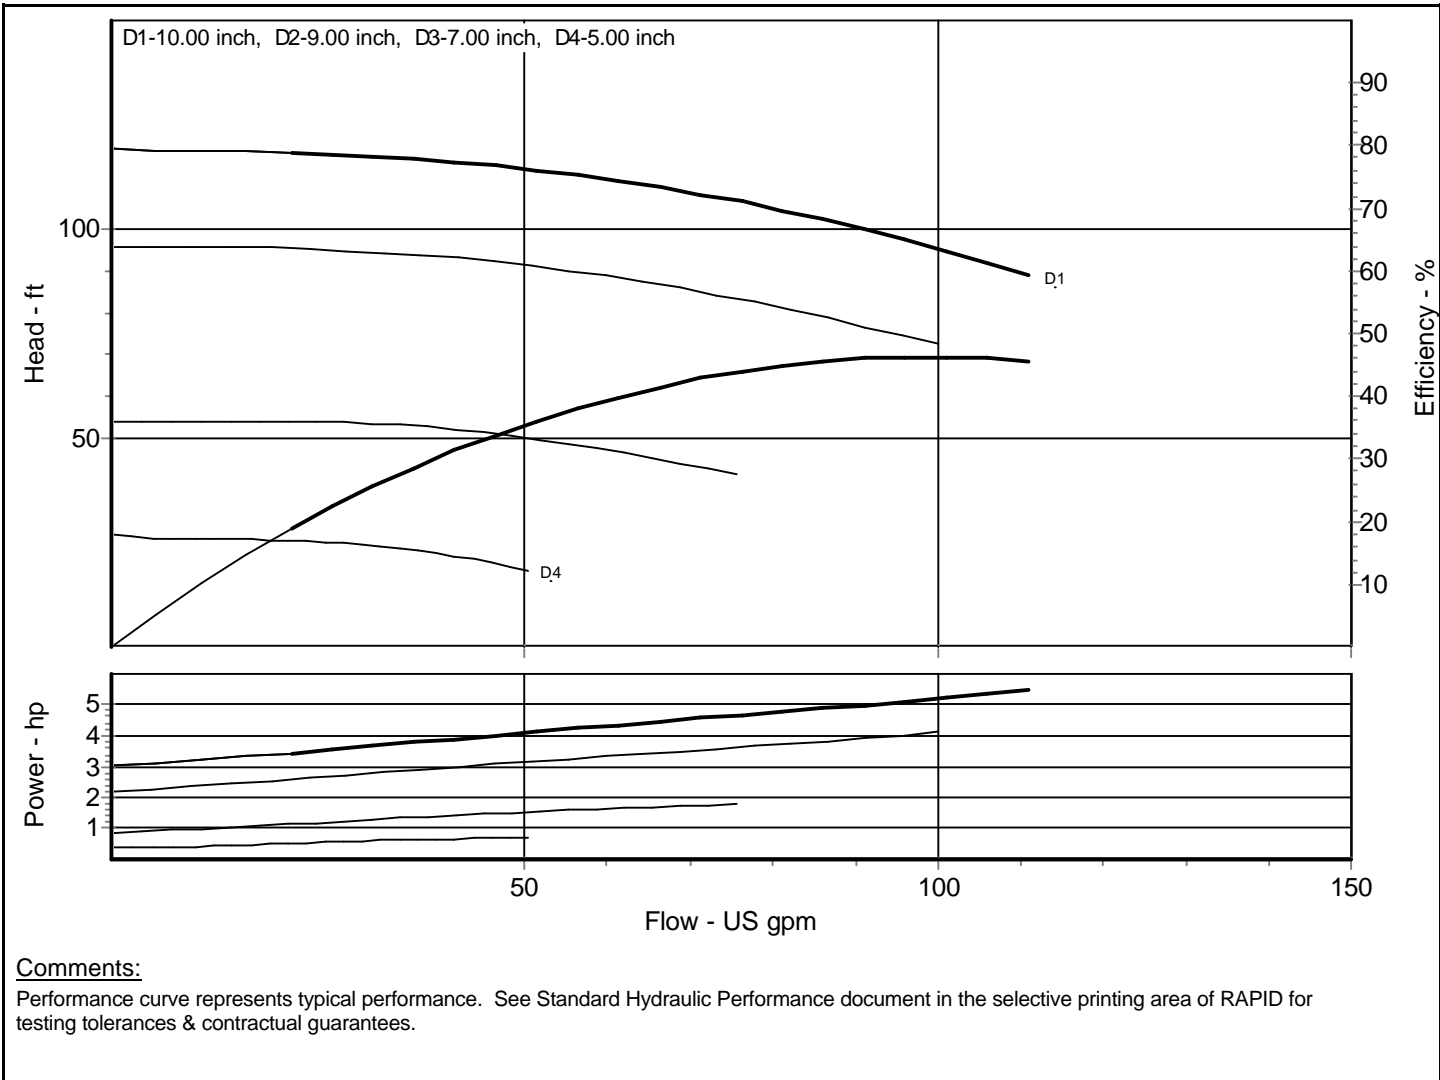

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1.5x3-6 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-004	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	11.56 hp
Item : 1		Closed Valve Pressure	154.889 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

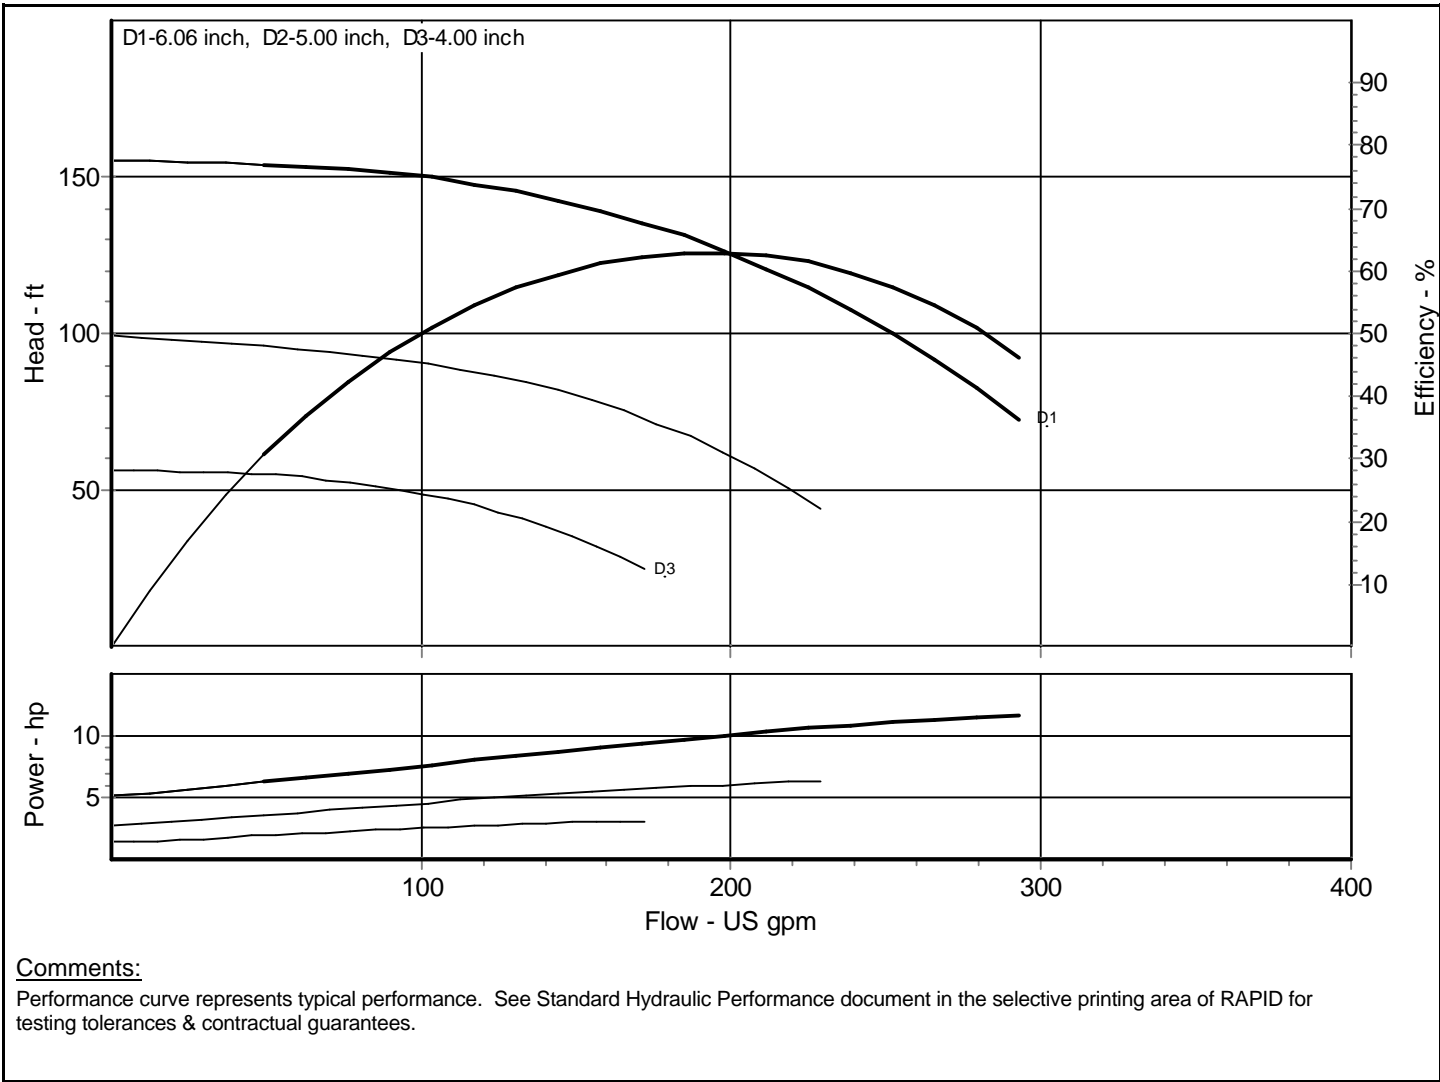

Comments:
Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.




Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	


Pump Model: Peerless - 1.5x3-8 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-008	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	26.21 hp
Item : 1		Closed Valve Pressure	289.857 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

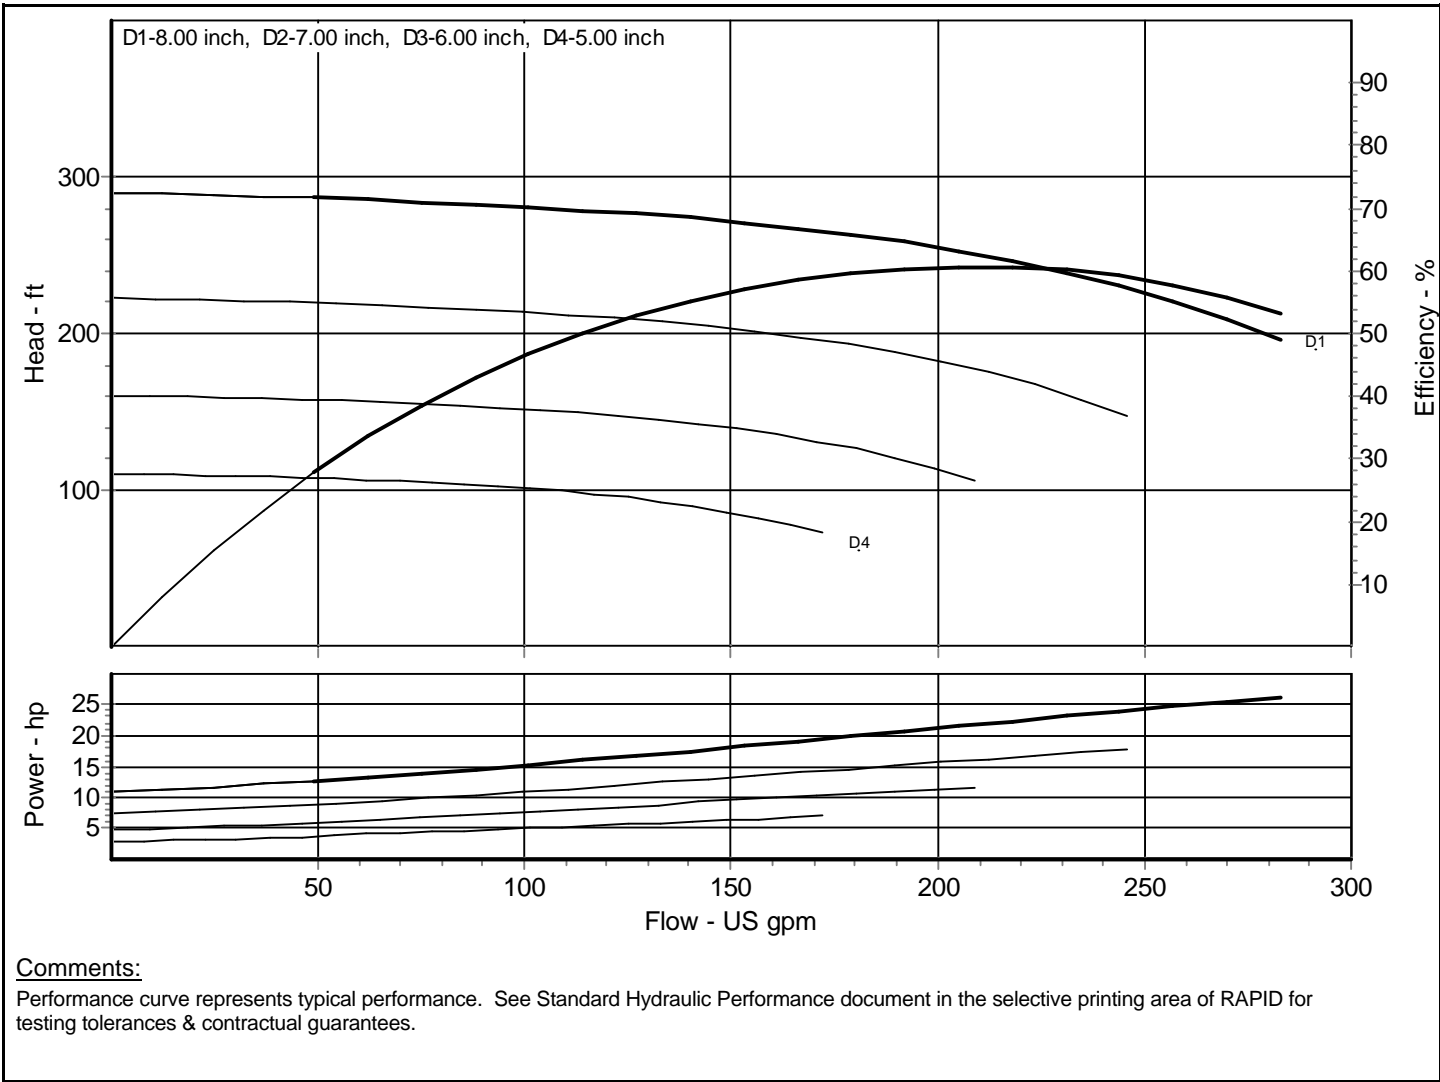

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1.5x3-8 STP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-007	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	3.31 hp
Item : 1		Closed Valve Pressure	70.437 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

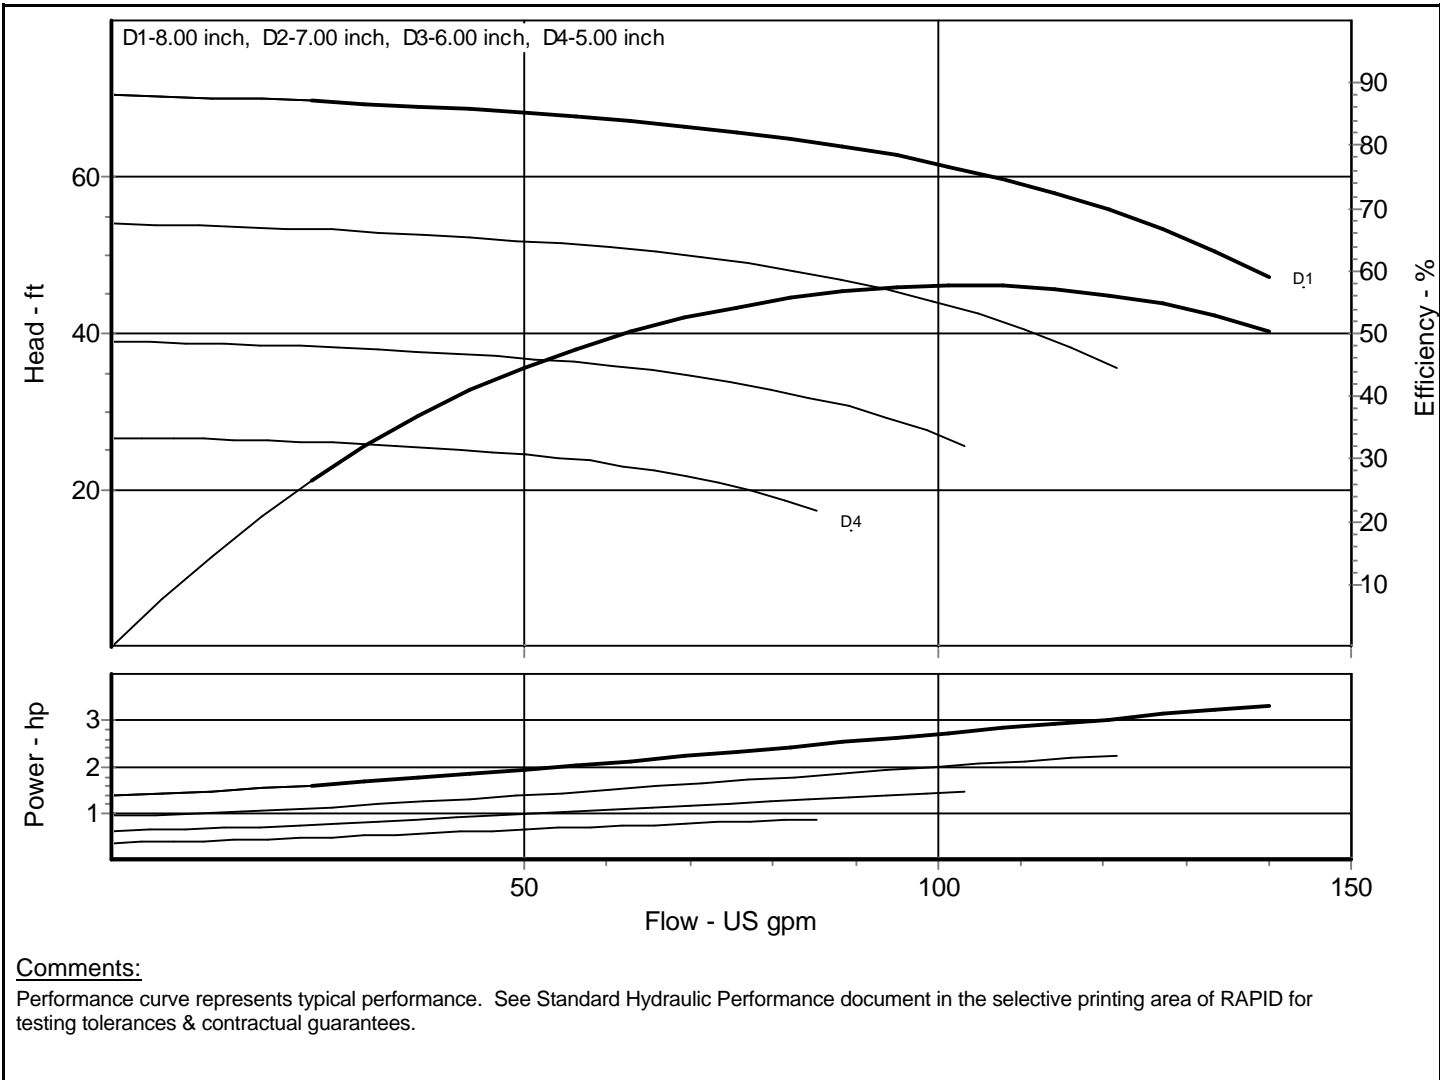

Comments:


Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1.5x3-10 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-022	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	6.5 hp
Item : 1		Closed Valve Pressure	106.975 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

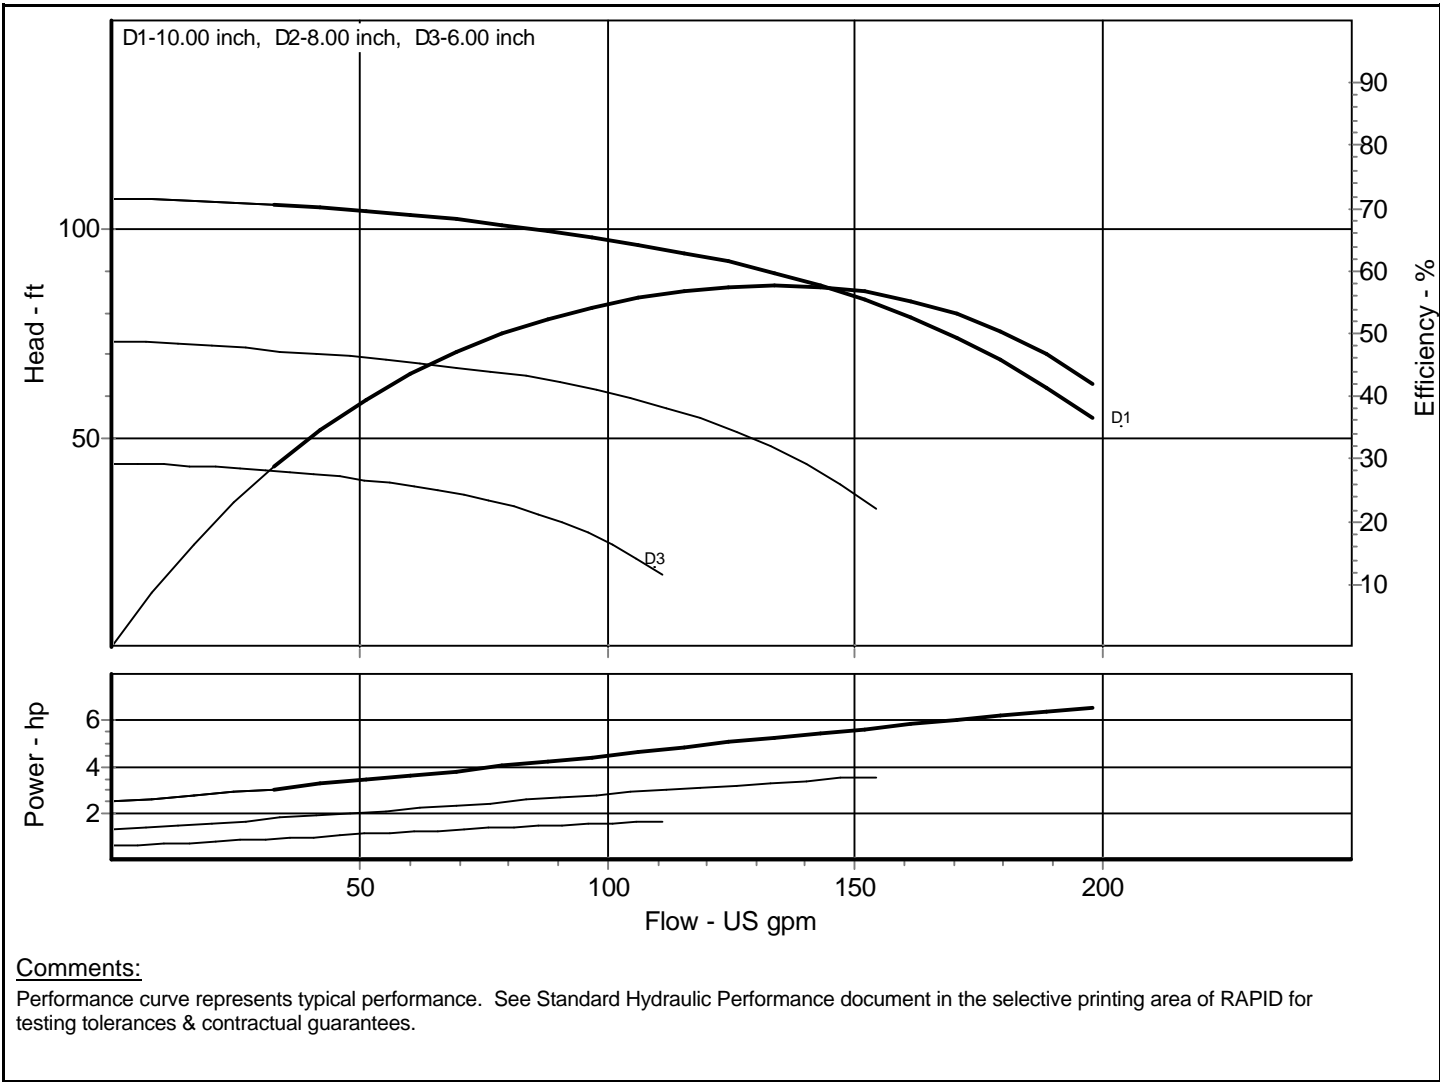

Comments:


Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1.5x3-13 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-030	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	14.55 hp
Item : 1		Closed Valve Pressure	157.94 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

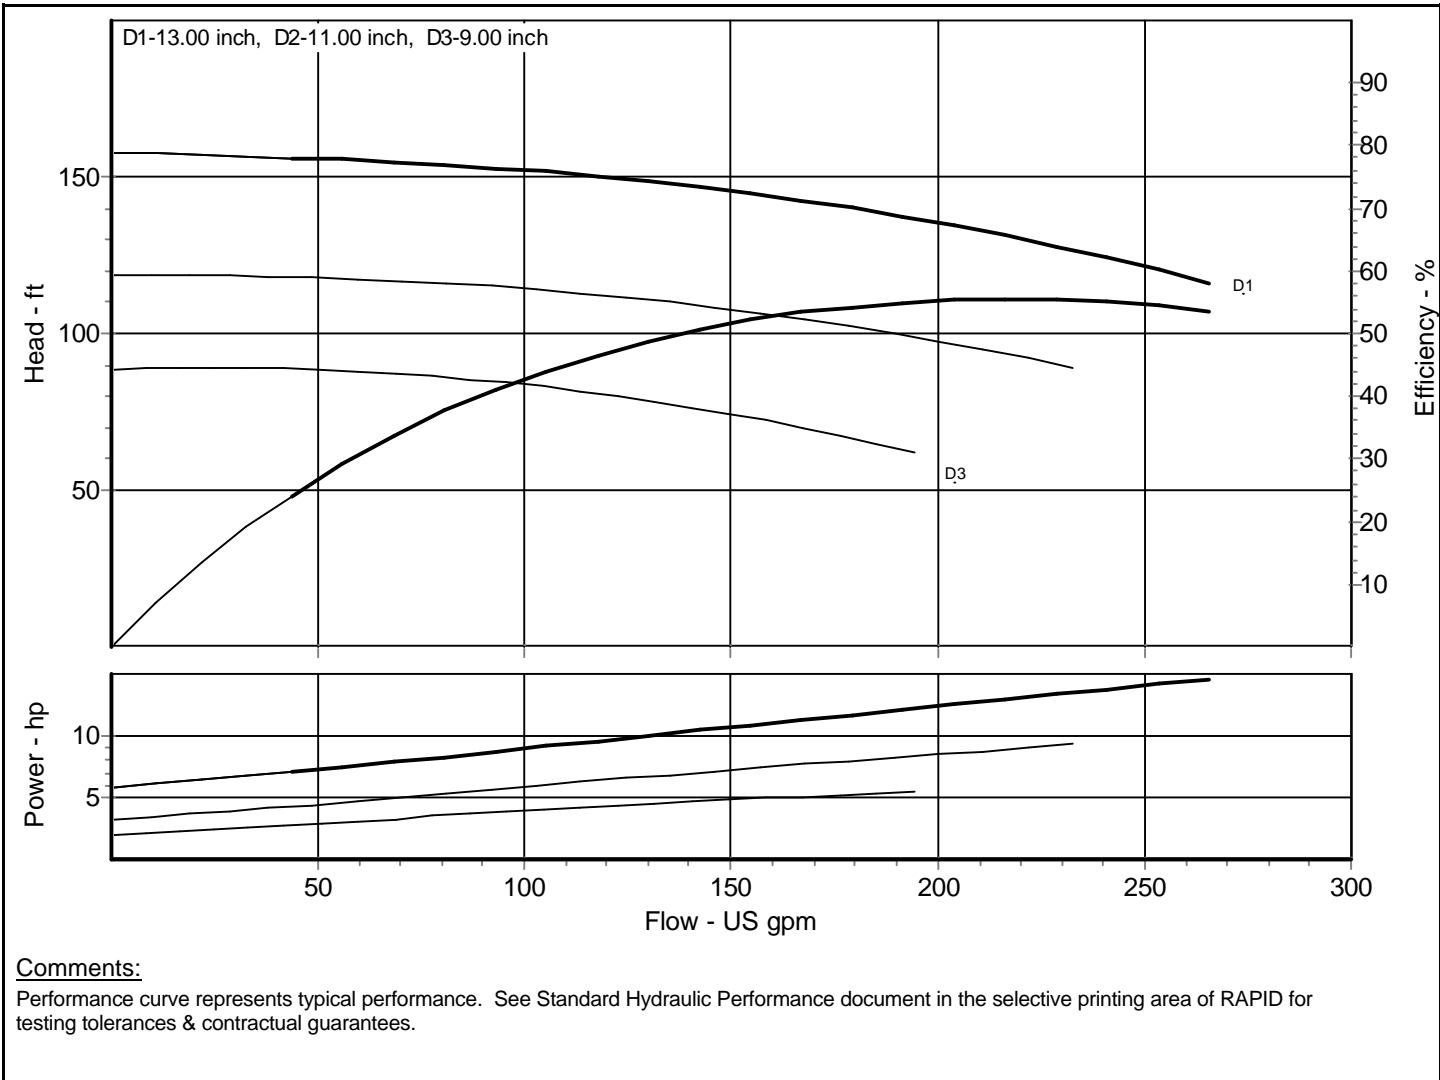

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1.5x3-13 MTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-029	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power: 121.42 hp	
Item : 1		Closed Valve Pressure 649.94 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

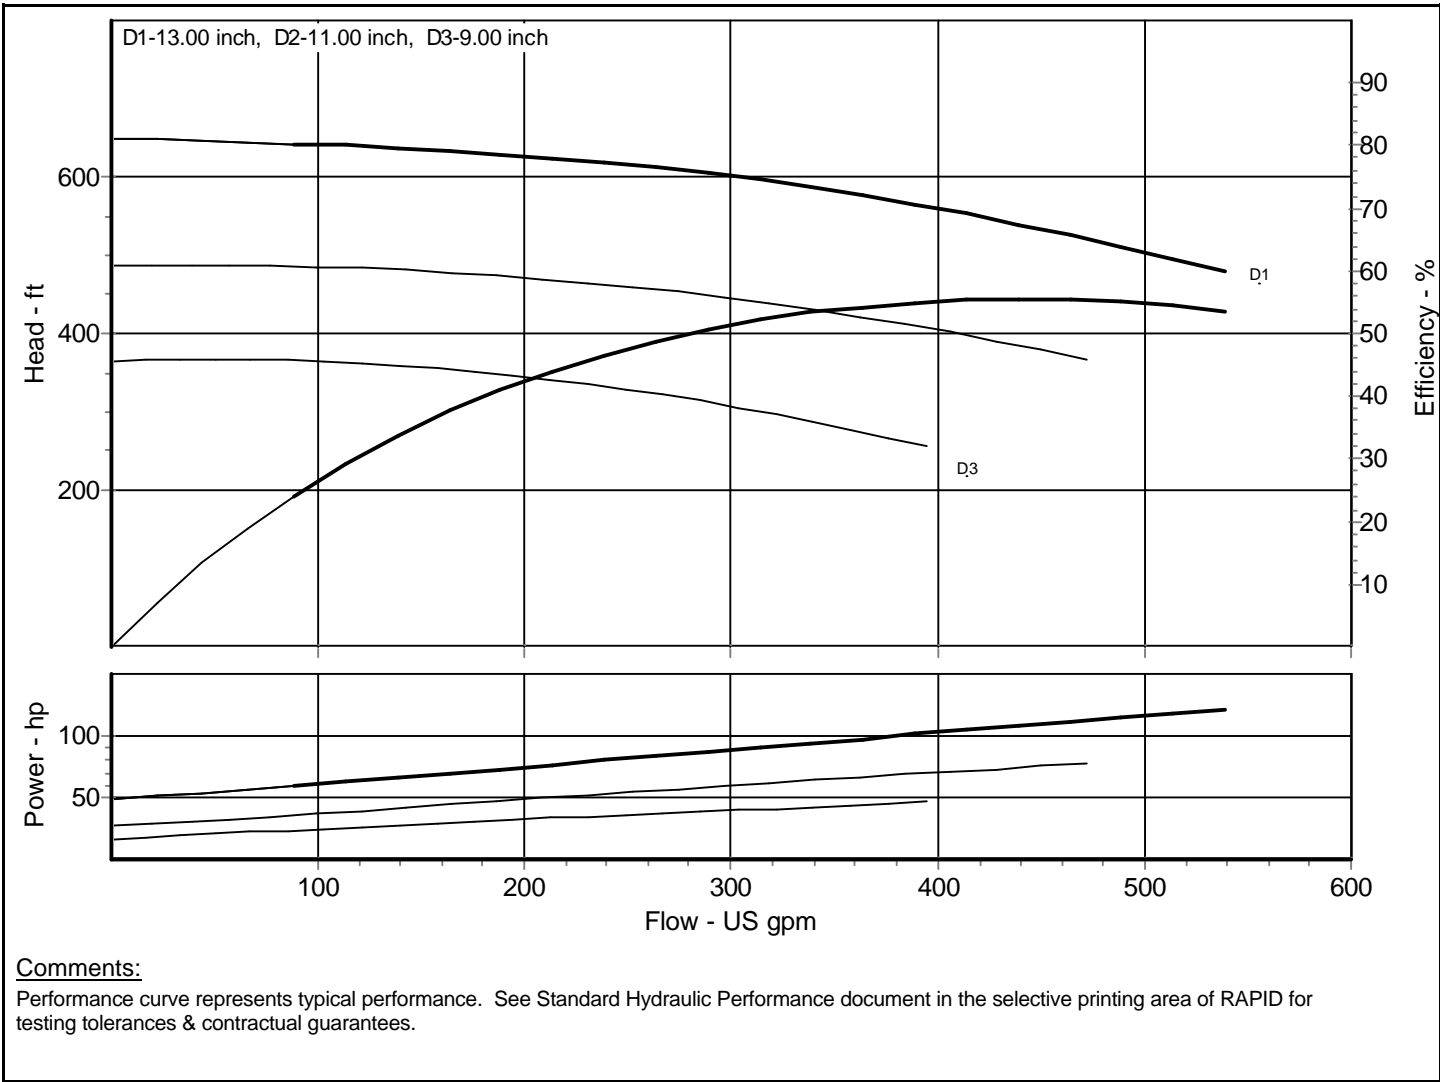

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1.5x3-13 MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-031	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	4.13 hp
Item : 1		Closed Valve Pressure	68.205 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

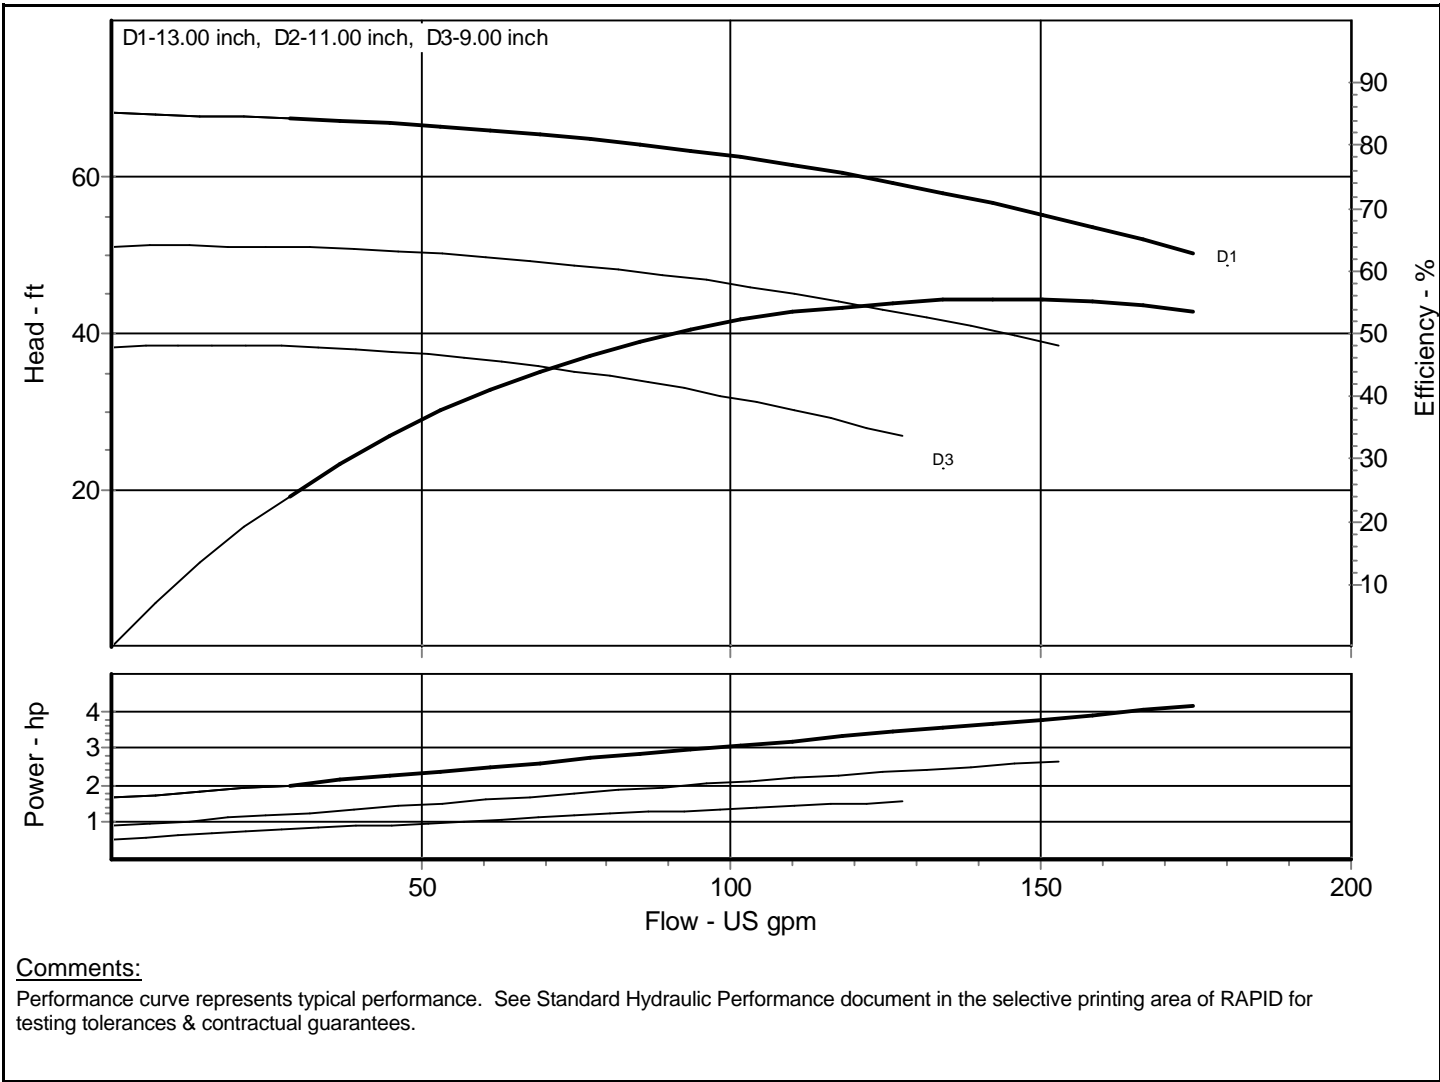

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 2x3-6 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-009	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	18.95 hp
Item : 1		Closed Valve Pressure	154.851 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

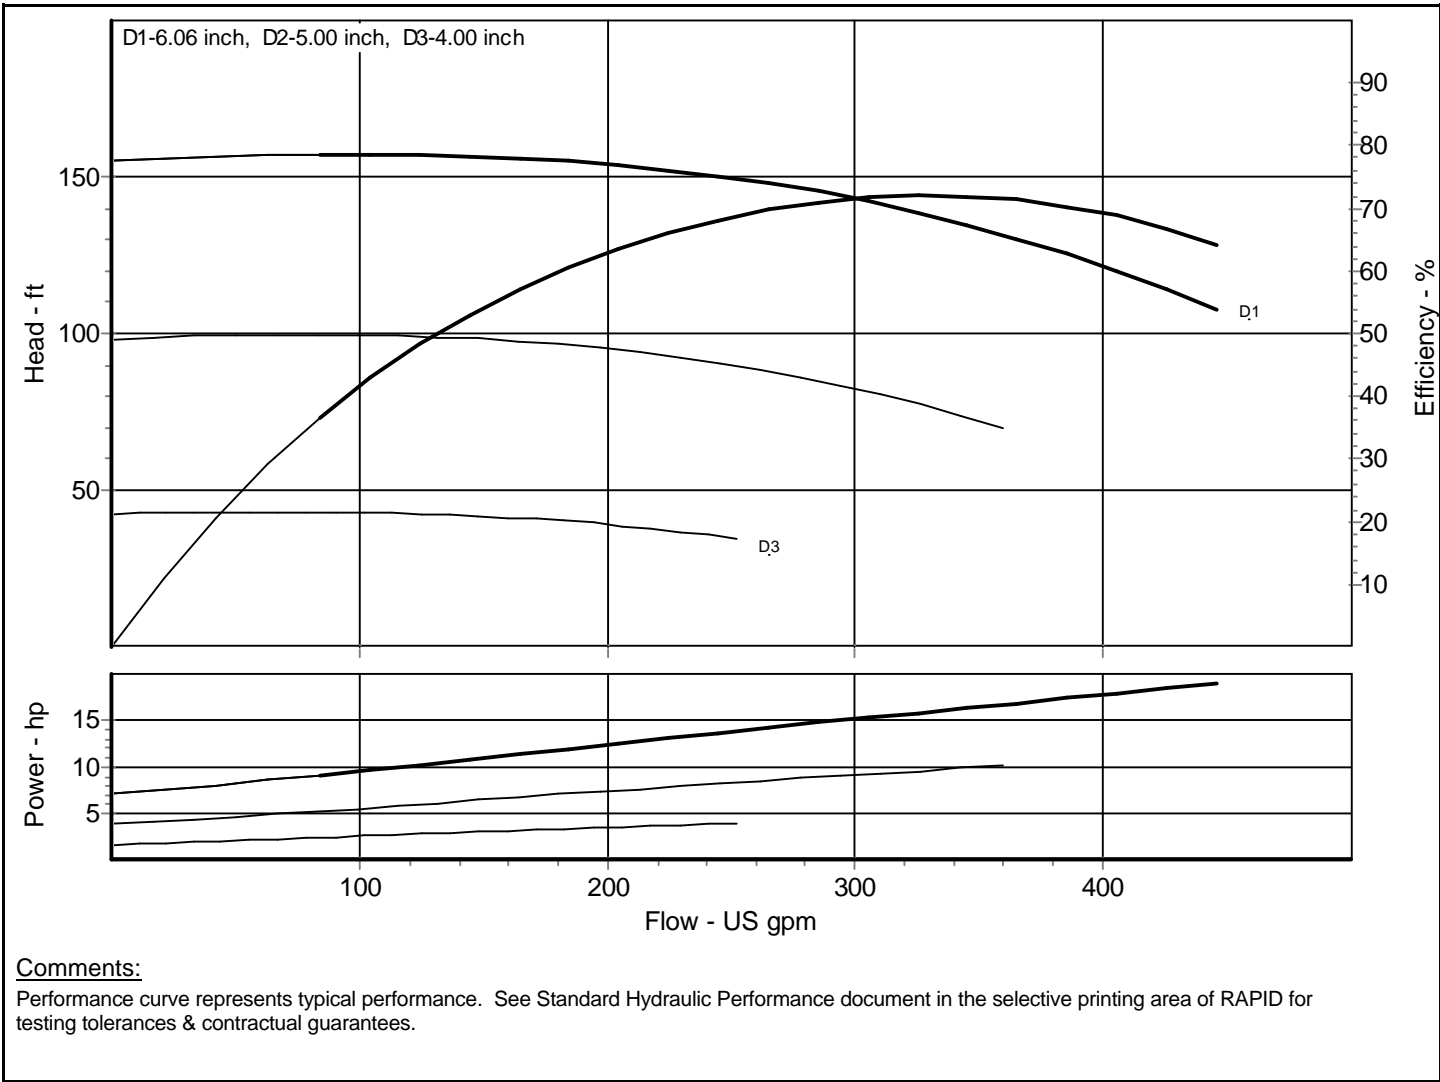


Comments:
Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 2x3-6 STP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-010	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	2.39 hp
Item : 1		Closed Valve Pressure	37.63 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

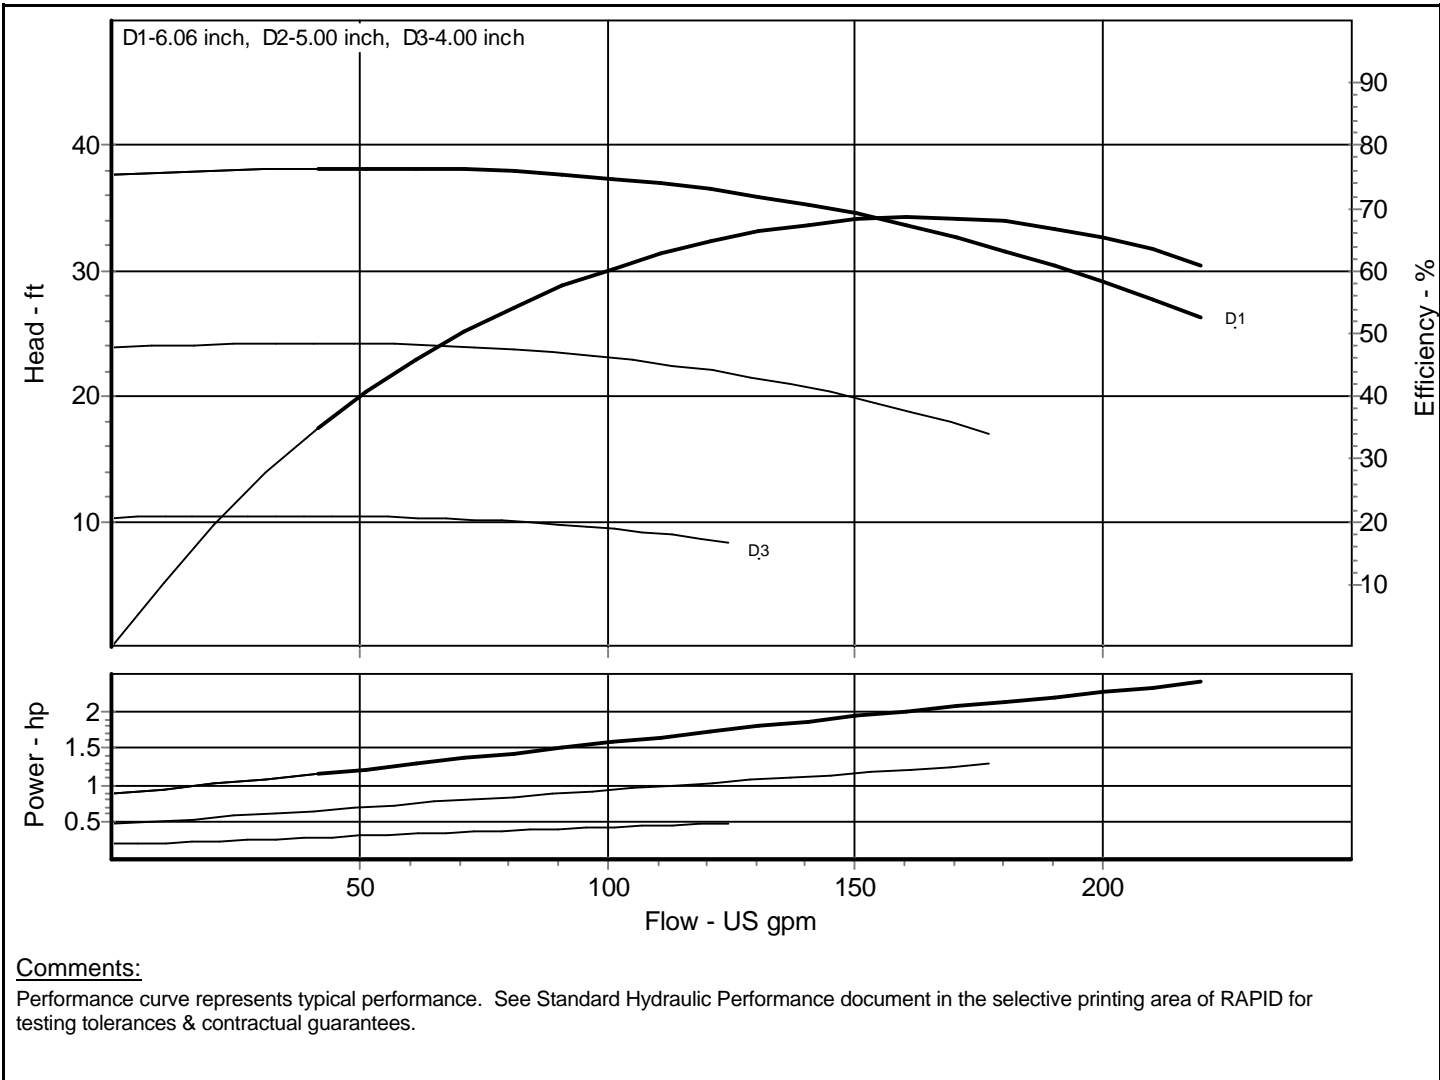

Comments:


Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 2x3-8 MTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/5.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-013	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	37.27 hp
Item : 1		Closed Valve Pressure	316.092 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

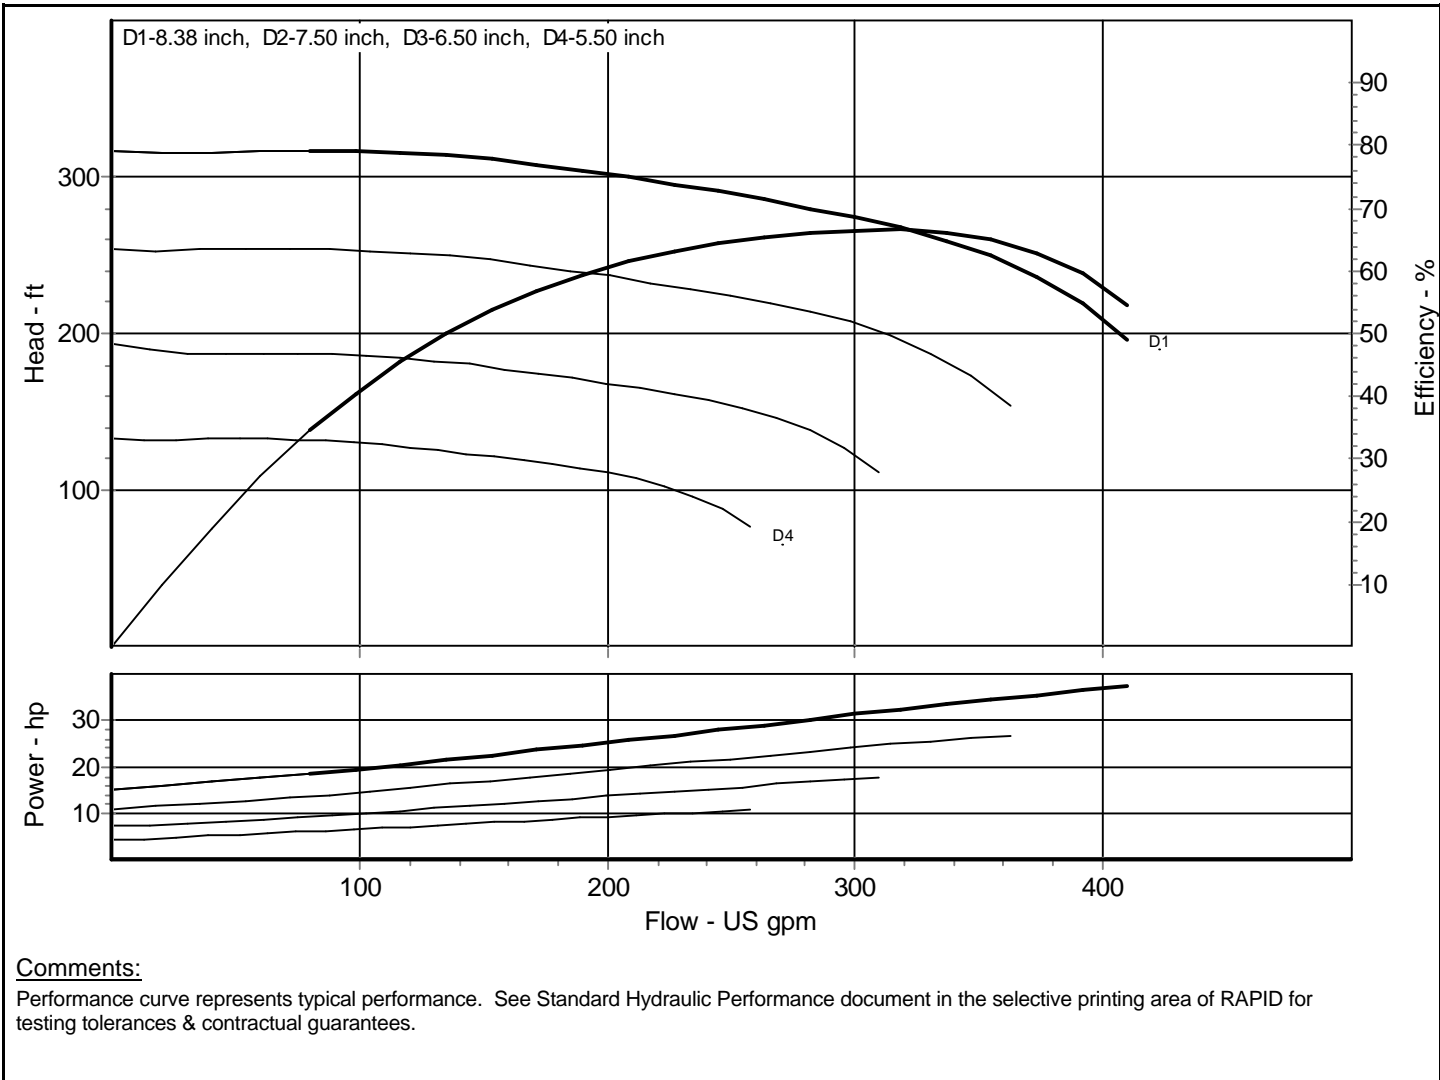

Comments:


Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 2x3-8 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/5.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-014	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	4.75 hp
Item : 1		Closed Valve Pressure	76.813 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

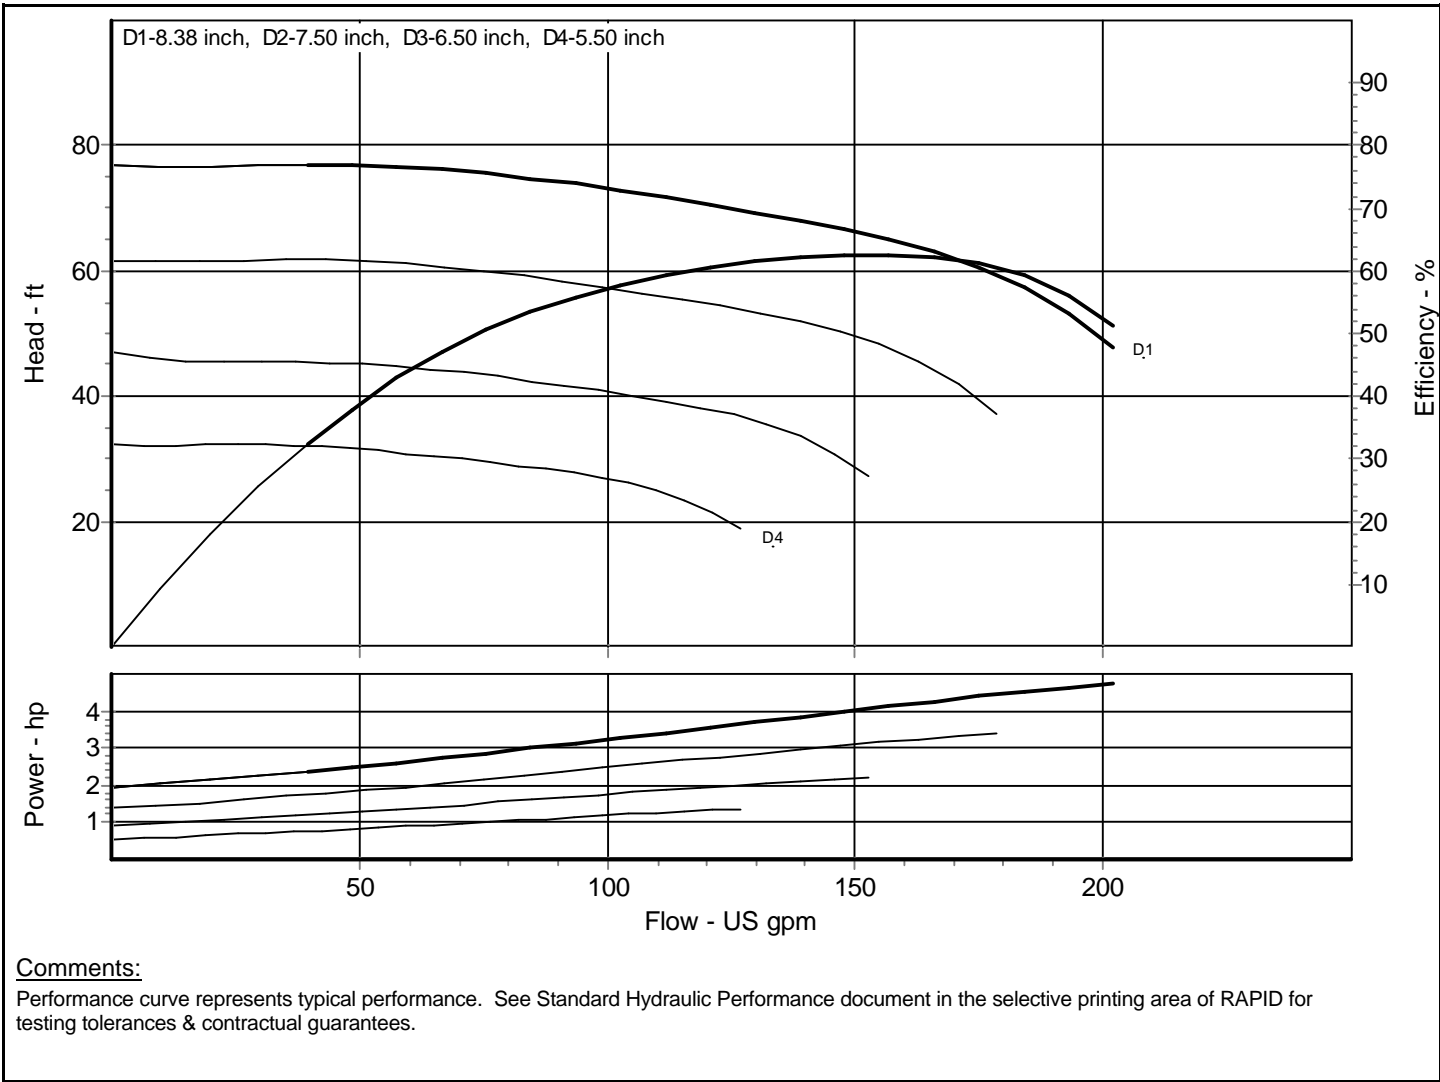

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :
Quote No. : US-2222-17

Page No. : 1

Contact :
Phone :
Date : Monday, April 14, 2003
Fax :

Pump Model: **Peerless - 2x3-10 MTP 8196**
Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750 RPM, 60 Hz Electric**
Impeller Dia.: **10/6 inch**

Duty Flow : US gpm
Duty Head : ft
Efficiency : %

Temperature: **68 °F**
Viscosity: **1.009 cP**
Sp. Gravity: **1.000**

Power Required : hp
NPSH Required : ft

Curve No.: **8196-024**


Fluid: **Water**

Peak Power: **10.23 hp**
Closed Valve Pressure **110.545 ft**

Impeller No.

Item : **1**


Tolerance : **Hyd Inst-Peerless Std**

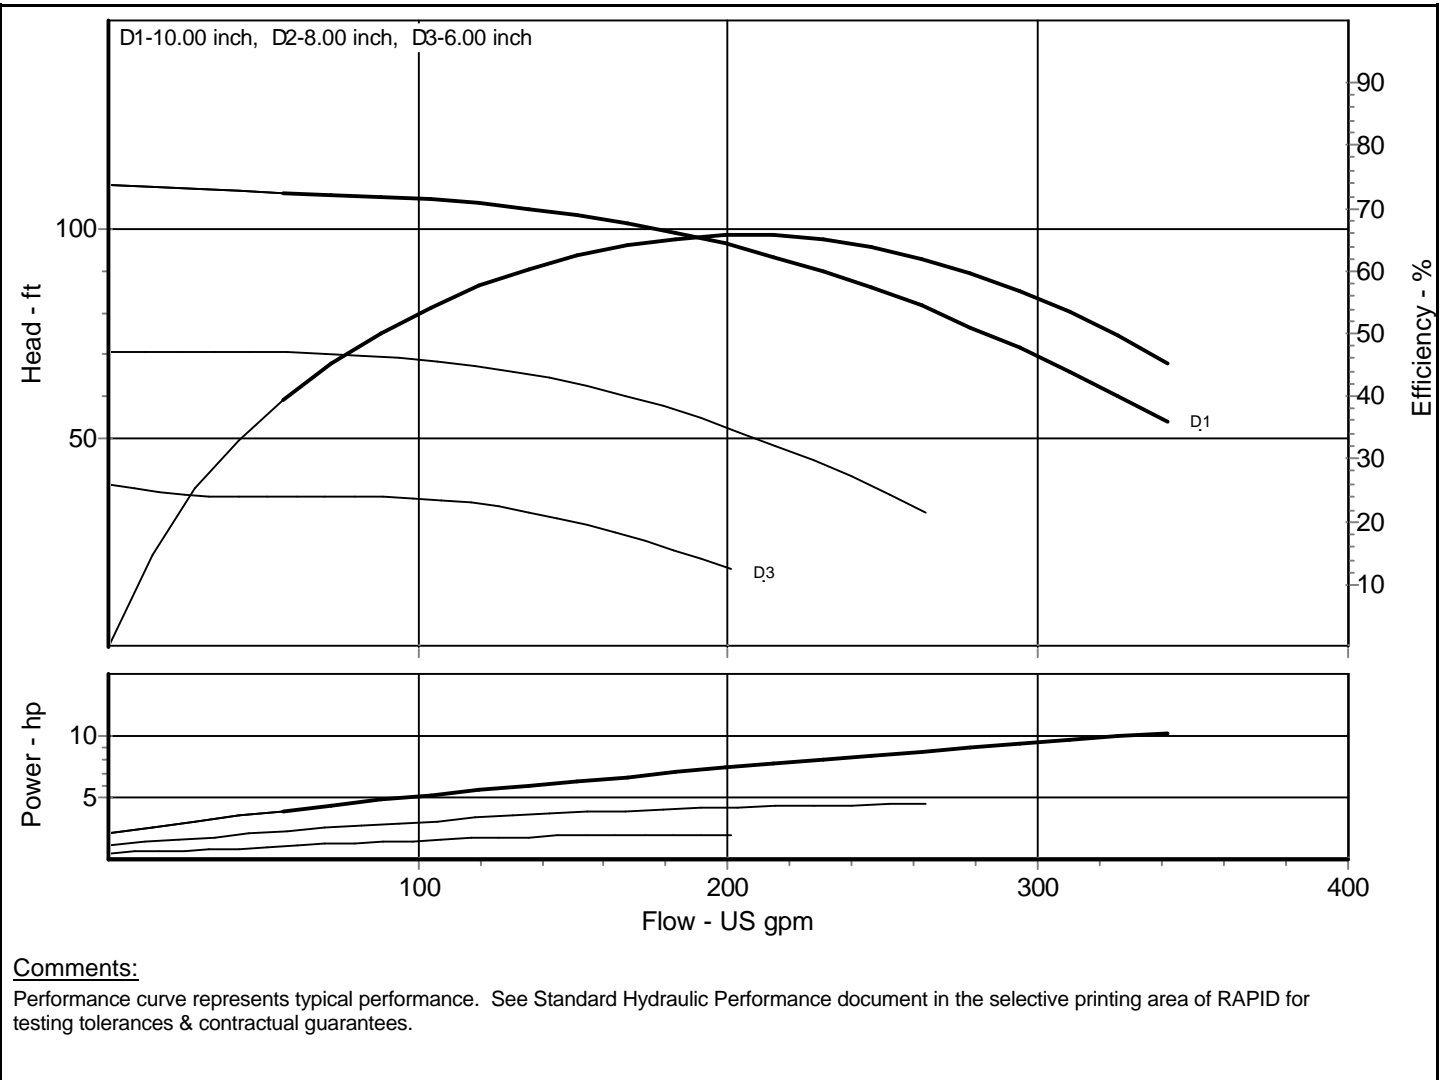

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 2x3-13 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-033	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	21.94 hp
Item : 1		Closed Valve Pressure	180.132 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

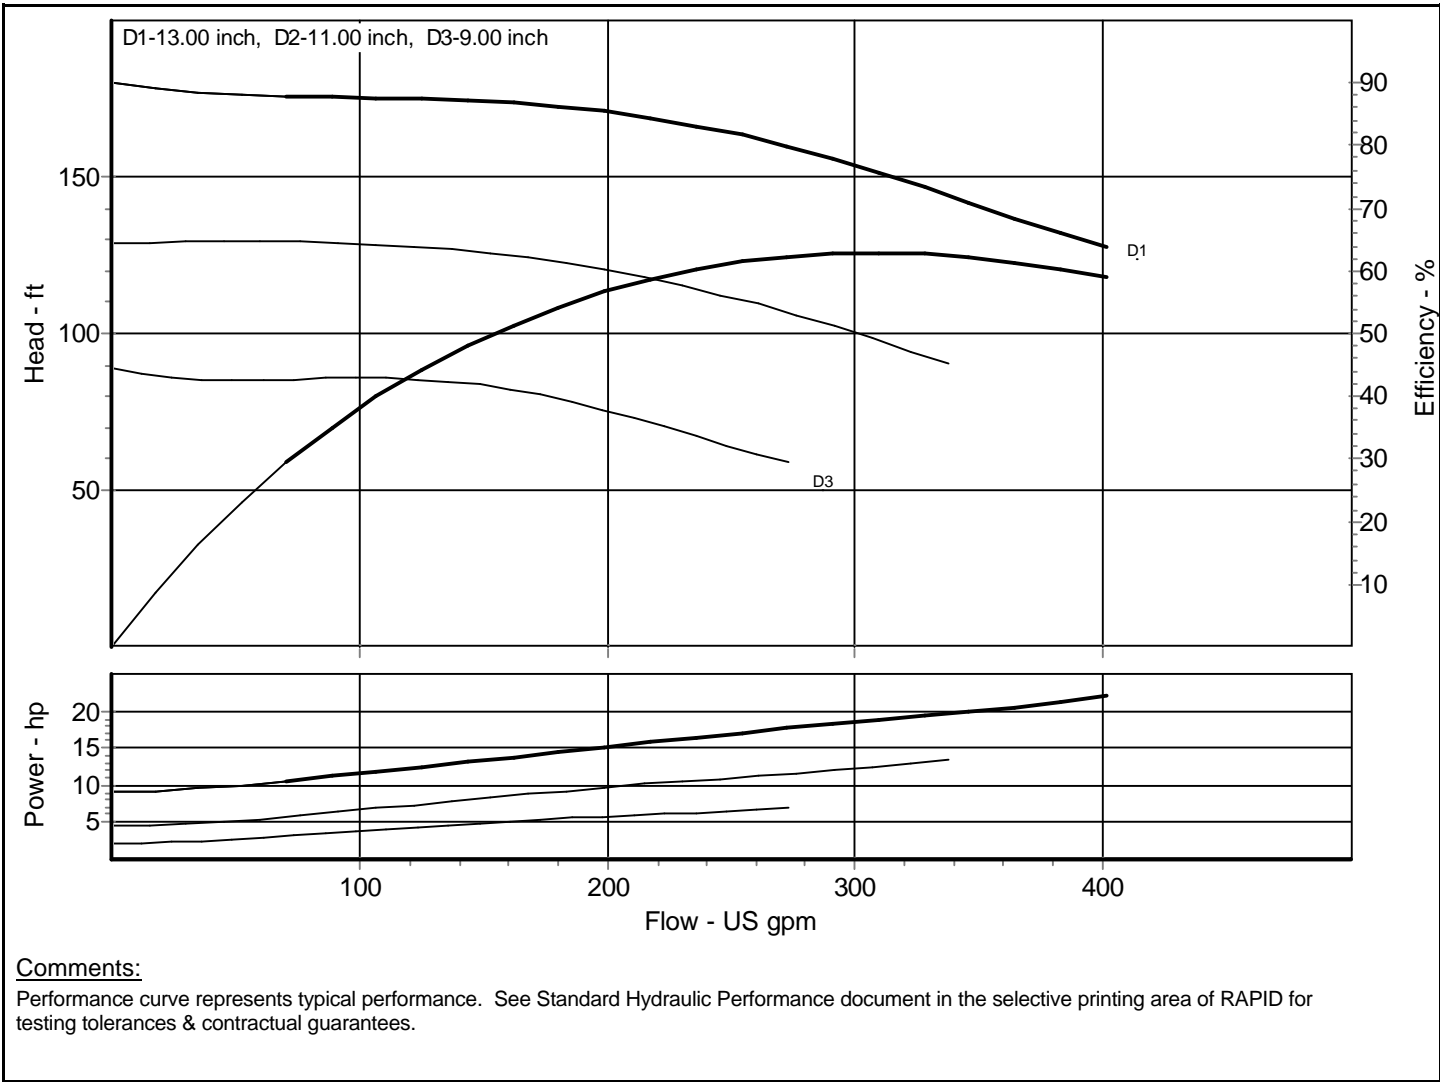

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 2x3-13 MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-034	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	6.23 hp
Item : 1		Closed Valve Pressure	77.788 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

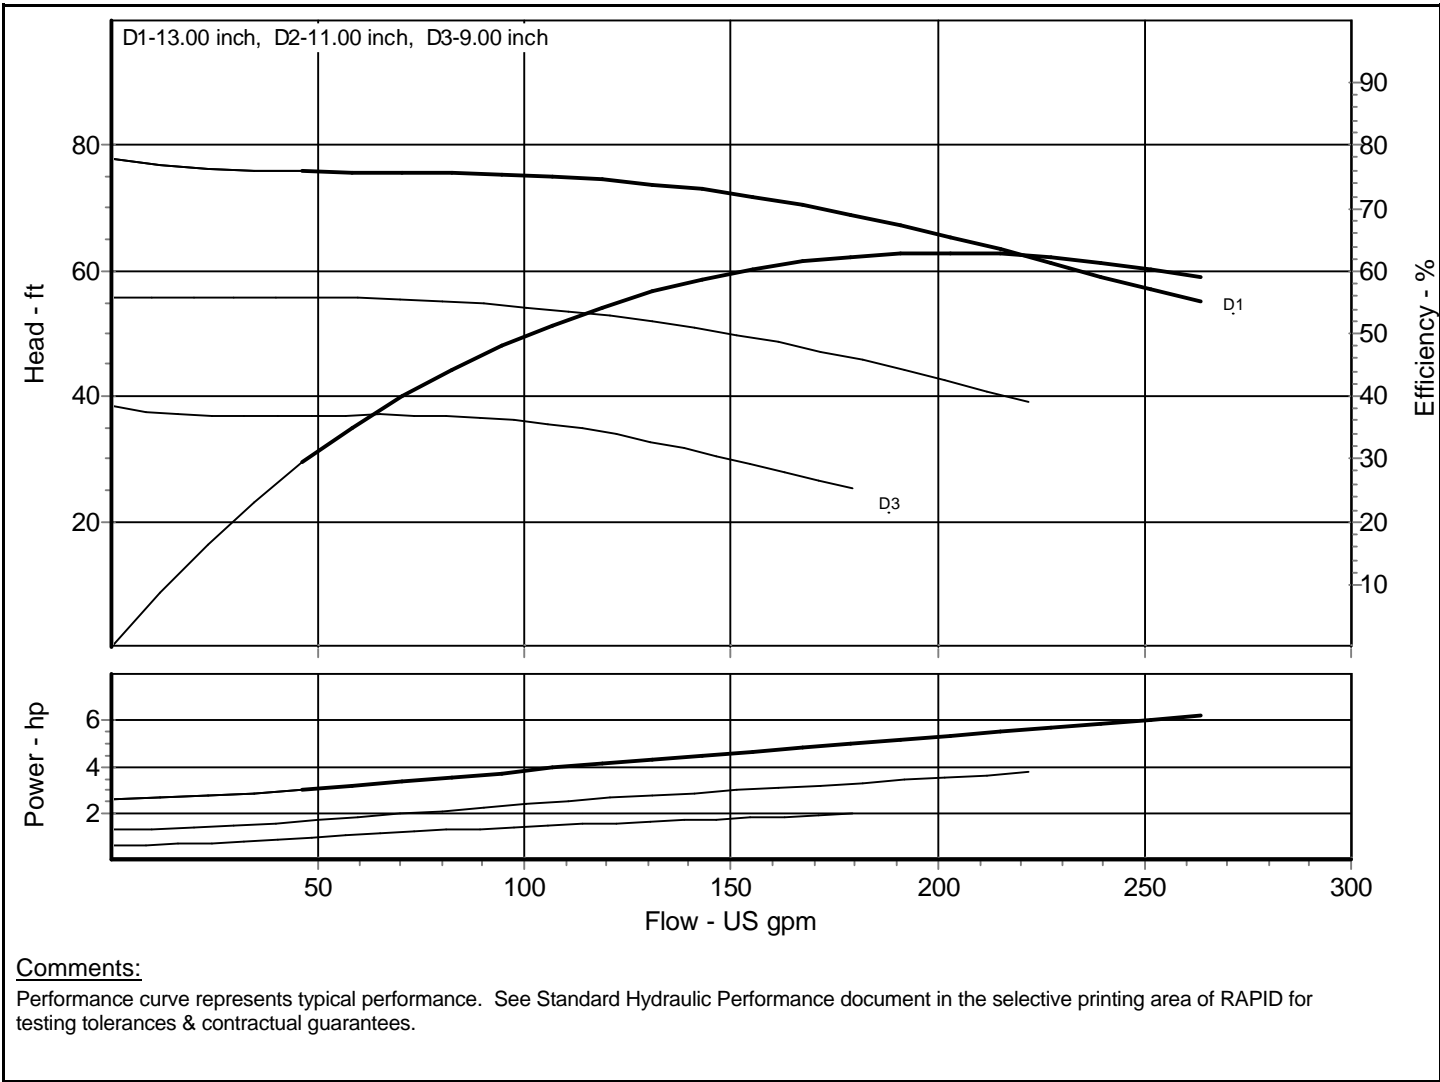

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 3x4-8 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-015	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	11.26 hp
Item : 1		Closed Valve Pressure	76.997 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

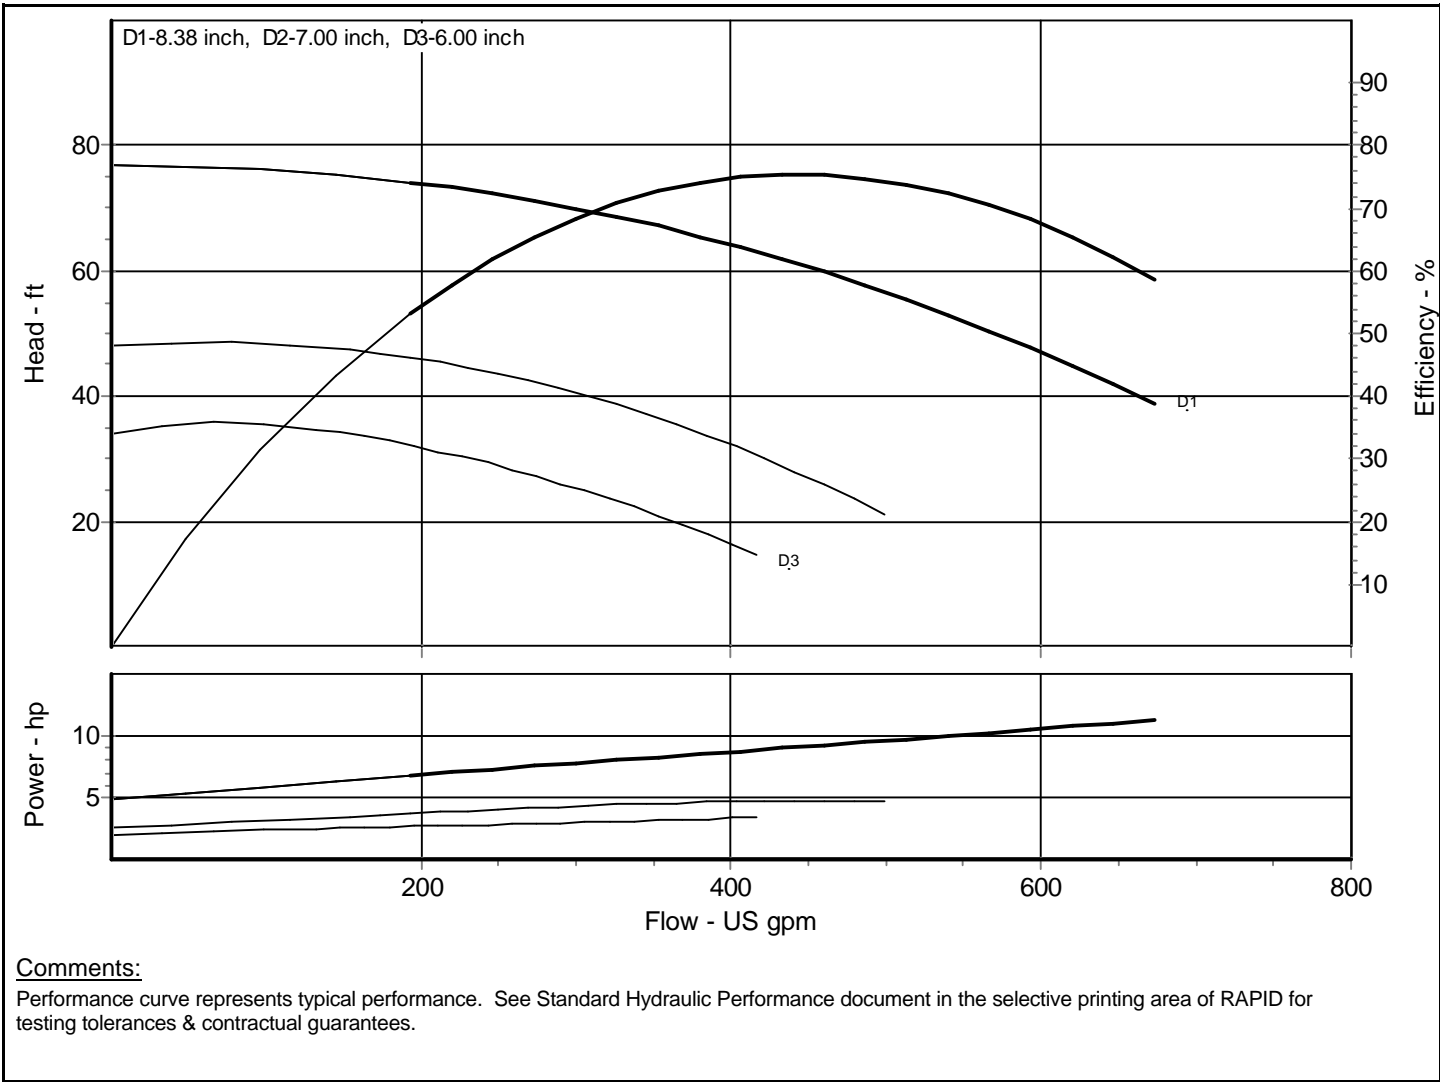

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 3x4-8 MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-016	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	3.2 hp
Item : 1		Closed Valve Pressure	33.25 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

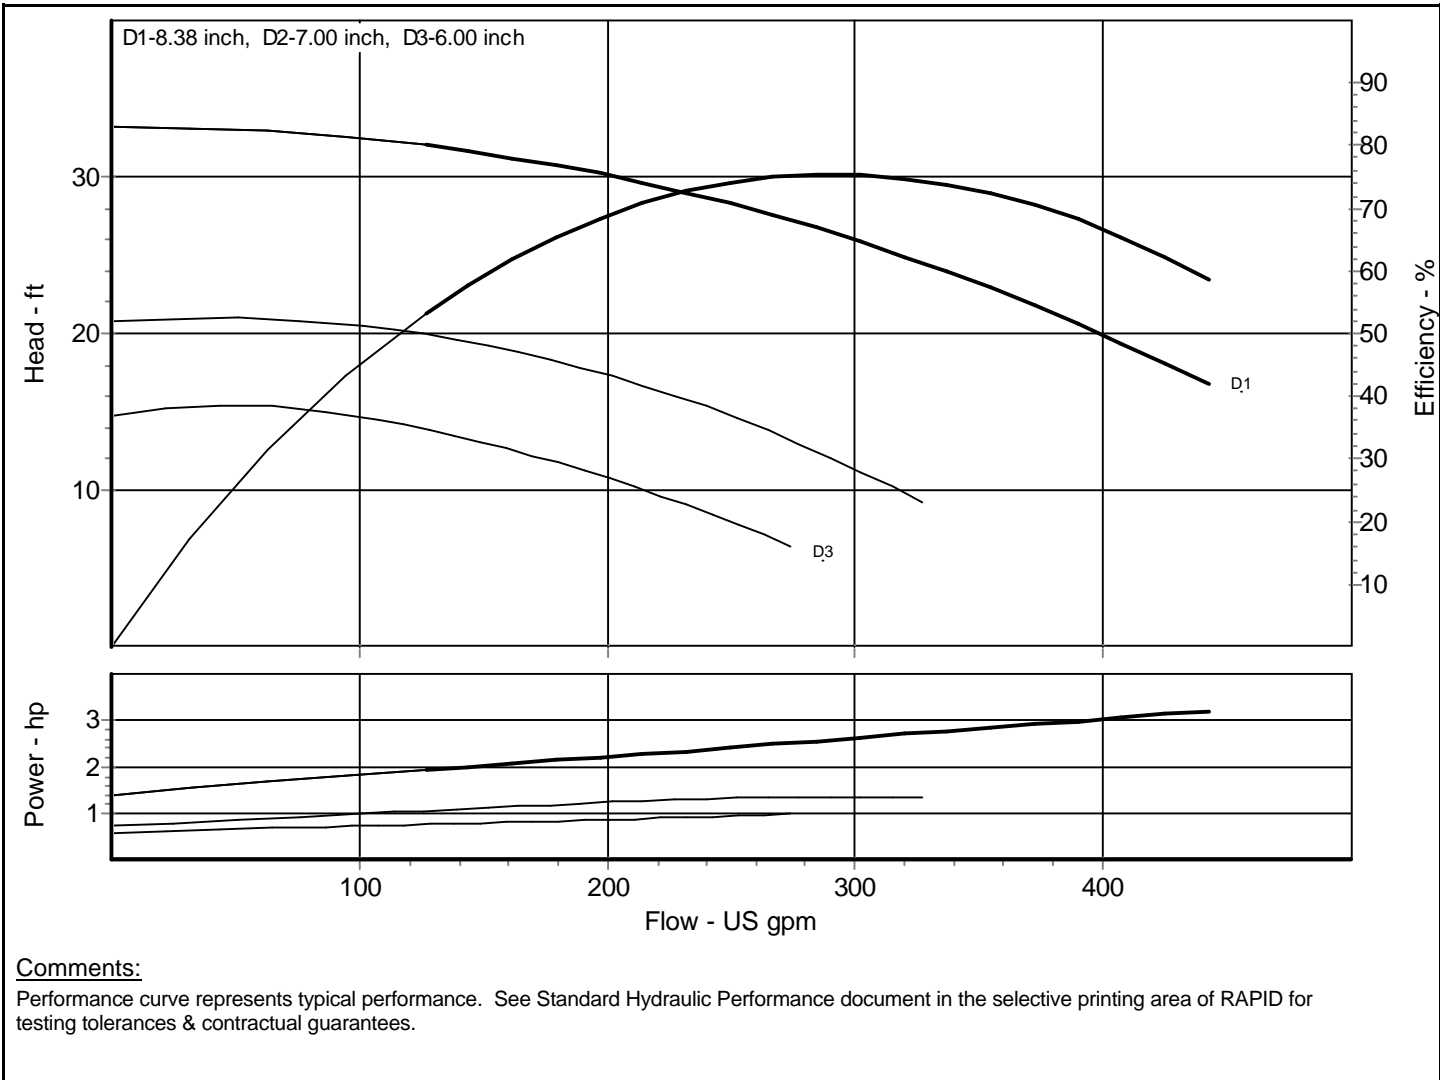

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 3x4-8G MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/5.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-018	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	7.37 hp
Item : 1		Closed Valve Pressure	75.019 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

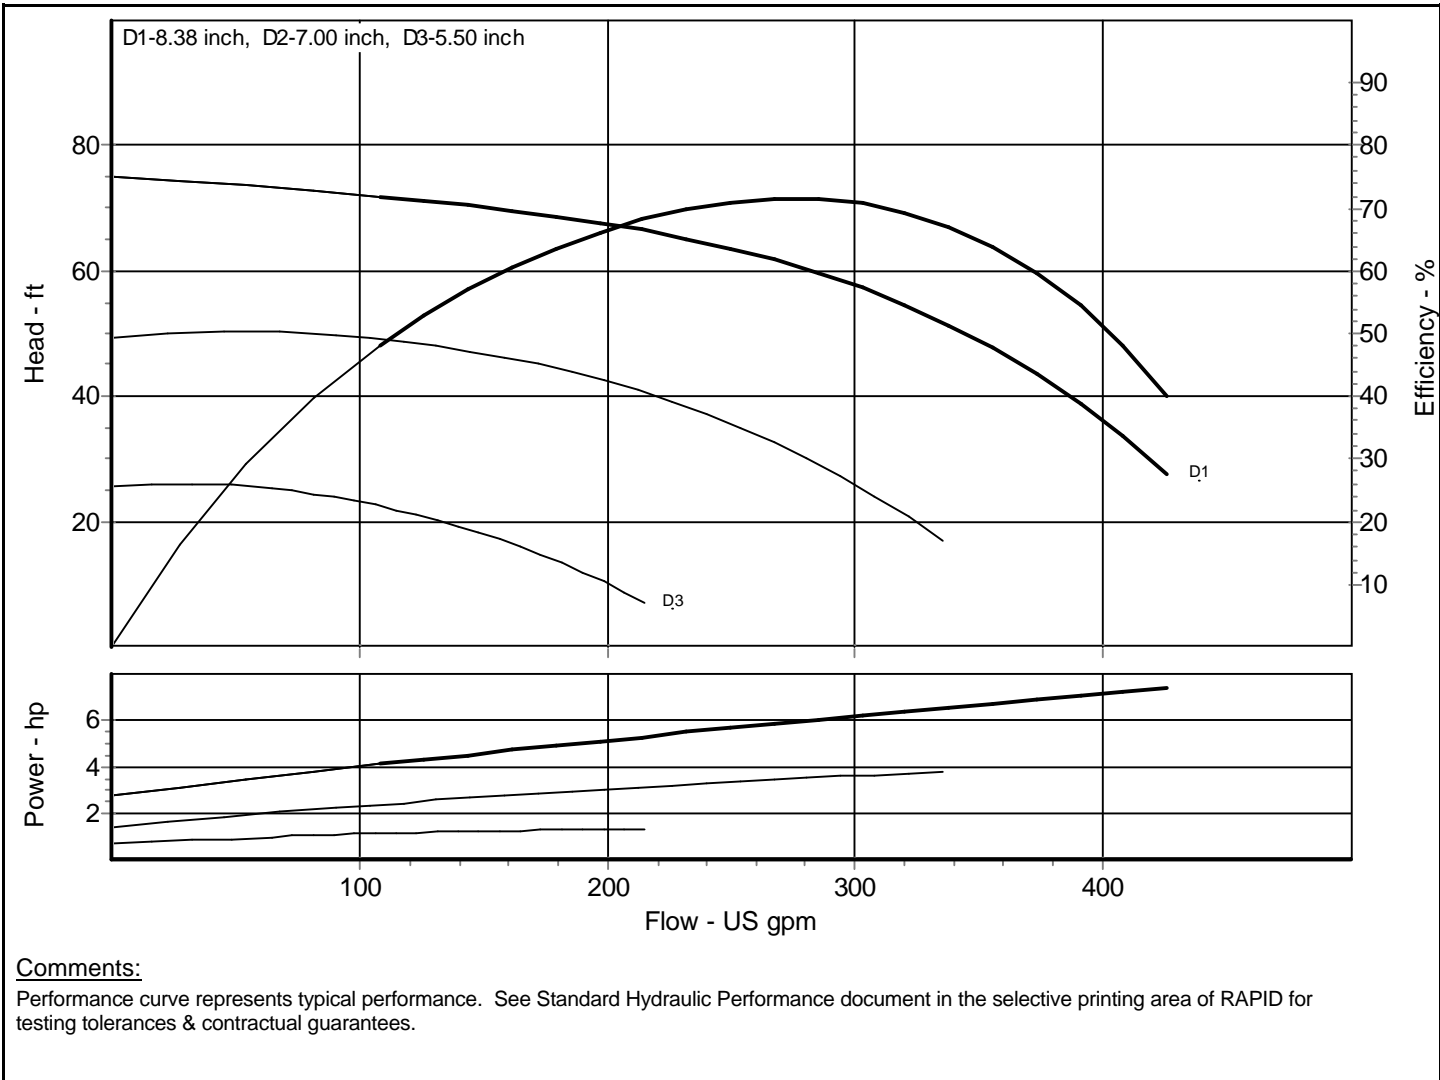

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 3x4-10 MTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-025	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	100.3 hp
Item : 1		Closed Valve Pressure	446.005 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

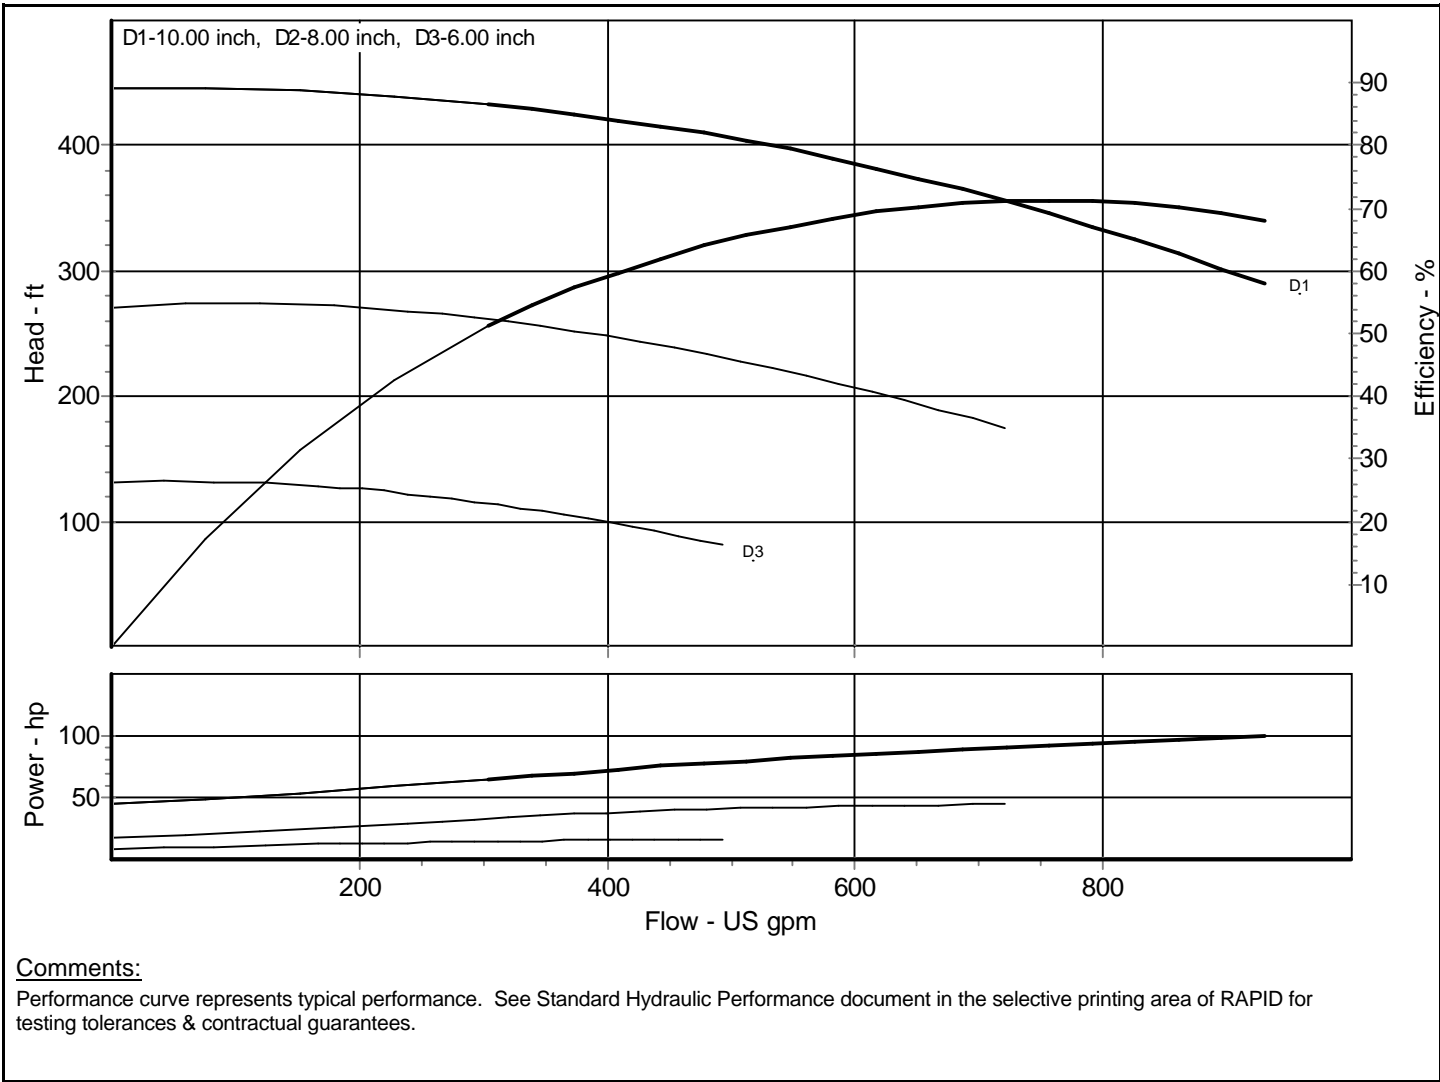

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 3x4-10 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-026	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	12.19 hp
Item : 1		Closed Valve Pressure	108.382 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

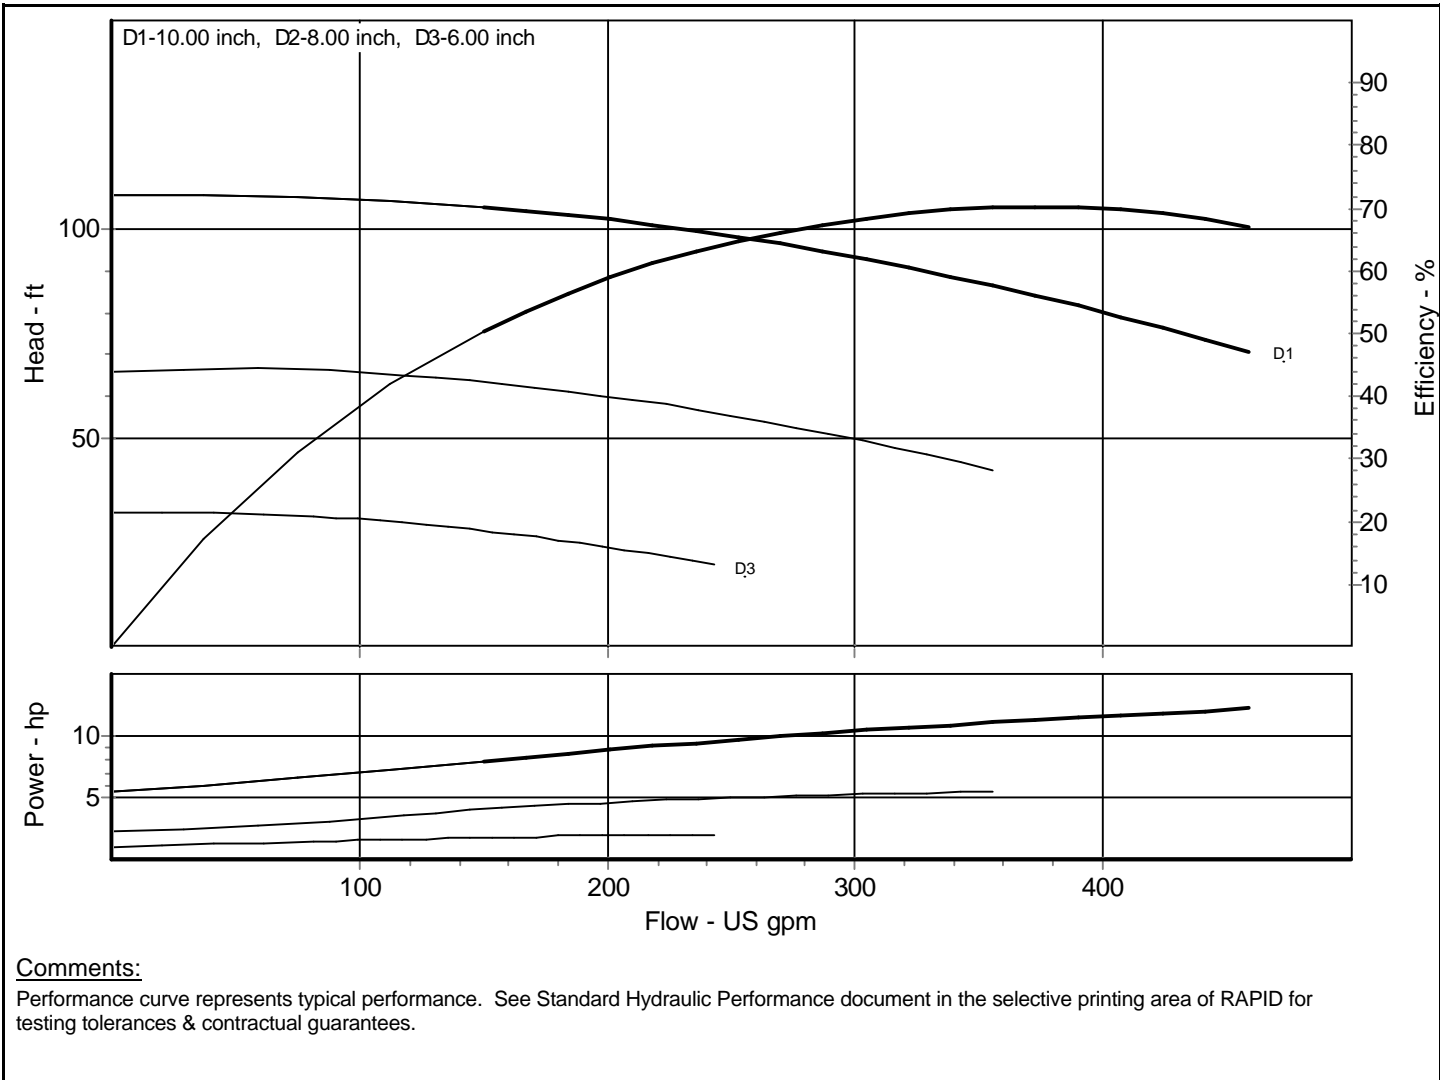

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 3x4-13 5V MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-036	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	40 hp
Item : 1		Closed Valve Pressure	179.992 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

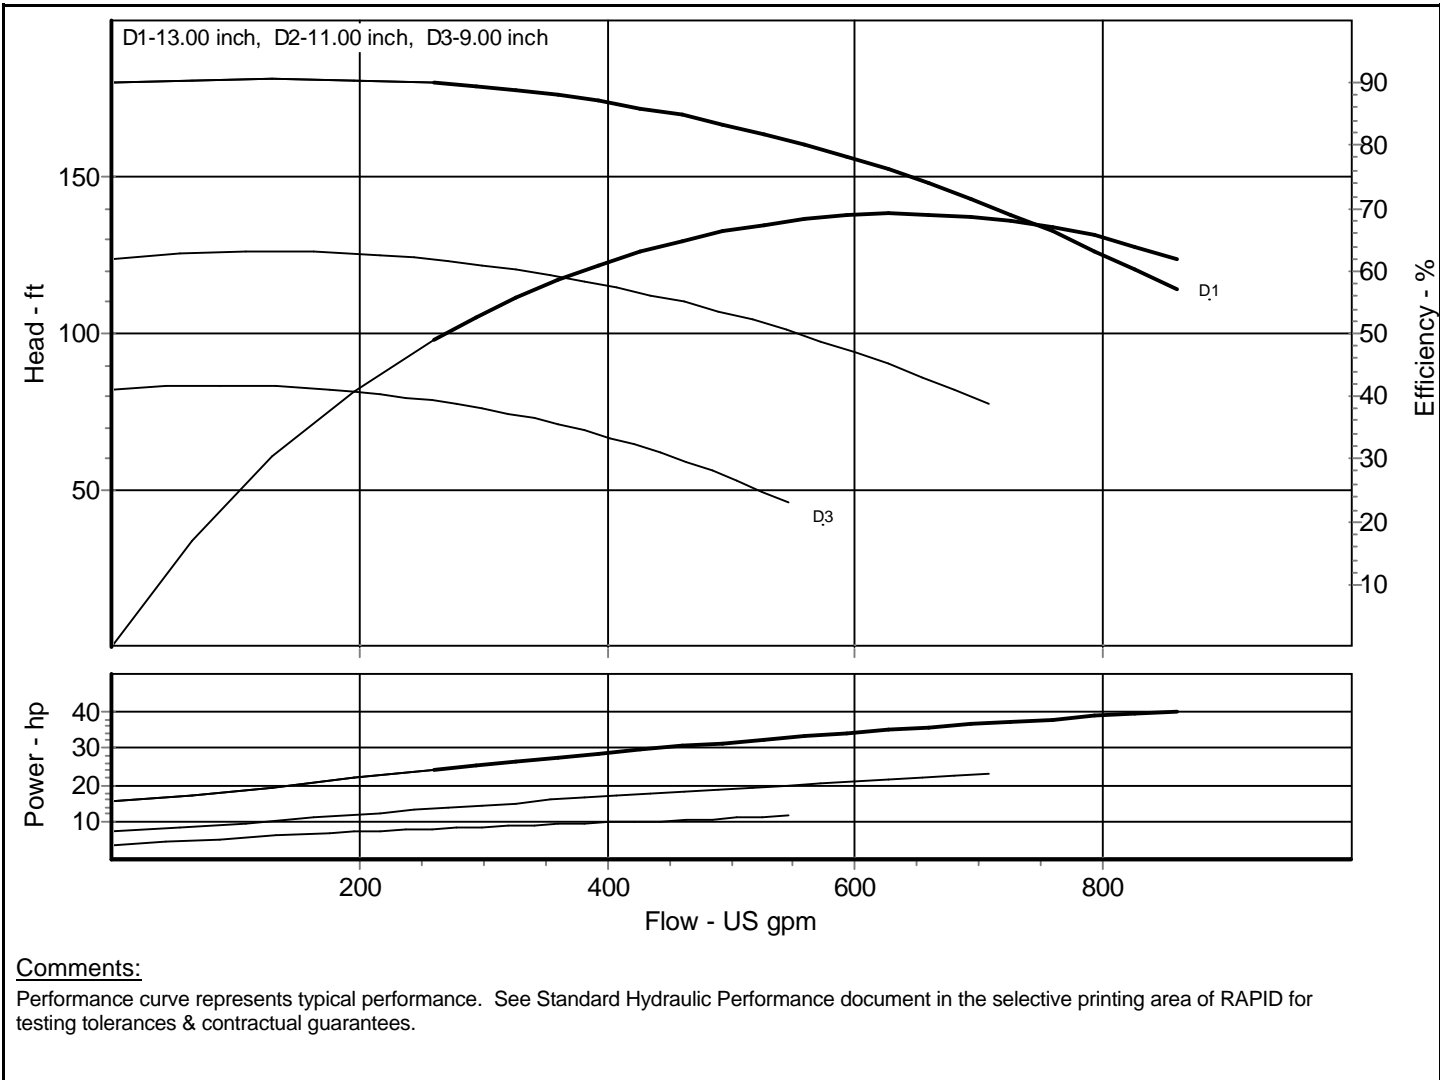

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 3x4-13 5V MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-037	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	11.51 hp
Item : 1		Closed Valve Pressure	77.727 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

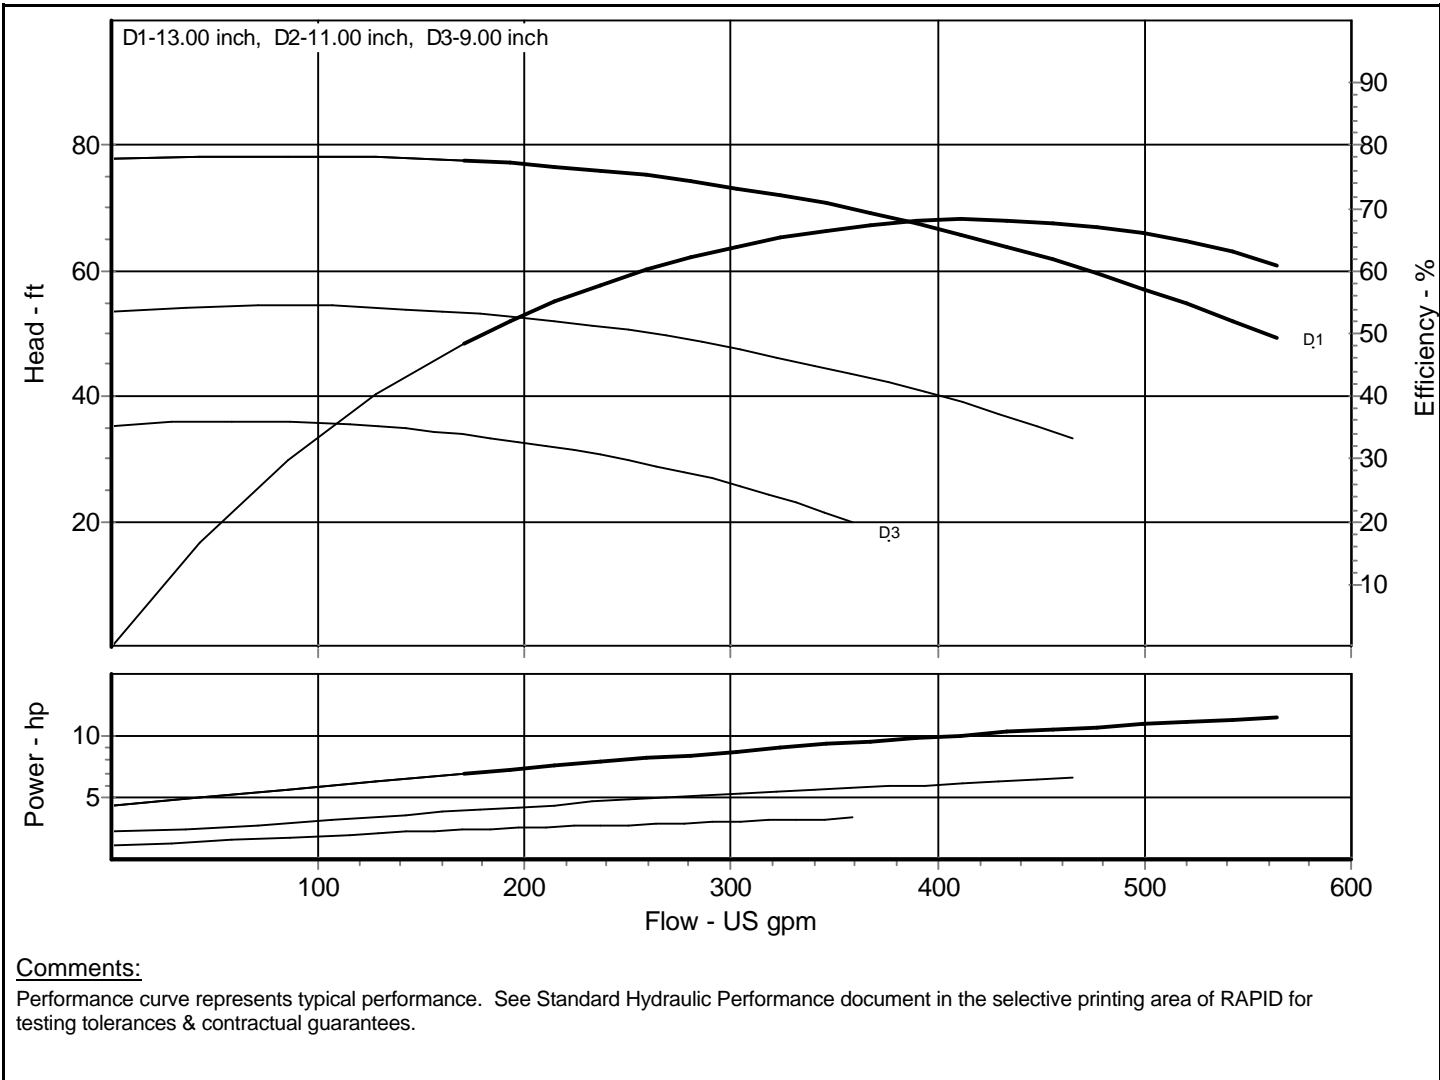

Customer :


Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :
Quote No. : US-2222-17

Page No. : 1

Contact :
Phone :
Date : Monday, April 14, 2003
Fax :


Pump Model:	Peerless - 3x4-13 6V MTP 8196	Nom. Speed:	1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type:	8196 - ANSI Standard End Suction	Impeller Dia.:	13/9 inch	Duty Head :	ft
		Temperature:	68 °F	Efficiency :	%
		Viscosity:	1.009 cP	Power Required :	hp
Curve No.:	8196-039	Sp. Gravity:	1.000	NPSH Required :	ft
Impeller No.:		Fluid:	Water	Peak Power:	49.41 hp
Item :	1			Closed Valve Pressure	183.974 ft
Your Ref.:		Tolerance :	Hyd Inst-Peerless Std		

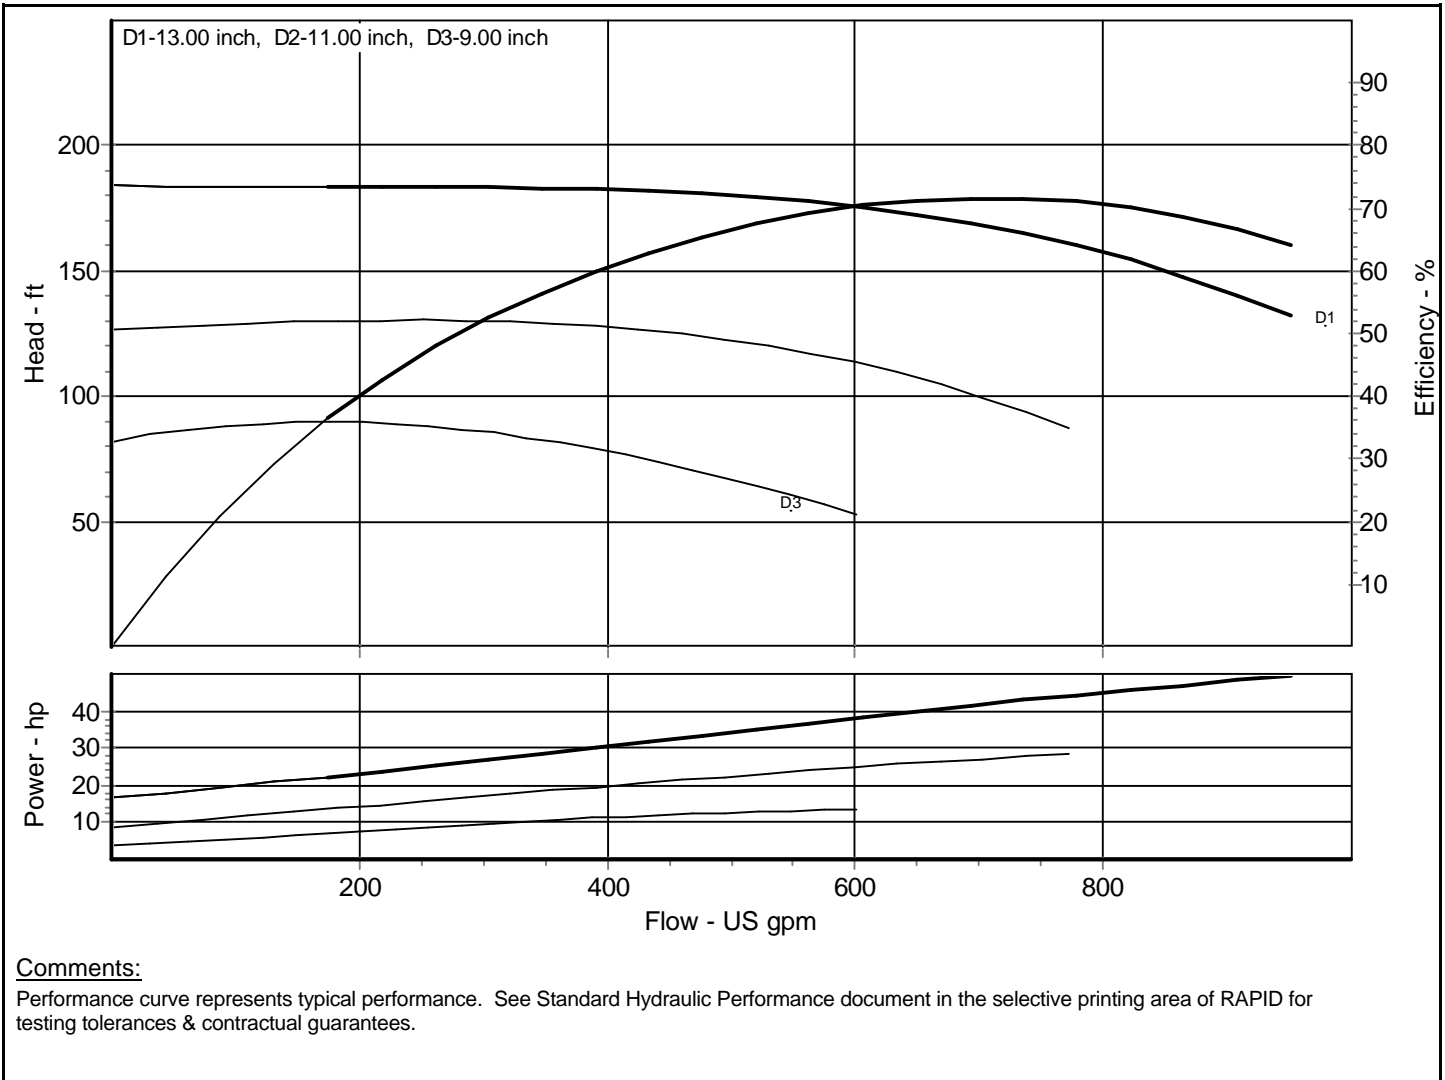

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 3x4-13 6V MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-040	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	14.22 hp
Item : 1		Closed Valve Pressure	79.447 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

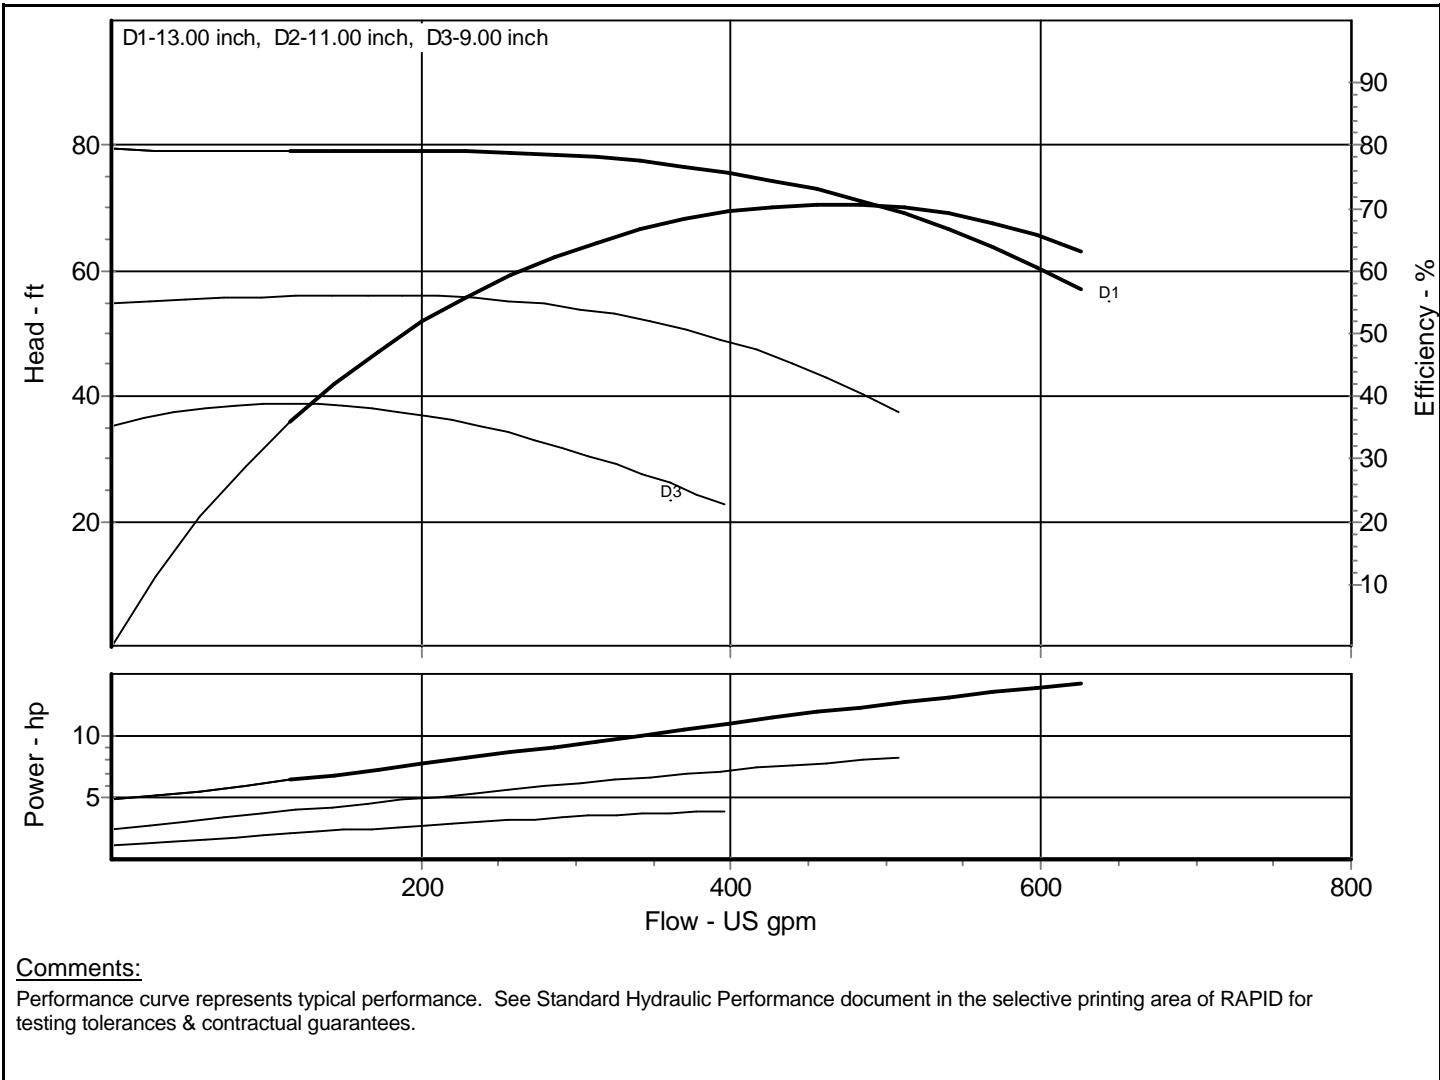

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 4x6-10 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-027	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	27.58 hp
Item : 1		Closed Valve Pressure	101.002 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

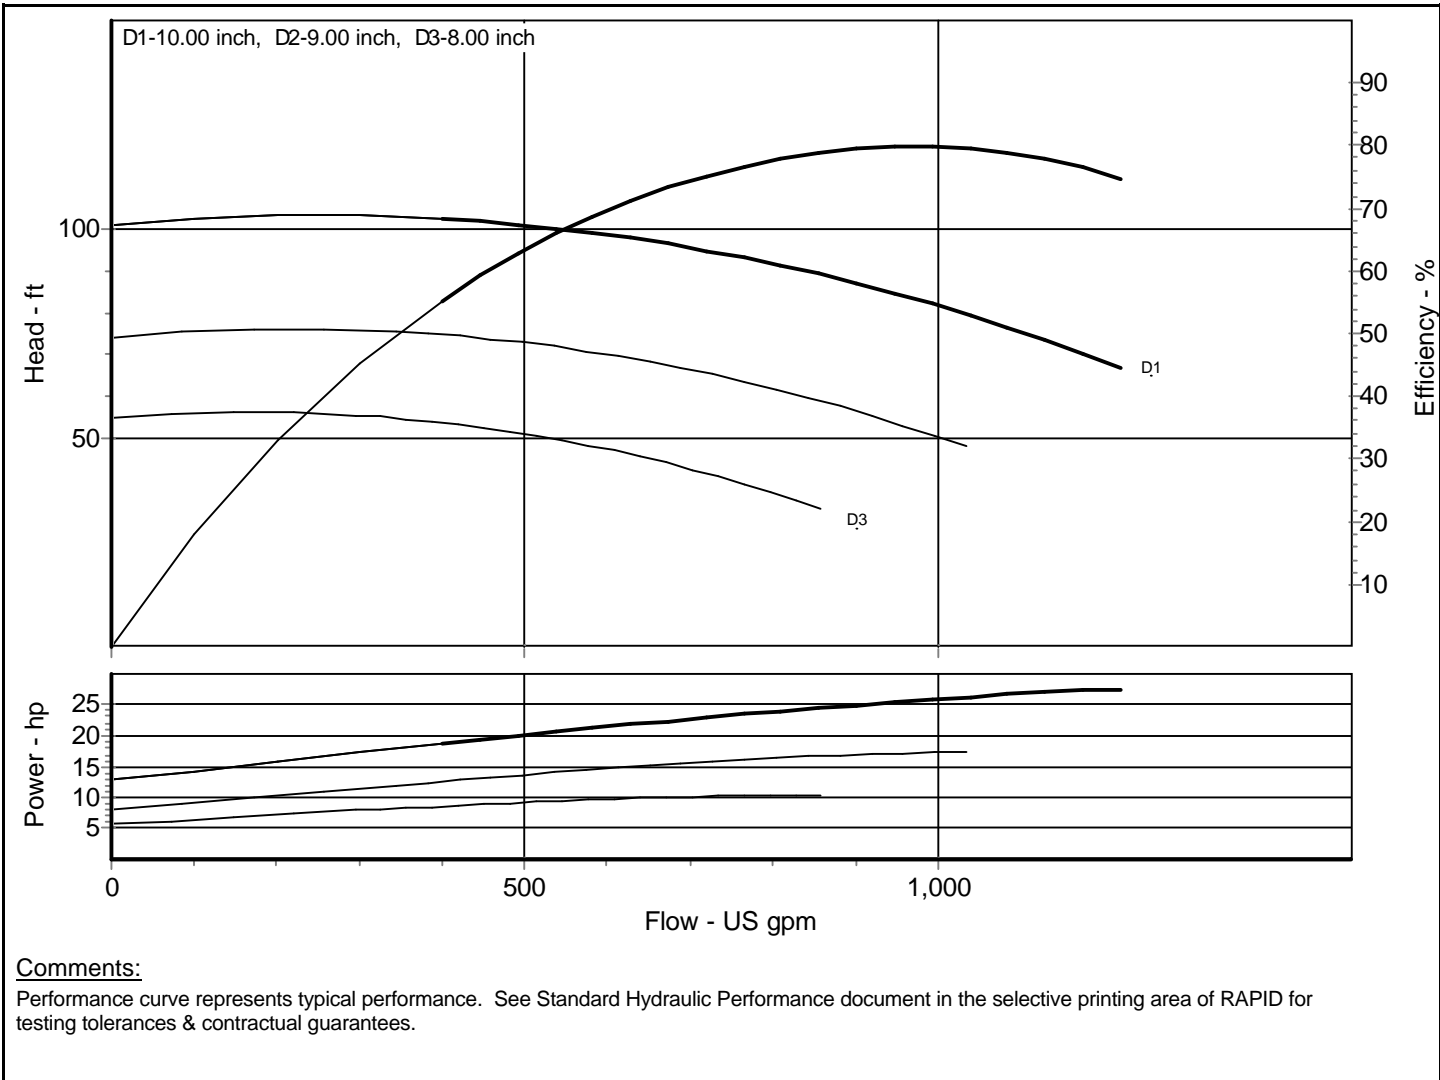

Comments:


Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 4x6-10 MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-028	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	7.93 hp
Item : 1		Closed Valve Pressure	43.616 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

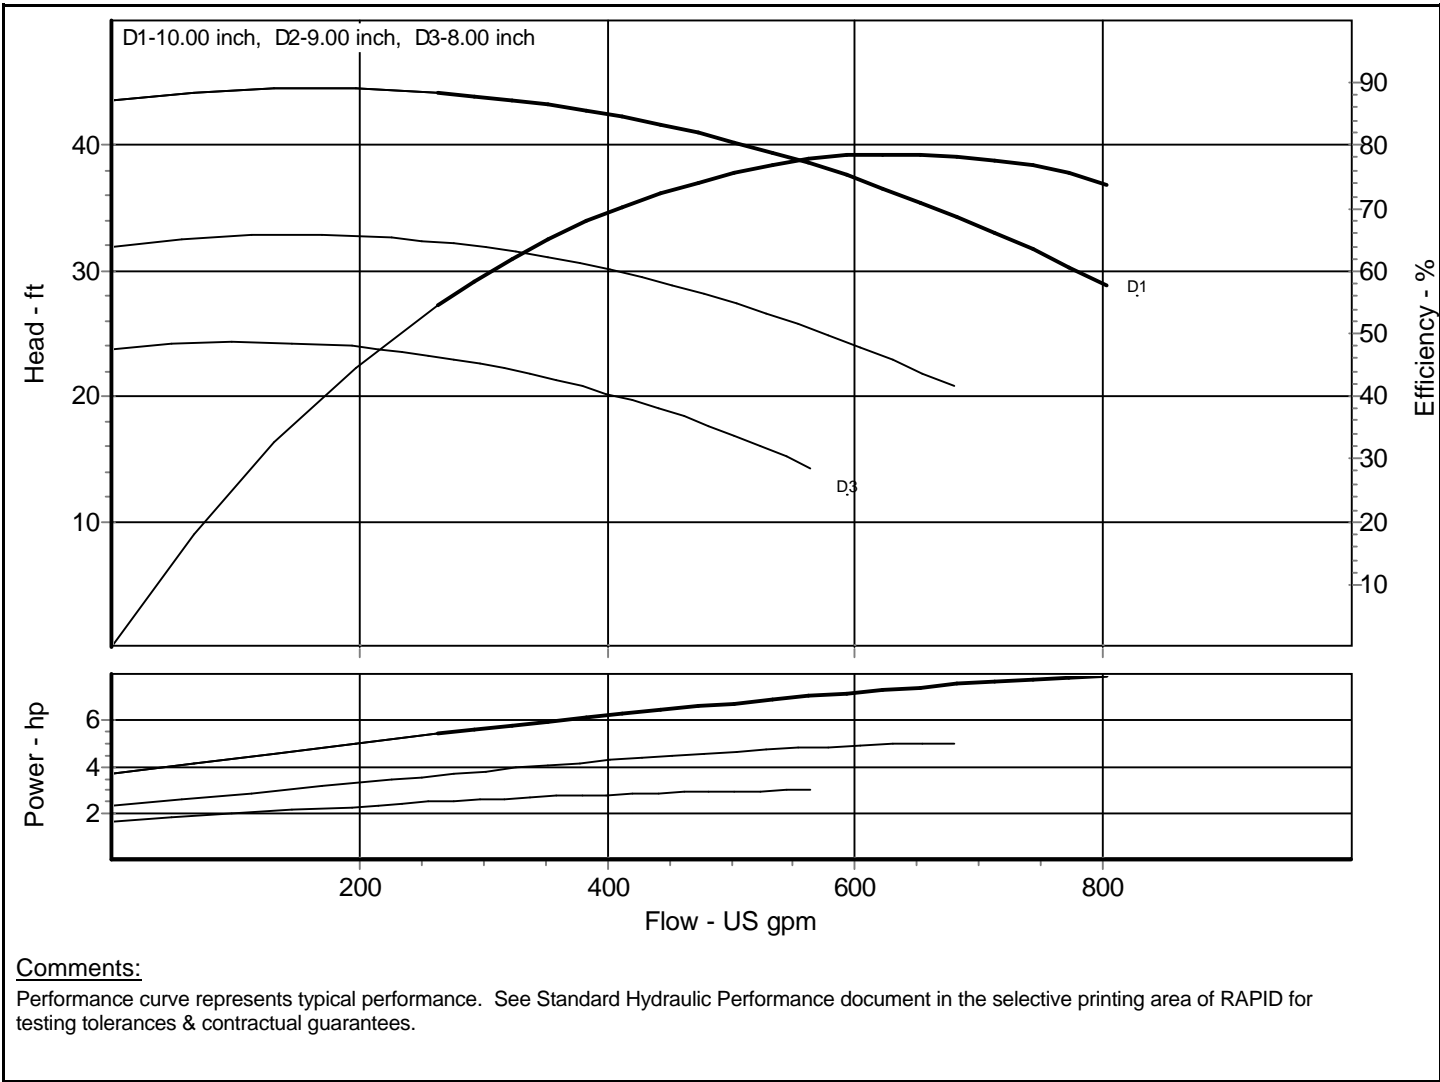

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 4x6-13 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-041	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	62.7 hp
Item : 1		Closed Valve Pressure	173.999 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

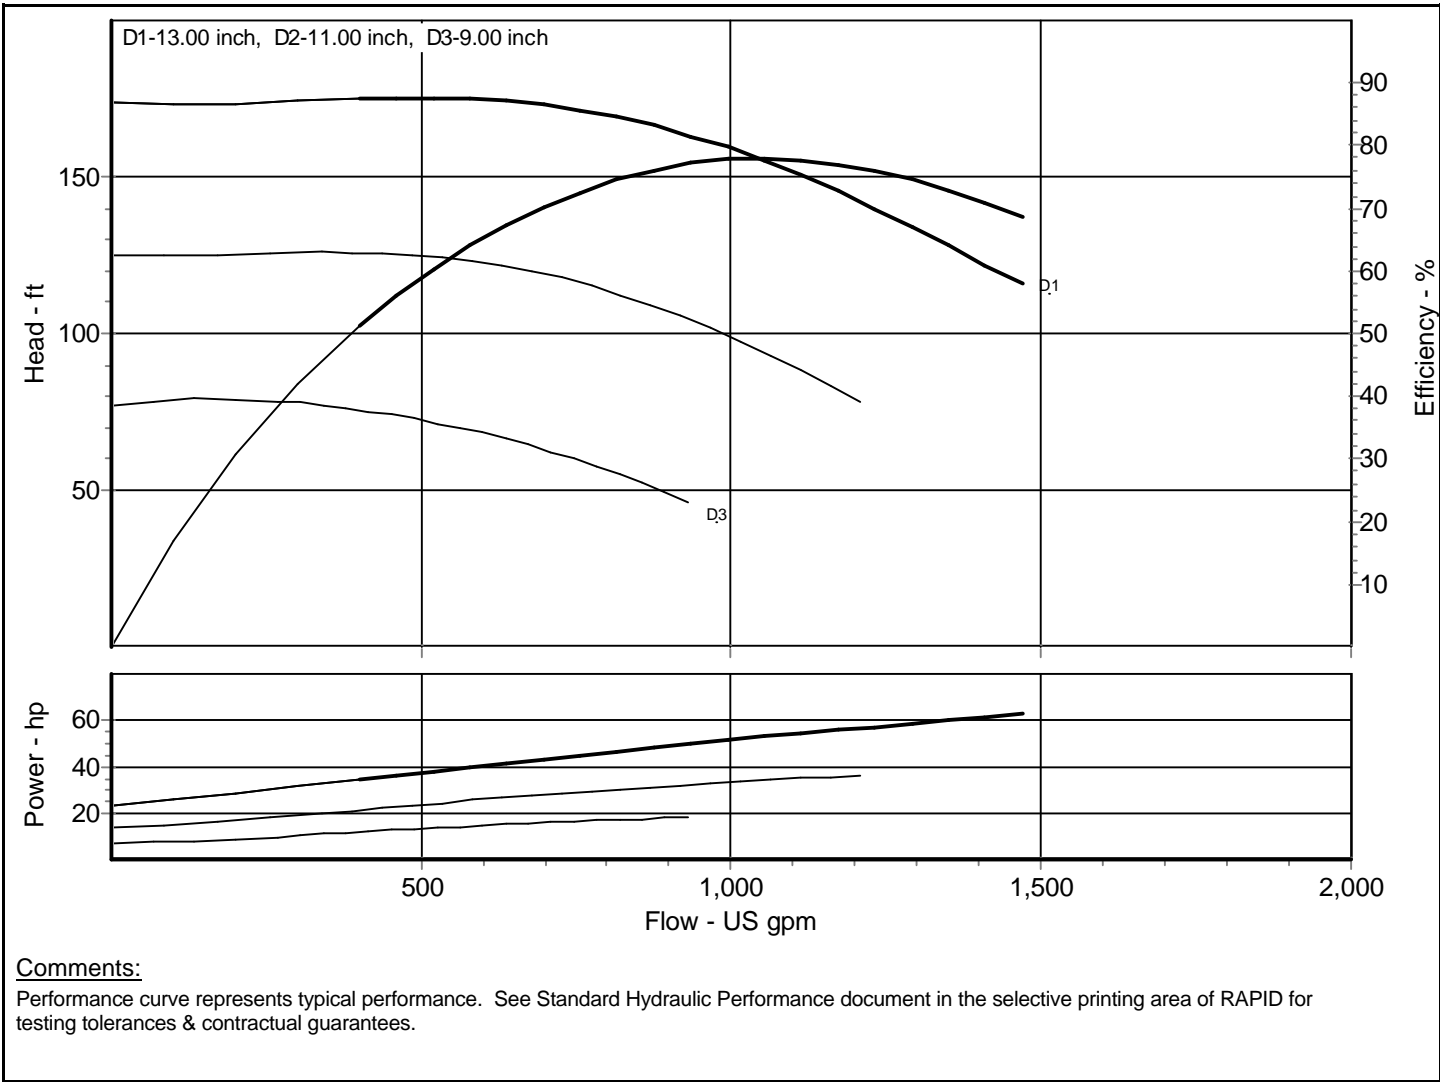

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 4x6-13 MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-042	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	18.02 hp
Item : 1		Closed Valve Pressure	75.139 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

