


Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-8 STP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-005	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	2.41 hp
Item : 1		Closed Valve Pressure	73.206 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

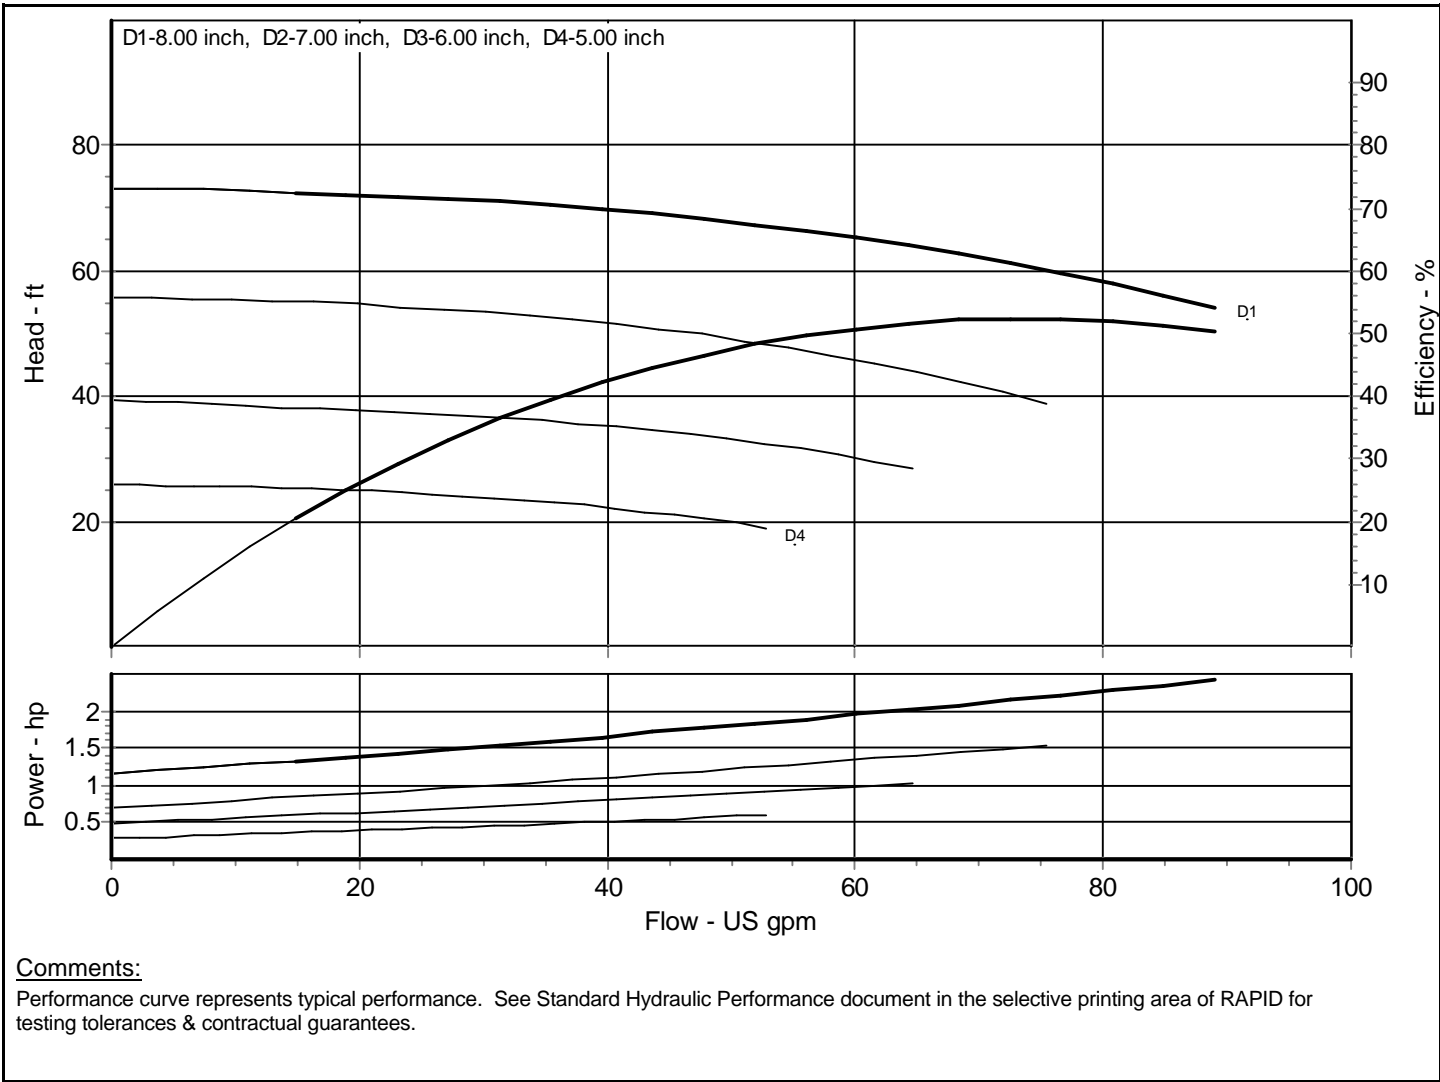


Comments:
Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-8 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-006	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	19.09 hp
Item : 1		Closed Valve Pressure	301.676 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

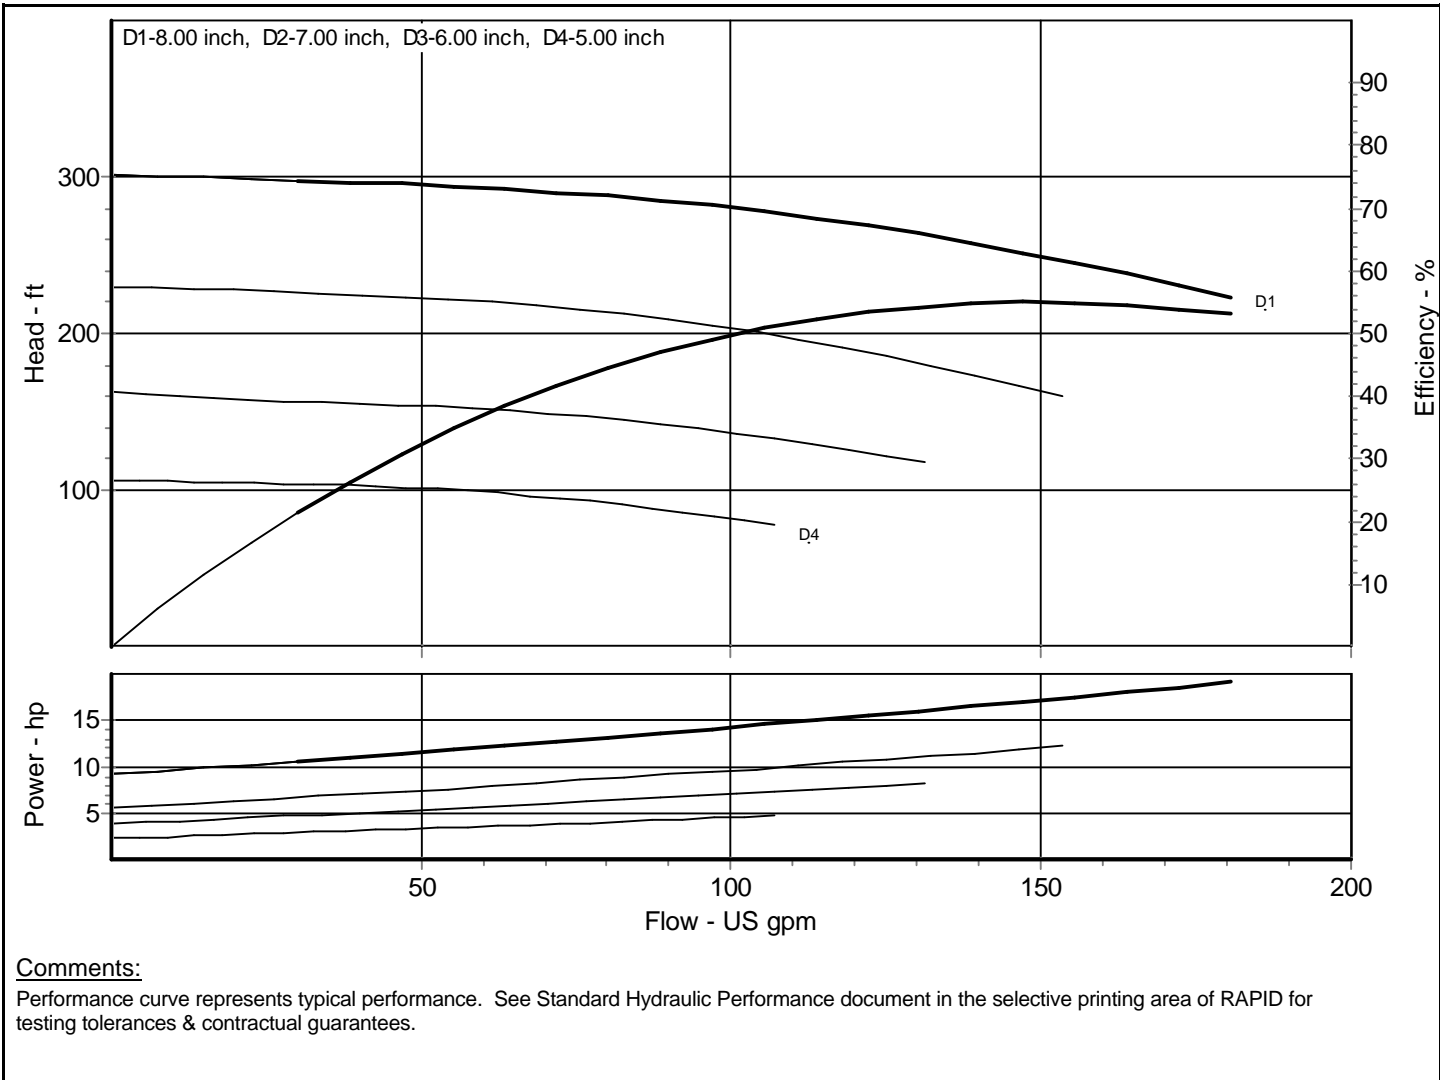

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana


Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-8 STP 8196LF	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-004	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	1.56 hp
Item : 1		Closed Valve Pressure	63.018 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

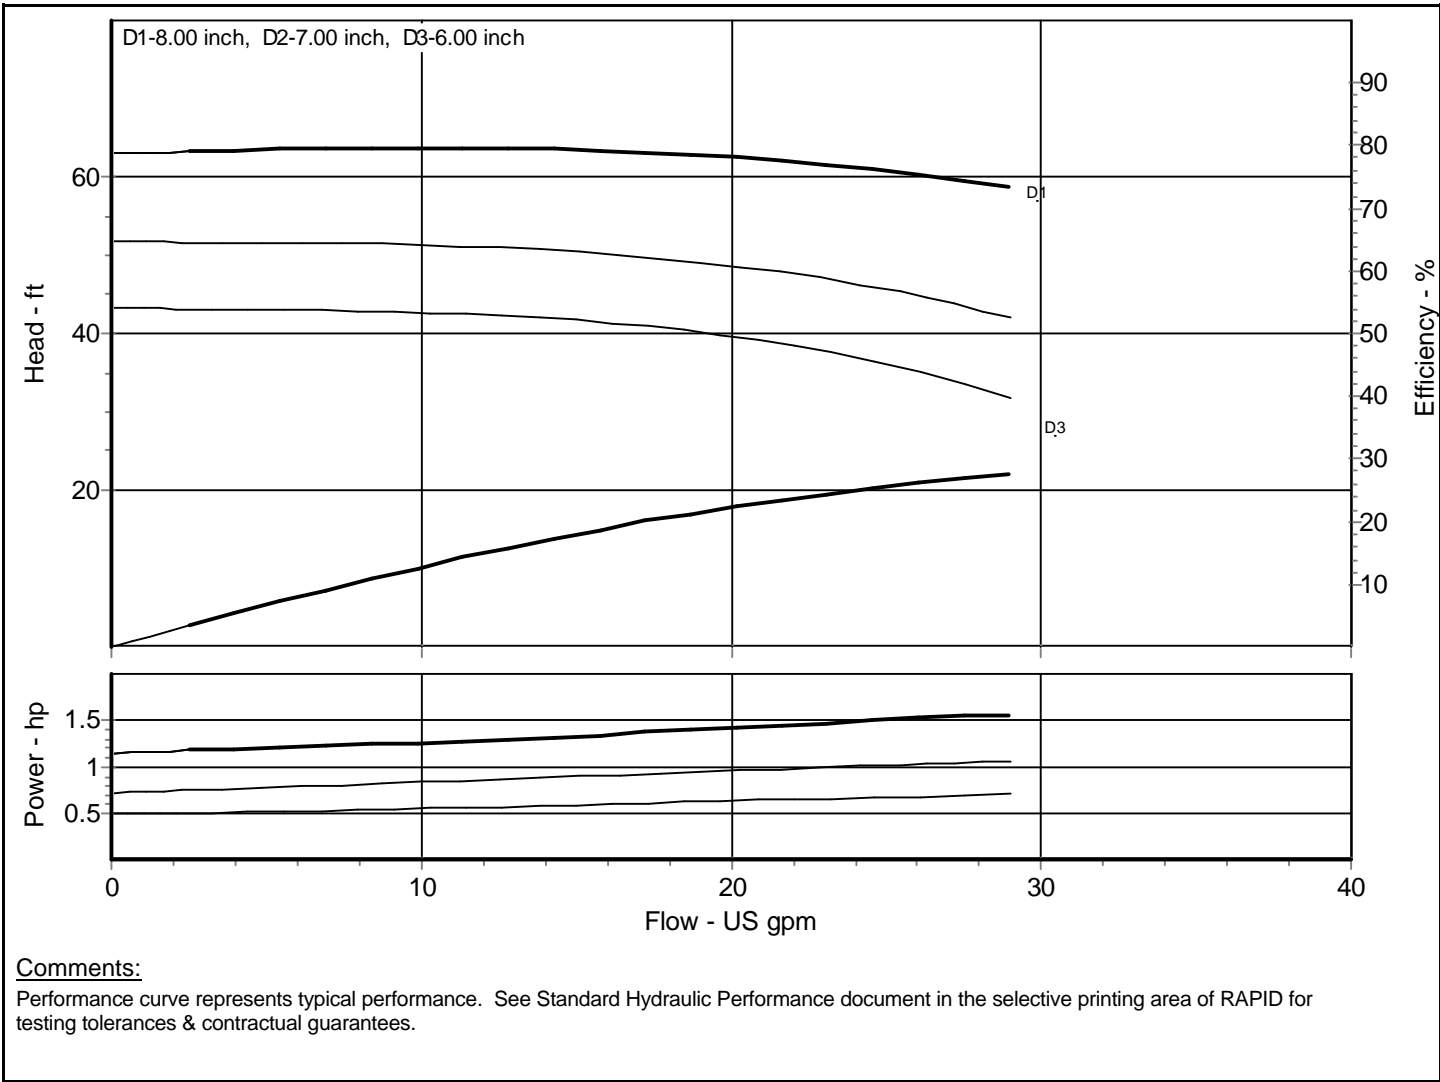

Customer :

Peerless Pump Company
2005 Dr. Martin Luther King Jr. Street Indianapolis, Indiana

Project :		Contact :	
Quote No. : US-2222-17	Page No. : 1	Phone :	Fax :
		Date : Monday, April 14, 2003	
Pump Model: Peerless - 1x1.5-8 STP 8196LF	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-003	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	11.12 hp
Item : 1		Closed Valve Pressure	257.983 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

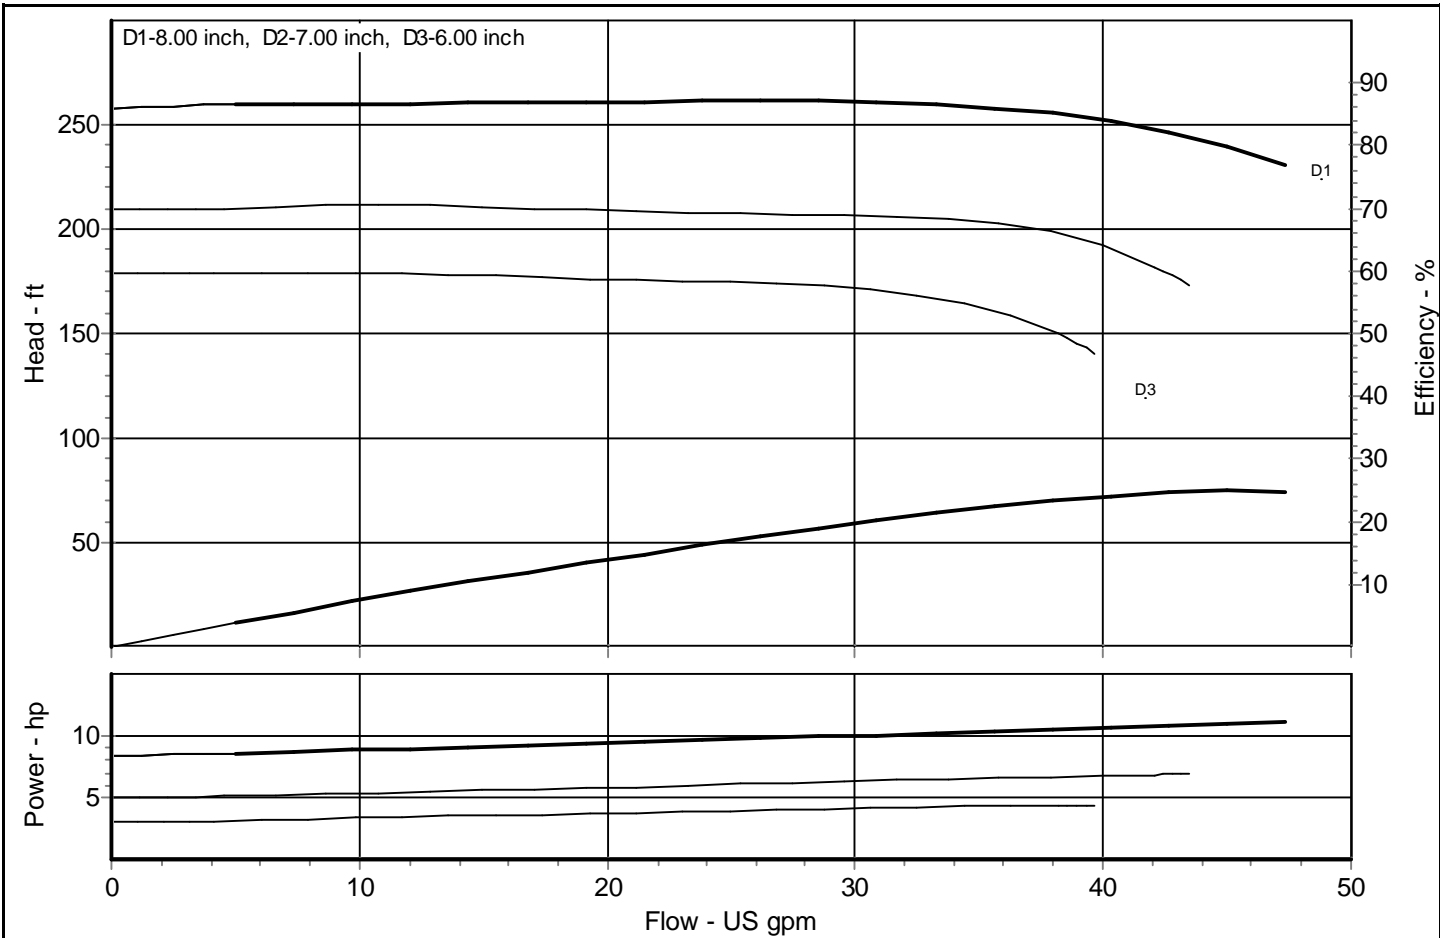

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.

