




Peerless Pump Company  
Indianapolis, IN 46207-7025

VERTICAL TURBINE PUMPS  
Model 24HH-OH - 1185 Rpm

SECTION 140  
Page 1160-73  
October, 1974

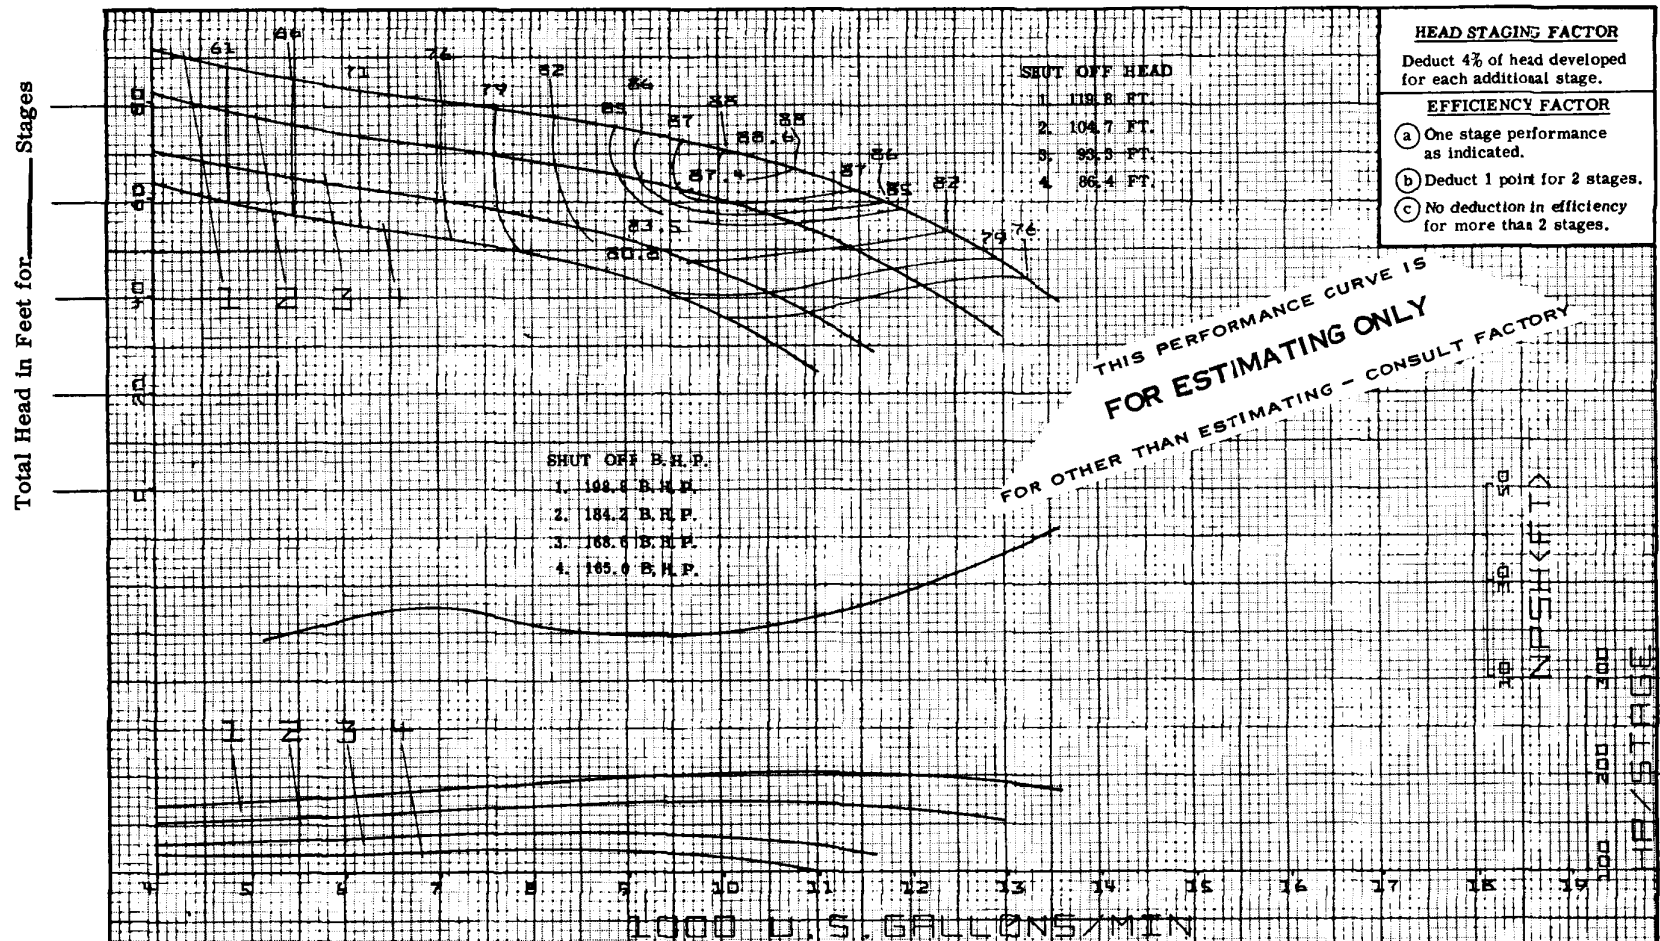


Stages \_\_\_\_\_ of Horsepower \_\_\_\_\_

<b>Head and Capacity Warranty</b> Contingent on:  Proper flow to pump suction. Proper submergence. Fluid free of gas, air & abrasives. Proper lateral setting of impeller.	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	Customer _____								
	1	2633415	13 1/4 X 17 1/4		Item _____								
	2	2633415	12 5/8 X 16 3/4		Peerless Ref. No: _____								
	3	2633415	11 X 16 11/32		<b>Laboratory Performance</b>								
	4	2633415	10 X 16		<table border="1"> <tr> <td>SIZE 24 HH - OH</td> <td>RPM 1185</td> <td>BOWL 2633420</td> <td>CIE</td> </tr> <tr> <td colspan="2">CURVE 4805127</td> <td colspan="2"></td> </tr> </table>	SIZE 24 HH - OH	RPM 1185	BOWL 2633420	CIE	CURVE 4805127			
SIZE 24 HH - OH	RPM 1185	BOWL 2633420	CIE										
CURVE 4805127													

PUMP DESCRIPTION: Driver \_\_\_\_\_; Head \_\_\_\_\_; Column \_\_\_\_\_  
 BOWL  PERFORMANCE: Capacity \_\_\_\_\_ gpm; Head \_\_\_\_\_ ft; Eff \_\_\_\_\_ %; BHP \_\_\_\_\_  
 FIELD

COMPUTER PLOTTED

Total Head in Feet for \_\_\_\_\_ Stages

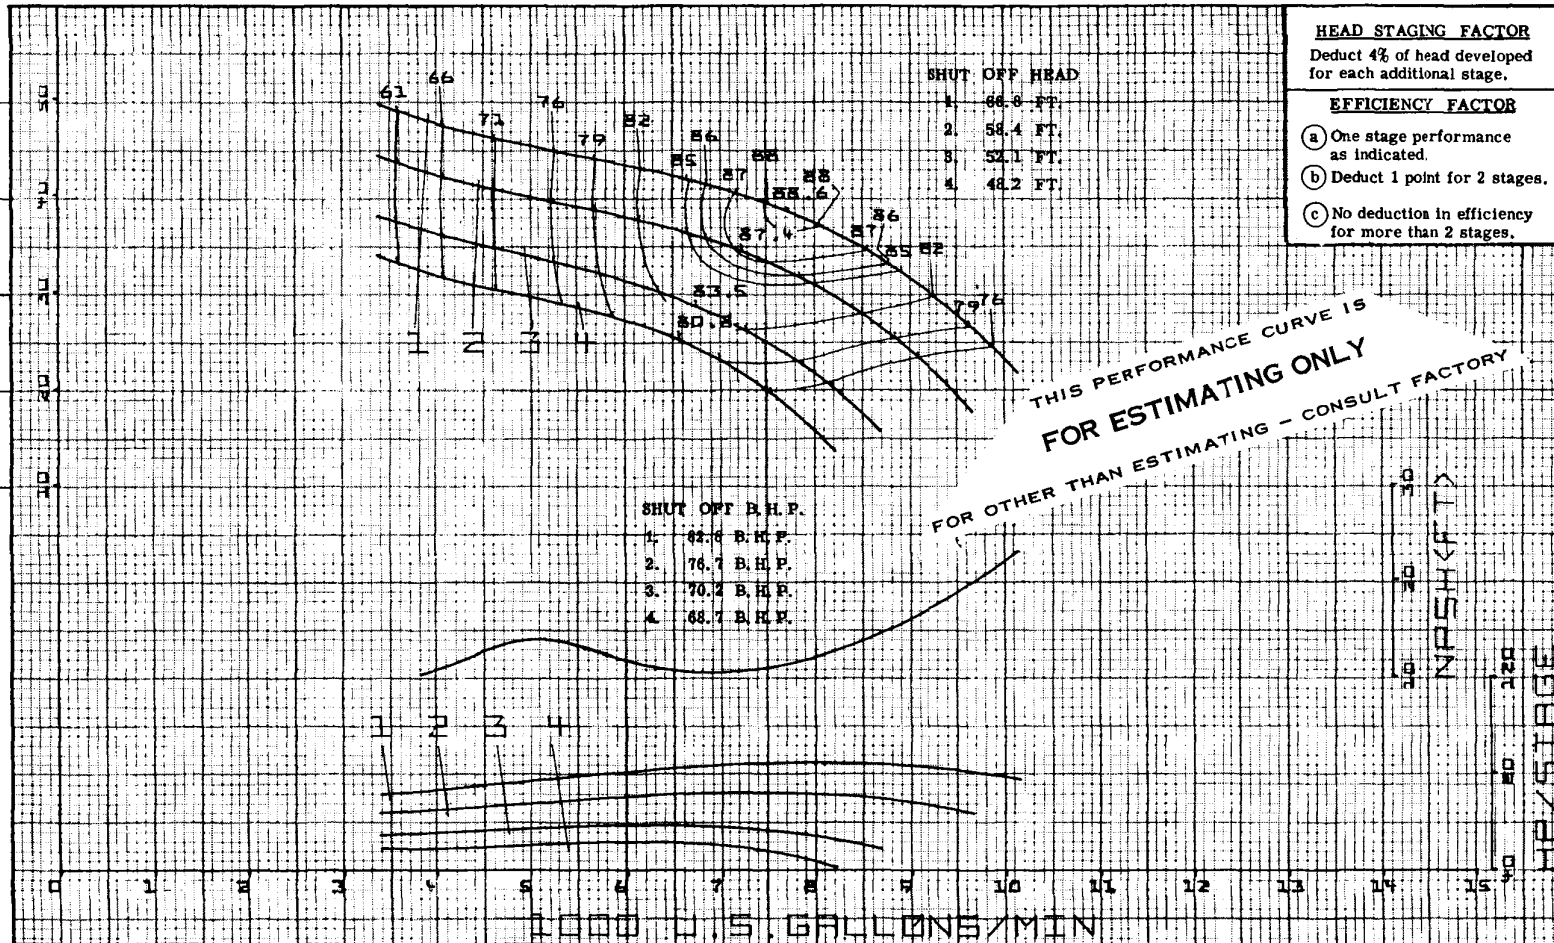

**HEAD STAGING FACTOR**  
Deduct 4% of head developed for each additional stage.

**EFFICIENCY FACTOR**

- (a) One stage performance as indicated.
- (b) Deduct 1 point for 2 stages.
- (c) No deduction in efficiency for more than 2 stages.

<b>HYDRAULIC PERFORMANCE WARRANTY</b> Guaranteed at designated point only, and contingent on: Proper flow to pump suction. Proper submergence. Fluid free of gas, air & abrasives. Proper lateral setting of impeller.	<b>CURVE NO.</b> 1	<b>IMPELLER NO.</b> 2633415	<b>IMPELLER DIA.</b> 13 1/4 X 17 1/4	<b>TAKEN FROM</b>	Customer _____ Item _____ Peerless Ref. No: _____
	2	2633415	12 1/8 X 16 3/4		<b>Laboratory Performance</b> SIZE 24 HH - OH    RPM 885    CURVE 4805128
	3	2633415	11 X 16 11/32		
	4	2633415	10 X 16		

PUMP DESCRIPTION: Driver \_\_\_\_\_; Head \_\_\_\_\_; Column \_\_\_\_\_

GUARANTEED BOWL  PERFORMANCE: Capacity \_\_\_\_\_ gpm; Head \_\_\_\_\_ ft; Eff \_\_\_\_\_ %; BHP \_\_\_\_\_

FIELD




Peerless Pump Company  
 Indianapolis, IN 46207-7025

VERTICAL TURBINE PUMPS  
 Model 24HH OH - 885 Rpm

Horsepower for \_\_\_\_\_ Stages

COMPUTER PLOTTED

Total Head in Feet for \_\_\_\_\_ Stages

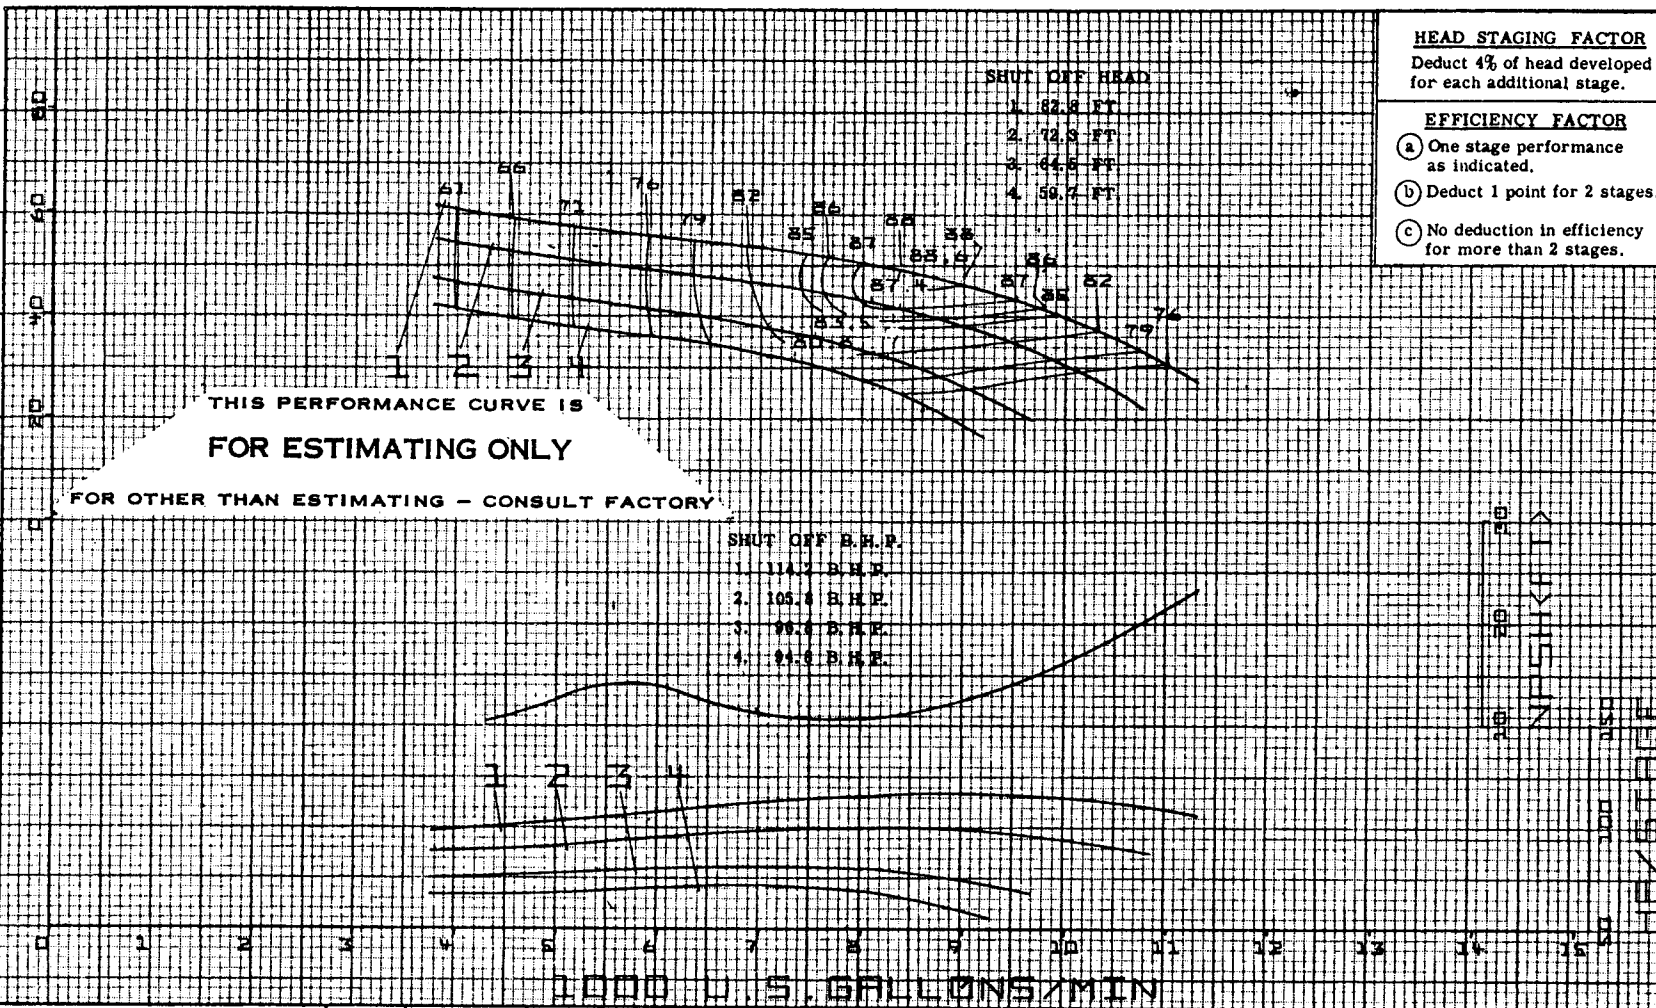

**HEAD STAGING FACTOR**  
Deduct 4% of head developed for each additional stage.

**EFFICIENCY FACTOR**

- (a) One stage performance as indicated.
- (b) Deduct 1 point for 2 stages.
- (c) No deduction in efficiency for more than 2 stages.



Peerless Pump Company  
Indianapolis, IN 46207-7026

VERTICAL TURBINE PUMPS

Stages \_\_\_\_\_  
Horsepower for \_\_\_\_\_


Section 140  
10-74

HYDRAULIC PERFORMANCE WARRANTY at designated point only, and contingent on: Proper flow to pump suction. Proper submergence. Fluid free of gas, air & abrasives. Proper lateral setting of impeller.	CURVE NO. 1	IMPELLER NO. 2633415	IMPELLER DIA. 13 1/4 X 17 1/4	TAKEN FROM	Customer _____ Item _____ Peerless Ref. No: _____
	2	2633415	12 1/8 X 16 3/4		<b>Laboratory Performance</b> SIZE 24 HH - OH    RPM 985    BOWL 2633420 C1 PLASTIC COATED CURVE 4805129
	3	2633415	11 X 16 11/32		
	4	2633415	10 X 16		

PUMP DESCRIPTION: Driver \_\_\_\_\_; Head \_\_\_\_\_; Column \_\_\_\_\_  
 BOWL  PERFORMANCE: Capacity \_\_\_\_\_ gpm; Head \_\_\_\_\_ ft; Eff \_\_\_\_\_ %; BHP \_\_\_\_\_  
 FIELD

COMPUTER PLOTTED

Total Head in Feet for \_\_\_\_\_ Stages

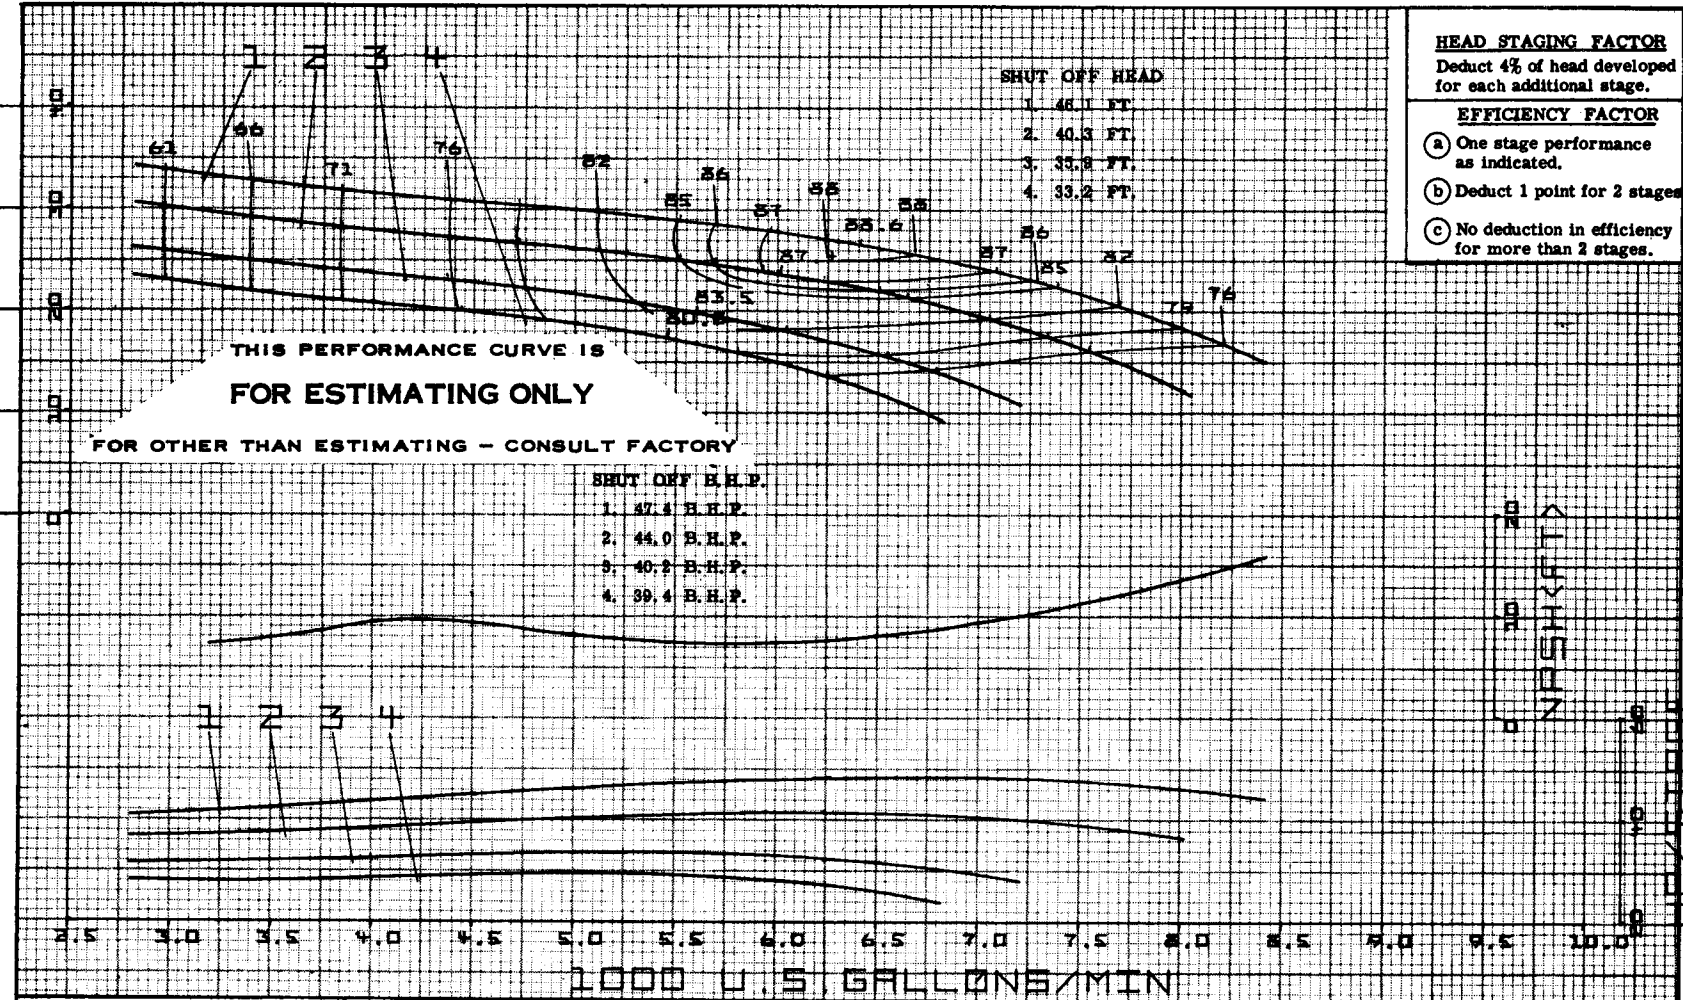

**HEAD STAGING FACTOR**  
Deduct 4% of head developed for each additional stage.

**EFFICIENCY FACTOR**

- (a) One stage performance as indicated.
- (b) Deduct 1 point for 2 stages
- (c) No deduction in efficiency for more than 2 stages.



Peerless Pump Company  
Indianapolis, IN 46207-7025

VERTICAL TURBINE PUMPS

\_\_\_\_\_ Stages  
Horsepower for \_\_\_\_\_

140-50Hz Page 165

HYDRAULIC PERFORMANCE WARRANTY at designated point only, and contingent on: Proper flow to pump suction. Proper submergence. Fluid free of gas, air & abrasives. Proper lateral setting of impeller.	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM	Customer _____
	1	2633415	13 <sup>3</sup> / <sub>4</sub> X 17 <sup>1</sup> / <sub>4</sub>		Item _____
	2	2633415	12 <sup>3</sup> / <sub>8</sub> X 16 <sup>3</sup> / <sub>4</sub>		Peerless Ref. No: _____
	3	2633415	11 X 16 <sup>11</sup> / <sub>32</sub>		<b>Laboratory Performance</b>
	4	2633415	10 X 16		BOWL 2633420 <sup>CI</sup> PLASTIC COATED SIZE 24 HH - OH    RPM 735    CURVE 4805130

PUMP DESCRIPTION: Driver \_\_\_\_\_; Head \_\_\_\_\_; Column \_\_\_\_\_  
 BOWL  PERFORMANCE: Capacity \_\_\_\_\_ gpm; Head \_\_\_\_\_ ft; Eff \_\_\_\_\_ %; BHP \_\_\_\_\_  
 FIELD