


HYDRAULIC PERFORMANCE WARRANTY
 Guaranteed at designated point only, and contingent on:
 Proper sump configuration
 Proper submergence
 Fluid free of gas, air & abrasives
 Proper lateral setting of impeller

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.3	3'
RAISE	0.2	6'
"	0.3	7'
"	0.4	8'
"	0.5	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

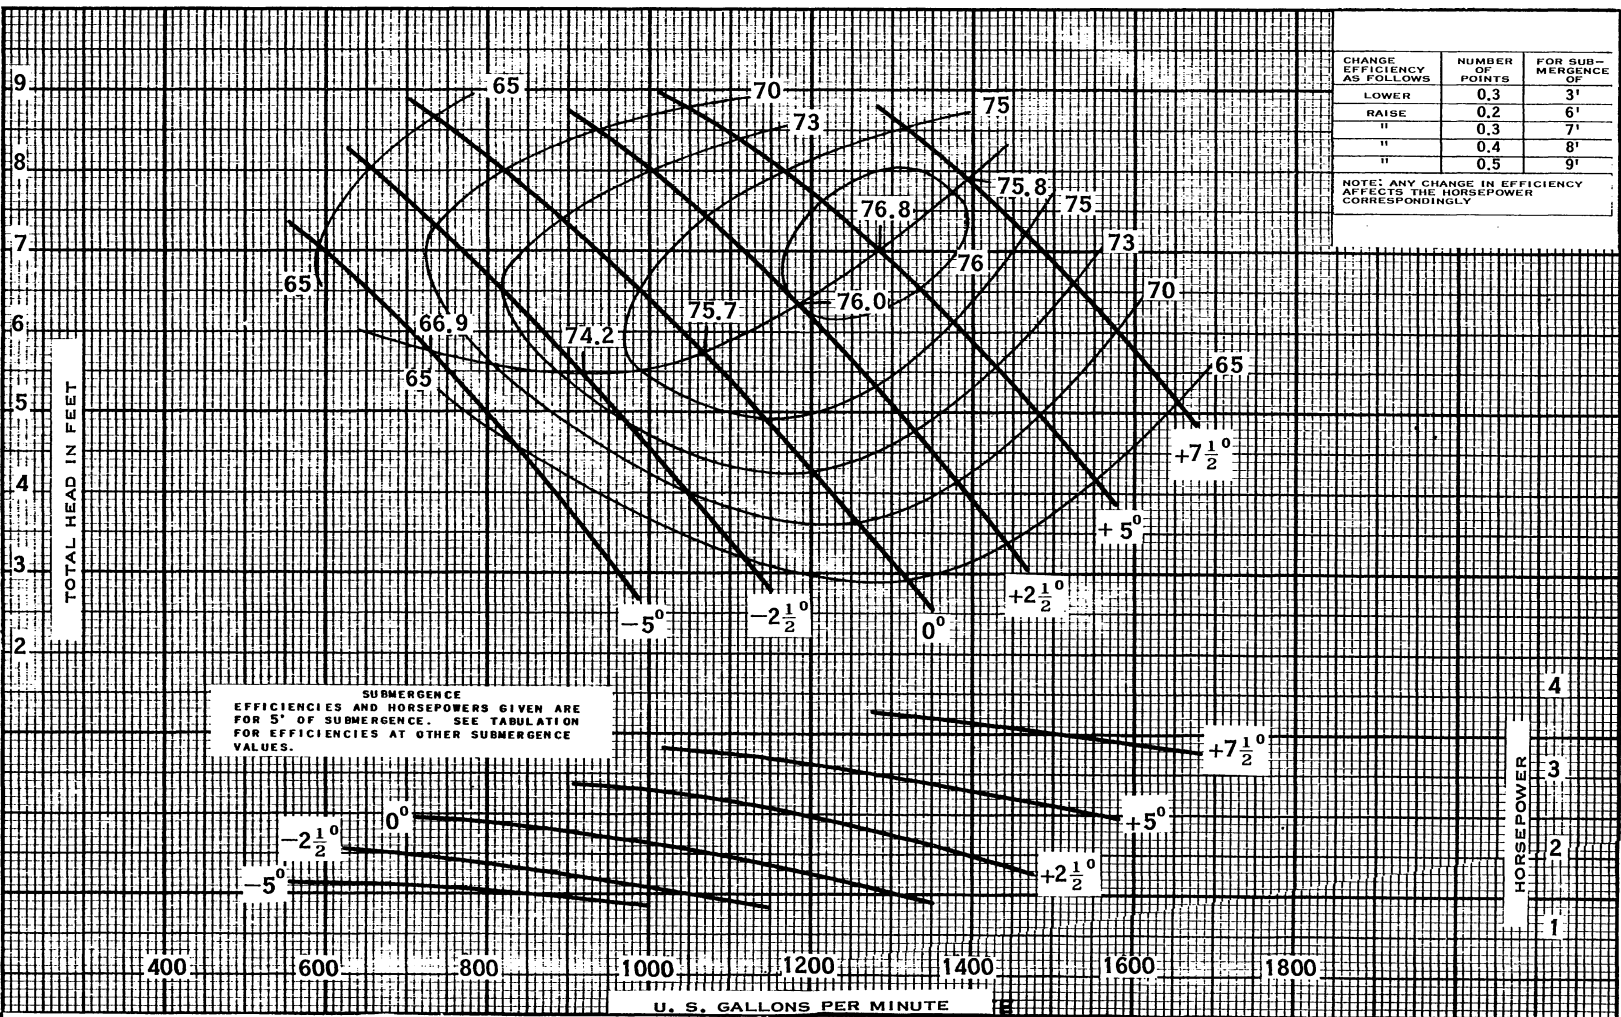

BOWL
 FIELD

PERFORMANCE

CAPACITY _____ GPM

TOTAL DYNAMIC HEAD _____ FT

EFFICIENCY _____

BRAKE HORSEPOWER _____ BHP



LABORATORY PERFORMANCE

SIZE 10 PL

RPM 1460

CURVE NUMBER V4208A

DESCRIPTION: Hydro-Foil Pump with: Bowl T83863 ; Propeller T84484

Elbow above below base dia with x inner column

Driver: _____

Customer _____

Item _____

Peerless Ref. No. _____ Pump No. _____

HYDRAULIC PERFORMANCE WARRANTY

Guaranteed at designated point only, and contingent on:

- Proper sump configuration
- Proper submergence
- Fluid free of gas, air & abrasives
- Proper lateral setting of impeller

- BOWL
- FIELD

PERFORMANCE

CAPACITY
GPM

TOTAL DYNAMIC HEAD
FT

EFFICIENCY

BRAKE HORSEPOWER
BHP


 Peerless Pump Company
Indianapolis, IN 46207-7026

LABORATORY PERFORMANCE

SIZE
10 PL

RPM
1160

CURVE NUMBER
V4192A

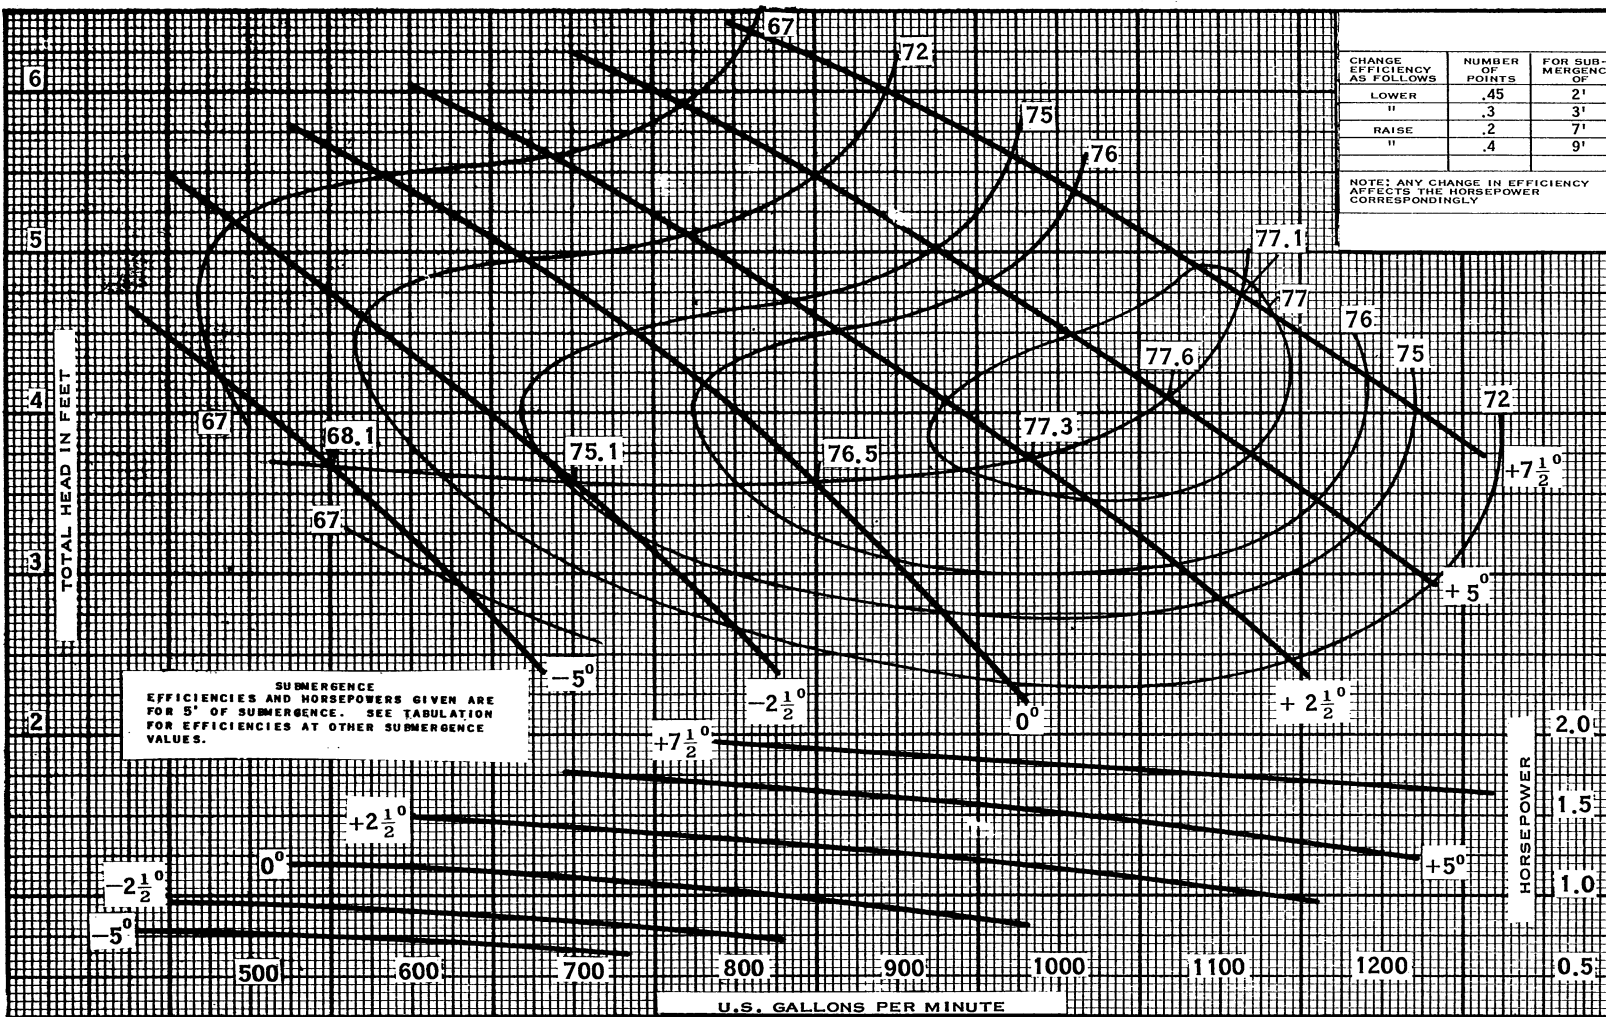

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUBMERGENCE OF
LOWER	.45	2'
"	.3	3'
RAISE	.2	7'
"	.4	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

SUBMERGENCE EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 5° OF SUBMERGENCE. SEE TABULATION FOR EFFICIENCIES AT OTHER SUBMERGENCE VALUES.

DESCRIPTION: Hydro-Foil Pump with: Bowl **T83863** ; Propeller **T84484**

above Elbow below base dia with x inner column

Driver: _____

Customer _____


Item _____

Peerless Ref. No. _____ Pump No. _____

HYDRAULIC PERFORMANCE WARRANTY
 Guaranteed at designated point only, and contingent on:
 Proper sump configuration
 Proper submergence
 Fluid free of gas, air & abrasives
 Proper lateral setting of impeller

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	.45	2'
"	.3	3'
RAISE	.2	7'
"	.4	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

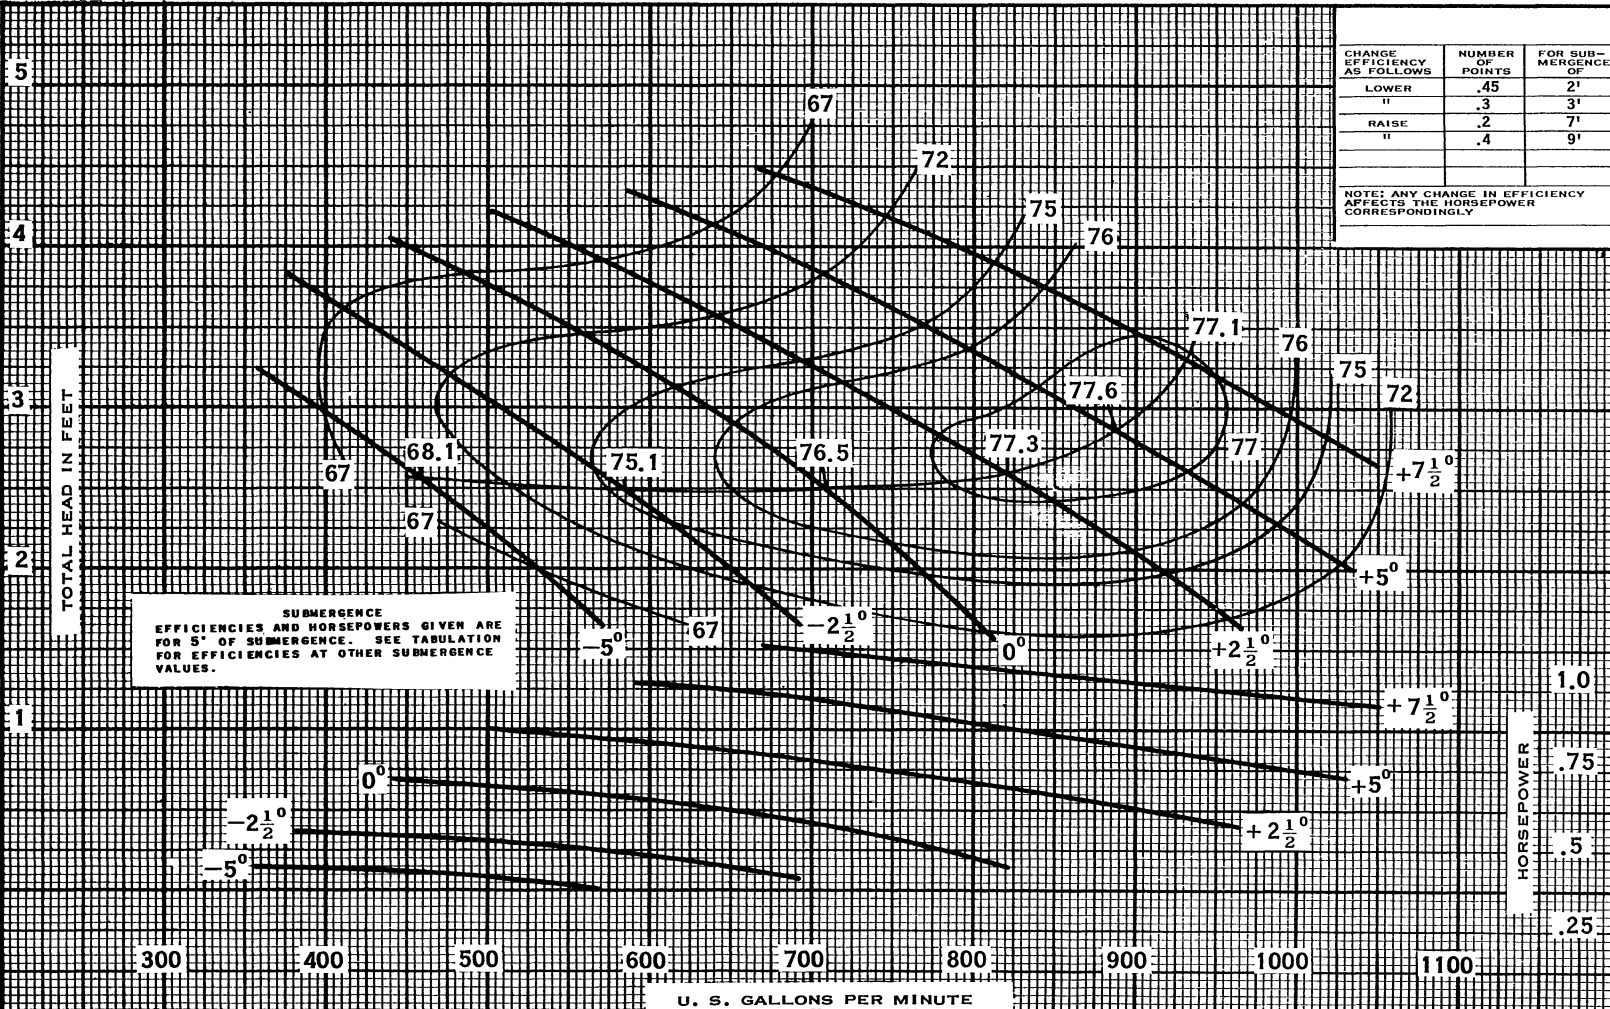

SUBMERGENCE
 EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 5° OF SUBMERGENCE. SEE TABULATION FOR EFFICIENCIES AT OTHER SUBMERGENCE VALUES.

BOWL
 FIELD

PERFORMANCE

CAPACITY _____ GPM

TOTAL DYNAMIC HEAD _____ FT

EFFICIENCY _____

BRAKE HORSEPOWER _____ BHP

PEERLESS PUMP Peerless Pump Company
 Indianapolis, IN 46207-7026

LABORATORY PERFORMANCE

SIZE 10 PL

RPM 970

CURVE NUMBER V4209A

DESCRIPTION: Hydro-Foil Pump with; Bowl T83863 ; Propeller T84484

Elbow above below base dia with x inner column

Driver: _____

Customer _____

Item _____

Peerless Ref. No. _____ Pump No. _____