


**HYDRAULIC PERFORMANCE WARRANTY**  
 Guaranteed at designated point only, and contingent on:  
 Proper sump configuration  
 Proper submergence  
 Fluid free of gas, air & abrasives  
 Proper lateral setting of impeller

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.45	2'
"	0.3	3'
RAISE	0.2	7'
"	0.4	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

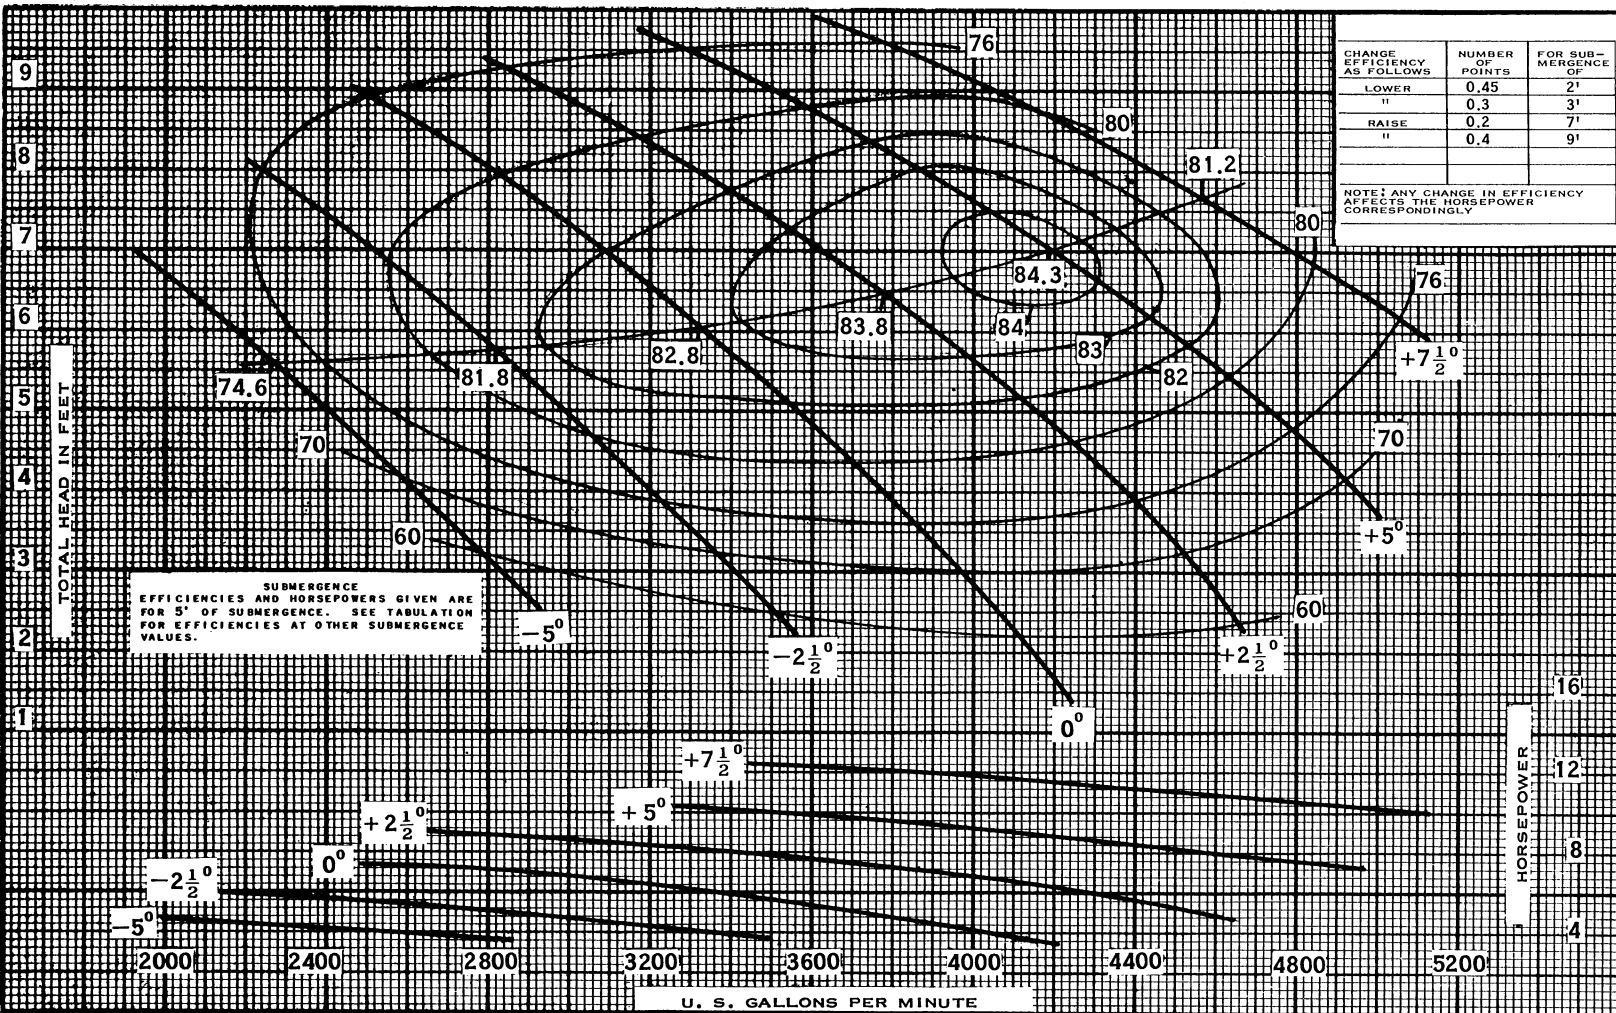

<input type="checkbox"/> BOWL	<input type="checkbox"/> FIELD
<b>PERFORMANCE</b>	
CAPACITY	GPM
TOTAL DYNAMIC HEAD	FT
EFFICIENCY	
BRAKE HORSEPOWER	BHP



<b>LABORATORY PERFORMANCE</b>	
SIZE	16 PL
RPM	870
CURVE NUMBER	V 4136 A


DESCRIPTION: Hydro-Foil Pump with: Bowl **T83760** ; Propeller **T84393**  
 Elbow  above  below base      dia with      x      inner column  
 Driver: \_\_\_\_\_

Customer \_\_\_\_\_  
 Item \_\_\_\_\_  
 Peerless Ref. No. \_\_\_\_\_ Pump No. \_\_\_\_\_

**HYDRAULIC PERFORMANCE WARRANTY**  
 Guaranteed at designated point only, and contingent on:  
 Proper sump configuration  
 Proper submergence  
 Fluid free of gas, air & abrasives  
 Proper lateral setting of impeller

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.45	2'
"	0.3	3'
RAISE	0.2	7'
"	0.4	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

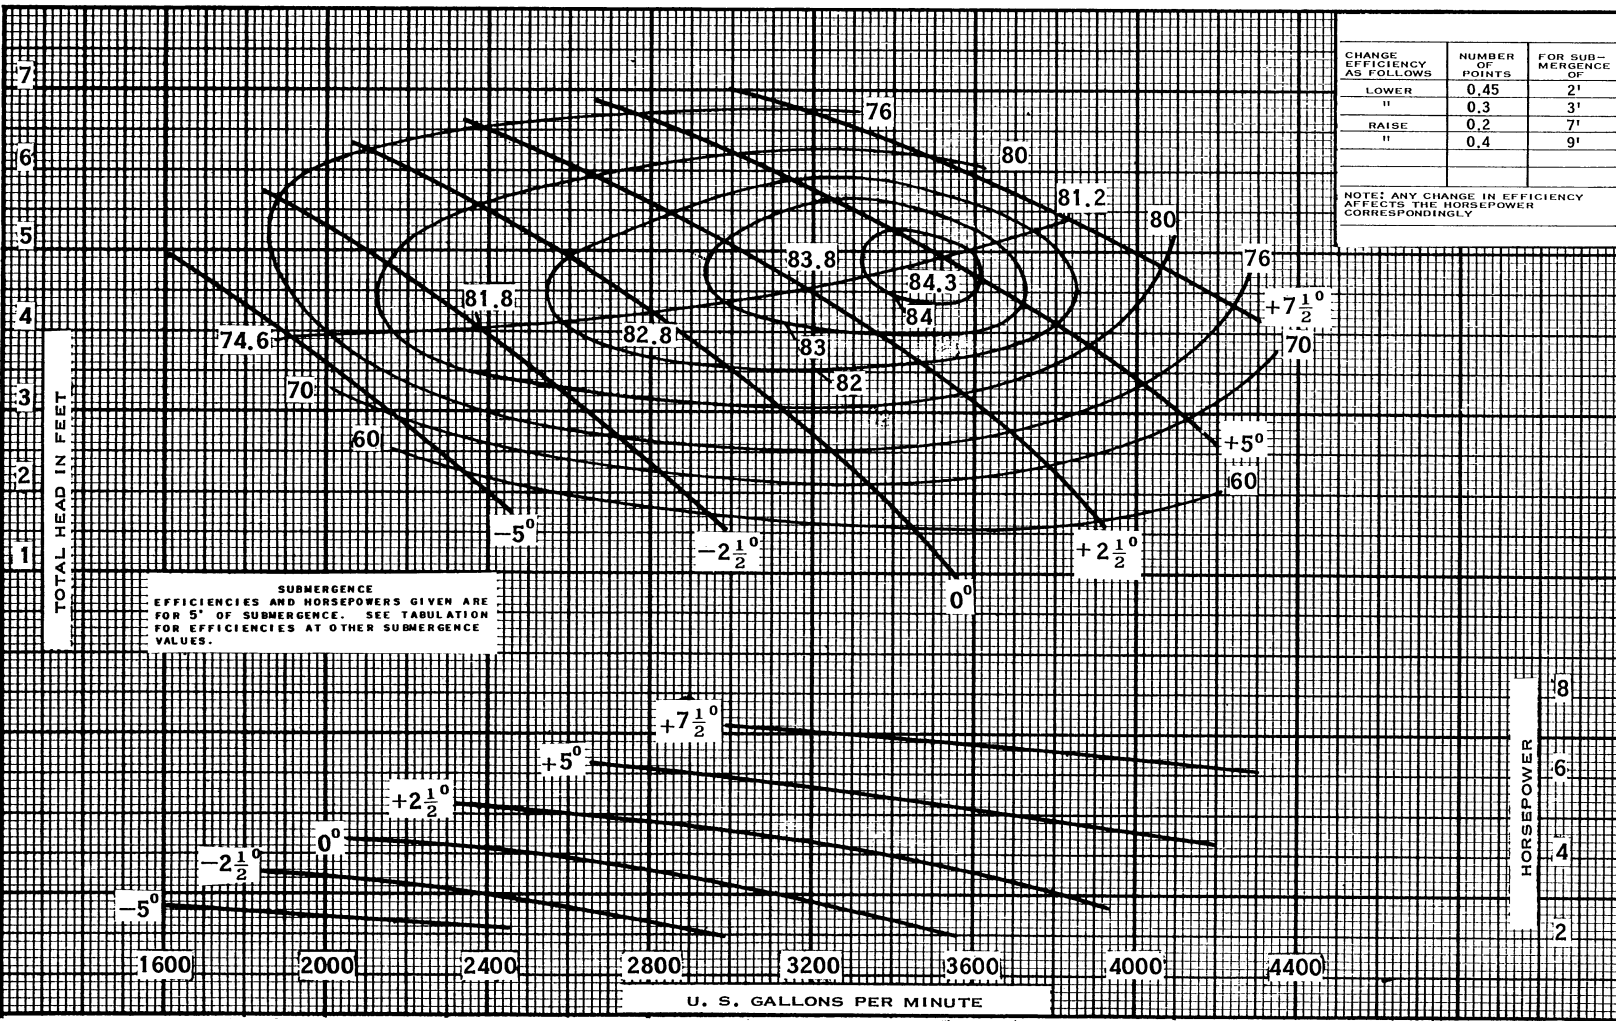

SUBMERGENCE EFFICIENCIES AND HORSEPOWERS GIVEN ARE FOR 5' OF SUBMERGENCE. SEE TABULATION FOR EFFICIENCIES AT OTHER SUBMERGENCE VALUES.

<input type="checkbox"/> BOWL	<input type="checkbox"/> FIELD
<b>PERFORMANCE</b>	
CAPACITY	GPM
TOTAL DYNAMIC HEAD	FT
EFFICIENCY	
BRAKE HORSEPOWER	BHP



<b>LABORATORY PERFORMANCE</b>	
SIZE	16 PL
RPM	730
CURVE NUMBER	V 4212A

DESCRIPTION: Hydro-Foil Pump with: Bowl **T 83760** ; Propeller **T 84393**

Elbow  above  below base      dia with      x      inner column

Driver: \_\_\_\_\_

Customer \_\_\_\_\_

Item \_\_\_\_\_

Peerless Ref. No. \_\_\_\_\_ Pump No. \_\_\_\_\_