



Peerless Pump Company
Indianapolis, IN 46207-7025


END SUCTION GENERAL PURPOSE PUMPS

Series C - Close Coupled - 6 Inch Sizes

SECTION 2330

Page 3

May 10, 1993

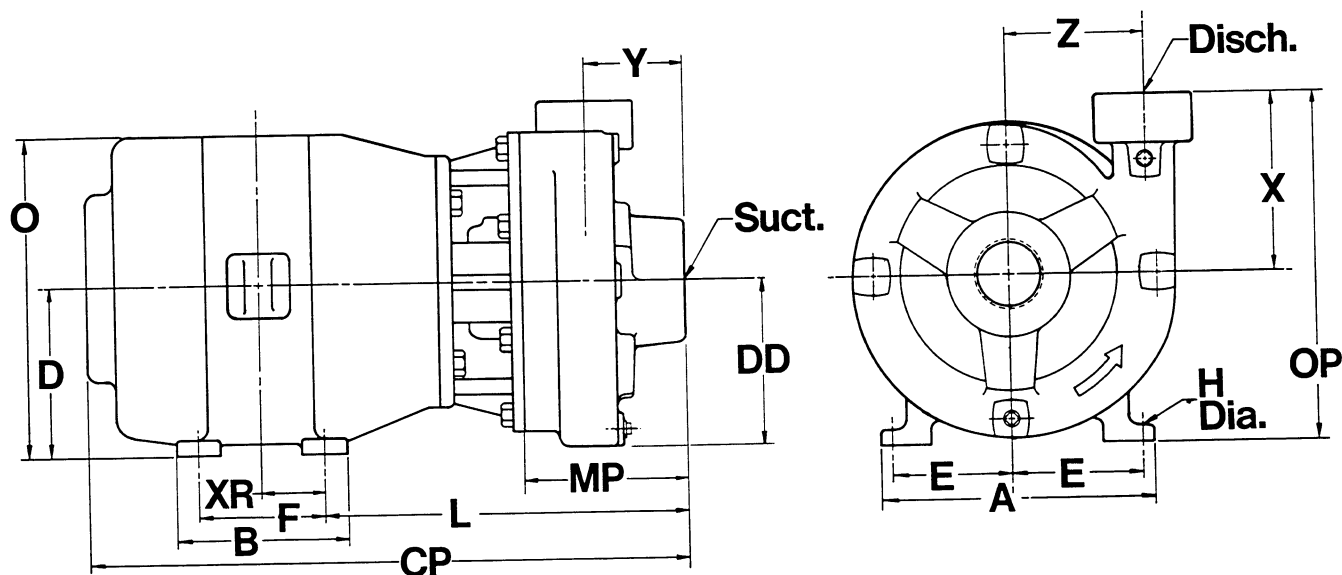

✓	Pump Series Type & Style	COMMON PUMP DIMENSIONS IN INCHES						
		Suction Size NPT	Discharge Size NPT	X	Y	Z	DD	MP
	C610AM, AP	2	1	4.75	2.62	3.38	4.25	4.12
	C615AM, AP	2	1-1/2	5.00	2.75	3.62	4.38	4.38
	C615JM, JP	2	1-1/2	5.00	2.75	3.62	4.38	4.38
	C620AM, AP	2-1/2	2	5.38	3.25	3.62	4.50	4.88

✓	Motor Frame	COMMON MOTOR DIMENSIONS IN INCHES							
		A Max	B Max	D	E	F	H	O Max	XR
	143	7.0	6.0	3.50	2.75	4.0	.34	8.75	2.00
	145	7.0	6.5	3.50	2.75	5.0	.34	8.75	2.50
	182	9.0	6.5	4.50	3.75	4.5	.40	9.38	2.25
	184	9.0	7.5	4.50	3.75	5.5	.40	9.38	2.75
	213	10.5	7.5	5.25	4.25	5.5	.40	11.12	2.75
	215	10.5	9.0	5.25	4.25	7.0	.40	11.12	3.50

✓	Motor Frame	UNIT DIMENSIONS IN INCHES AND WEIGHTS (WT) IN LBS ODP MOTORS											
		□ C610AM				□ C615AM □ C615JM				□ C620AM			
		CP	L	OP	WT	CP	L	OP	WT	CP	L	OP	WT
	143JM	17.00	9.38	8.25	91	21.00	9.50	8.50	91	17.75	10.12	8.88	93
	145JM	18.00	9.38	8.25	103	21.00	9.50	8.50	103	18.75	10.12	8.88	105
	182JM	20.50	10.12	9.25	128	21.75	10.25	9.50	128	21.25	10.88	9.88	130
	184JM	20.50	10.12	9.25	143	21.75	10.25	9.50	143	21.25	10.88	9.88	145
	213JM	22.62	11.00	10.00	205	22.62	11.12	10.25	205	23.38	11.75	10.62	207
	215JM	-	-	-	-	22.62	11.12	10.25	236	24.88	11.75	10.62	238

✓	Motor Frame	UNIT DIMENSIONS IN INCHES AND WEIGHTS (WT) IN LBS ODP MOTORS											
		□ C610AP				□ C615AP □ C615JP				□ C620AP			
		CP	L	OP	WT	CP	L	OP	WT	CP	L	OP	WT
	143JP	20.00	12.38	8.25	91	24.00	12.50	8.50	91	20.75	13.12	8.88	93
	145JP	21.00	12.38	8.25	103	24.00	12.50	8.50	103	21.75	13.12	8.88	105
	182JP	23.50	13.12	9.25	128	24.75	13.25	9.50	128	24.25	13.88	9.88	130
	184JP	23.50	13.12	9.25	143	24.75	13.25	9.50	143	24.25	13.88	9.88	145

CUSTOMER _____ JOB NAME _____

P.O. NUMBER _____ SERIAL NUMBER _____


MOTOR MFR _____ ENCL _____ FRAME _____ HP _____ VOLTS _____ PH _____ HERTZ _____

PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____

CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

END SUCTION GENERAL PURPOSE PUMPS

Series C - Close Coupled - 8 Inch Sizes

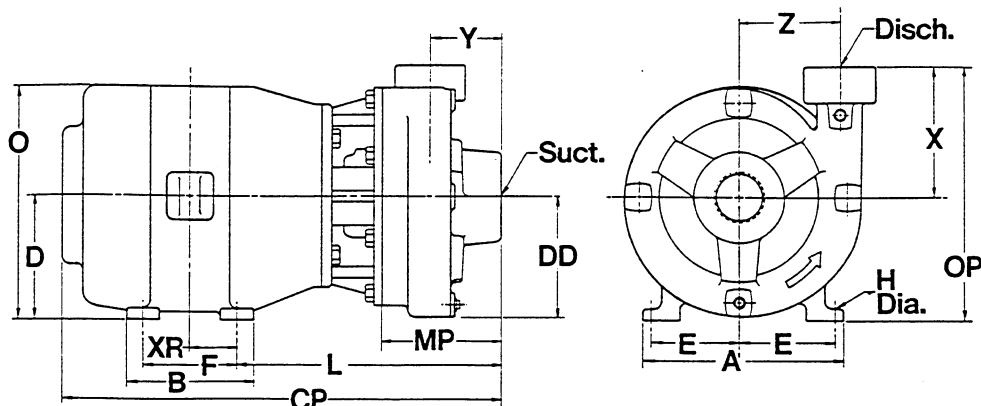

✓	Pump Series Type & Style	COMMON PUMP DIMENSIONS IN INCHES						
		Suction Size NPT	Discharge Size NPT	X	Y	Z	DD	MP
	C810AM, AP	2	1	5.12	2.75	4.31	5.25	4.25
	C810GM, GP	2	1	5.12	2.75	4.31	5.25	4.25
	C820AM, AP	2-1/2	2	6.00	3.12	4.62	5.50	4.75

✓	Motor Frame	COMMON MOTOR DIMENSIONS IN INCHES							
		A Max	B Max	D	E	F	H	O Max	XR
	143	7.0	6.00	3.50	2.75	4.00	.34	8.75	2.00
	145	7.0	6.50	3.50	2.75	5.00	.34	8.75	2.50
	182	9.0	6.50	4.50	3.75	4.50	.40	9.38	2.25
	184	9.0	7.50	4.50	3.75	5.50	.40	9.38	2.75
	213	10.5	7.50	5.25	4.25	5.50	.40	11.12	2.75
	215	10.5	9.00	5.25	4.25	7.00	.40	11.12	3.50
	254	12.5	10.75	6.25	5.00	8.25	.53	13.25	4.12
	256	12.5	12.50	6.25	5.00	10.00	.53	13.25	5.00
	284	14.0	12.50	7.00	5.50	9.50	.53	15.00	4.75

✓	Motor Frame	UNIT DIMENSIONS IN INCHES AND WEIGHTS (WT) IN LBS ODP MOTORS											
		□ C810AM				□ C810GM				□ C820AM			
		CP	L	OP	WT	CP	L	OP	WT	CP	L	OP	WT
	143JM	17.12	9.50	8.62	111	17.12	9.50	8.62	111	17.38	9.88	9.50	118
	145JM	18.12	9.50	8.62	123	18.12	9.50	8.62	123	18.38	9.88	9.50	130
	182JM	20.62	10.25	9.62	148	20.62	10.25	9.62	148	20.88	10.62	10.50	155
	184JM	20.62	10.25	9.62	163	20.62	10.25	9.62	163	20.88	10.62	10.50	170
	213JM	22.75	11.12	10.38	225	22.75	11.12	10.38	225	23.00	11.50	11.25	232
	215JM	24.25	11.12	10.38	257	24.25	11.12	10.38	257	24.50	11.50	11.25	264
	254JM	28.12	12.88	11.38	328	28.12	12.88	11.38	328	28.38	13.25	12.25	335
	256JM	30.25	12.88	11.38	399	30.25	12.88	11.38	399	30.50	13.25	12.25	406
	284JM	-	-	-	-	-	-	-	-	29.88	13.25	13.00	423

✓	Motor Frame	UNIT DIMENSIONS IN INCHES AND WEIGHTS (WT) IN LBS ODP MOTORS											
		□ C810AP				□ C810GP				□ C820AP			
		CP	L	OP	WT	CP	L	OP	WT	CP	L	OP	WT
	143JP	20.12	12.50	8.62	111	20.12	12.50	8.62	111	20.38	12.88	9.50	118
	145JP	21.12	12.50	8.62	123	21.12	12.50	8.62	123	21.38	12.88	9.50	130
	182JP	23.62	13.25	9.62	148	23.62	13.25	9.62	148	23.88	13.62	10.50	155
	184JP	23.62	13.25	9.62	163	23.62	13.25	9.62	163	23.88	13.62	10.50	170
	213JP	26.75	15.12	10.38	225	26.75	15.12	10.38	225	27.12	15.62	11.25	232
	215JP	28.25	15.12	10.38	257	28.25	15.12	10.38	257	28.62	15.62	11.25	264
	254JP	31.25	15.62	11.38	328	31.25	15.62	11.38	328	31.62	16.12	12.25	335
	256JP	33.00	15.62	11.38	399	33.00	15.62	11.38	399	33.38	16.12	12.25	406
	284JP	-	-	-	-	-	-	-	-	32.75	16.12	13.00	423

CUSTOMER _____ JOB NAME _____

P.O. NUMBER _____ SERIAL NUMBER _____

MOTOR MFR _____ ENCL _____ FRAME _____ HP _____ VOLTS _____ PH _____ HERTZ _____

PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____


CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____



END SUCTION GENERAL PURPOSE PUMPS Series C — Close Coupled

Series, Type, Style
C815AM, C815AP
C815GM, C815GP

UNIT OUTLINE

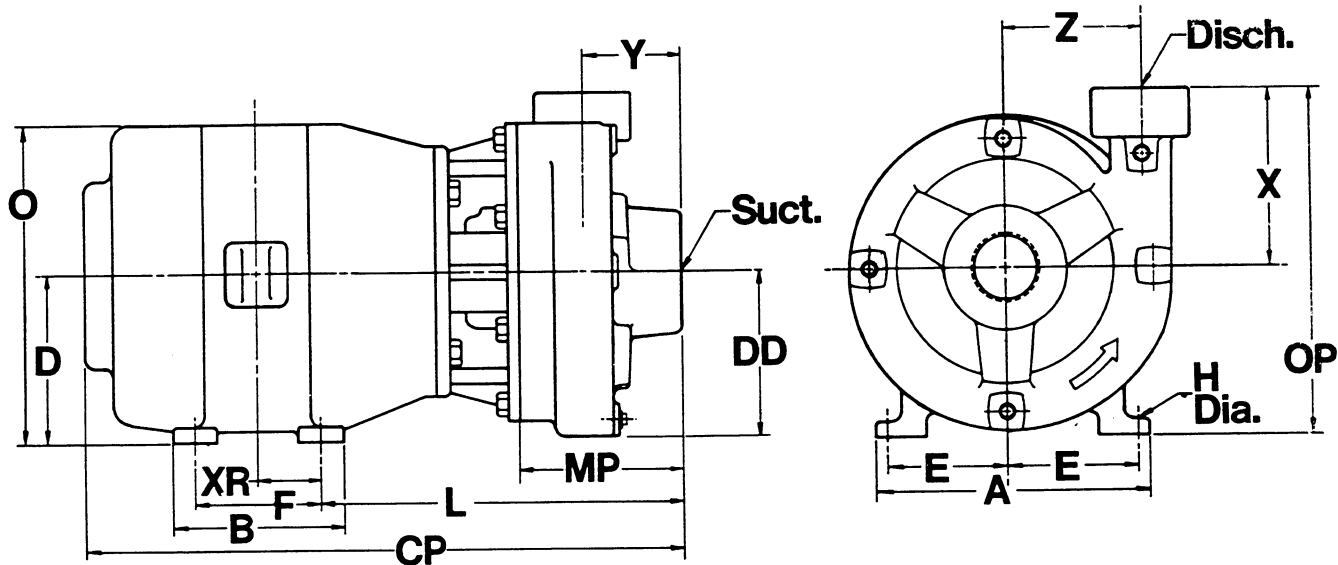

✓	PUMP DIMENSIONS IN INCHES							
	PUMP SERIES, TYPE, STYLE	SUCTION NPT	DISCHARGE NPT	X	Y	Z	DD	MP
	C815AM	2	1½	5.50	2.75	4.50	5.38	4.25
	C815GM	2	1½	5.50	2.75	4.50	5.38	4.25
	C815AP	2	1½	5.50	2.75	4.50	5.38	4.25
	C815GP	2	1½	5.50	2.75	4.50	5.58	4.25

SPECIFIC UNIT DIMENSIONS IN INCHES								COMMON DIMENSIONS IN INCHES								WEIGHT—LBS.		
✓								A Max.	B Max.	D	E	F	H	O* Max.	XR	Pump w/ODP Mtr.		Add for TEFC Mtr.
✓	Motor Frame	C815AM C815GM			C815AP C815GP											C815A C815G		
		L	CP*	OP	L	CP*	OP									M	P	
	143	9.50	17.12	9.00	12.50	20.12	9.00	7.0	6.00	3.50	2.75	4.00	.34	8.75	2.00	113	120	5
	145	9.50	18.12	9.00	12.50	21.12	9.00	7.0	6.50	3.50	2.75	5.00	.34	8.75	2.50	125	132	5
	182	10.25	20.62	10.00	13.25	23.62	10.00	9.0	6.50	4.50	3.75	4.50	.40	9.38	2.25	150	157	10
	184	10.25	20.62	10.00	13.25	23.62	10.00	9.0	7.50	4.50	3.75	5.50	.40	9.38	2.75	165	172	10
	213	11.12	22.75	10.75	15.12	26.75	10.75	10.5	7.50	5.25	4.25	5.50	.40	11.12	2.75	227	234	20
	215	11.12	24.25	10.75	15.12	28.25	10.75	10.5	9.00	5.25	4.25	7.00	.40	11.12	3.50	259	266	20
	254	12.88	28.50	11.75	15.62	31.25	11.75	12.5	10.75	6.25	5.00	8.25	.53	13.25	4.12	330	337	25
	256	12.88	30.25	11.75	15.62	33.00	11.75	12.5	12.50	6.25	5.00	10.00	.53	13.25	5.00	401	408	25
	284	12.88	29.62	12.50	15.62	32.38	12.50	14.0	12.50	7.00	5.50	9.50	.53	15.00	4.75	418	425	60

*Maximum dimensions; may be less with different make motors or enclosures.

CUSTOMER _____ JOB NAME _____
P.O. NO. _____ ITEM NO. _____
S.O. NO. _____ SERIAL NO. _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ H.P. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES, TYPE, STYLE _____ RPM _____ G.P.M. _____ TOTAL HD. FT. _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____


Subject to change unless certified for construction.

DT4852435



END SUCTION GENERAL PURPOSE PUMPS

Series C - Close Coupled - 7 Inch Sizes

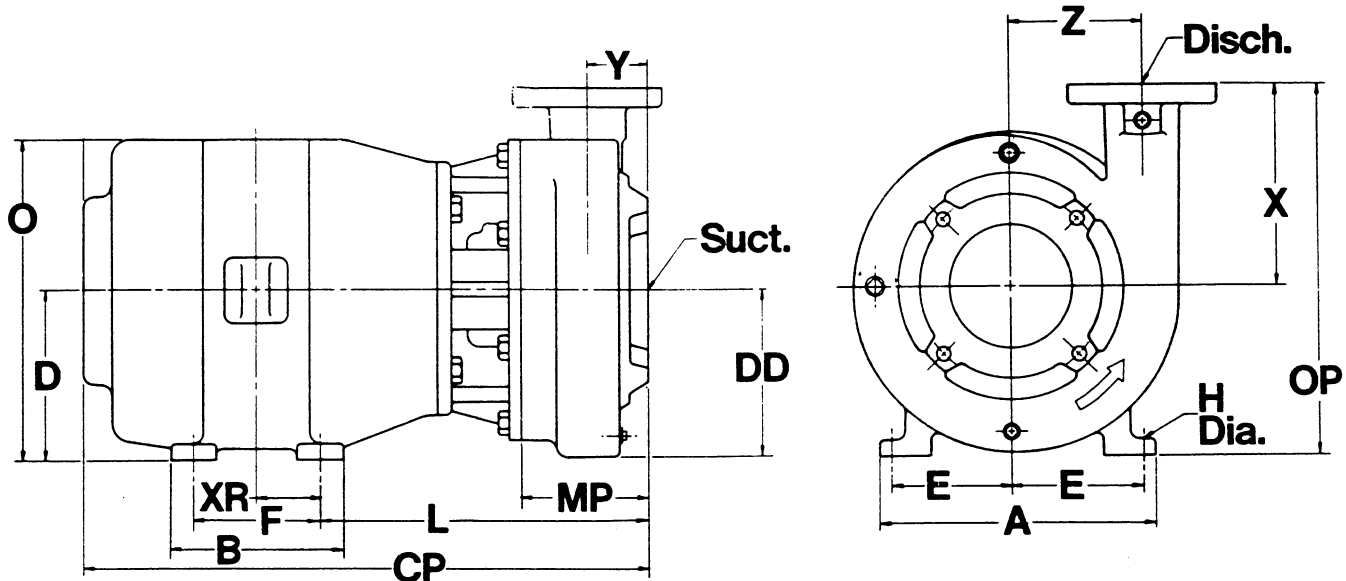

✓	Pump Series Type & Style	COMMON PUMP DIMENSIONS IN INCHES						
		Suction Size 125 Lb. ANSI*	Discharge Size 125 Lb. ANSI	X	Y	Z	DD	MP
	C740M	5	4	7.38	2.64	5.50	7.25	4.64
	C740P	5	4	7.38	2.64	5.50	7.25	4.64

*Equivalent to 125 Lb. ANSI

✓	Motor Frame	COMMON MOTOR DIMENSIONS IN INCHES							
		A Max	B Max	D	E	F	H	O Max	XR
	182	9.0	6.5	4.50	3.75	4.50	.40	9.38	2.25
	184	9.0	7.5	4.50	3.75	5.50	.40	9.38	2.75
	213	10.0	7.5	5.25	4.25	5.50	.40	11.12	2.75
	254	12.5	10.8	6.25	5.00	8.25	.53	13.20	4.12
	256	12.5	12.5	6.25	5.00	10.00	.53	13.20	5.00
	284	14.0	12.5	7.00	5.50	9.50	.53	12.70	4.75
	286	14.0	14.0	7.00	5.50	11.00	.53	12.70	5.50
	324	16.0	14.0	8.00	6.25	10.50	.66	15.20	5.25

✓	Motor Frame	UNIT DIMENSIONS IN INCHES AND WEIGHTS (WT) IN LBS ODP MOTORS			
		□ C740M			
		CP	L	OP	WT
	182JM	19.62	10.62	11.88	179
	184JM	20.62	10.62	11.88	192
	213JM	22.25	11.50	12.62	247
	254JM	27.38	13.25	13.62	342
	256JM	29.12	13.25	13.62	407
	284JM	29.25	13.25	14.38	468
	286JM	30.69	13.25	14.38	528
	324JM	31.38	13.75	15.38	648

✓	Motor Frame	UNIT DIMENSIONS IN INCHES AND WEIGHTS (WT) IN LBS ODP MOTORS			
		□ C740P			
		CP	L	OP	WT
	182JP	22.62	13.62	11.88	179
	184JP	23.62	13.62	11.88	192
	213JP	26.25	15.50	12.62	247
	254JP	30.12	16.00	13.62	342
	256JP	31.88	16.00	13.62	407
	284JP	31.94	16.00	14.38	468
	286JP	33.44	16.00	14.38	528
	324JP	34.12	16.50	15.38	648

CUSTOMER _____ JOB NAME _____

P.O. NUMBER _____ SERIAL NUMBER _____

MOTOR MFR _____ ENCL _____ FRAME _____ HP _____ VOLTS _____ PH _____ HERTZ _____

PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____

CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____



Peerless Pump Company
Indianapolis, IN 46207-7025

END SUCTION GENERAL PURPOSE PUMPS

Series C - Close Coupled


Models C825AP, C825AM, C830AP, C830AM

Pump Unit Dimensional Outline

SECTION 2330

Page 5

June 2, 1975

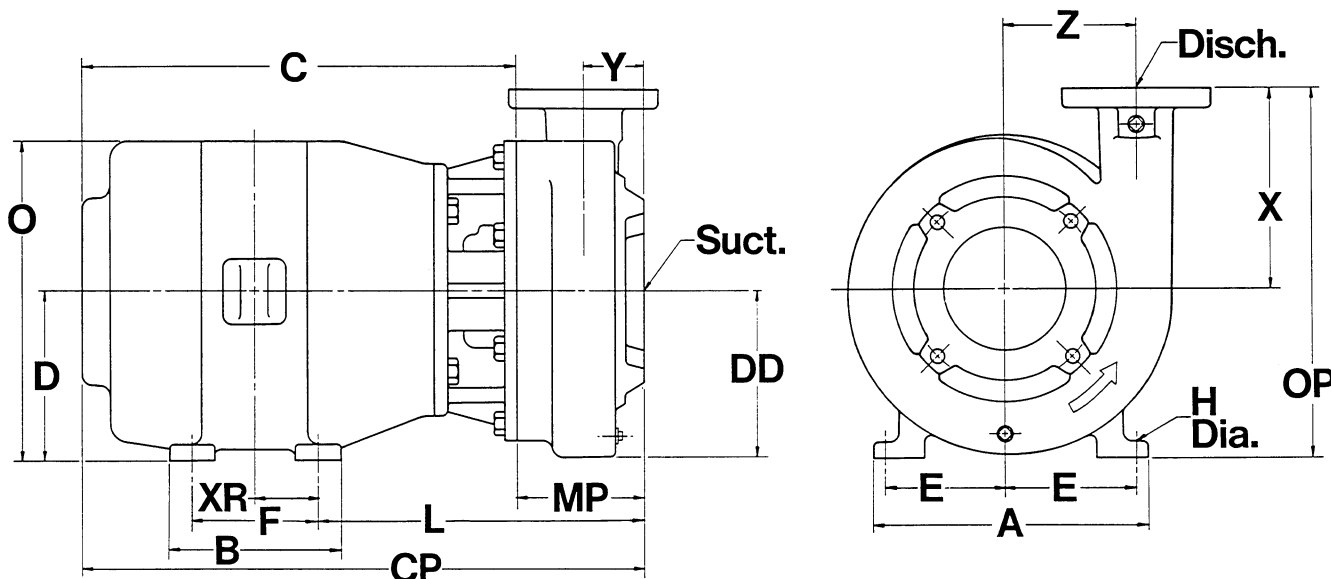

COMMON DIMENSIONS																SPECIFIC DIMENSIONS						Approx. Wt. Lbs.
C825AP and C825AM																C825AP			C825AM			
Motor Frame	Suct. (1)	Disch. 125 lb. ANSI	A Max	B Max	D	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP Max	DD	L	CP Max	DD	L	
145	3	2½	7	6½	3½	2¾	5	.34	3⅞	8¾	10¾	2½	7¼	2¼	4⅞	20¾	5¾	12⅞	17¾	5¾	9⅞	147
182	3	2½	9	6½	4½	3¾	4½	.40	3⅞	9¾	11¾	2¼	7¼	2¼	4⅞	23¼	5¾	12⅞	20¼	5¾	9⅞	172
184	3	2½	9	7½	4½	3¾	5½	.40	3⅞	9¾	11¾	2¾	7¼	2¼	4⅞	23¼	5¾	12⅞	20¼	5¾	9⅞	187
213	3	2½	10½	7½	5¼	4¼	5½	.40	3⅞	11½	12½	2¾	7¼	2¼	4⅞	26¾	5¾	14¾	22¾	5¾	10¾	249
215	3	2½	10½	9	5¼	4¼	7	.40	3⅞	11½	12½	3½	7¼	2¼	4⅞	27⅞	5¾	14¾	23¾	5¾	10¾	281
254	3	2½	12½	10¾	6¼	5	8¼	.53	3⅞	13¼	13½	4½	7¼	2¼	4⅞	30⅞	5¾	15¾	28⅞	5¾	12½	352
256	3	2½	12½	12½	6¼	5	10	.53	3⅞	13¼	13½	5	7¼	2¼	4⅞	32⅝	5¾	15¾	29⅞	5¾	12½	423
284	3	2½	14	12½	7	5½	9½	.53	3⅞	15	14¼	4¾	7¼	2¼	4⅞	32	5¾	15¾	29¼	5¾	12½	440
286	3	2½	14	14	7	5½	11	.53	3⅞	15	14¼	5½	7¼	2¼	4⅞	33½	5¾	15¾	30¾	5¾	12½	503
324	3	2½	16	14	8	6¼	10½	.65	3⅞	17	15¼	5¼	7¼	2¼	4⅞	35	5¾	15¾	32¼	5¾	13	629

COMMON DIMENSIONS																SPECIFIC DIMENSIONS						Approx Wt. Lbs.
C830AP and C830AM																C830AP			C830AM			
Motor Frame	Suct. (1)	Disch. 125 lb. ANSI	A Max	B Max	D	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP Max	DD	L	CP Max	DD	L	
182	4	3	9	6½	4½	3¾	4½	.40	3⅞	9¾	12	2¼	7½	2½	5¼	23⅞	6½	12¾	20⅞	6½	9¾	184
184	4	3	9	7½	4½	3¾	5½	.40	3⅞	9¾	12	2¾	7½	2½	5¼	23⅞	6½	12¾	20⅞	6½	9¾	199
213	4	3	10½	7½	5¼	4¼	5½	.40	3⅞	11½	12¾	2¾	7½	2½	5¼	26⅜	6½	14¾	22¼	6½	10⅝	261
215	4	3	10½	9	5¼	4¼	7	.40	3⅞	11½	12¾	3½	7½	2½	5¼	27⅞	6½	14¾	23¾	6½	10⅝	293
254	4	3	12½	10¾	6¼	5	8¼	.53	3⅞	13¼	13¾	4½	7½	2½	5¼	30⅞	6½	15¼	28	6½	12⅜	364
256	4	3	12½	12½	6¼	5	10	.53	3⅞	13¼	13¾	5	7½	2½	5¼	32⅞	6½	15¼	29¾	6½	12⅜	435
284	4	3	14	12½	7	5½	9½	.53	3⅞	15	14½	4¾	7½	2½	5¼	32	6½	15¼	29⅝	6½	12⅜	452
286	4	3	14	14	7	5½	11	.53	3⅞	15	14½	5½	7½	2½	5¼	33½	6½	15¼	30⅝	6½	12⅜	515
324	4	3	16	14	8	6¼	10½	.65	3⅞	17	15½	5¼	7½	2½	5¼	35	6½	15¾	32⅞	6½	12⅞	641
326	4	3	16	15½	8	6¼	12	.65	3⅞	17	15½	6	7½	2½	5¼	36½	6½	15¾	33⅝	6½	12⅞	704


(1) Equivalent to 125 lb. ANSI

CUSTOMER _____ JOB NAME _____
P.O. NUMBER _____ ITEM NO. _____
S.O. NUMBER _____ SERIAL NUMBER _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ HP. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

Subject to change unless certified for construction

DT 4846830

END SUCTION GENERAL PURPOSE PUMPS
Series C - Close Coupled
Models C840AP, C840AM
Pump Unit Dimensional Outline

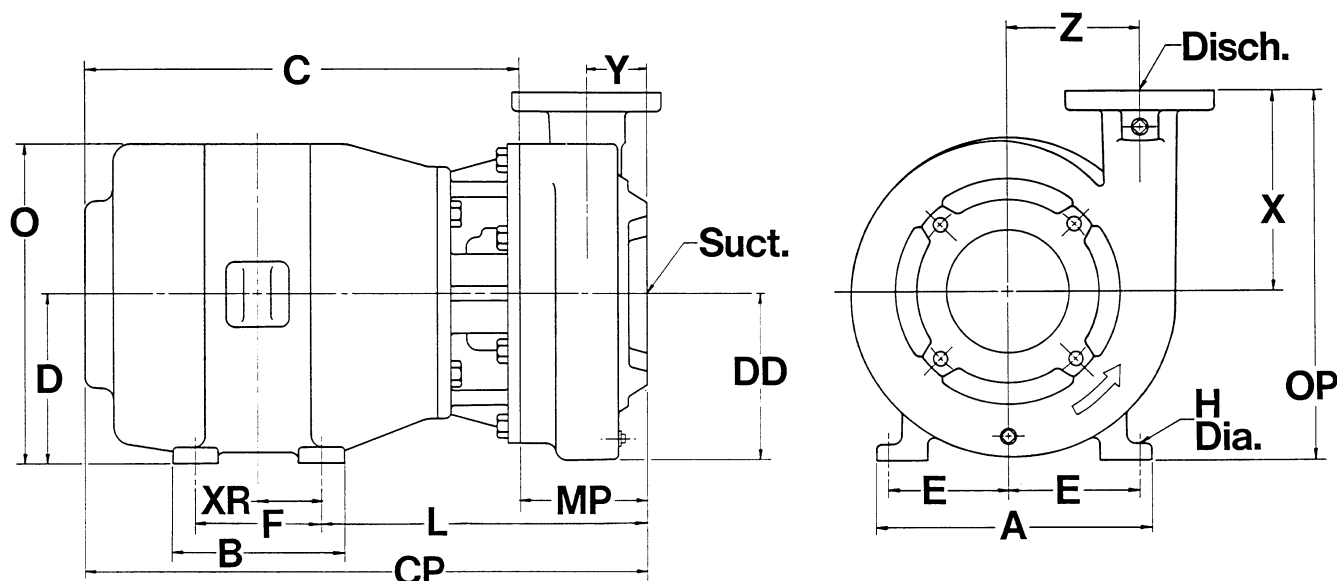

COMMON DIMENSIONS																SPECIFIC DIMENSIONS						Approx. Wt. Lbs.
C840P and C840M																C840P			C840M			
Motor Frame	Suct. (1)	Disch. 125 lb. ANSI	A Max	B Max	D	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP Max	DD	L	CP Max	DD	L	
182	5	4	9	6½	4½	3¾	4½	.40	5½	9¾	11⅞	2¼	7¾	3	5⅞	24⅞	7¼	14½	21⅞	7¼	11½	213
184	5	4	9	7½	4½	3¾	5½	.40	5½	9¾	11⅞	2¾	7¾	3	5⅞	24⅞	7¼	14½	21⅞	7¼	11½	228
213	5	4	10½	7½	5¼	4¼	5½	.40	5½	11⅞	12⅝	2¾	7¾	3	5⅞	28	7¼	16⅜	24	7¼	12⅜	290
215	5	4	10½	9	5¼	4¼	7	.40	5½	11⅞	12⅝	3½	7¾	3	5⅞	29½	7¼	16⅜	25½	7¼	12⅜	322

(1) Equivalent to 125 lb. ANSI

CUSTOMER _____ JOB NAME _____
P.O. NUMBER _____ ITEM NO. _____
S.O. NUMBER _____ SERIAL NUMBER _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ HP. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

Subject to change unless certified for construction

DT 4846831




END SUCTION GENERAL PURPOSE PUMPS

Series C - Close Coupled

Models C1020AP, C1020AM, C1025AP,
C1025AM, C1030AP, C1030AM

Pump Unit Dimensional Outline

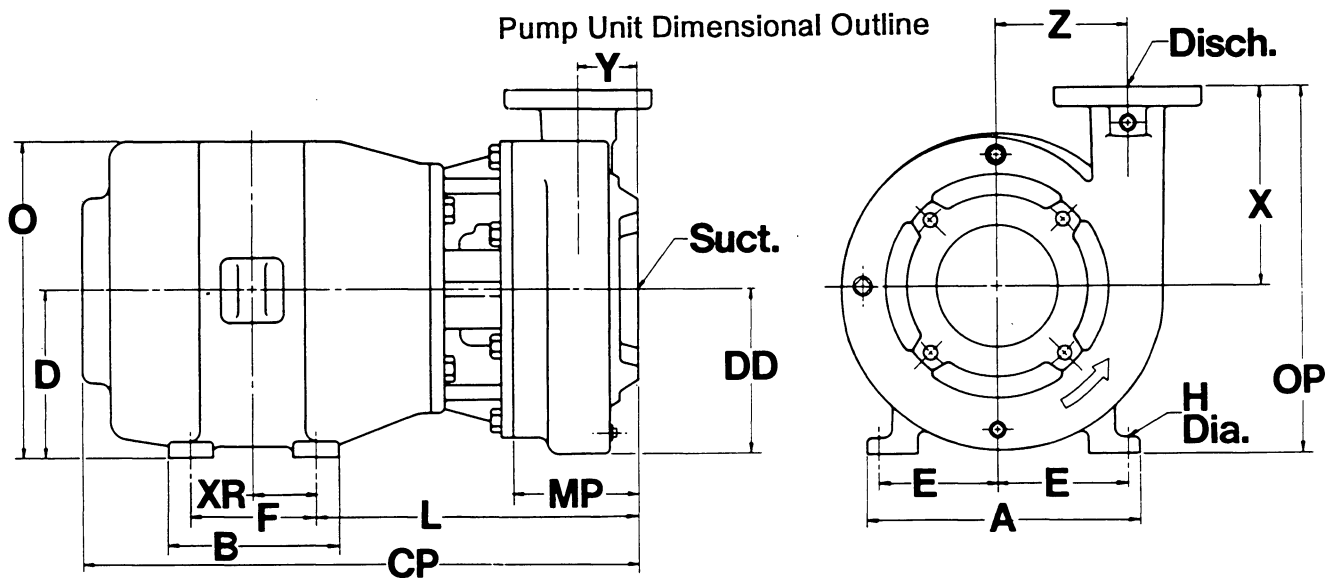

X	COMMON DIMENSIONS																SPECIFIC DIMENSIONS				Approx. Wt. Lbs.	
	C1020AP and C1020AM																C1020AP		C1020AM			
	Motor Frame	Suct. (1)	Disch. (2)	A Max	B Max	D	DD	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP	L	CP		L
	145	2½	2	7.0	6.50	3.50	6.9	2.75	5.00	.34	4.25	8.8	10.50	2.50	7.0	2.50	5.88	22	12.50	19	9.50	166
	182	2½	2	9.0	6.50	4.50	6.9	3.75	4.50	.40	4.25	9.4	11.50	2.25	7.0	2.50	5.88	24	13.25	21	10.25	191
	184	2½	2	9.0	7.50	4.50	6.9	3.75	5.50	.40	4.25	9.4	11.50	2.75	7.0	2.50	5.88	24	13.25	21	10.25	206
	213	2½	2	10.5	7.50	5.25	6.9	4.25	5.50	.40	4.25	11.2	12.25	2.75	7.0	2.50	5.88	27	15.12	23	11.12	268

X	COMMON DIMENSIONS																	SPECIFIC DIMENSIONS				Approx. Wt. Lbs.
	C1025AP and C1025AM																	C1025AP		C1025AM		
	Motor Frame	Suct. (1)	Disch. (2)	A Max	B Max	D	DD	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP	L	CP	L	
	182	3	2½	9.0	6.50	4.50	7.0	3.75	4.50	.40	4.12	9.4	12.00	2.25	7.5	2.25	5.88	24	13.12	21	10.12	184
	184	3	2½	9.0	7.50	4.50	7.0	3.75	5.50	.40	4.12	9.4	12.00	2.75	7.5	2.25	5.88	24	13.12	21	10.12	199
	213	3	2½	10.5	7.50	5.25	7.0	4.25	5.50	.40	4.12	11.2	12.75	2.75	7.5	2.25	5.88	27	15.00	23	11.00	261
	215	3	2½	10.5	9.00	5.25	7.0	4.25	7.00	.40	4.12	11.2	12.75	3.50	7.5	2.25	5.88	29	15.00	25	11.00	293
	254	3	2½	12.5	10.75	6.25	7.0	5.00	8.25	.53	4.12	13.3	13.75	4.12	7.5	2.25	5.88	32	15.50	29	12.75	364

X	COMMON DIMENSIONS																	SPECIFIC DIMENSIONS				Approx. Wt. Lbs.
	C1030AP and C1030AM																	C1030AP		C1030AM		
	Motor Frame	Suct. (1)	Disch. (2)	A Max	B Max	D	DD	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP	L	CP	L	
	182	4	3	9.0	6.50	4.50	7.5	3.75	4.50	.40	4.12	9.4	12.00	2.25	7.5	2.12	6.25	24	13.12	21	10.12	203
	184	4	3	9.0	7.50	4.50	7.5	3.75	5.50	.40	4.12	9.4	12.00	2.75	7.5	2.12	6.25	24	13.12	21	10.12	218
	213	4	3	10.5	7.50	5.25	7.5	4.25	5.50	.40	4.12	11.2	12.75	2.75	7.5	2.12	6.25	27	15.00	23	11.00	280
	215	4	3	10.5	9.00	5.25	7.5	4.25	7.00	.40	4.12	11.2	12.75	3.50	7.5	2.12	6.25	29	15.00	25	11.00	312
	254	4	3	12.5	10.75	6.25	7.5	5.00	8.25	.53	4.12	13.3	13.75	4.12	7.5	2.12	6.25	32	15.50	29	12.75	383

(1) Equivalent to 125 lb. ANSI ALL DIMENSIONS ARE IN INCHES
(2) 125 lb. ANSI

CUSTOMER _____ JOB NAME _____
P.O. NUMBER _____ ITEM NO. _____
S.O. NUMBER _____ SERIAL NUMBER _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ HP. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

Subject to change unless certified for construction


DT 4846832 Rev. 3-82



END SUCTION GENERAL PURPOSE PUMPS

Series C - Close Coupled
Models C1125AP, C1125AM

Pump Unit Dimensional Outline

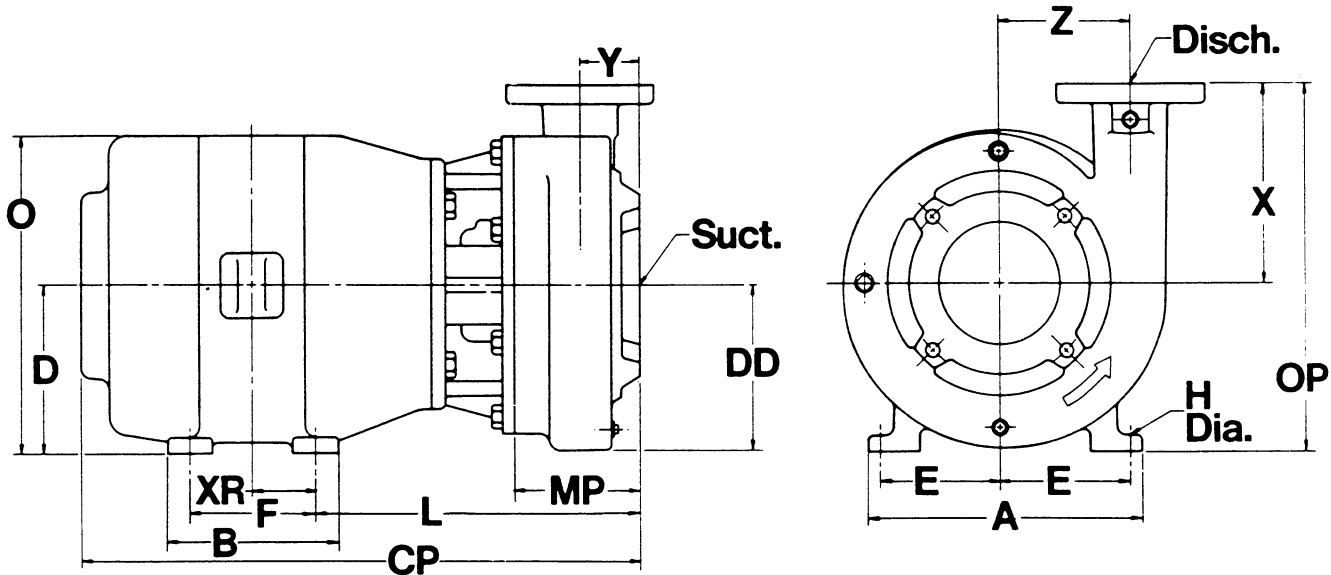


✓	PUMP DIMENSIONS								DISCHARGE FLANGE ANSI LB. RATING
	PUMP SERIES, TYPE, STYLE	SUCTION (Equivalent to 125 lb. ANSI Fig.)	DISCHARGE ANSI FLANGE	X	Y	Z	DD	MP	
	C1125M	3.0	2.5	8.06	2.32	6.12	7.12	4.44	125
	C1125M	3.0	2.5	8.06	2.32	6.12	7.12	4.44	250
	C1125P	3.0	2.5	8.06	2.32	6.12	7.12	4.44	125
	C1125P	3.0	2.5	8.06	2.32	6.12	7.12	4.44	250

SPECIFIC UNIT DIMENSIONS								COMMON DIMENSIONS								WEIGHT — LBS.		
✓	Motor Frame	C1125M			C1125P			A Max	B Max	D	E	F	H	O* Max.	XR	Pump w/ODP Mtr.		Add for TEFC Mtr.
		L	CP*	OP	L	CP*	OP									C 1125 M	C 1125 P	
	182	10.25	19.06	12.56	12.96	21.81	12.56	9.0	6.50	4.50	3.75	4.50	.40	9.38	2.25	165	172	10
	184	10.25	20.06	12.56	12.96	21.81	12.56	9.0	7.50	4.50	3.75	5.50	.40	9.38	2.75	175	182	10
	213	11.12	21.94	13.31	14.88	25.69	13.31	10.5	7.50	5.25	4.25	5.50	.40	11.12	2.75	207	214	20
	215	11.12	23.44	13.31	14.88	27.19	13.31	10.5	9.00	5.25	4.25	7.00	.40	11.12	3.50	217	224	20
	254	12.56	27.50	14.31	15.38	30.32	14.31	12.5	10.75	6.25	5.00	8.25	.53	13.25	4.12	272	274	25
	256	12.56	29.25	14.31	15.38	32.06	14.31	12.5	12.50	6.25	5.00	10.00	.53	13.25	5.00	282	284	25
	284	12.56	29.32	15.06	15.38	32.12	15.06	14.0	12.50	7.00	5.50	9.50	.53	15.00	4.75	336	344	60
	286	12.56	30.81	15.06	15.38	33.62	15.06	14.0	14.00	7.00	5.50	11.00	.53	15.00	5.50	356	364	60
	324	13.06	32.25	16.06	15.88	35.06	16.06	16.0	14.00	8.00	6.25	10.50	.66	17.00	5.25	546	554	90
	326	13.06	33.75	16.06	15.88	36.56	16.06	16.0	14.00	8.00	6.25	12.00	.66	17.00	6.00	586	594	90

*Maximum dimensions; may be less with different make motors or enclosures.
All dimensions are in inches.

CUSTOMER _____ JOB NAME _____
P.O. NO. _____ ITEM NO. _____
S.O. NO. _____ SERIAL NO. _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ H.P. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES, TYPE, STYLE _____ RPM _____ G.P.M. _____ TOTAL HD. FT. _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

END SUCTION GENERAL PURPOSE PUMPS
Series C - Close Coupled
Models C1140AP, C1140AM
Pump Unit Dimensional Outline

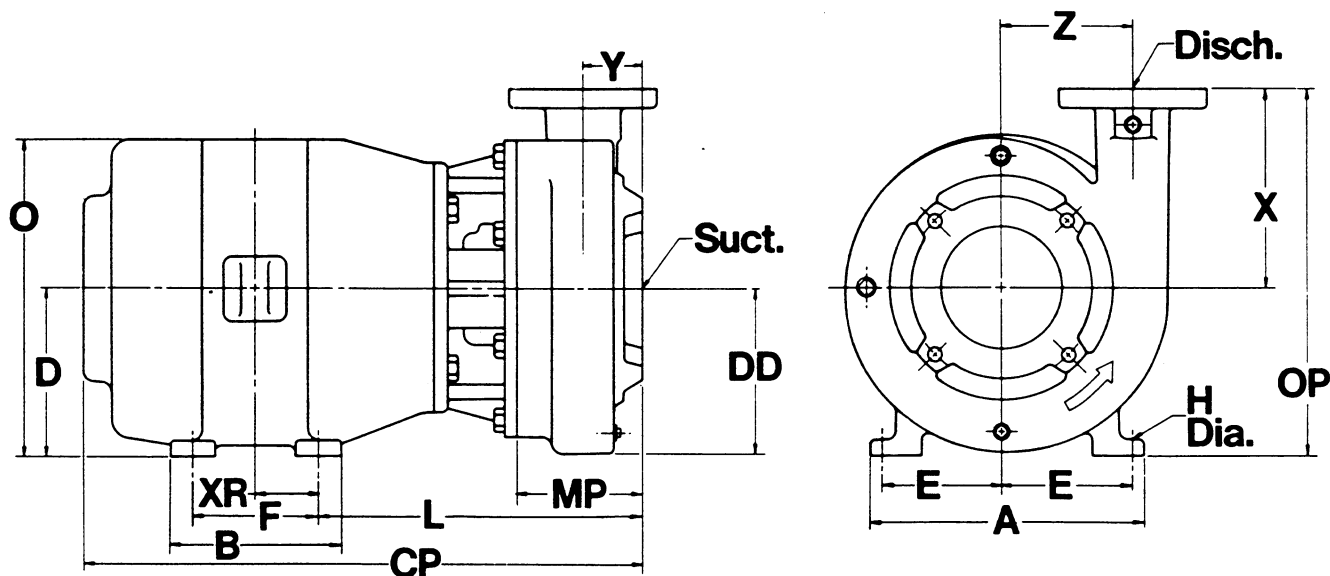

✓	PUMP DIMENSIONS								DISCHARGE FLANGE ANSI LB. RATING
	PUMP SERIES, TYPE, STYLE	SUCTION (Equivalent to 125 lb. ANSI Fig.)	DISCHARGE ANSI FLANGE	X	Y	Z	DD	MP	
	C1140M	5.0	4.0	9.00	2.62	6.50	7.75	4.75	125
	C1140M	5.0	4.0	9.00	2.62	6.50	7.75	4.75	250
	C1140P	5.0	4.0	9.00	2.62	6.50	7.75	4.75	125
	C1140P	5.0	4.0	9.00	2.62	6.50	7.75	4.75	250

SPECIFIC UNIT DIMENSIONS								COMMON DIMENSIONS								WEIGHT — LBS.		
✓	Motor Frame	C1140M			C1140P			A Max	B Max	D	E	F	H	O* Max.	XR	Pump w/ODP Mtr.		Add for TEFC Mtr.
		L	CP*	OP	L	CP*	OP									C 1140 M	C 1140 P	
	182	10.56	19.37	13.50	13.27	22.12	13.50	9.0	6.50	4.50	3.75	4.50	.40	9.38	2.25	212	219	10
	184	10.56	20.37	13.50	13.27	23.12	13.50	9.0	7.50	4.50	3.75	5.50	.40	9.38	2.75	222	229	10
	213	11.43	22.25	14.25	15.19	26.00	14.25	10.5	7.50	5.25	4.25	5.50	.40	11.12	2.75	254	261	20
	215	11.43	23.75	14.25	15.19	27.50	14.25	10.5	9.00	5.25	4.25	7.00	.40	11.12	3.50	264	271	20
	254	12.87	27.81	15.25	15.69	30.63	15.25	12.5	10.75	6.25	5.00	8.25	.53	13.25	4.12	319	321	25
	256	12.87	29.56	15.25	15.69	32.37	15.25	12.5	12.50	6.25	5.00	10.00	.53	13.25	5.00	329	331	25
	284	12.87	29.63	16.00	15.69	32.44	16.00	14.0	12.50	7.00	5.50	9.50	.53	15.00	4.75	383	391	60
	286	12.87	31.12	16.00	15.69	33.94	16.00	14.0	14.00	7.00	5.50	11.00	.53	15.00	5.50	403	411	60
	324	13.37	32.56	17.00	16.19	35.37	17.00	16.0	14.00	8.00	6.25	10.50	.66	17.00	5.25	593	601	90
	326	13.37	34.06	17.00	16.19	36.87	17.00	16.0	14.00	8.00	6.25	12.00	.66	17.00	6.00	633	641	90

*Maximum dimensions; may be less with different make motors or enclosures.
All dimensions are in inches.


CUSTOMER _____ JOB NAME _____
P.O. NUMBER _____ ITEM NO. _____
S.O. NUMBER _____ SERIAL NUMBER _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ HP. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

Subject to change unless certified for construction

DT 4852390



END SUCTION GENERAL PURPOSE PUMPS
Series C - Close Coupled
Models C1040AP, C1040AM, C1050AP, C1050AM
Pump Unit Dimensional Outline

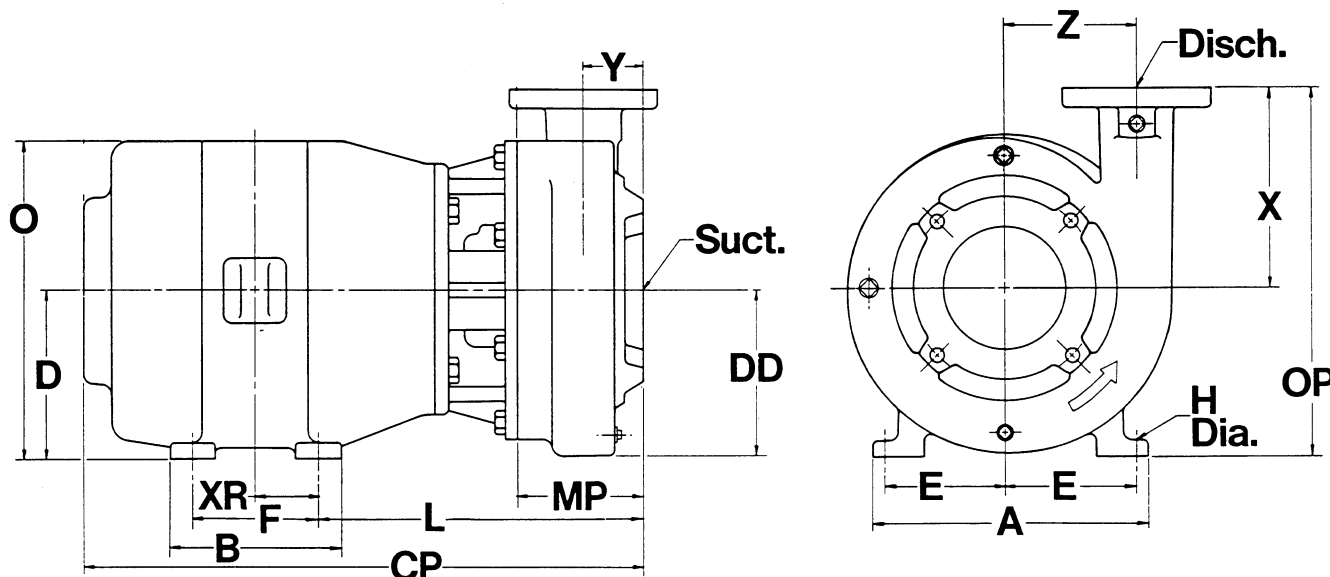

PUMP DIMENSIONS								
X	PUMP Series, Type, Style	SUCTION (Equivalent to 125 lb. ANSI Flg.)	Discharge 125 Lb. ANSI Flg.	X	Y	Z	DD	MP
	C1040AM	5	4	8	2.88	7.00	8.12	5.00
	C1040AP	5	4	8	2.88	7.00	8.12	5.00
	C1050AM	6	5	9	3.25	7.12	8.75	6.25
	C1050AP	6	5	9	3.25	7.12	8.75	6.25

SPECIFIC UNIT DIMENSIONS													COMMON DIMENSIONS								WEIGHT—LBS			
X														A Max	B Max	D	E	F	H	O* Max.	XR	Pump w/DDP Mtr.		Add for TEFC Mtr.
Motor Frame	C1040AM			C1040AP			C1050AM			C1050AP			C 1040 A									C 1050 A		
X		L	CP*	OP	L	CP*	OP	L	CP*	OP	L	CP	OP											
	182	11.00	21.38	12.50	14.00	24.38	12.50	12.25	22.62	13.50	15.25	25.76	13.50	9.0	6.50	4.50	3.75	4.50	.40	9.38	2.25	198	229	10
	184	11.00	21.38	12.50	14.00	24.38	12.50	12.25	22.62	13.50	15.25	25.76	13.50	9.0	7.50	4.50	3.75	5.50	.40	9.38	2.75	210	241	10
	213	11.88	23.50	13.25	15.88	27.50	13.25	13.12	24.75	14.25	17.12	28.88	14.25	10.5	7.50	5.25	4.25	5.50	.40	11.12	2.75	252	277	20
	215	11.88	25.00	13.25	15.88	27.50	13.25	13.12	26.75	14.25	17.12	30.25	14.25	10.5	9.00	5.25	4.25	7.00	.40	11.12	3.50	271	296	20
	254	13.62	29.25	14.25	16.38	29.00	14.25	14.88	30.50	15.25	17.62	33.25	15.25	12.5	10.75	6.25	5.00	8.25	.53	13.25	4.12	366	391	25
	256	13.62	30.62	14.25	16.38	33.75	14.25	14.88	32.25	15.25	17.62	35.00	15.25	12.5	12.50	6.25	5.00	10.00	.53	13.25	5.00	396	421	25
	284	13.88	27.38	15.00	16.62	30.50	15.00	14.88	32.00	16.00	17.62	34.50	16.00	14.0	12.50	7.00	5.50	9.50	.53	15.00	4.75	432	457	60
	286	—	—	—	—	—	—	14.88	33.25	16.00	17.62	36.00	16.00	14.0	14.00	7.00	5.50	11.00	.53	15.00	5.50	477	502	60
	324	—	—	—	—	—	—	15.38	34.00	17.00	18.12	36.75	17.00	16.0	14.00	8.00	6.25	10.50	.66	17.00	5.25	519	544	90


*Maximum dimensions; may be less with different make motors or enclosures.
All dimensions are in inches.

CUSTOMER _____ JOB NAME _____
P.O. NUMBER _____ ITEM NO. _____
S.O. NUMBER _____ SERIAL NUMBER _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ HP. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

Subject to change unless certified for construction

DT 4851061

END SUCTION GENERAL PURPOSE PUMPS
Series C - Close Coupled
Models C1215AP, C1215AM
Pump Unit Dimensional Outline

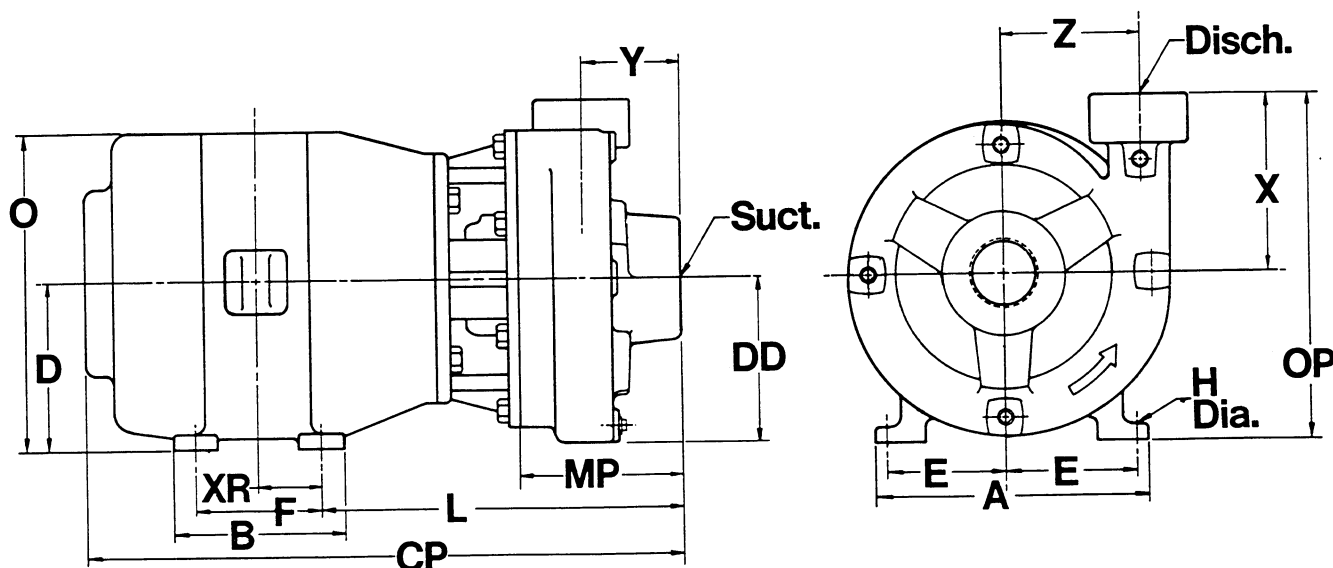

✓	Pump Series Type & Style	COMMON PUMP DIMENSIONS IN INCHES						
		Suction Size NPT	Discharge Size NPT	X	Y	Z	DD	MP
	C1215AM, AP	2	1½	7.50	3.00	6.75	7.50	4.94

✓	Motor Frame	COMMON MOTOR DIMENSIONS IN INCHES							
		A Max	B Max	D	E	F	H	O Max	XR
	213	10.5	7.50	5.25	4.25	5.50	.40	11.12	2.75
	215	10.5	9.00	5.25	4.25	7.00	.40	11.12	3.50
	254	12.5	10.75	6.25	5.00	8.25	.53	13.25	4.12
	256	12.5	12.50	6.25	5.00	10.00	.53	13.25	5.00

✓	Motor Frame	UNIT DIMENSIONS IN INCHES AND WEIGHTS (WT) IN LBS ODP MOTORS			
		C1215AM			
		CP	L	OP	WT
	213JM	23.00	11.38	12.75	256
	215JM	24.50	11.38	12.75	288
	254JM	27.50	12.88	13.75	361
	256JM	29.25	12.88	13.75	432

✓	Motor Frame	UNIT DIMENSIONS IN INCHES AND WEIGHTS (WT) IN LBS ODP MOTORS			
		C1215AP			
		CP	L	OP	WT
	213JP	26.75	15.12	12.75	256
	215JP	28.25	15.12	12.75	288
	254JP	31.25	15.62	13.75	361
	256JP	33.00	15.62	13.75	432


CUSTOMER _____ JOB NAME _____
P.O. NUMBER _____ ITEM NO. _____
S.O. NUMBER _____ SERIAL NUMBER _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ HP. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____



Peerless Pump Company
Indianapolis, IN 46207-7025

END SUCTION GENERAL PURPOSE PUMPS
Series C - Close Coupled
Models C1220AP, C1220AM, C1230AP, C1230AM
Pump Unit Dimensional Outline

SECTION 2330
Page 11
September 23, 1977

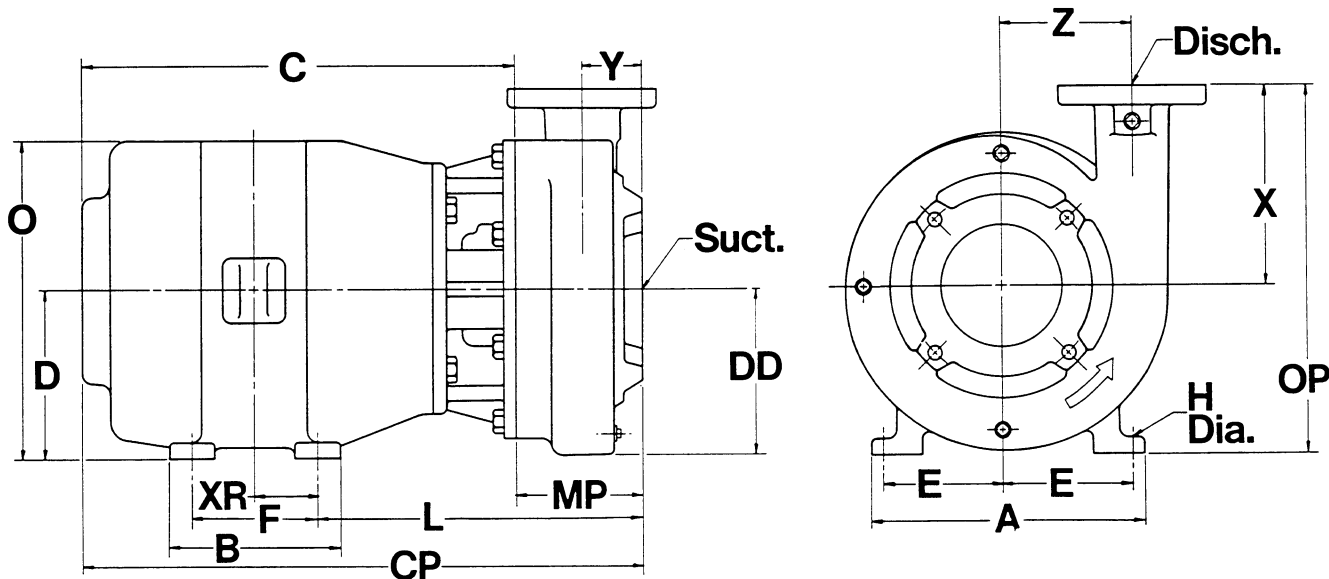

COMMON DIMENSIONS																SPECIFIC DIMENSIONS								Approx. Wt. Lbs.
C1220AP and C1220AM																C1220AP				C1220AM				
Motor Frame	Suct. (1)	Disch. 125 Lb. ANSI	A Max	B Max	D	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP Max	DD	L	Mtr. Shft.	CP Max	DD	L	Mtr. Shft.	
215	2½	2	10.50	9	5.25	4.25	7	.41	4.06	11.12	13	3.50	7.75	2.12	6.81	27.38	7.88	14.25	JP	23.62	7.88	10.44	JM	306
254	2½	2	12.50	10.75	6.25	5	8.25	.53	4.06	13.25	14	4.12	7.75	2.12	6.81	30.38	7.88	14.75	JP	27.62	7.88	11.94	JM	377
256	2½	2	12.50	12.50	6.25	5	10	.53	4.06	13.25	14	5	7.75	2.12	6.81	32.12	7.88	14.75	JP	29.38	7.88	11.94	JM	448
284	2½	2	14	12.50	7	5.50	9.50	.53	4.06	15	14.75	4.75	7.75	2.12	6.81	31.50	7.88	14.75	JP	28.75	7.88	11.94	JM	473

COMMON DIMENSIONS																SPECIFIC DIMENSIONS								Approx. Wt. Lbs.
C1230AP and C1230AM																C1230AP				C1230AM				
Motor Frame	Suct. (1)	Disch. 125 Lb. ANSI	A Max	B Max	D	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP Max	DD	L	Mtr. Shft.	CP Max	DD	L	Mtr. Shft.	
254	4	3	12.50	10.75	6.25	5	8.25	.53	4.31	13.25	15.25	4.12	9	2.25	7.12	30.75	8.38	15	JP	27.88	8.38	12.25	JM	377
256	4	3	12.50	12.50	6.25	5	10	.53	4.31	13.25	15.25	5	9	2.25	7.12	32.50	8.38	15	JP	29.62	8.38	12.25	JM	427
284	4	3	14	12.50	7	5.50	9.50	.53	4.31	15	16	4.75	9	2.25	7.12	31.88	8.38	15	JP	29	8.38	12.25	JM	488
286	4	3	14	14	7	5.50	11	.53	4.31	15	16	5.50	9	2.25	7.12	33.88	8.38	15	JP	30.50	8.38	12.25	JM	543

(1) Equivalent to 125 lb. ANSI


ALL DIMENSIONS ARE IN INCHES

CUSTOMER _____ JOB NAME _____
P.O. NUMBER _____ ITEM NO. _____
S.O. NUMBER _____ SERIAL NUMBER _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ HP. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

Subject to change unless certified for construction

DT 4847503

END SUCTION GENERAL PURPOSE PUMPS
Series C - Close Coupled
Models C1240AP, C1240AM, C1250AP, C1250AM
Pump Unit Dimensional Outline

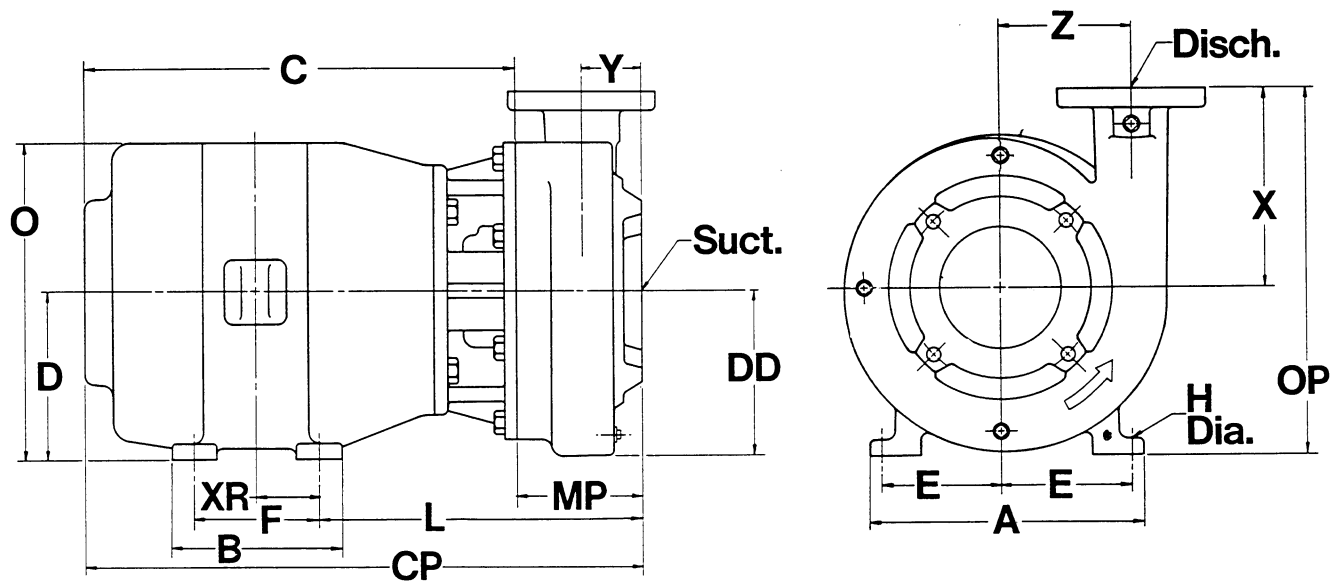

COMMON DIMENSIONS																SPECIFIC DIMENSIONS								Approx. Wt. Lbs.
C1240AP and C1240AM																C1240AP				C1240AM				
Motor Frame	Suct. (1)	Disch. 125 lb. ANSI	A Max	B Max	D	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP Max	DD	L	Mtr. Shft.	CP Max	DD	L	Mtr. Shft.	
256	5	4	12.50	12.50	6.25	5	10	.53	4.56	13.25	15.25	5	9	2.44	7.50	32.62	9	15.25	JP	29.88	9	12.50	JM	476
284	5	4	14	12.50	7	5.50	9.50	.53	4.56	15	16	4.75	9	2.44	7.50	32	9	15.25	JP	29.25	9	12.50	JM	508
286	5	4	14	14	7	5.50	11	.53	4.56	15	16	5.50	9	2.44	7.50	33.50	9	15.25	JP	30.75	9	12.50	JM	564
324	5	4	16	14	8	6.25	10.50	.66	4.56	17	17	5.25	9	2.44	7.50	35	9	15.75	JP	32.25	9	13	JM	709

COMMON DIMENSIONS																SPECIFIC DIMENSIONS								Approx. Wt. Lbs.
C1250AP and C1250AM																C1250AP				C1250AM				
Motor Frame	Suct. (1)	Disch. 125 lb. ANSI	A Max	B Max	D	E	F	H	MP	O Max	OP	XR	X	Y	Z	CP Max	DD	L	Mtr. Shft.	CP Max	DD	L	Mtr. Shft.	
284	6	5	14	12.50	7	5.50	9.50	.53	5.81	15	16.38	4.75	9.38	3.50	8	33.25	9.75	16.50	JP	24.66	9.75	12.75	JM	534
286	6	5	14	14	7	5.50	11	.53	5.81	15	16.38	5.50	9.38	3.50	8	34.75	9.75	16.50	JP	26.16	9.75	13.75	JM	589
324	6	5	16	14	8	6.25	10.25	.66	5.81	17	17.38	5.25	9.38	3.50	8	36.25	9.75	17	JP	27.66	9.75	14.25	JM	734
326	6	5	16	15.50	8	6.25	12	.66	5.81	17	17.38	6	9.38	3.50	8	37.75	9.75	17	JP	29.16	9.75	14.25	JM	799

(1) Equivalent to 125 Lb. ANSI

ALL DIMENSIONS ARE IN INCHES


CUSTOMER _____ JOB NAME _____
P.O. NUMBER _____ ITEM NO. _____
S.O. NUMBER _____ SERIAL NUMBER _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ HP. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES TYPE STYLE _____ RPM _____ GPM _____ TOTAL HEAD IN FEET _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____



Peerless Pump Company
Indianapolis, IN 46207-7026

END SUCTION GENERAL PURPOSE PUMPS
Series C - Close Coupled
C1260GP, C1260GP
Pump Unit Dimensional Outline

SECTION 2330
Page 12.01
February 8, 1991

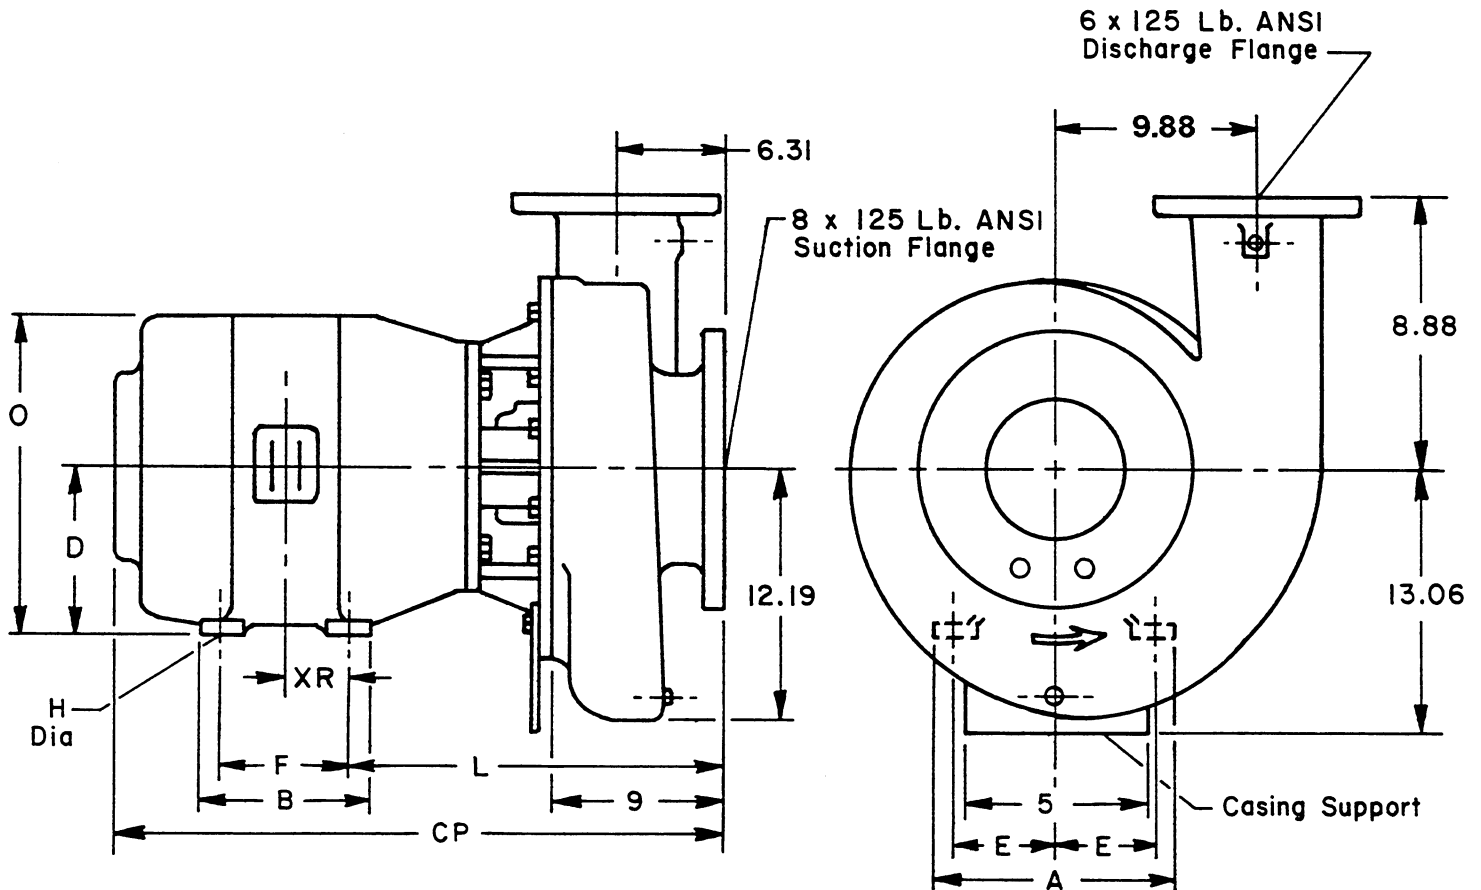

SPECIFIC UNIT DIMENSIONS IN INCHES								COMMON DIMENSIONS IN INCHES								WEIGHT - LBS.		
✓	MOTOR FRAME	C1260GM			C1260GP			A Max.	B Max.	D	E	F	H	O* Max.	XR	Pump w/ODP Mtr.		ADD FOR TEFC MTR.
		L	CP*	Motor Shaft	L	CP*	Motor Shaft									C 1260G M	C 1260G P	
	286	16.91	32.41	JM	19.69	35.19	JP	14.00	13.50	7.0	5.50	11.00	.53	14.0	5.50	615	625	60
	324	17.41	32.91	JM	20.19	35.69	JP	16.00	13.50	8.0	6.25	10.50	.66	16.0	5.25	700	710	90
	326	17.41	34.41	JM	20.19	37.19	JP	16.00	15.00	8.0	6.25	12.00	.66	16.0	6.00	750	760	90
	364	20.81	37.69	JP	20.81	37.69	JP	17.50	13.75	9.0	7.00	11.25	.66	18.0	5.62	915	925	125
	365	20.81	38.69	JP	20.81	38.69	JP	17.50	14.75	9.0	7.00	12.25	.66	18.0	6.25	975	985	125

*Maximum dimensions; may be less with different make motors or enclosures.

CUSTOMER _____ JOB NAME _____
P.O. NO. _____ ITEM NO. _____
S.O. NO. _____ SERIAL NO. _____
MOTOR MFR. _____ ENCL. _____ FRAME _____ H.P. _____ VOLTS _____ PH. _____ HZ. _____
PUMP SERIES, TYPE, STYLE _____ RPM _____ G.P.M. _____ TOTAL HD. FT. _____
CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

Subject to change unless certified for construction.

DT 4852741
Rev. 1-91



Peerless Pump Company
Indianapolis, IN 46207-7026



END SUCTION GENERAL SERVICE PUMPS

SECTION 2330

Page 12.1

September 9, 1988

C1425M, C1425P, C1430M, C1430P,
C1430GM, C1430GP, C1440M, C1440P

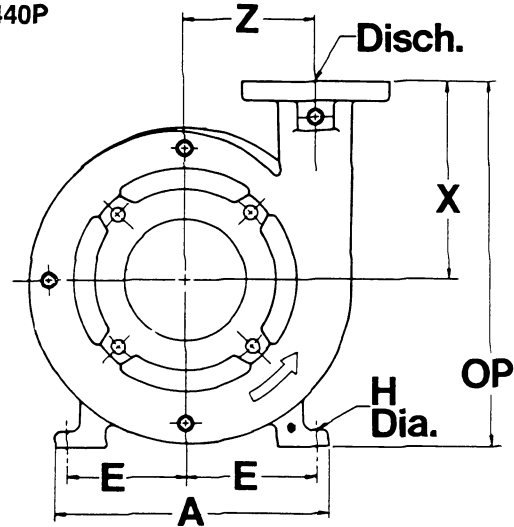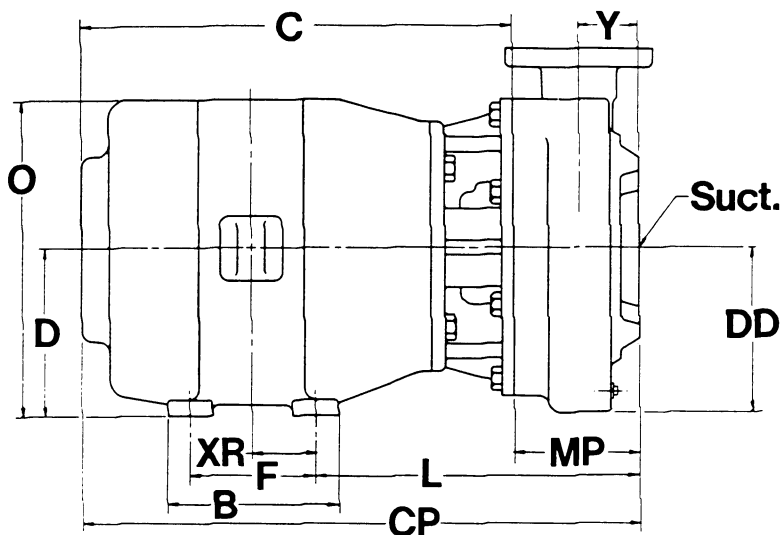

COMMON DIMENSIONS															SPECIFIC DIMENSIONS								Wt. Lbs.	
C1425M and C1425P															C1425M				C1415P					
Motor Frame	Suct. 125 Lb. ANSI	Disch. 125 Lb. ANSI	A Max.	B Max.	D	E	F	H	MP	O Max.	OP	XR	X	Y	Z	CP Max.	DD	L	Mtr. Shft	CP Max.	DD	L		Mtr. Shft
254	4	2.5	12.5	10.75	6.25	5.0	8.25	.53	5.46	12.5	14.87	4.12	8.62	2.91	7.75	28.2	8.5	12.6	JM	31.0	8.5	15.4	JP	369
256	4	2.5	12.5	12.50	6.25	5.0	10.00	.53	5.46	12.5	14.87	5.00	8.62	2.91	7.75	30.0	8.5	12.7	JM	32.8	8.5	15.5	JP	395
284	4	2.5	14.0	12.50	7.00	5.0	9.50	.53	5.46	14.0	15.62	4.75	8.62	2.91	7.75	29.4	8.5	12.7	JM	32.2	8.5	15.5	JP	445
286	4	2.5	14.0	14.00	7.00	5.0	11.00	.53	5.46	14.0	15.62	5.50	8.62	2.91	7.75	31.0	8.5	12.8	JM	33.7	8.5	15.5	JP	482

COMMON DIMENSIONS																SPECIFIC DIMENSIONS								Wt. Lbs.
C1430M, C1430M and C1430P, C1430GP																C1430M, C1430GP				C1430P, C1430GP				
Motor Frame	Suct. 125 Lb. ANSI	Disch. 125 Lb. ANSI	A Max.	B Max.	D	E	F	H	MP	O Max.	OP	XR	X	Y	Z	CP Max.	DD	L	Mtr. Shft	CP Max.	DD	L	Mtr. Shft	
254	4	3	12.5	10.75	6.25	5.0	8.25	.53	5.46	12.5	14.87	4.12	8.62	2.91	8	28.2	9.06	12.6	JM	31.0	9.06	15.4	JP	380
256	4	3	12.5	12.50	6.25	5.0	10.00	.53	5.46	12.5	14.87	5.00	8.62	2.91	8	30.0	9.06	12.7	JM	32.8	9.06	15.5	JP	406
284	4	3	14.0	12.50	7.00	5.5	9.50	.53	5.46	14.0	15.62	4.75	8.62	2.91	8	29.4	9.06	12.7	JM	32.2	9.06	15.5	JP	456
286	4	3	14.0	14.00	7.00	5.5	11.00	.53	5.46	14.0	15.62	5.50	8.62	2.91	8	31.0	9.06	12.8	JM	33.7	9.06	15.5	JP	493
324	4	3	16.0	14.00	8.00	6.25	10.50	.66	5.46	16.0	16.62	5.25	8.62	2.91	8	32.5	9.06	13.3	JM	35.2	9.06	16.0	JP	602
326	4	3	16.0	15.50	8.00	6.25	12.00	.66	5.46	16.0	16.62	6.00	8.62	2.91	8	33.8	9.06	13.3	JM	36.7	9.06	16.0	JP	653

COMMON DIMENSIONS																SPECIFIC DIMENSIONS								Wt. Lbs.
C1440M and C1440P																C1440M				C1440P				
Motor Frame	Suct. 125 Lb. ANSI	Disch. 125 Lb. ANSI	A Max.	B Max.	D	E	F	H	MP	O Max.	OP	XR	X	Y	Z	CP Max.	DD	L	Mtr. Shft	CP Max.	DD	L	Mtr. Shft	
256	5	4	12.5	12.5	6.25	5.00	10.00	.53	5.46	12.5	16.25	5.00	10	2.78	8.5	30.0	9.56	12.7	JM	32.8	9.56	15.5	JP	412
284	5	4	14.0	12.5	7.00	5.50	9.50	.53	5.46	14.0	17.00	4.75	10	2.78	8.5	29.4	9.56	12.7	JM	32.2	9.56	15.5	JP	462
286	5	4	14.0	14.0	7.00	5.50	11.00	.53	5.46	14.0	17.00	5.50	10	2.78	8.5	31.0	9.56	12.8	JM	33.7	9.56	15.5	JP	499
324	5	4	16.0	14.0	8.00	6.25	10.50	.66	5.46	16.0	18.00	5.25	10	2.78	8.5	32.5	9.56	13.3	JM	35.2	9.56	16.0	JP	608
326	5	4	16.0	15.5	8.00	6.25	12.00	.66	5.46	16.0	18.00	6.00	10	2.78	8.5	33.8	9.56	13.3	JM	36.7	9.56	16.0	JP	659
364	5	4	18.0	14.0	9.00	7.00	11.25	.66	5.46	18.0	19.00	5.62	10	2.78	8.5	NA	NA	NA	NA	37.0	9.56	16.7	JP	747

ALL DIMENSIONS ARE IN INCHES

CUSTOMER _____ JOB NAME _____

P.O. NO. _____ ITEM NO. _____

S.O. NO. _____ SERIAL NO. _____

MOTOR MFR. _____ ENCL. _____ FRAME _____ H.P. _____ VOLTS _____ PH. _____ HZ. _____

PUMP SERIES, TYPE, STYLE _____ RPM _____ G.P.M. _____ TOTAL HD. FT. _____

CERTIFIED FOR ☐ APPROVAL ☐ CONSTRUCTION BY _____ DATE _____

Subject to change unless certified for construction.

DT4849457

Rev. 7-88




Peerless Pump Company
Indianapolis, IN 46207-7025

END SUCTION GENERAL SERVICE PUMPS
Series C Close Coupled
Vertical Mounted

SECTION 2330
Page 35
August 10, 1992

This mounting arrangement is only available on C825AM, C830AM, C840M, C1020AM, C1025AM, C1030AM, C1040AM, C1050AM, C1125M, C1140M, C1220AM, C1230AM, C1240AM, C1250AM, C1260GM pumps and requires motor specifically designed for vertical shaft down mounting. Refer to the factory for dimensions, motor and base elbow price additions.

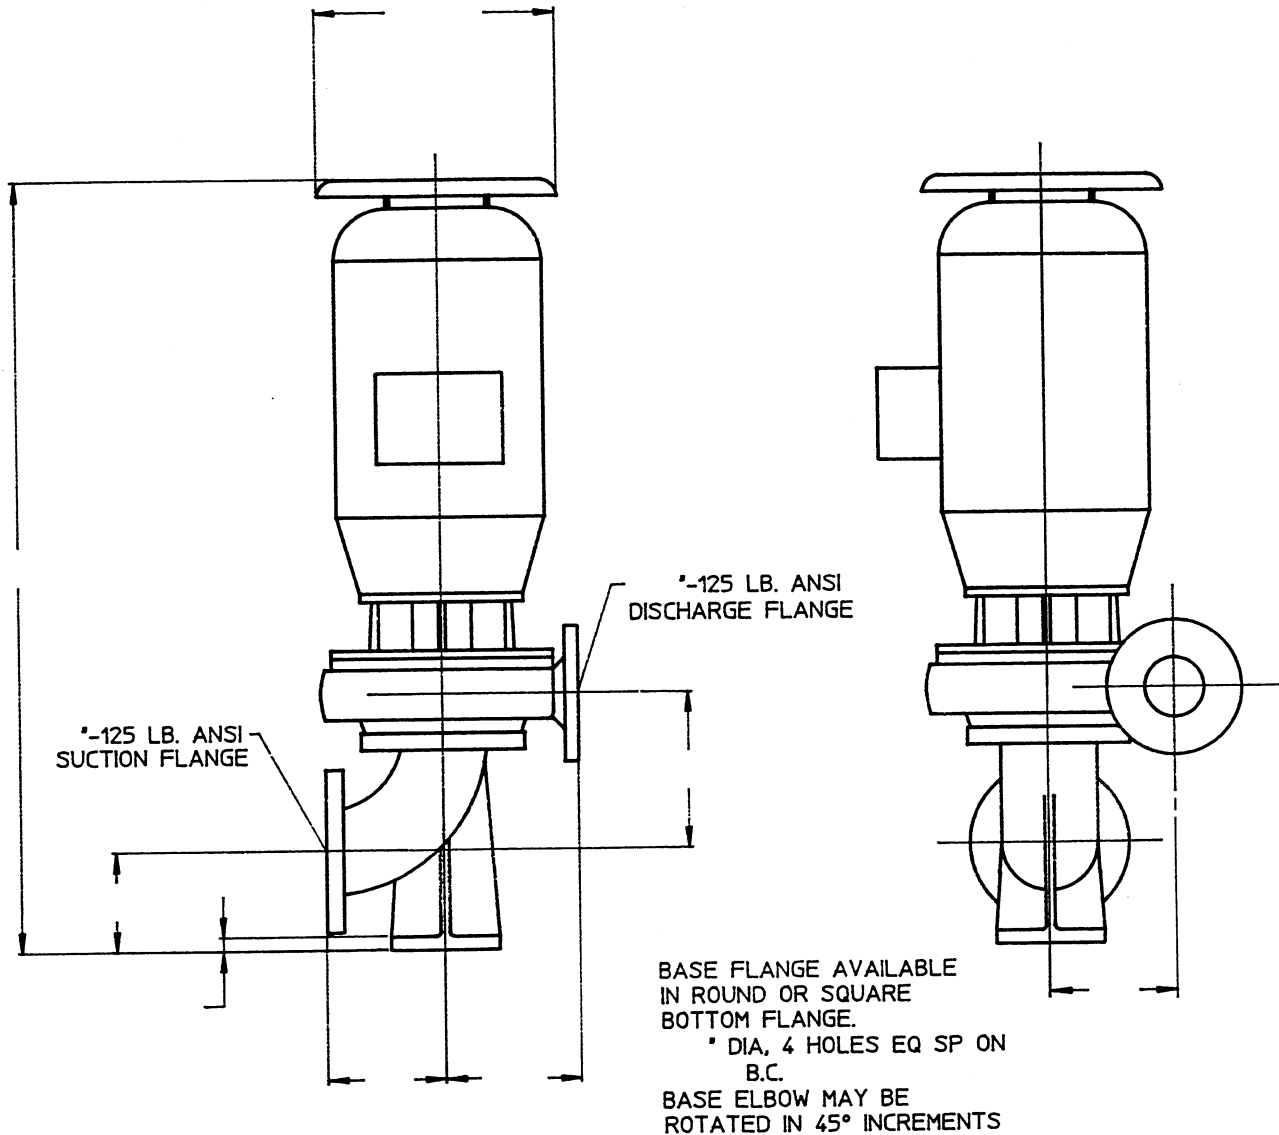

CUSTOMER _____ JOB NAME _____

P.O. NO. _____ ITEM NO. _____

S.O. NO. _____ SERIAL NO. _____


PUMP SERIES, TYPE, STYLE _____ RPM _____ GPM _____ LAB. HD. FT. _____

MOTOR MFR. _____ FRAME _____ ENCL. _____ HP _____ VOLTS _____ PH _____ HZ _____

4852695
Rev 8-92



Cyclone Separator Arrangement

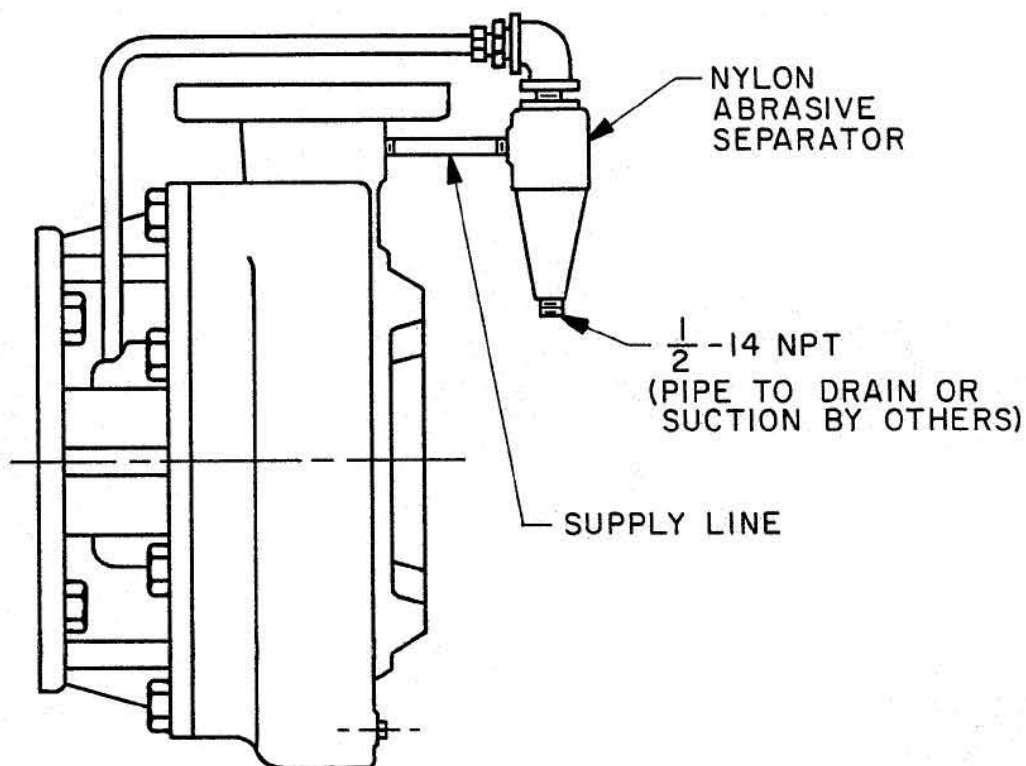

Notes:

1. Contractor to supply pipe and fittings at the time of installation.
2. Sterling Fluid Systems to supply Cyclone Separator.

DT 4852617
Rev. 7-00

Subject to change without notice