



HYDRAULIC PERFORMANCE TOLERANCE

Peerless Pump performance tests are determined acceptable based on the tolerances of the Hydraulic Institute, paragraph 1.6.5.3 Level "A", as follows (unless level "B" is customer specified).

At rated capacity;

Heads under 200 feet at 2999 US GPM and under	= +8%, -0% Head
Heads under 200 feet at 3000 US GPM and over	= +5%, -0% Head
Heads 201 feet to 500 feet, at any flow	= +5%, -0% Head
Heads 501 feet and over, at any flow	= +3%, -0 Head

OR

At rated head;	
Capacity tolerance at rated head	= +10%, -0% Capacity


Performance Guarantee

- A guarantee of pump efficiency requires Peerless Pump factory engineering to determine and authorize a guarantee.
- A Peerless Pump factory performance test is required for any performance guarantee.
- A Peerless Pump factory authorized performance guarantees will be based on Peerless Pump factory testing.
- A Peerless Pump factory determined and authorized efficiency guarantee will have a -0% tolerance.
- A guarantee of pump performance is limited to one operating condition point only.

BLANK


MODEL: 8196 @ 3550 RPM

PEERLESS PROCESS PUMPS

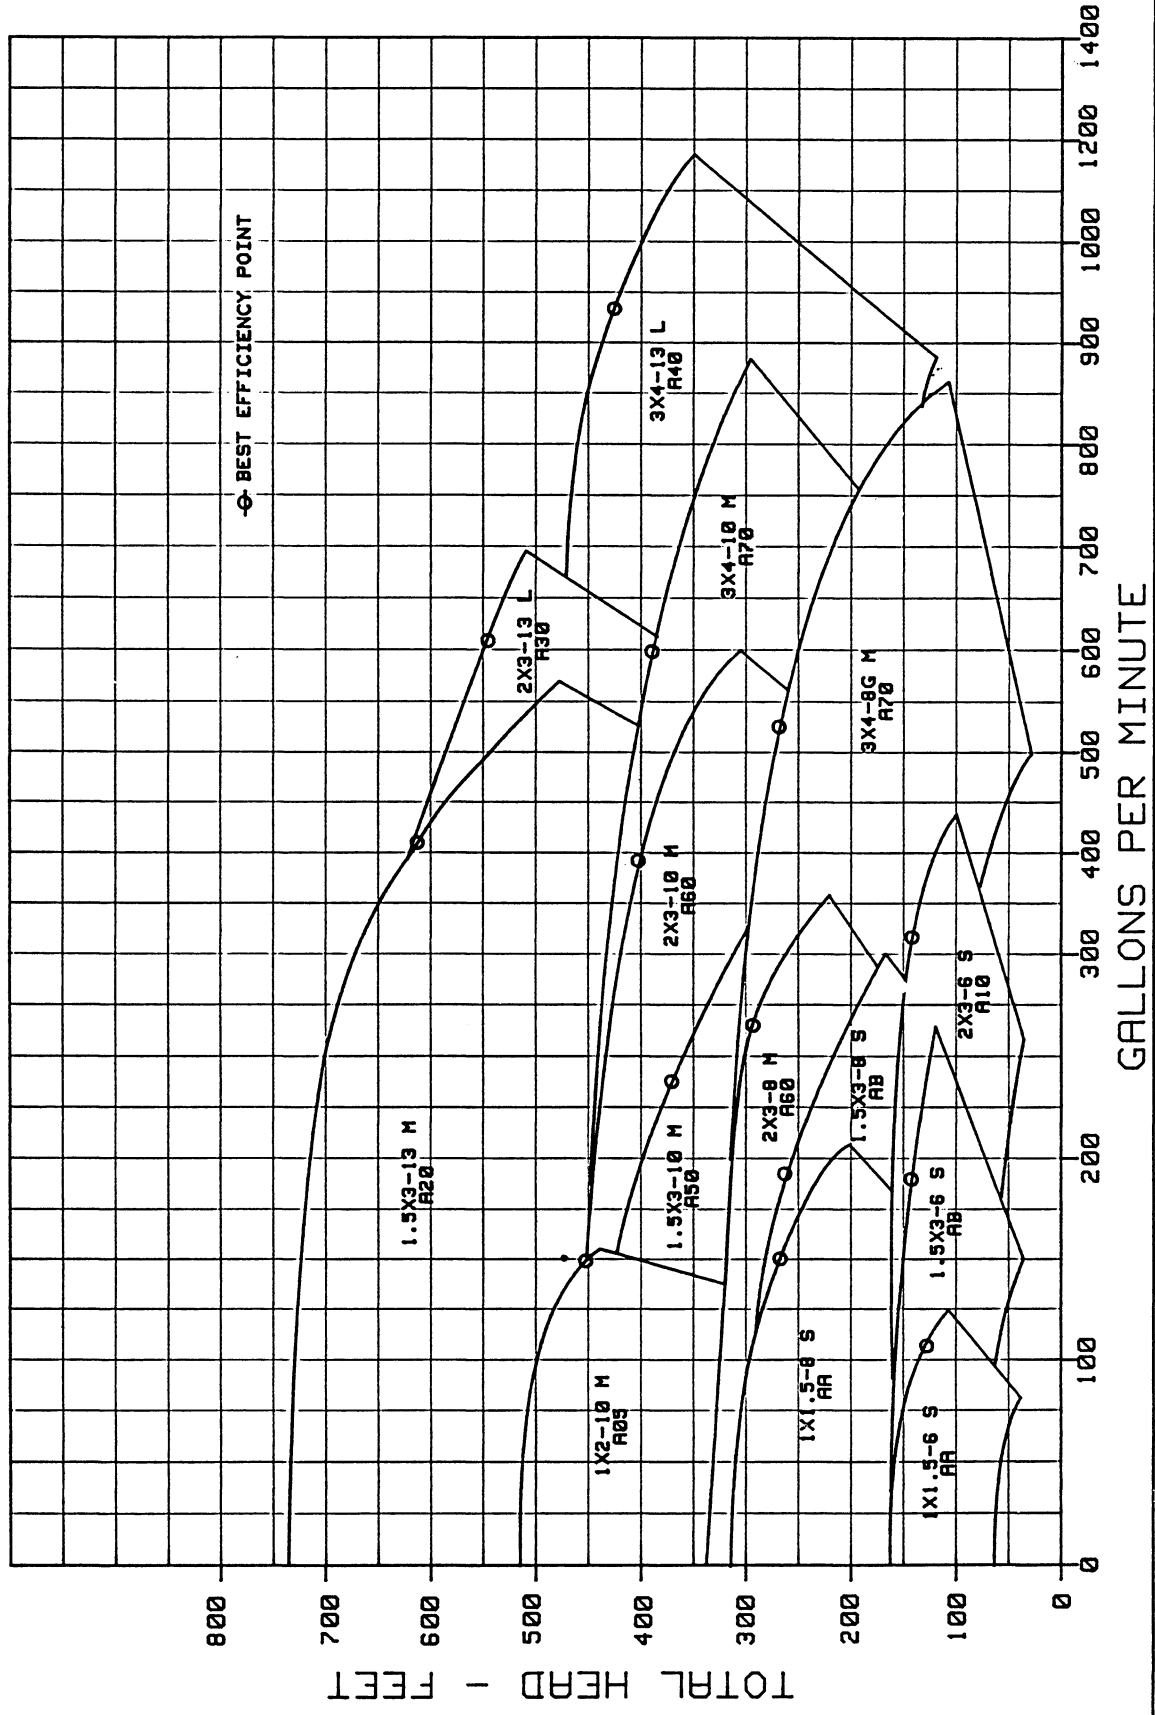


MODEL: 8196 @ 1750 RPM

PEERLESS PROCESS PUMPS

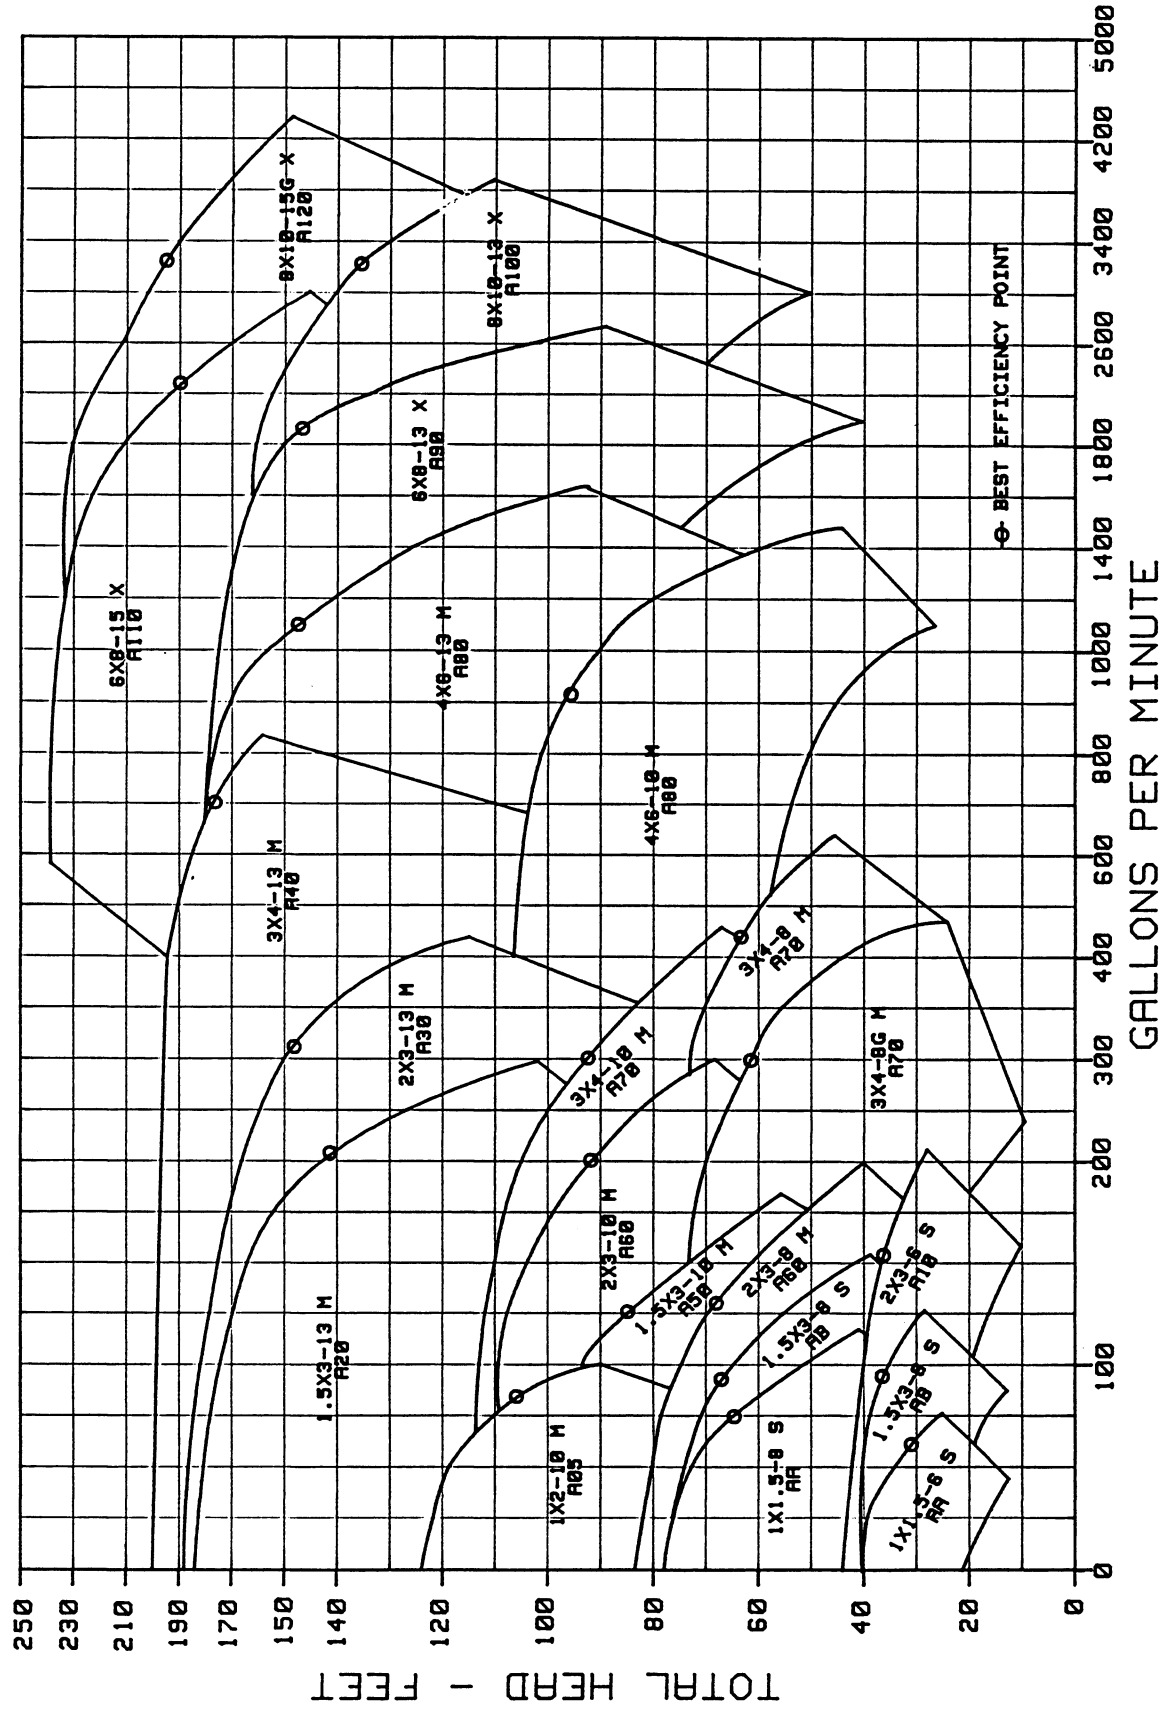

PEERLESS PROCESS PUMPS

MODEL: 8196 @ 1150 RPM

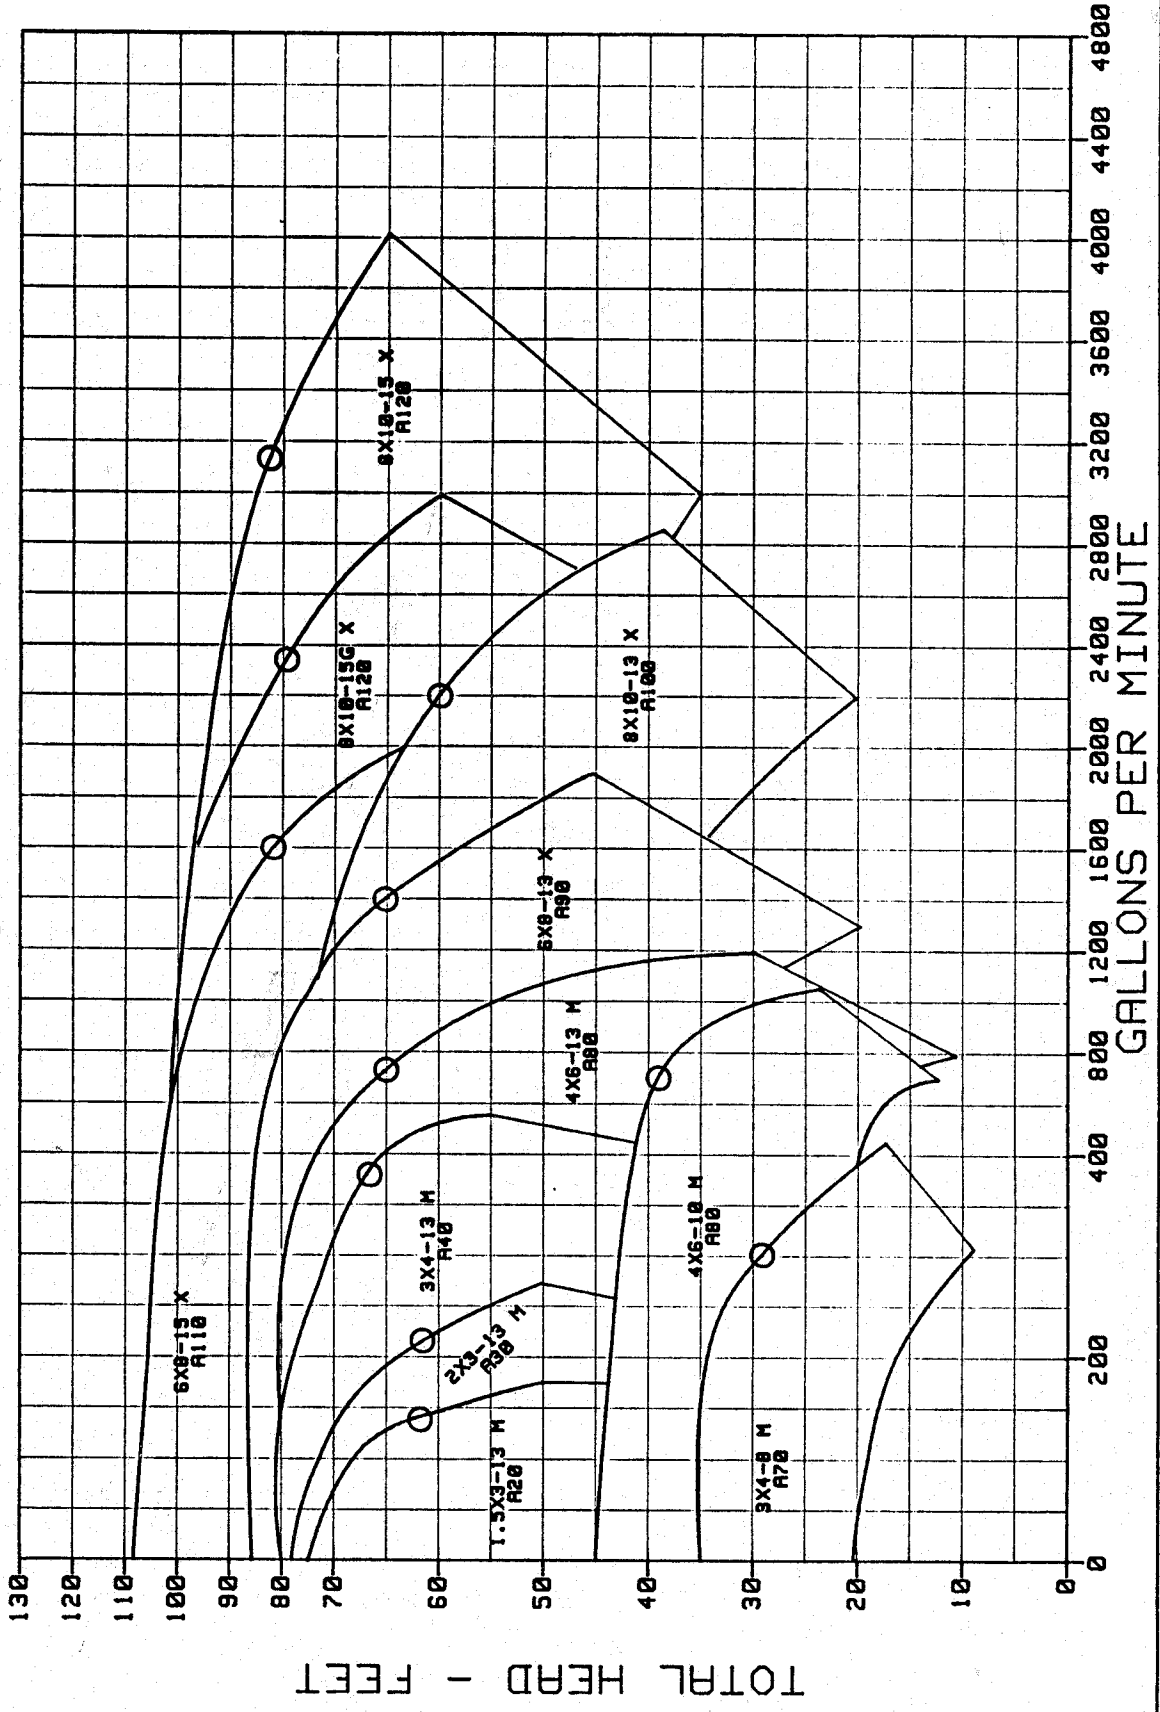




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1x1.5-6 STP 8196LF	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-001	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	4.62 hp
Item : 1		Closed Valve Pressure	157.922 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

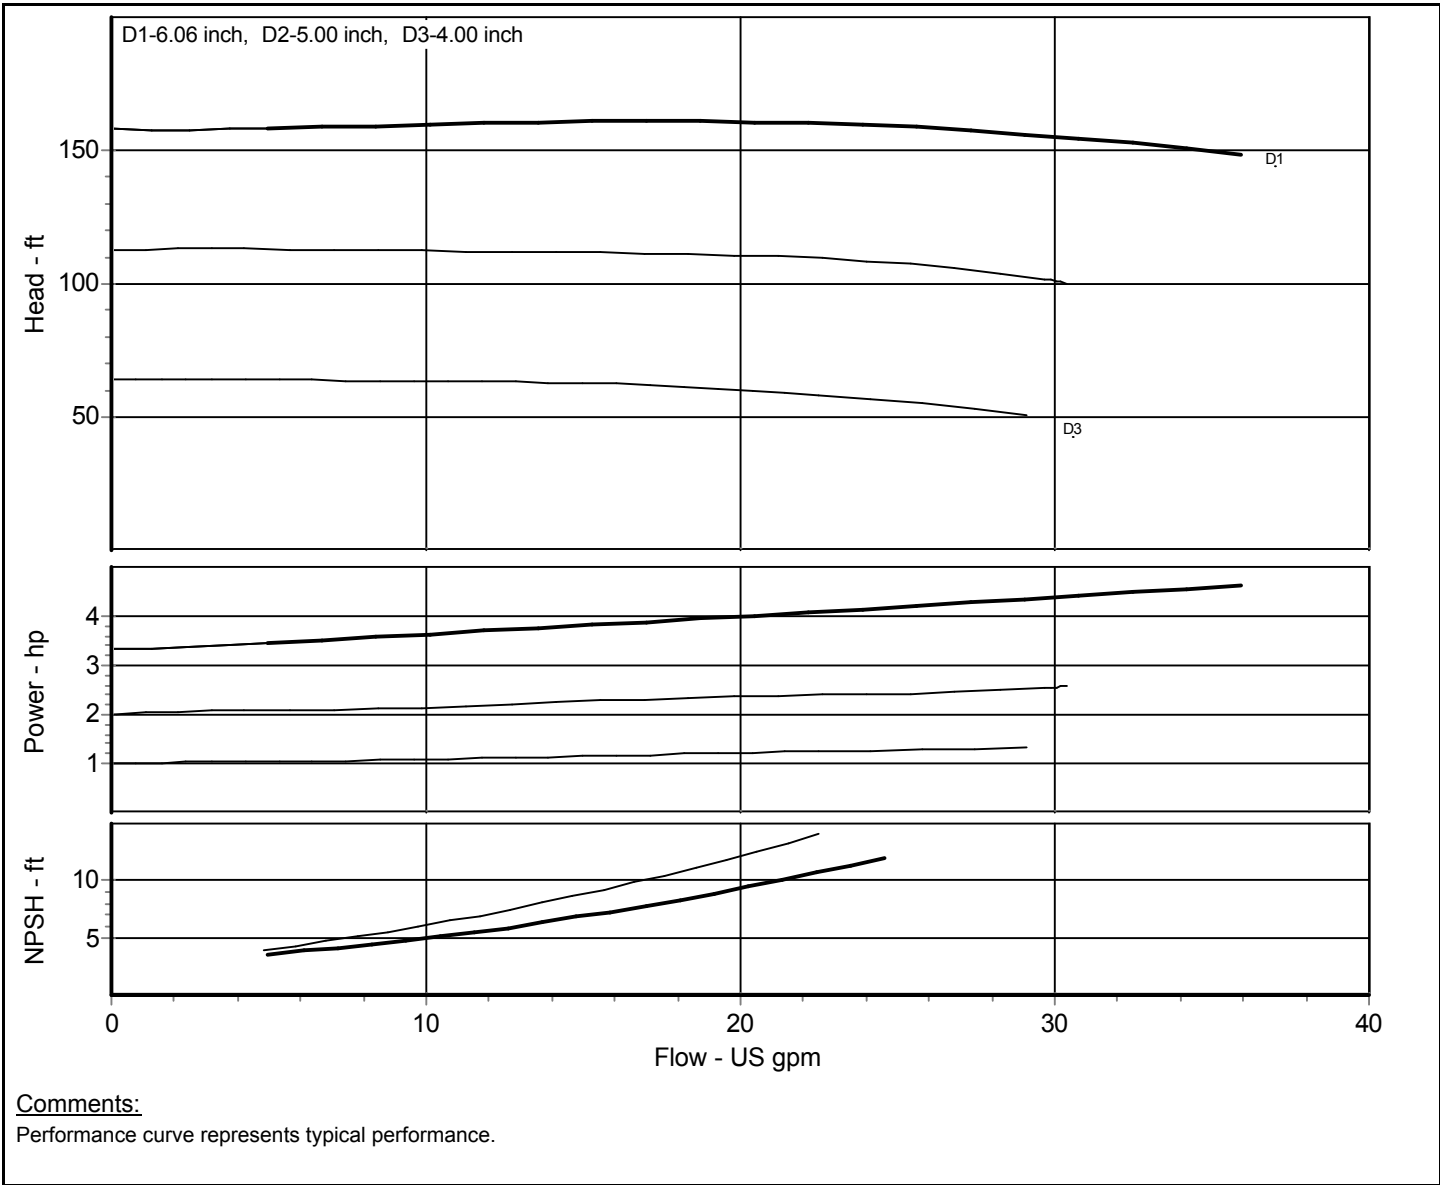




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 1x1.5- 6 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/3.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-002	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	7.06 hp
Item : 1		Closed Valve Pressure	154.842 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

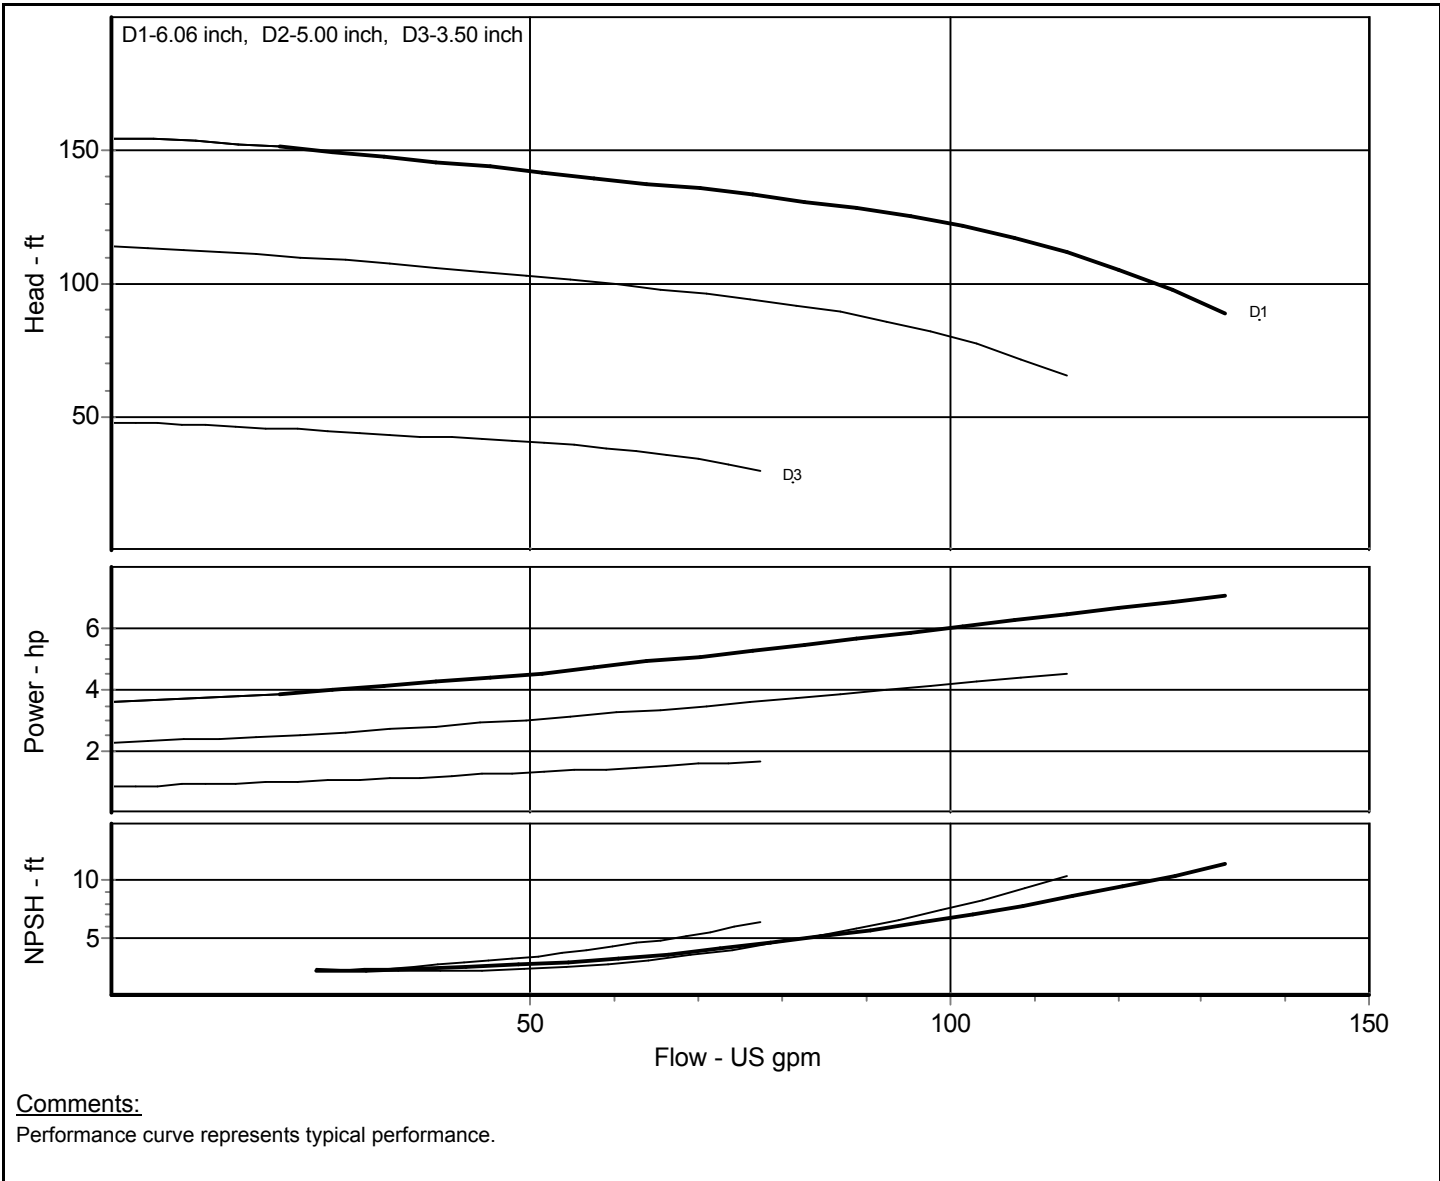




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1x1.5-8 STP 8196LF	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-003	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	11.12 hp
Item : 1		Closed Valve Pressure	257.983 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

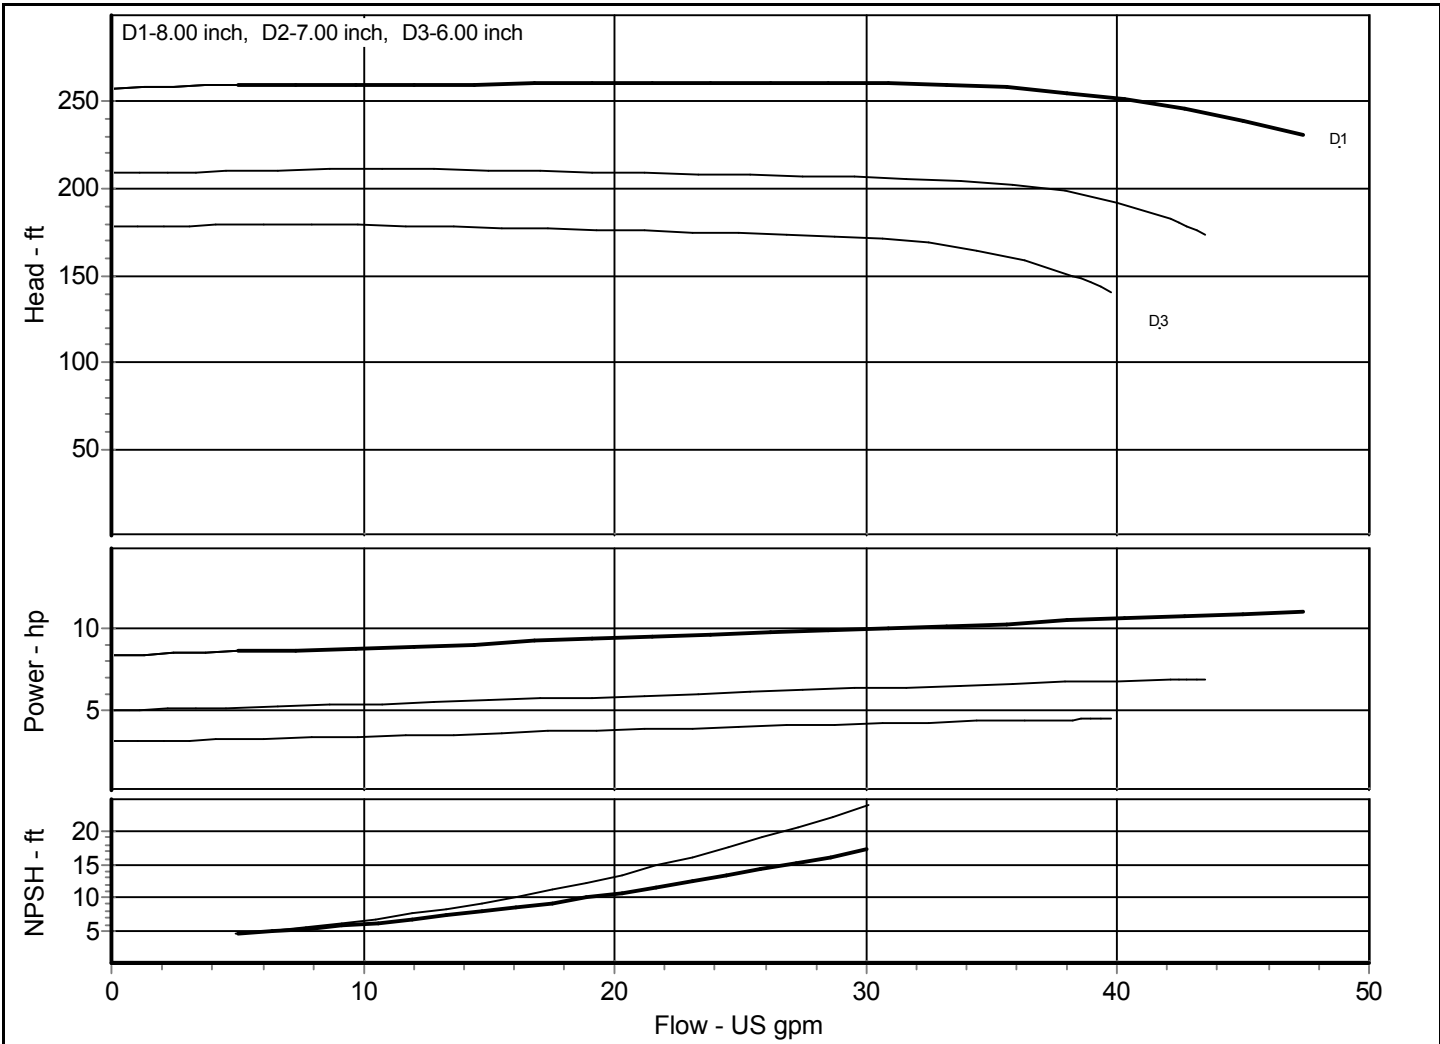

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1x1.5-8 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-006	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	19.09 hp
Item : 1		Closed Valve Pressure	301.676 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

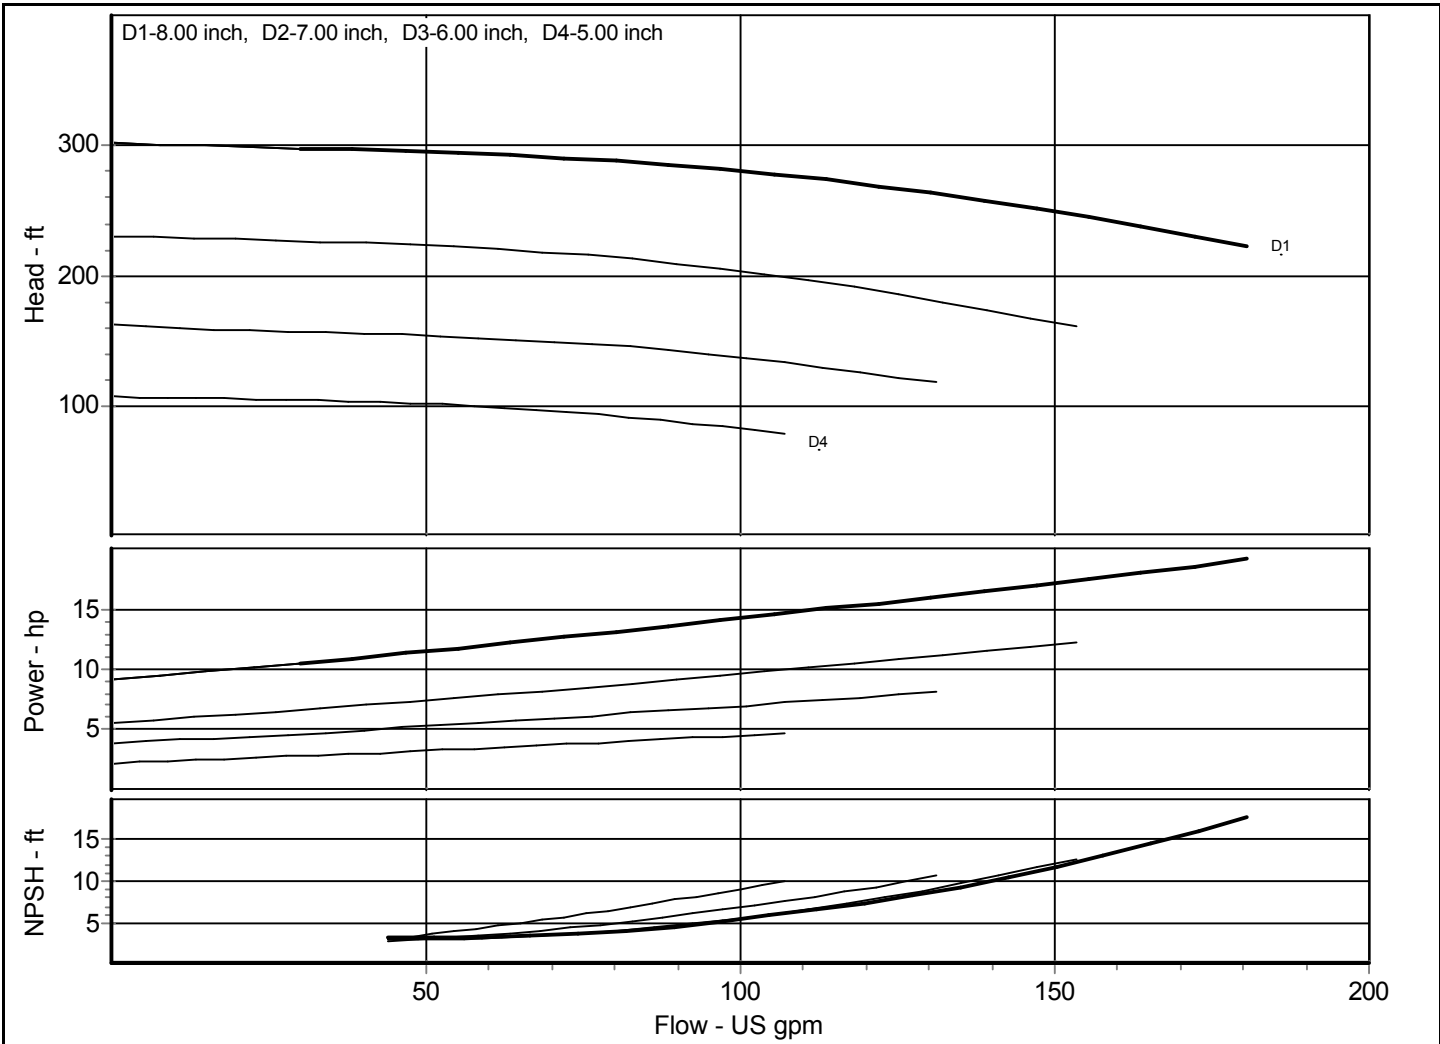

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 1x2-10 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **3550** RPM, 60 Hz Electric
 Impeller Dia.: **10/5** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-019**

Fluid: **Water**


Peak Power: **42.21** hp
 Closed Valve Pressure **490.006** ft

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

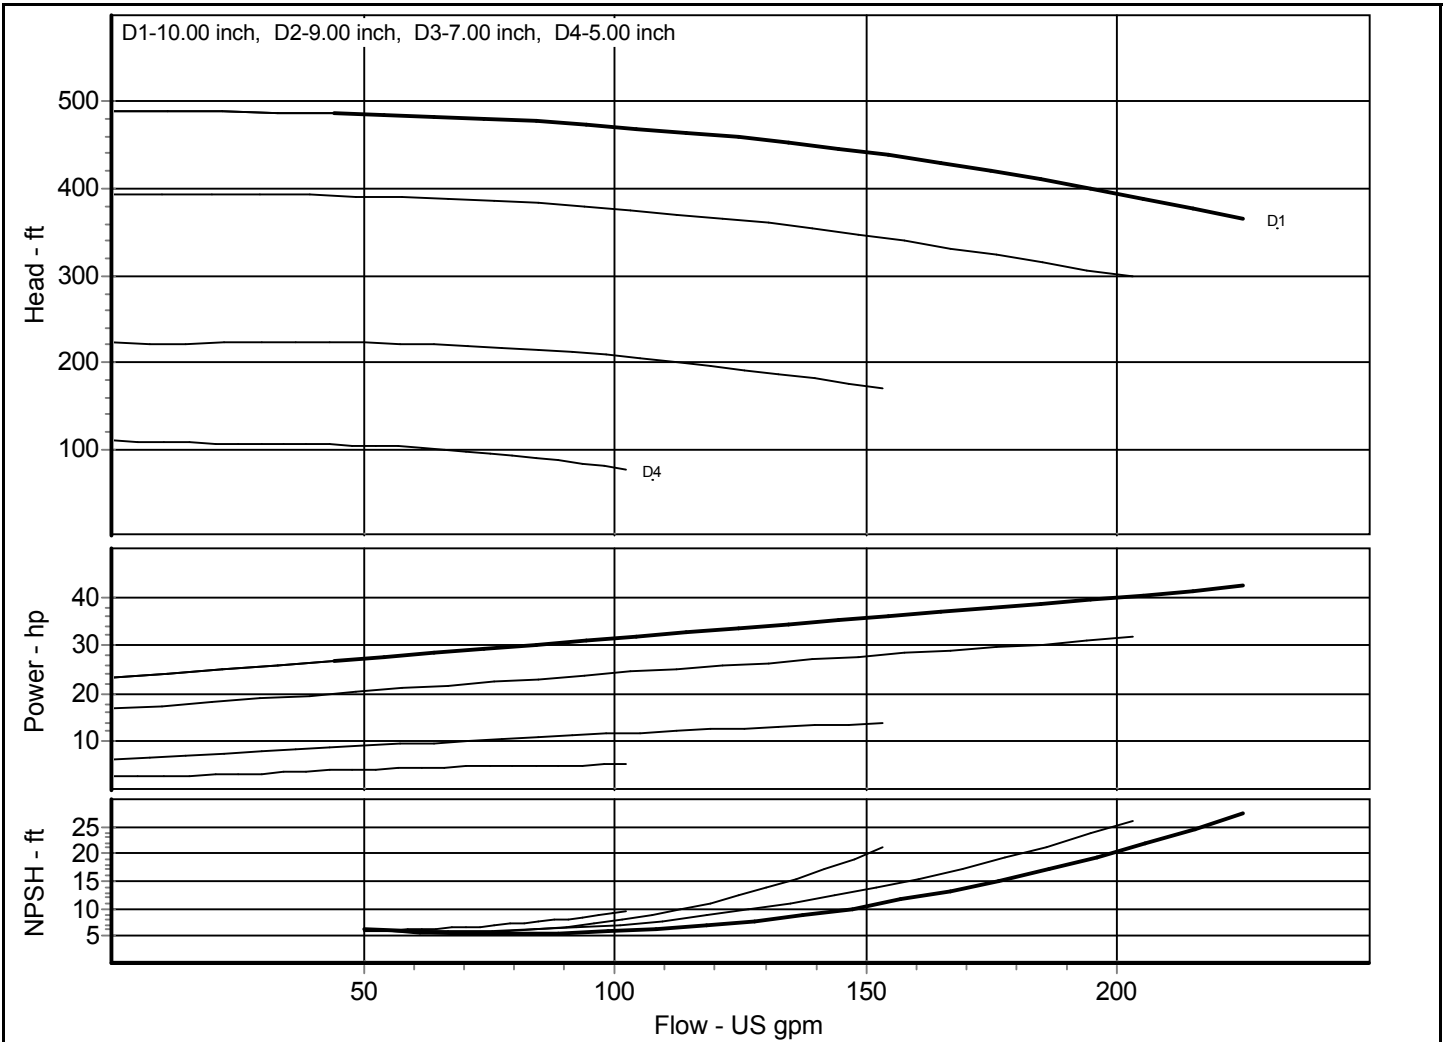

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1x2-10 LTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-019	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	42.21 hp
Item : 1		Closed Valve Pressure	490.006 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

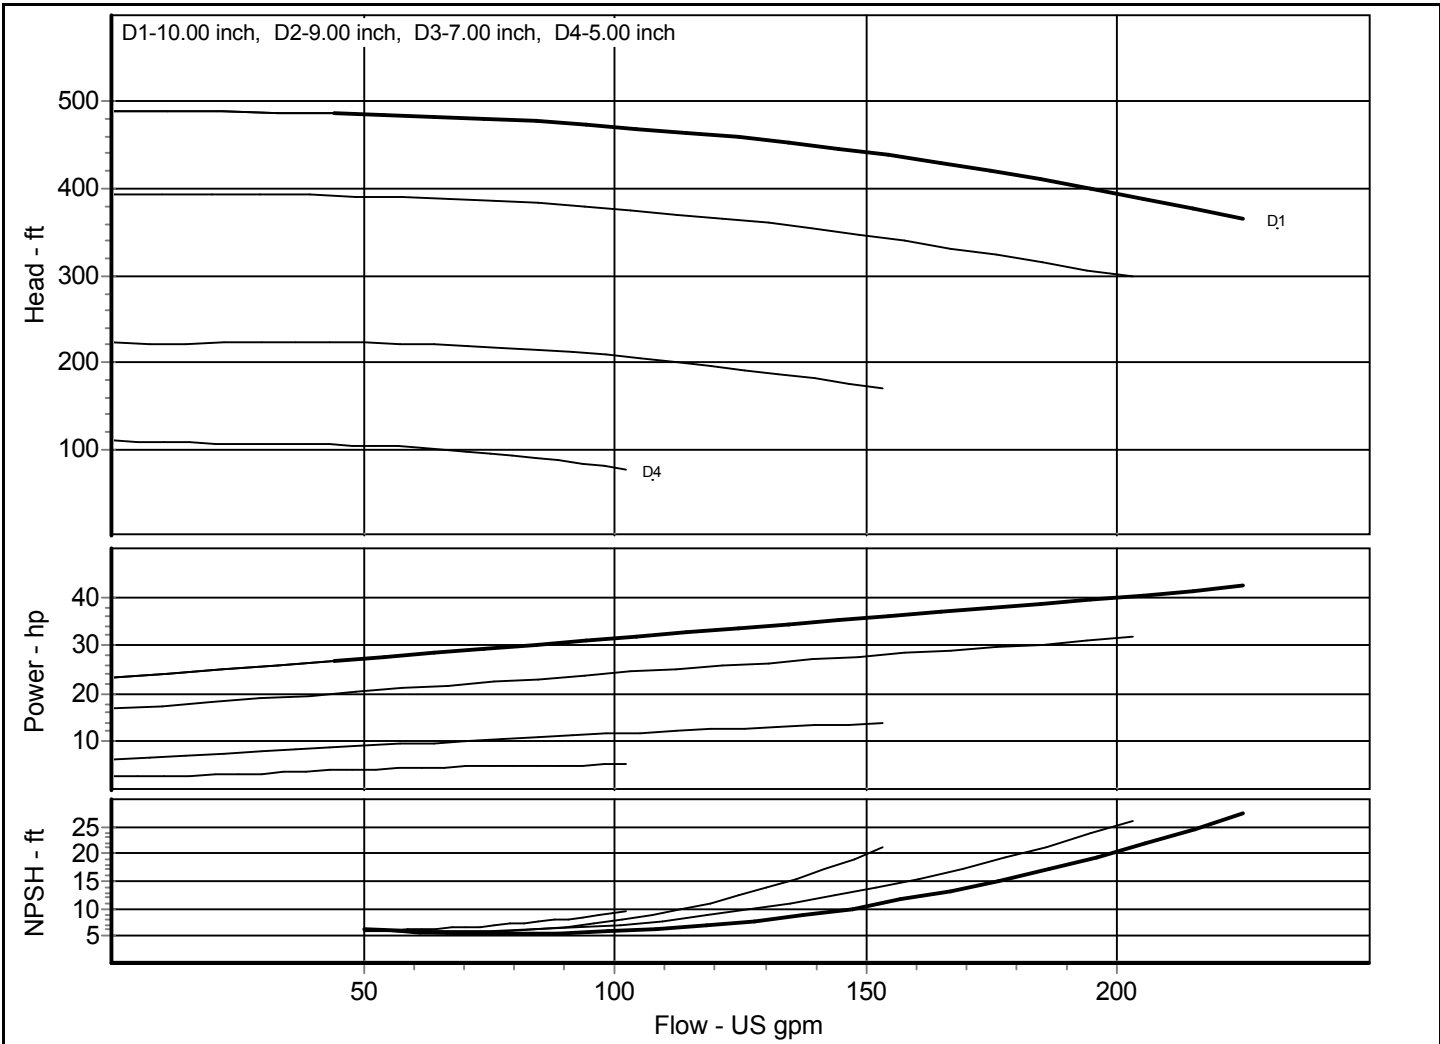

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 1.5x3-6 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-004	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 11.56 hp	
Item : 1		Closed Valve Pressure 154.889 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

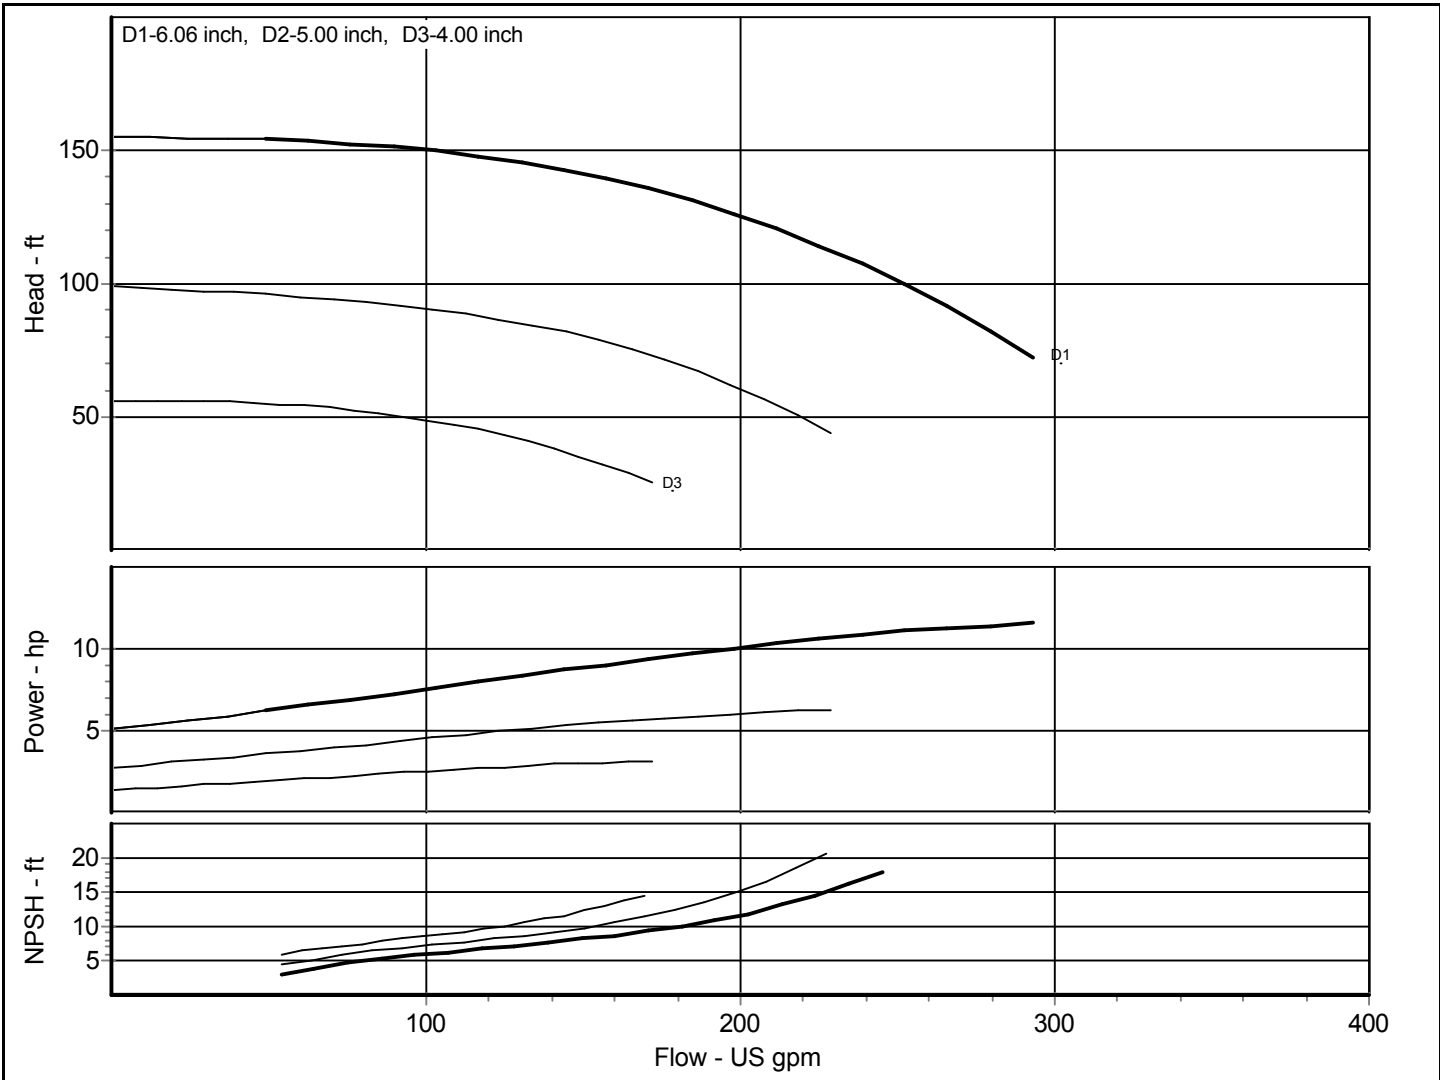

Comments:
Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1.5x3-8 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-008	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	26.21 hp
Item : 1		Closed Valve Pressure	289.857 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

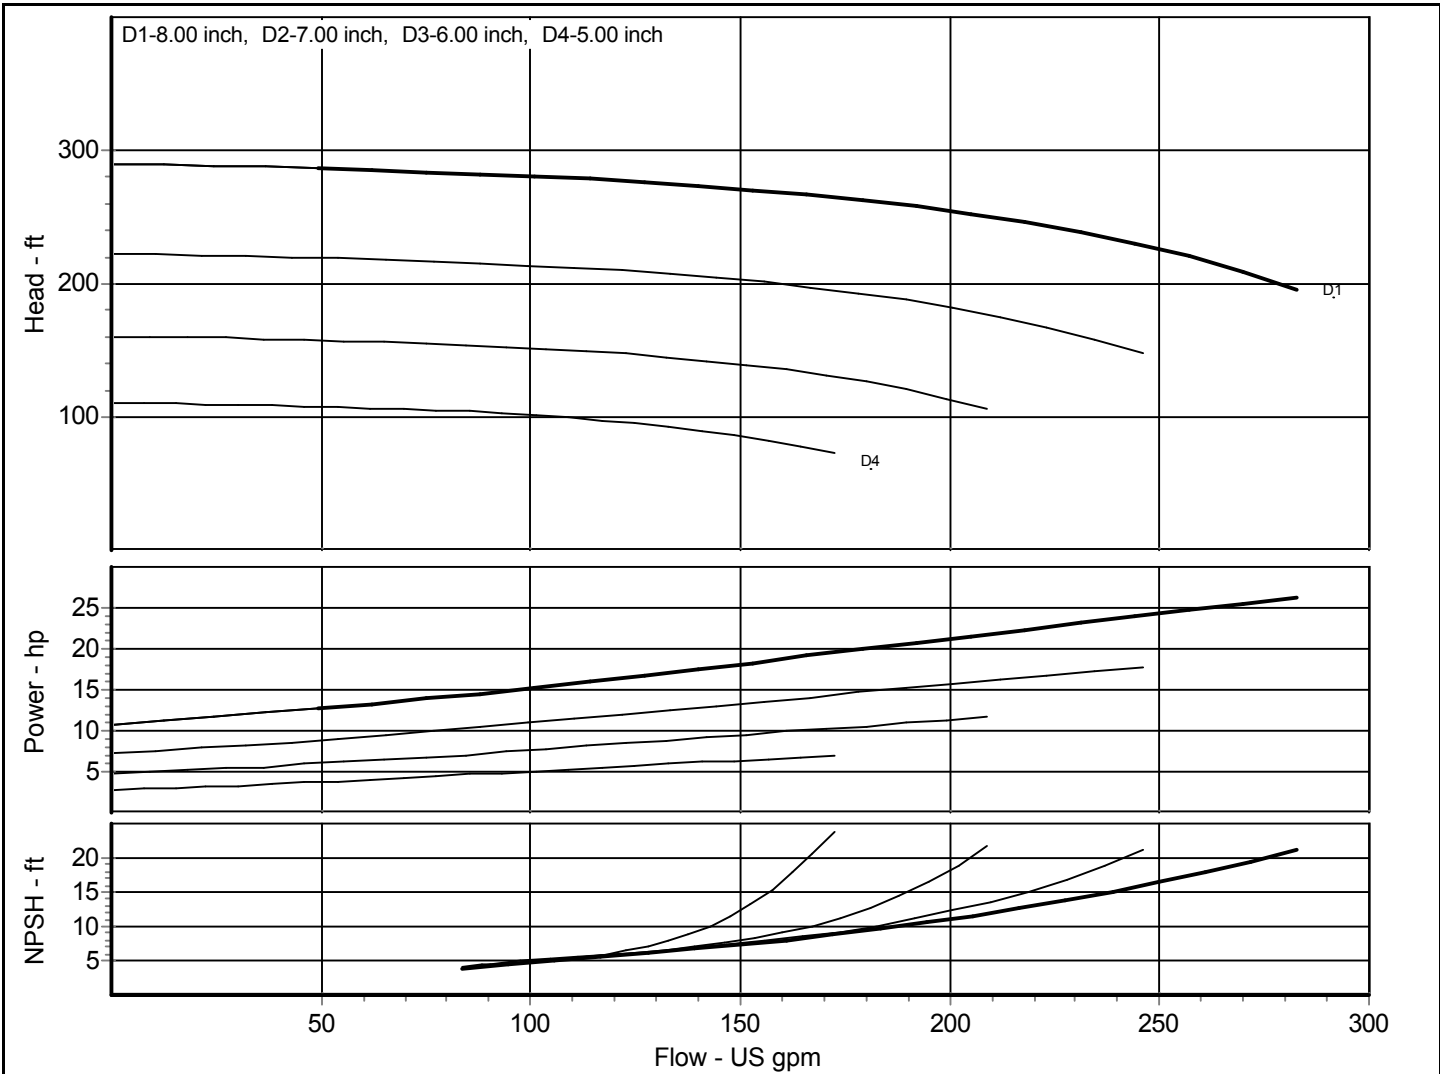

Comments:
 Performance curve represents typical performance.




Customer :

Peerless Pump Company LLC
P O Box 7026, Indianapolis, Indiana, 46202

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 1.5x3-10 MTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-021	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	53.19 hp
Item : 1		Closed Valve Pressure	440.214 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

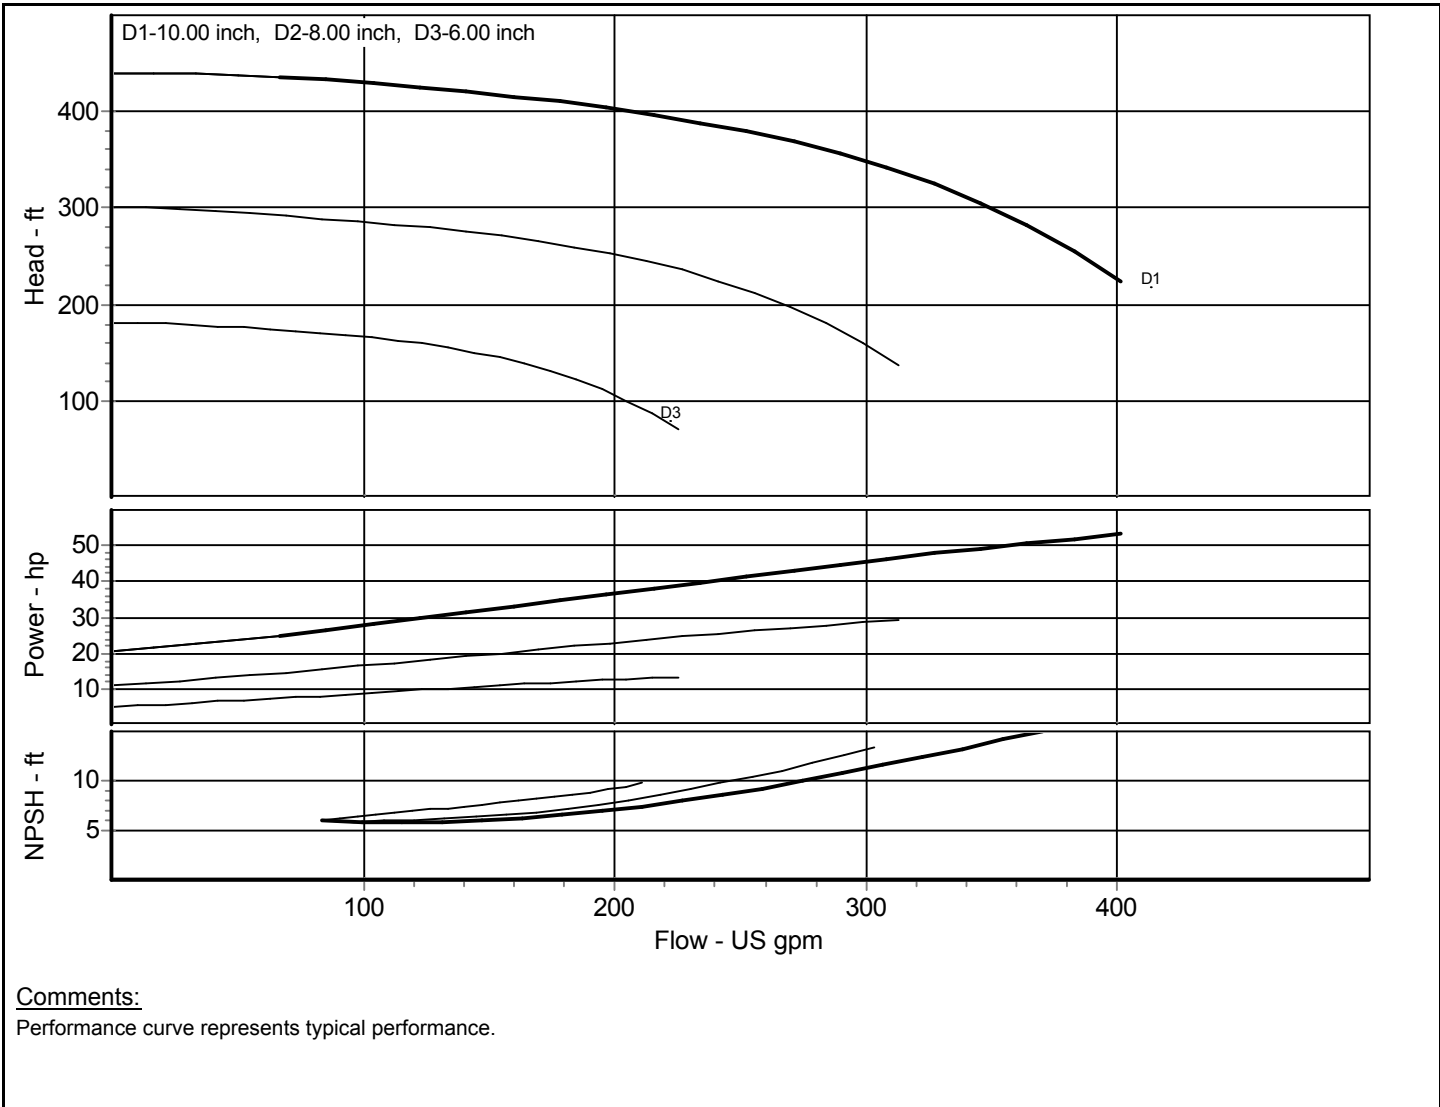




Customer :

Peerless Pump Company LLC
P O Box 7026, Indianapolis, Indiana, 46202

Project :		Contact :	
Quote No. :	Page No. :	Phone :	Fax :
Date :		Date :	

Pump Model: Peerless - 1.5x3-10 LTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow : US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head : ft
	Temperature: 68 °F	Efficiency : %
	Viscosity: 1.009 cP	Power Required : hp
Curve No.: 8196-021	Sp. Gravity: 1.000	NPSH Required : ft
Impeller No.	Fluid: Water	Peak Power: 53.19 hp
Item : 1		Closed Valve Pressure 440.214 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std	

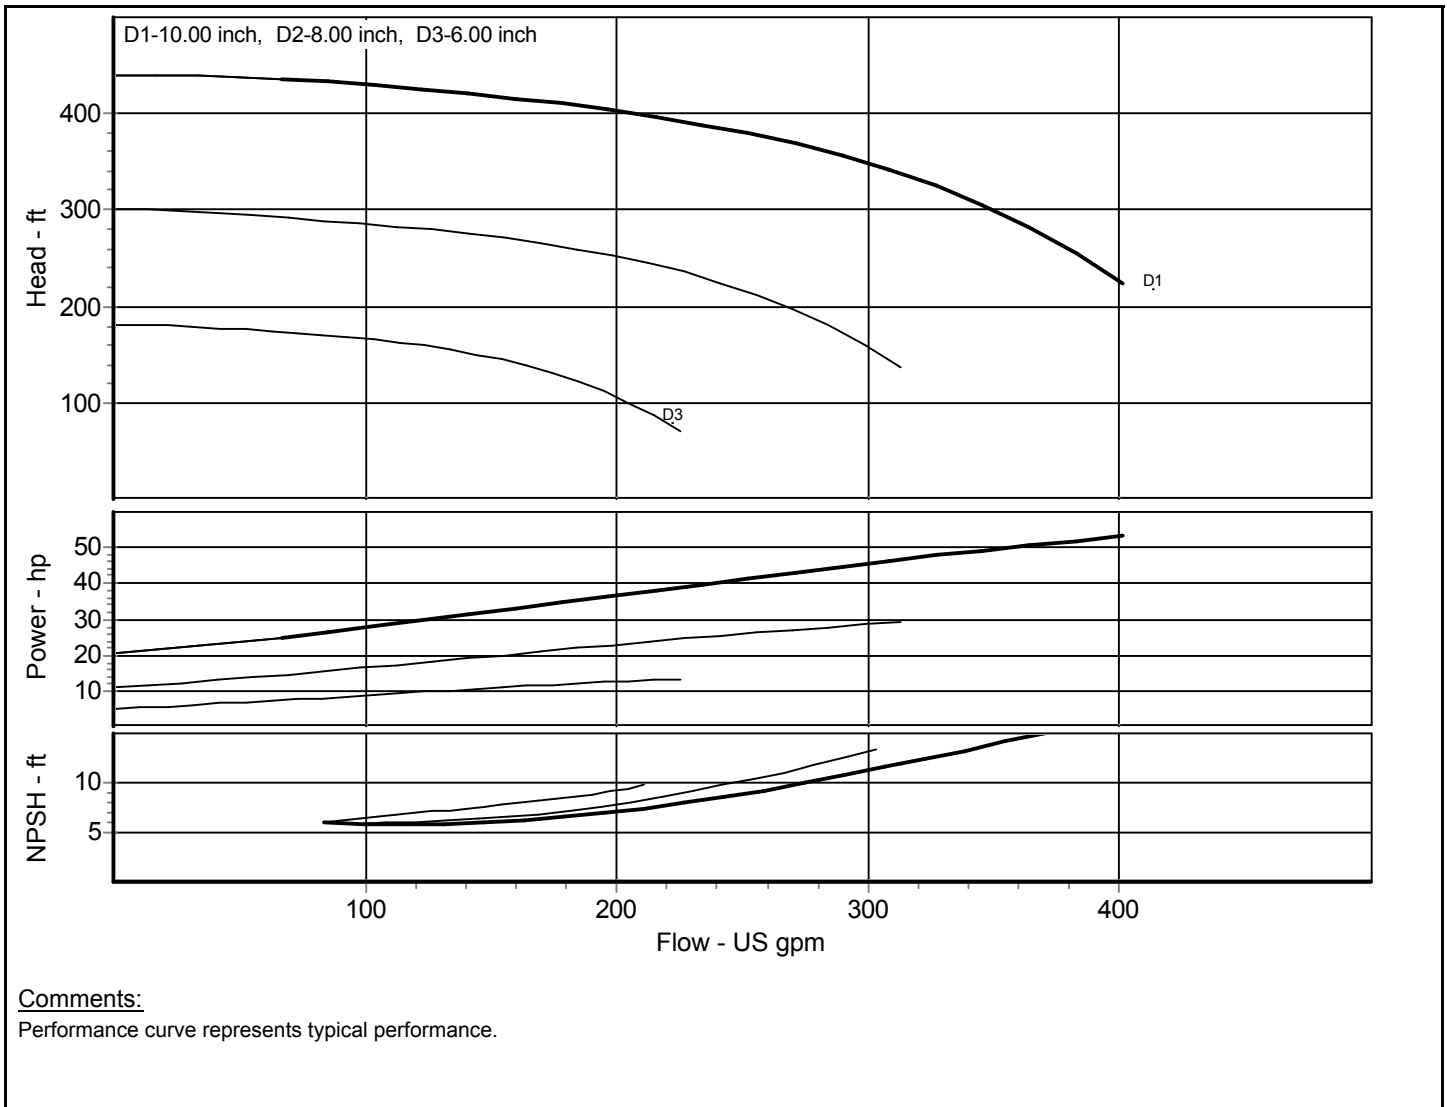




Peerless Pump Company LLC
 P O Box 7026, Indianapolis, Indiana, 46202

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 1.5x3-13 MTP 8196** Nom. Speed: **3550** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Curve No.: **8196-029** Sp. Gravity: **1.000** Peak Power: **121.42** hp
 Impeller No. Fluid: **Water** Closed Valve Pressure **649.94** ft
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

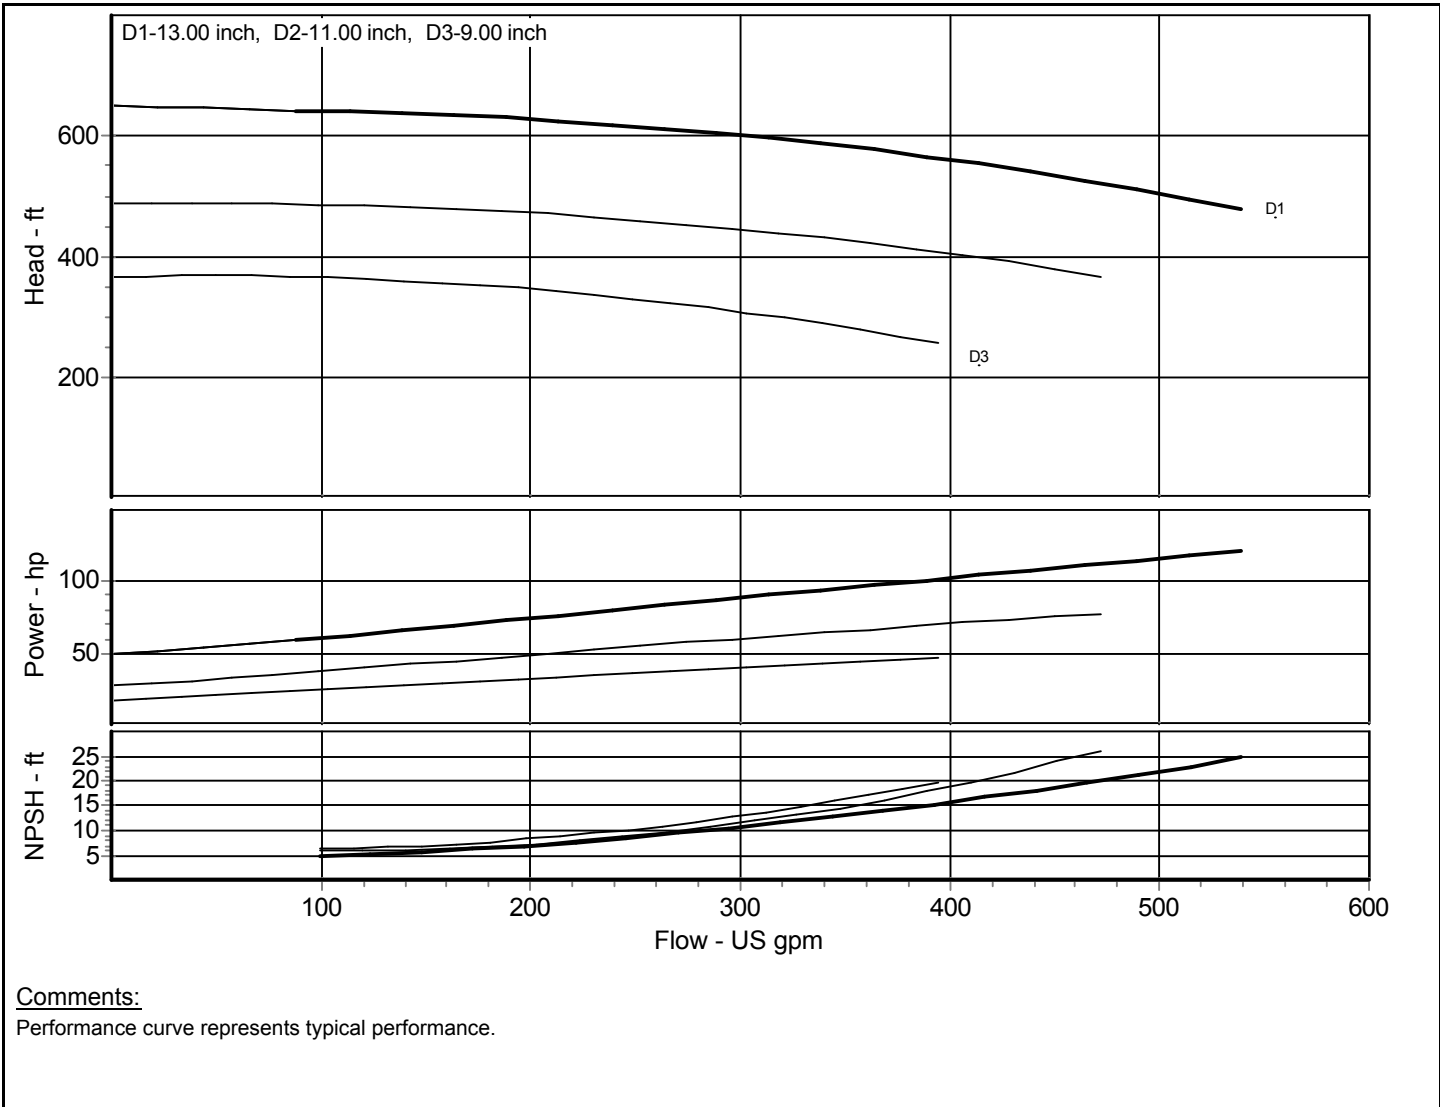




Peerless Pump Company LLC
 P O Box 7026, Indianapolis, Indiana, 46202

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1.5x3-13 LTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-029	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 121.42 hp	
Item : 1		Closed Valve Pressure 649.94 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

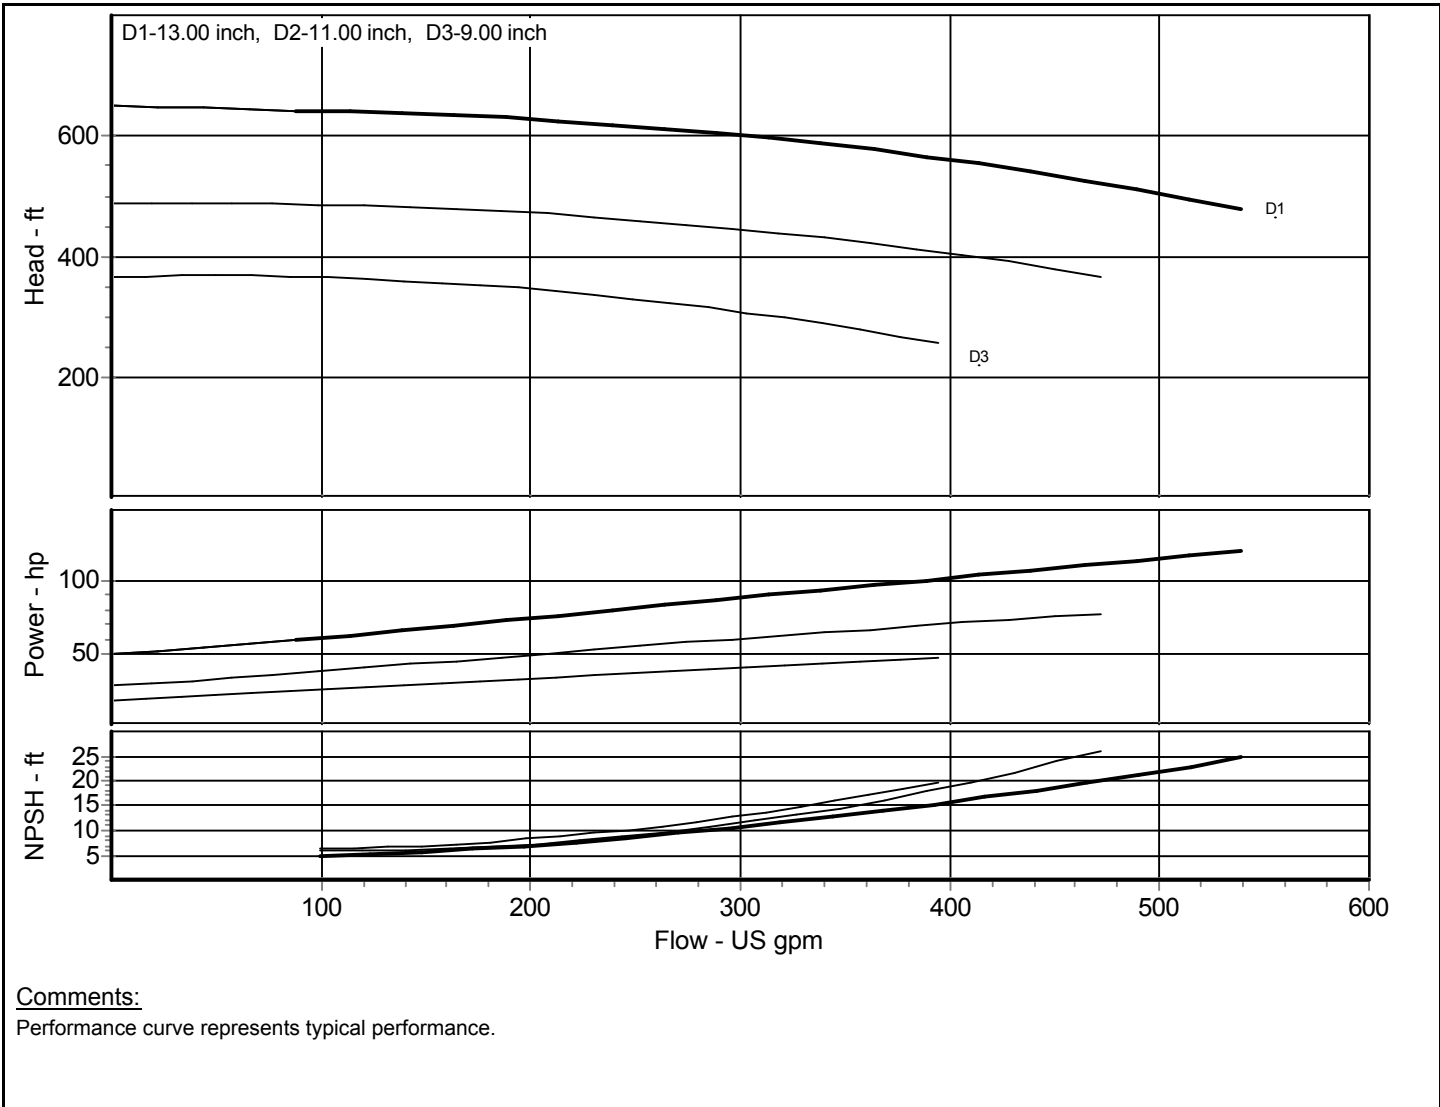



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 2x3-6 STP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-009	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	18.95 hp
Item : 1		Closed Valve Pressure	154.851 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

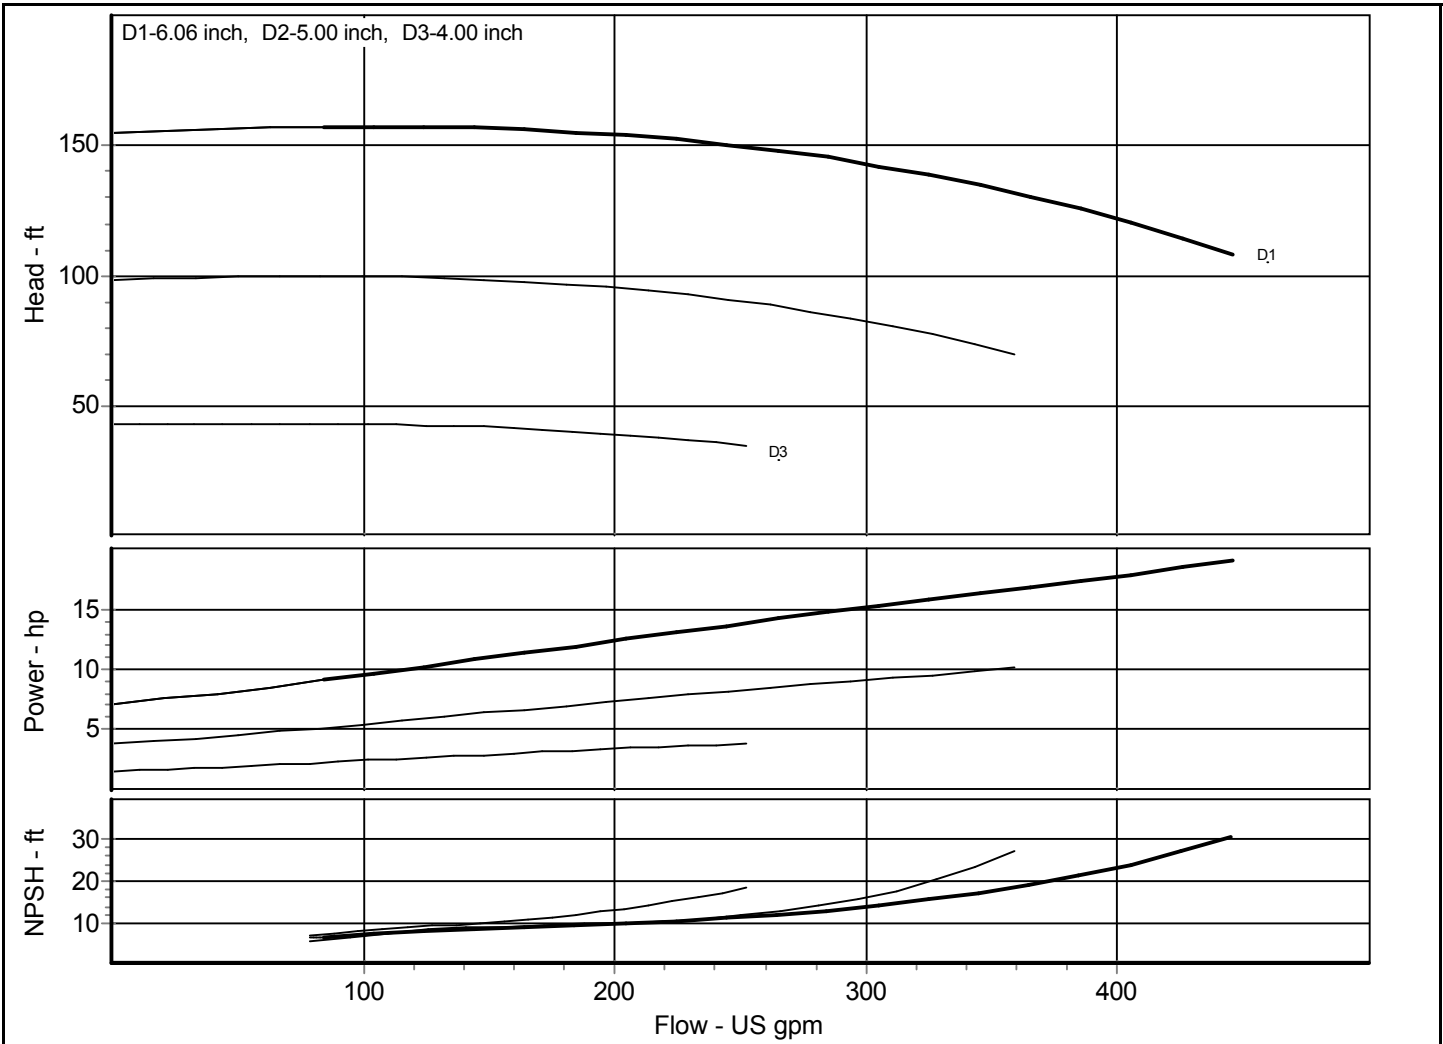

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-6 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **3550** RPM, 60 Hz Electric
 Impeller Dia.: **5.88/4** inch


Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **16.01** hp
 Closed Valve Pressure **168.959** ft

Curve No.: **8196-012**
 Impeller No.
 Item : **1**
 Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

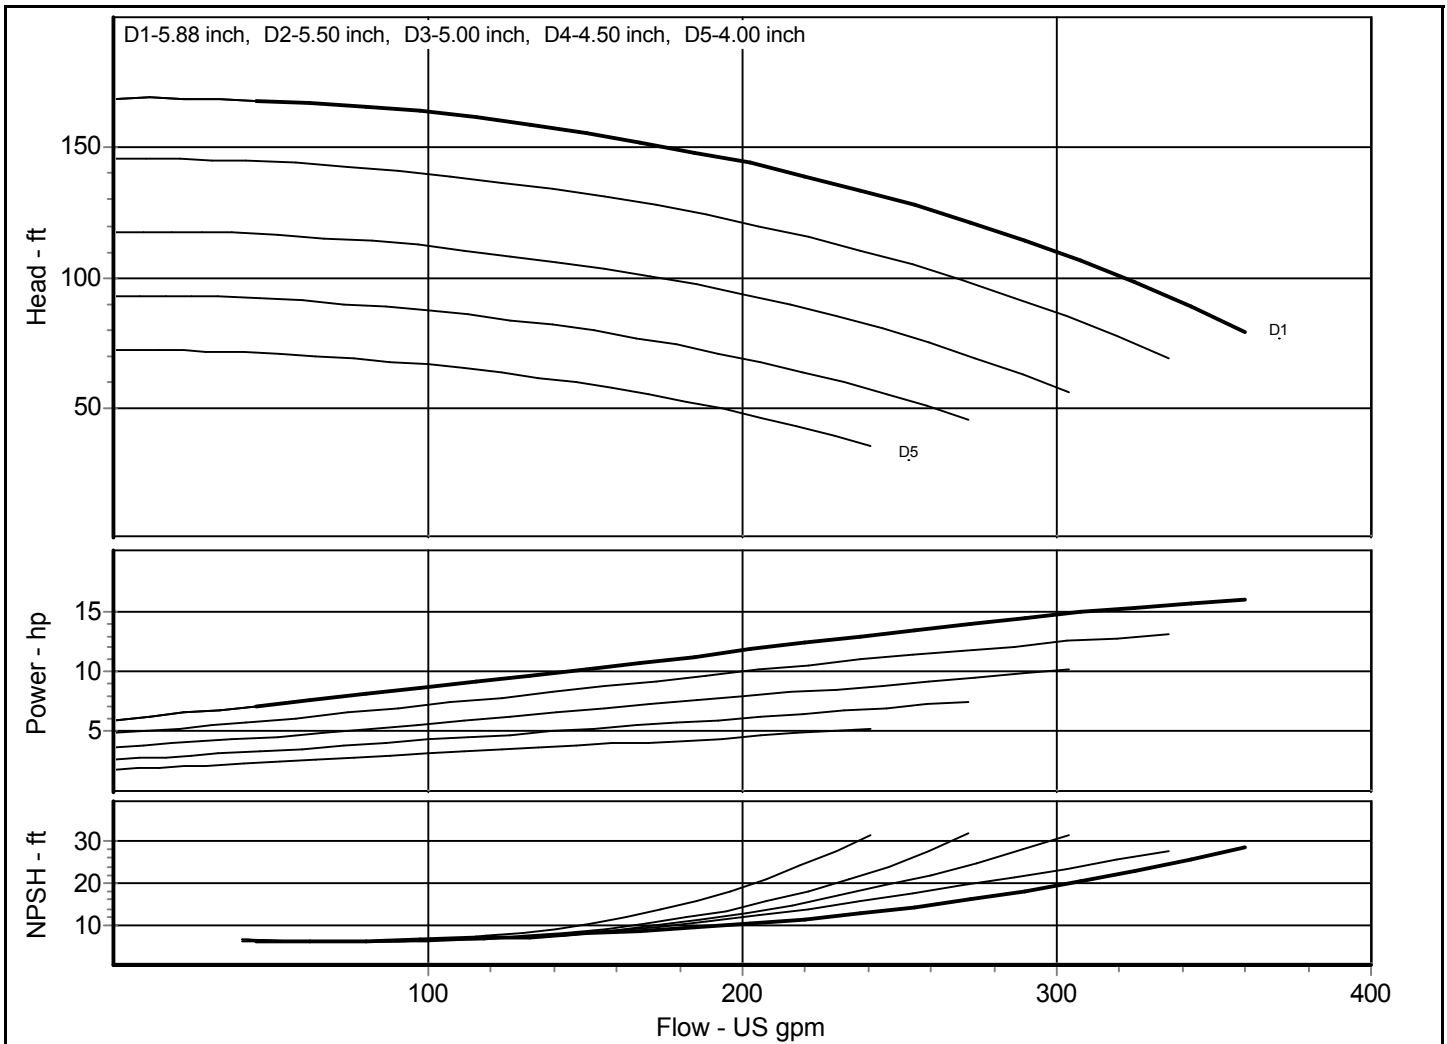

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-8 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **3550** RPM, 60 Hz Electric
 Impeller Dia.: **8.38/5.5** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-013**

Fluid: **Water**

Peak Power: **37.27** hp


Impeller No.

Closed Valve Pressure **316.092** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

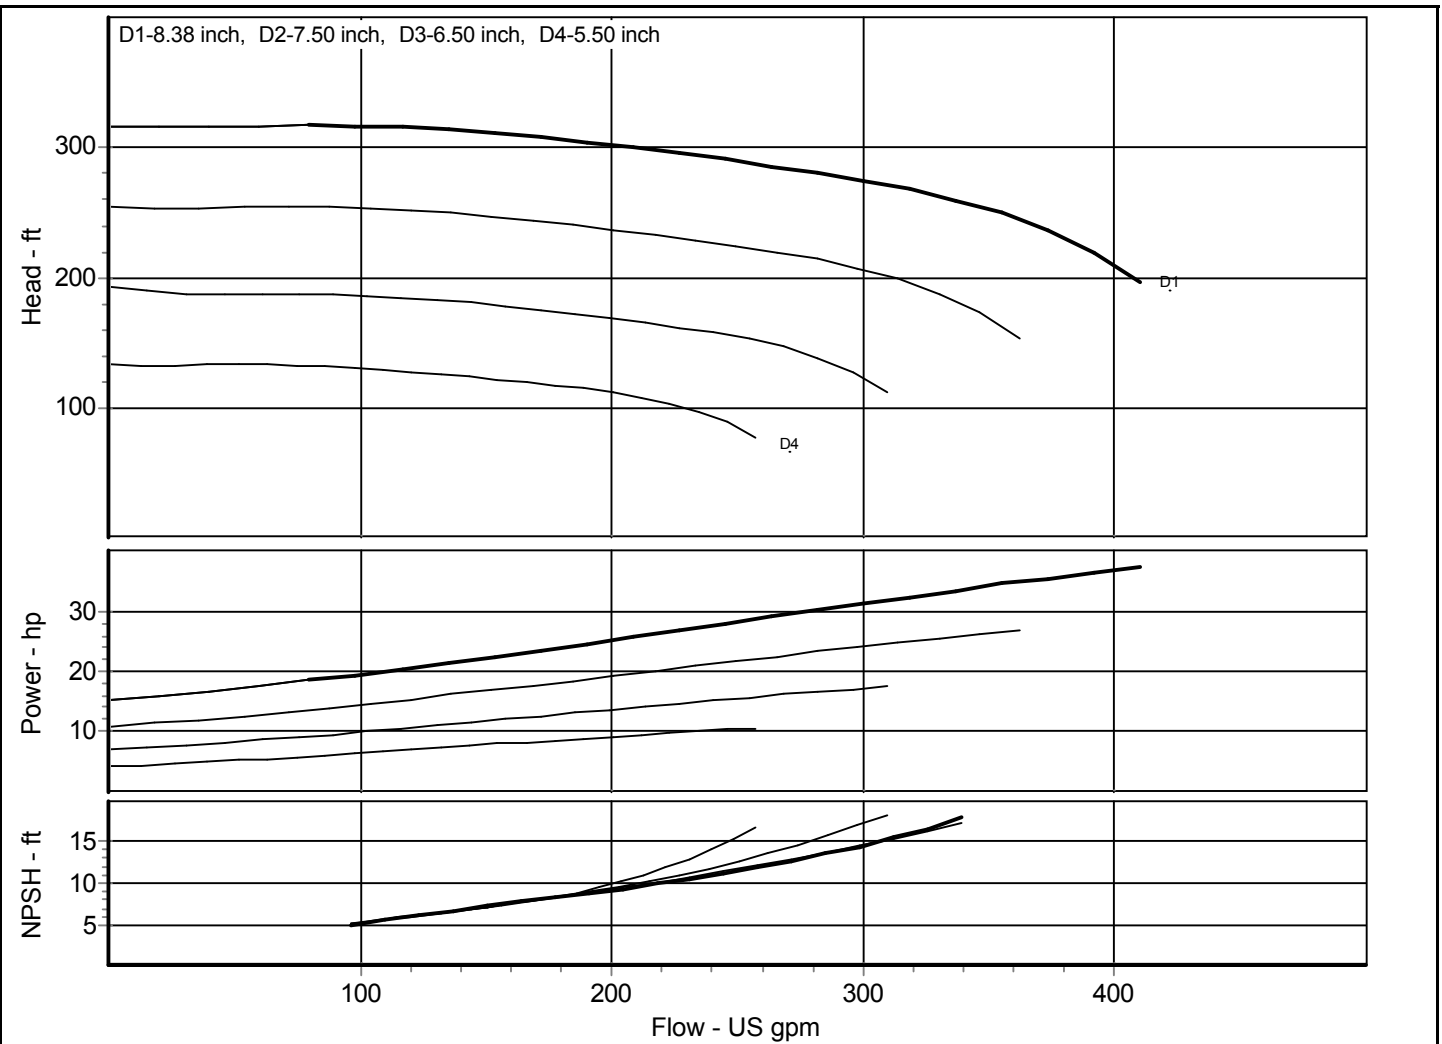

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-10 MTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-023	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 85.39 hp	
Item : 1		Closed Valve Pressure 454.906 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

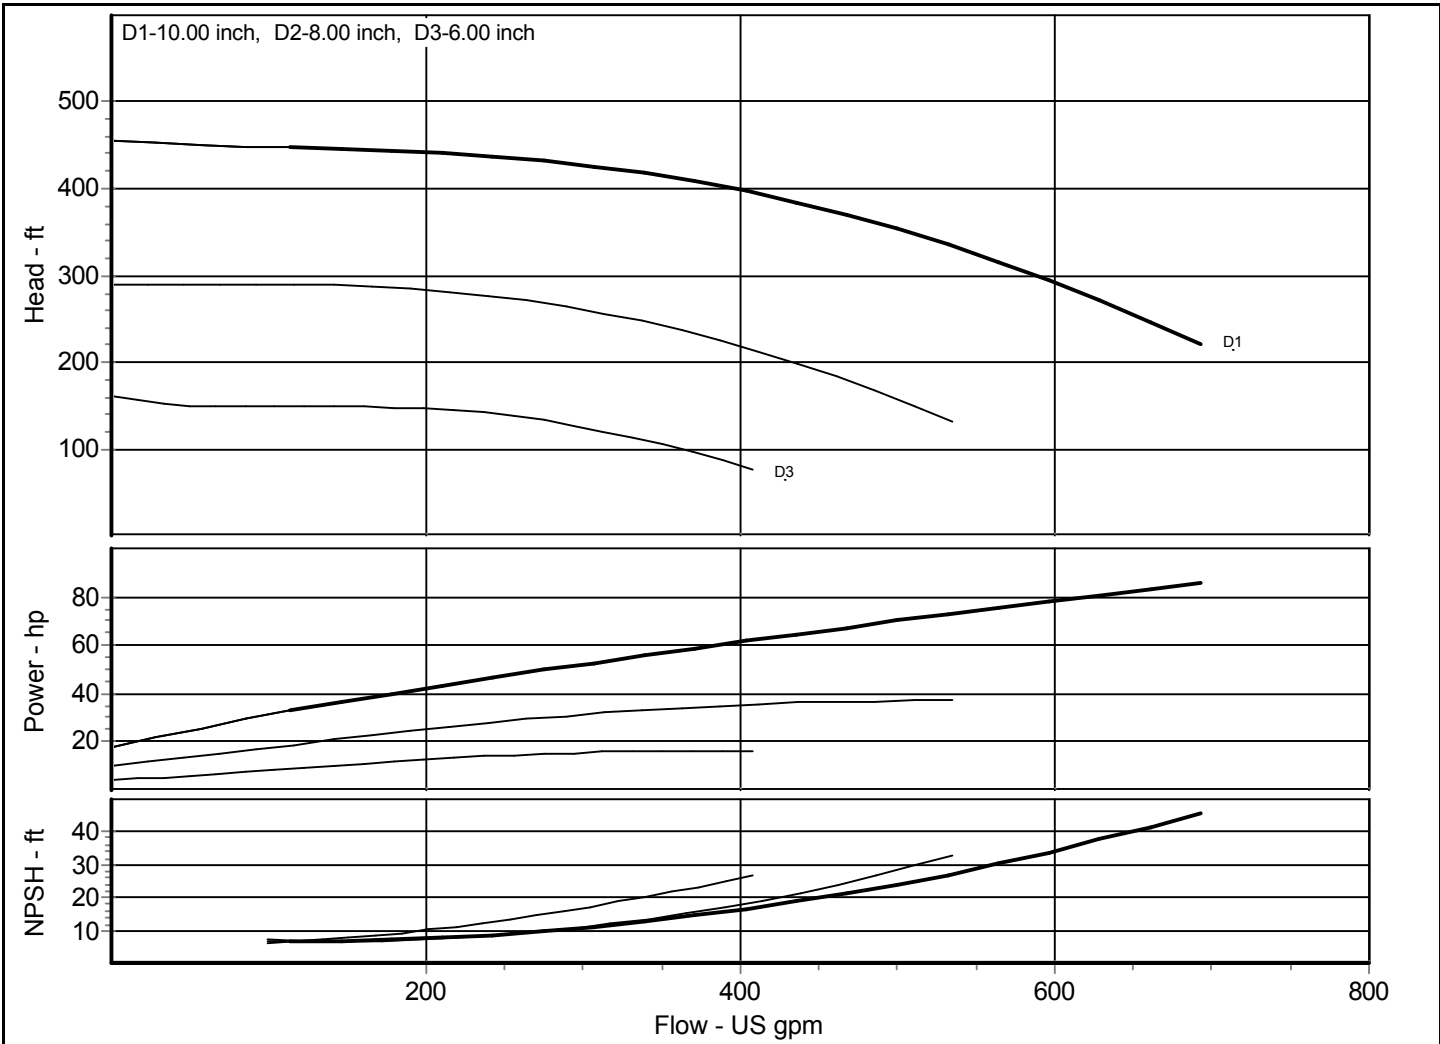

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-10 LTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **3550** RPM, 60 Hz Electric
 Impeller Dia.: **10/6** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-023**

Impeller No.

Fluid: **Water**


Peak Power: **85.39** hp

Item : **1**

Closed Valve Pressure **454.906** ft

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

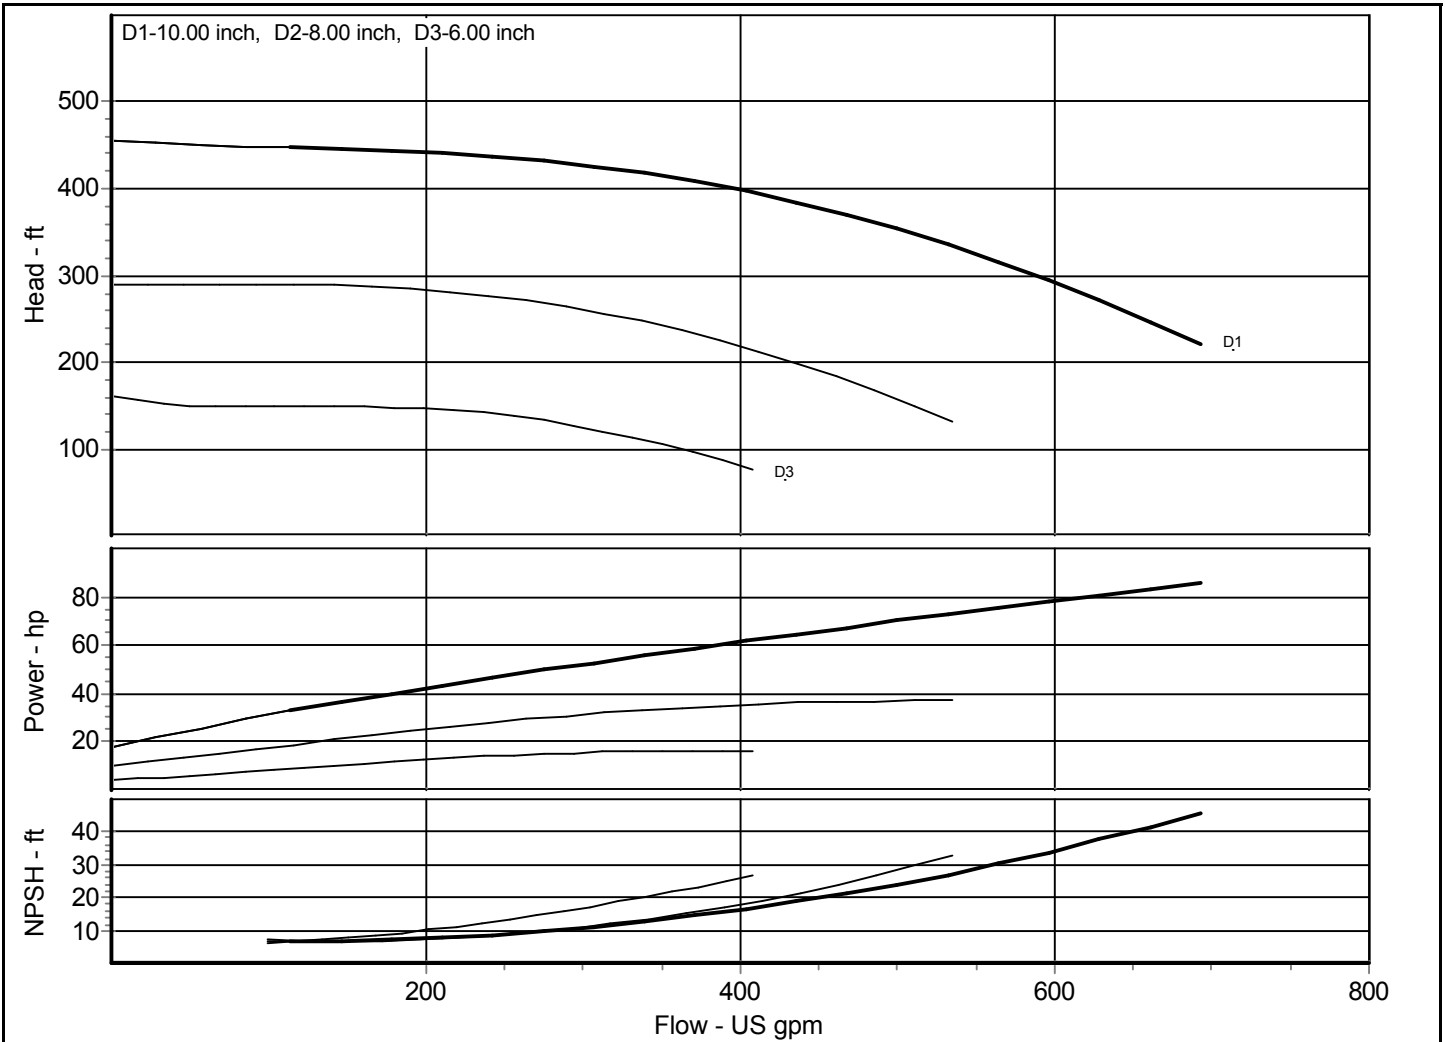

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-13 LTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **3550** RPM, 60 Hz Electric
 Impeller Dia.: **13/9** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-032**

Fluid: **Water**

Peak Power: **183.14** hp


Impeller No.

Closed Valve Pressure **741.259** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

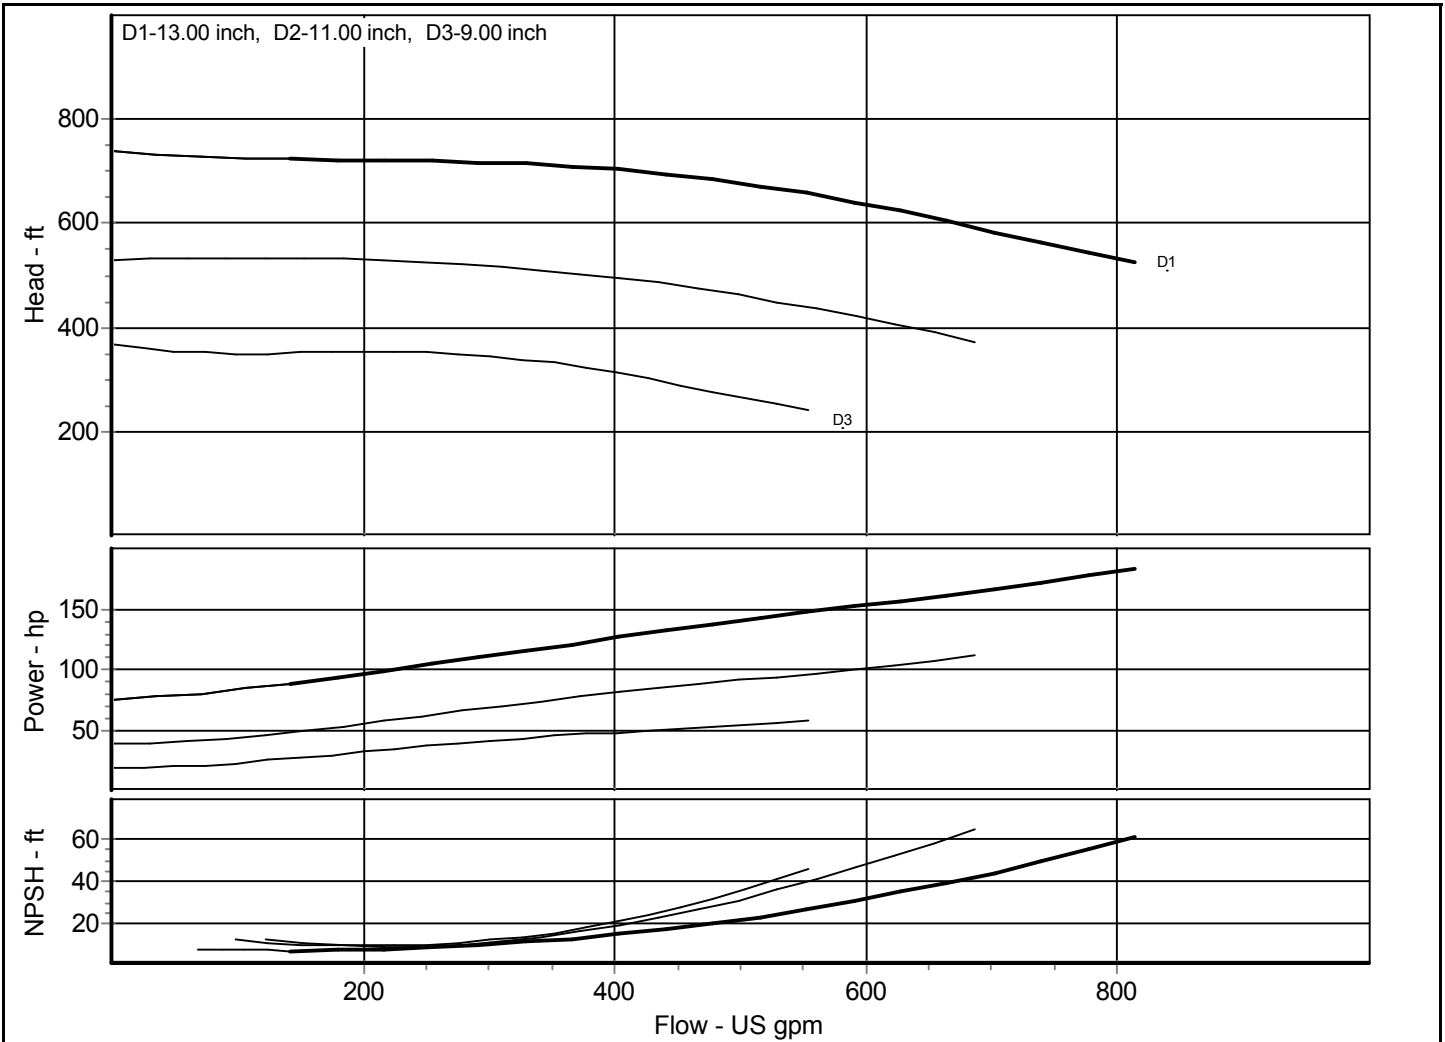

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 3x4-7 MTP 8196	Nom. Speed: 3560 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 7.19/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-053	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	30.03 hp
Item : 1		Closed Valve Pressure	209.315 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

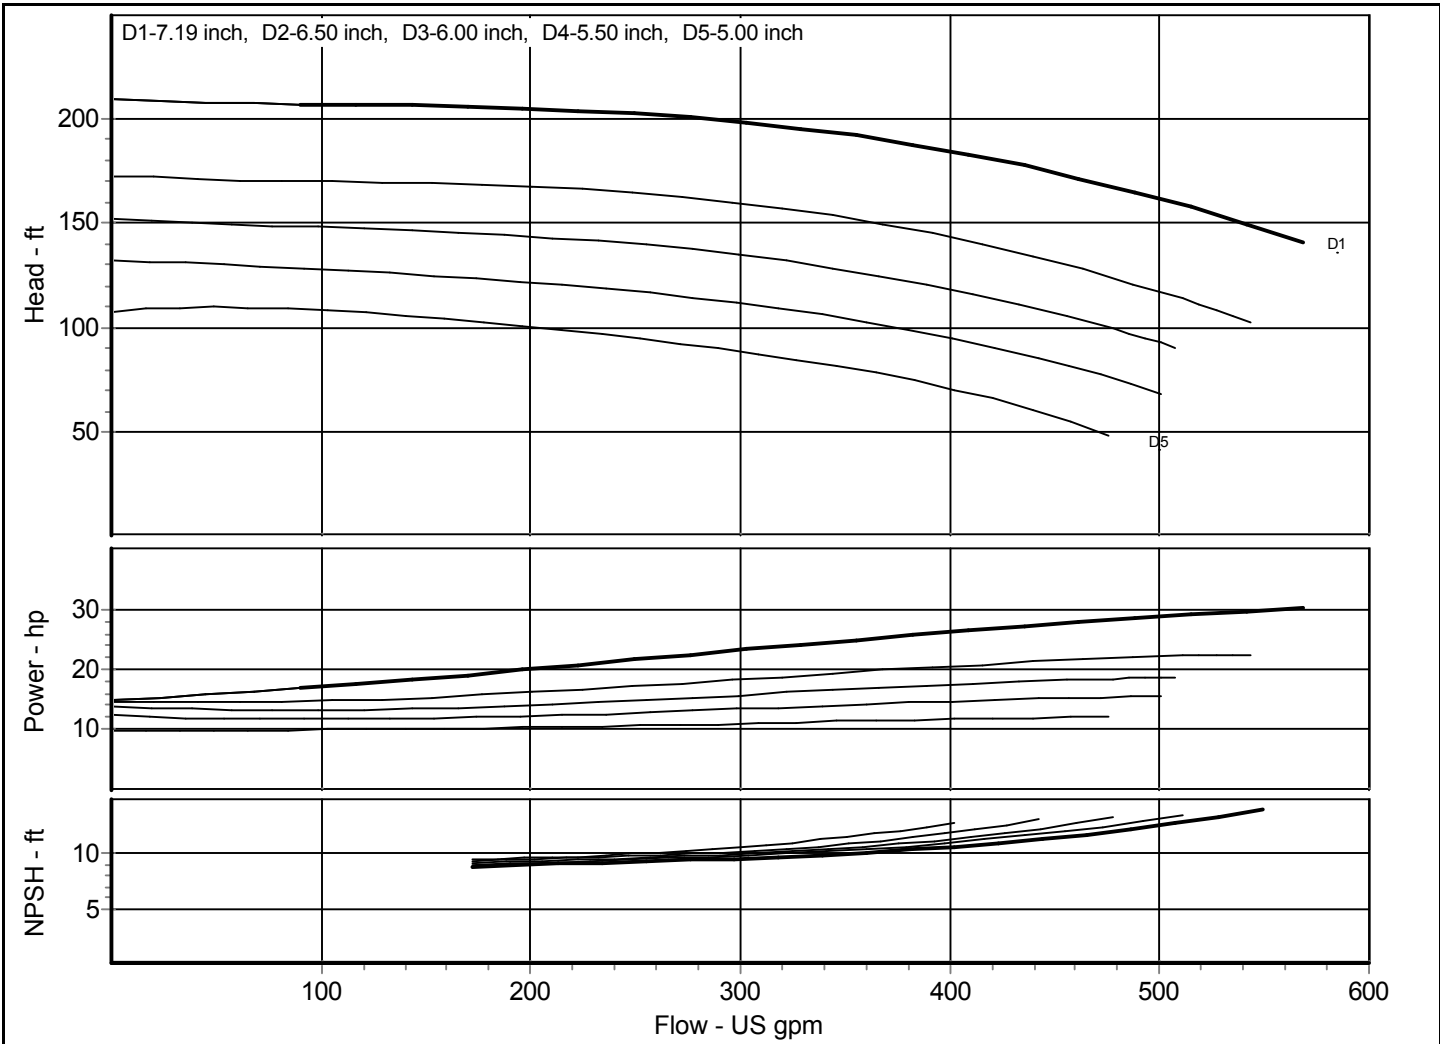

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 3x4-8G MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **3550** RPM, 60 Hz Electric
 Impeller Dia.: **8.38/5.5** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-017**

Impeller No.

Fluid: **Water**


Peak Power: **61.56** hp

Item : **1**

Closed Valve Pressure **308.713** ft

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

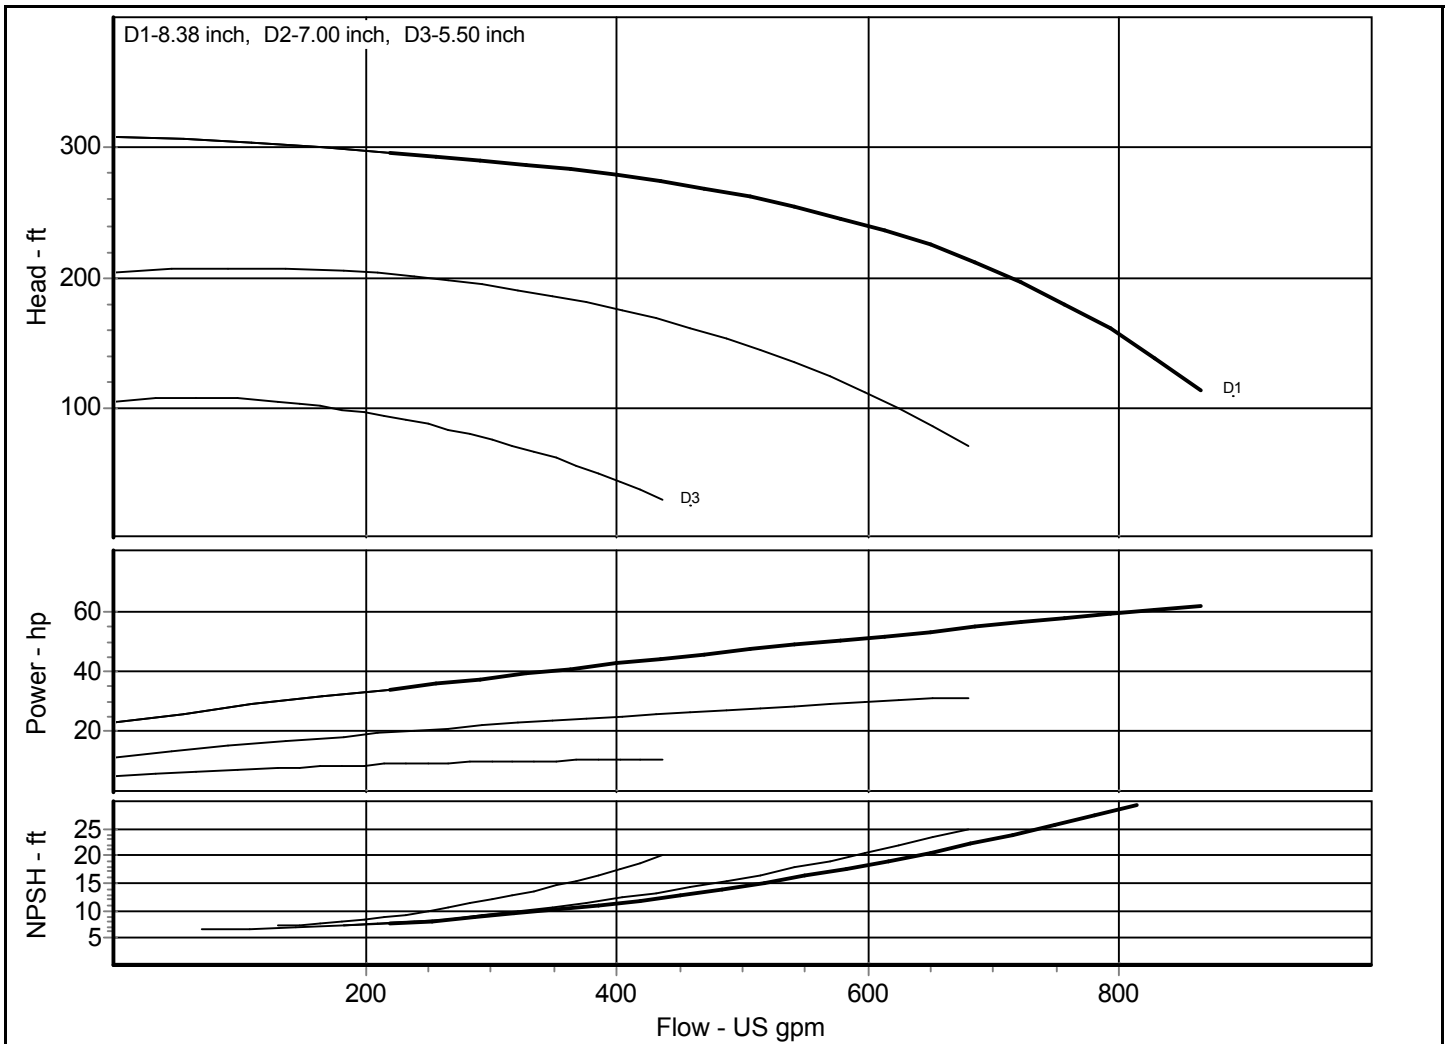

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 3x4-10 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **3550 RPM, 60 Hz Electric**
 Impeller Dia.: **10/6 inch**

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68 °F**
 Viscosity: **1.009 cP**
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-025**

Fluid: **Water**

Peak Power: **100.3 hp**


Impeller No.

Closed Valve Pressure **446.005 ft**

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

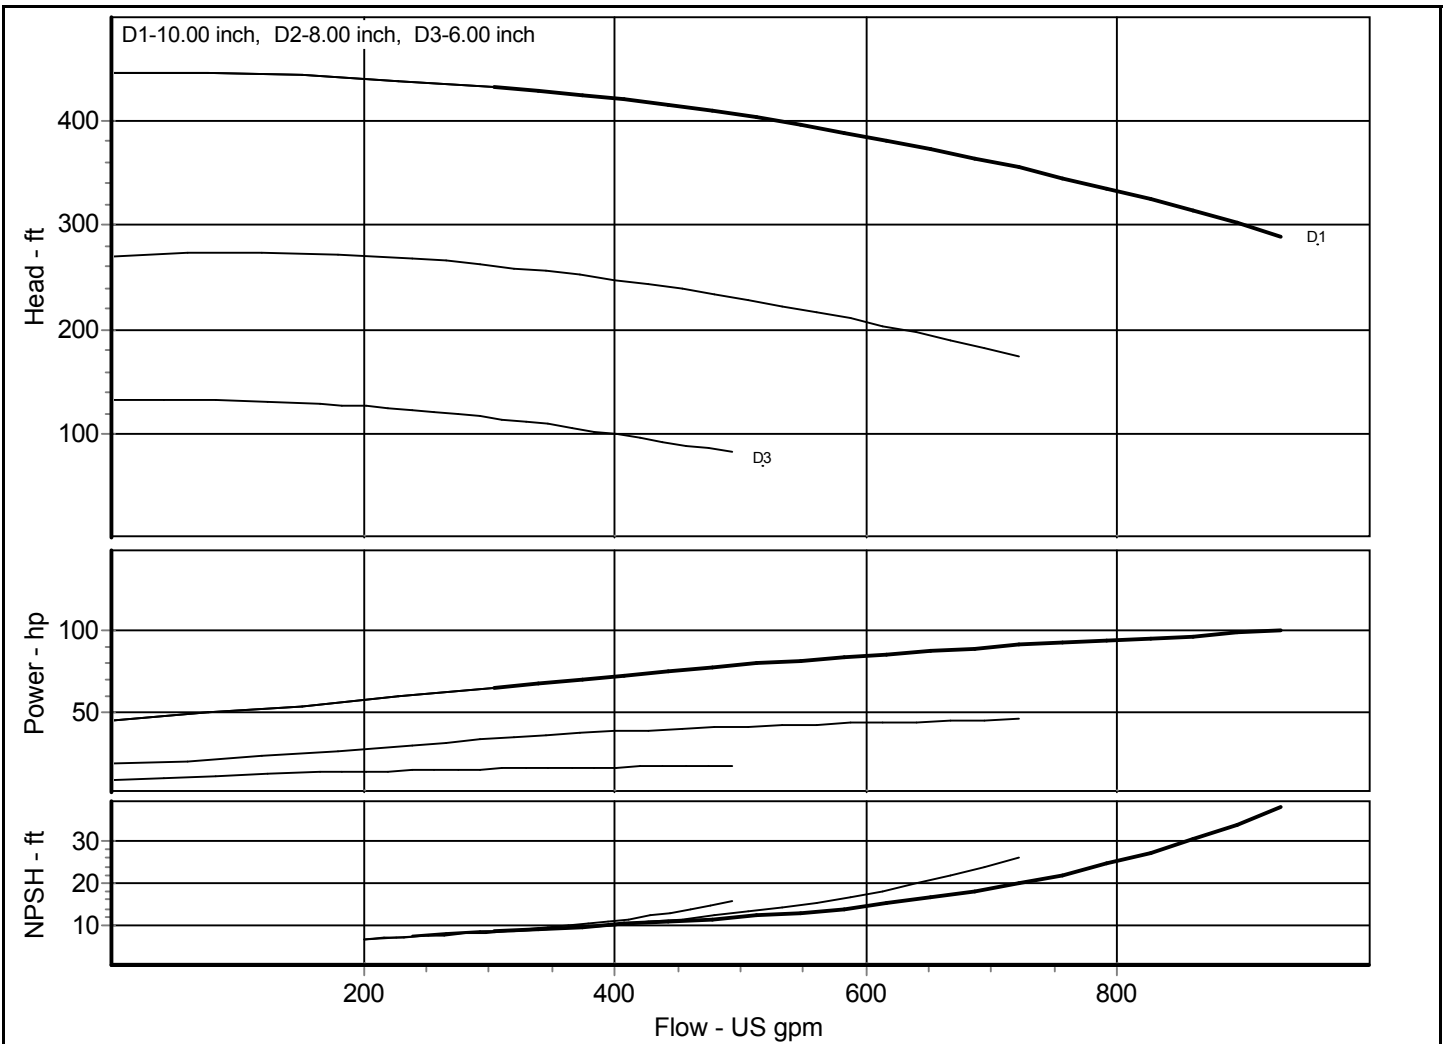

Comments:

Performance curve represents typical performance.




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 3x4-10 LTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-025	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	100.3 hp
Item : 1		Closed Valve Pressure	446.005 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

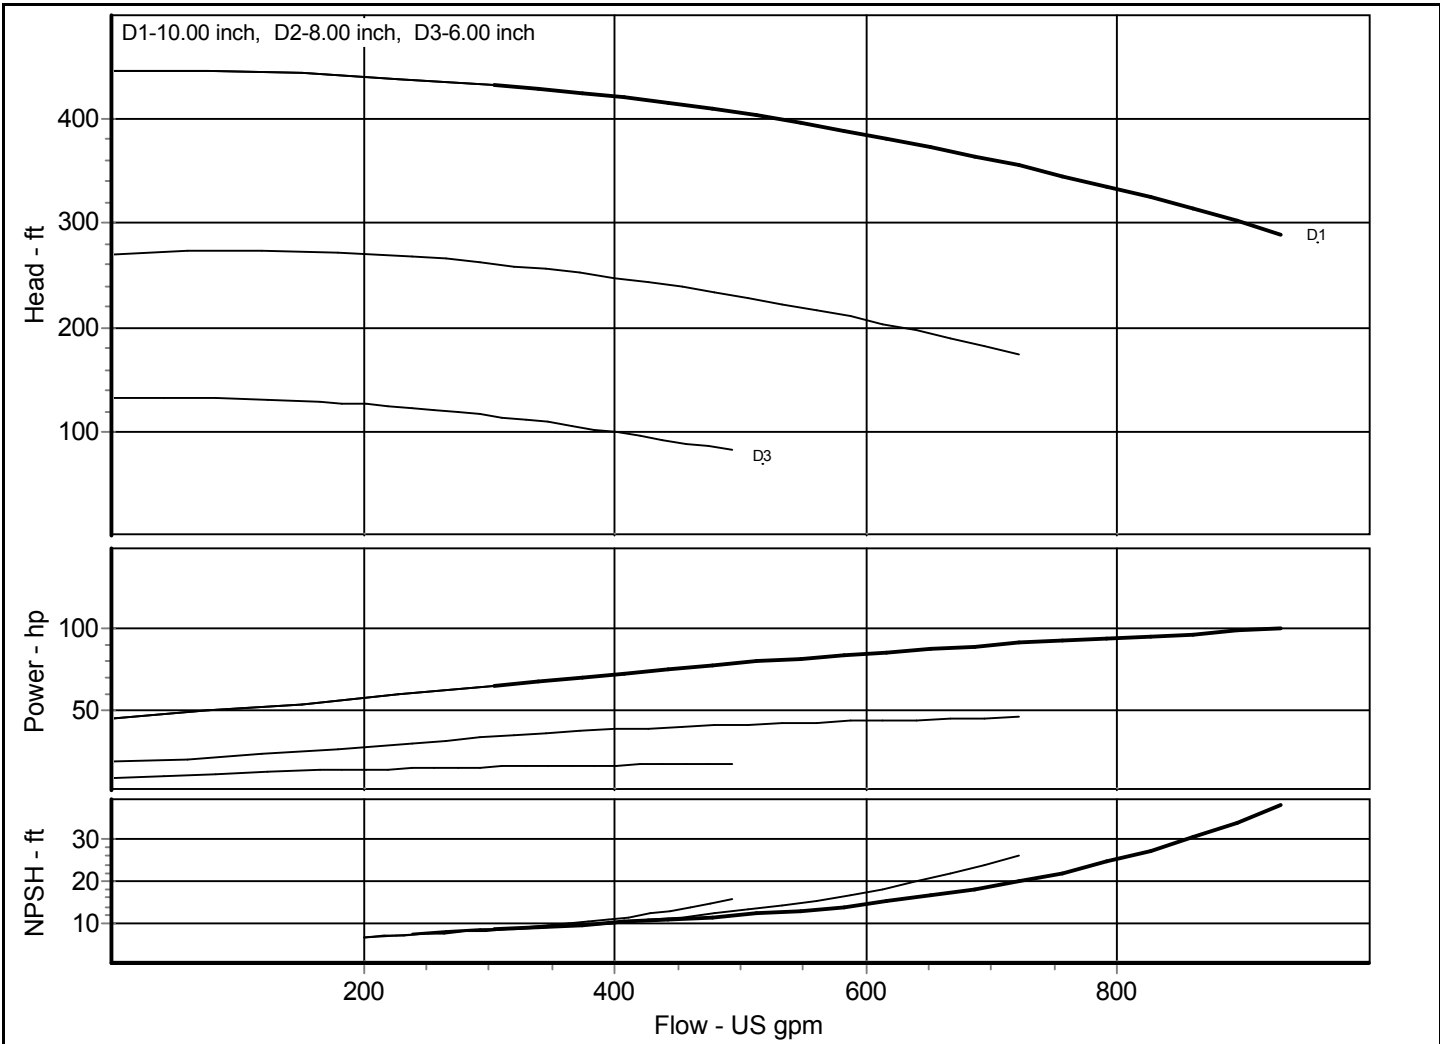

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : _____ **Contact :** _____
Quote No. : _____ **Page No. :** _____ **Phone :** _____ **Fax :** _____
 _____ **Date :** _____

Pump Model:	Peerless - 3x4-13 5V MTP 8196	Nom. Speed:	3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type:	8196 - ANSI Standard End Suction	Impeller Dia.:	10/7 inch	Duty Head :	ft
		Temperature:	68 °F	Efficiency :	%
		Viscosity:	1.009 cP	Power Required :	hp
Curve No.:	8196-035	Sp. Gravity:	1.000	NPSH Required :	ft
Impeller No.		Fluid:	Water	Peak Power:	134.1 hp
Item :	1			Closed Valve Pressure	422.993 ft
Your Ref.:		Tolerance :	Hyd Inst-Peerless Std		

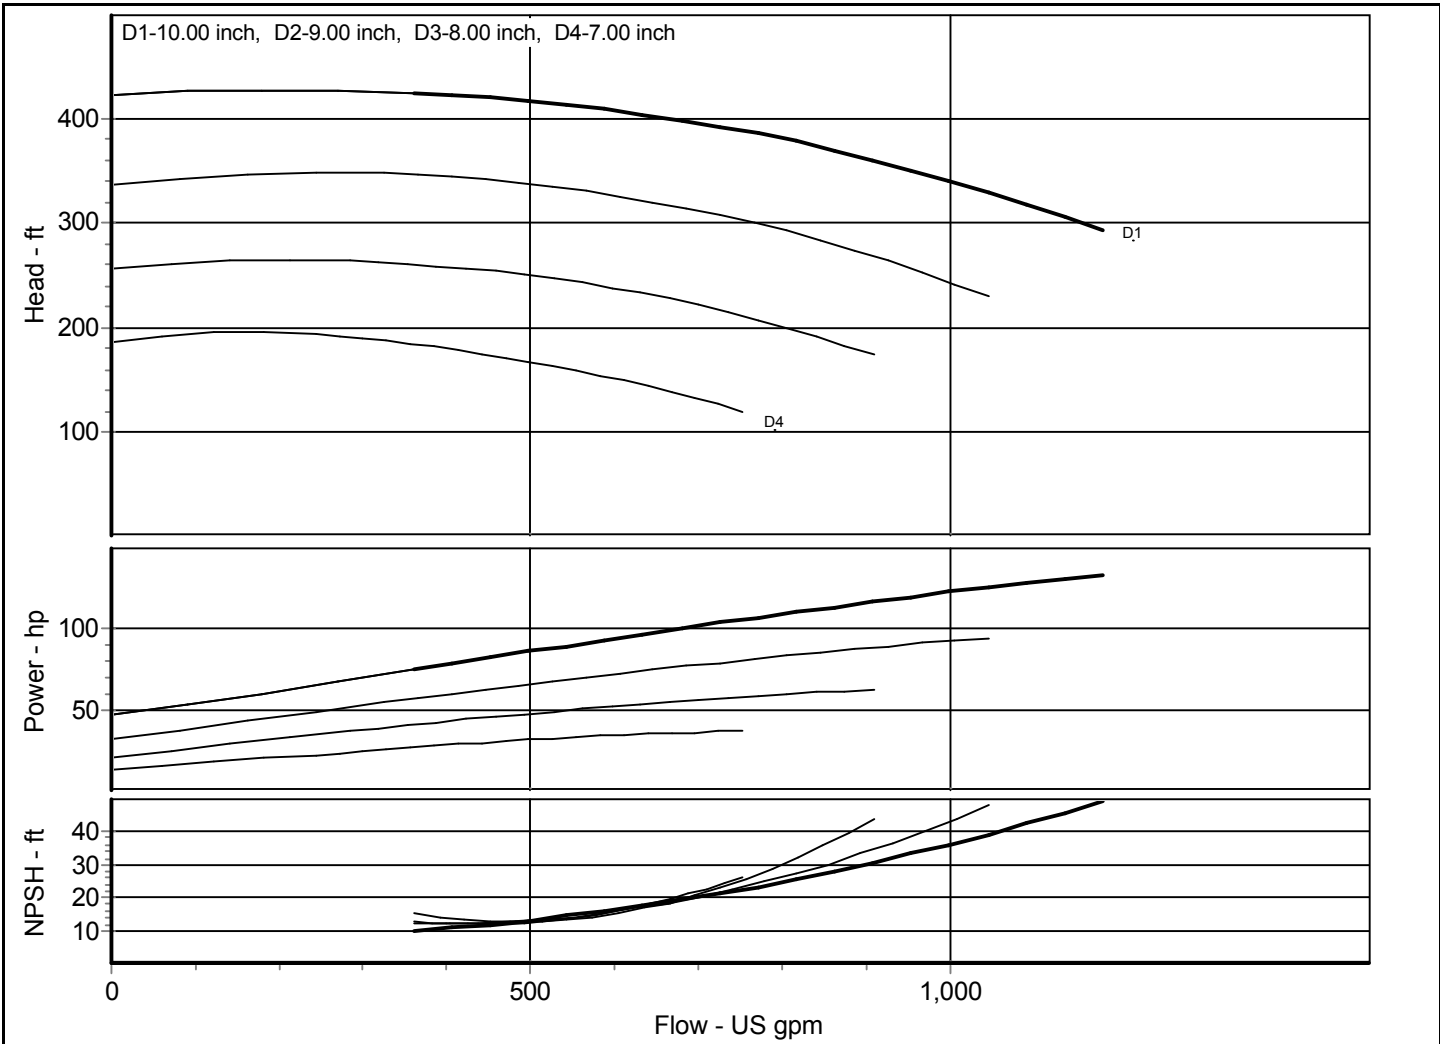

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : _____ **Contact :** _____
Quote No. : _____ **Page No. :** _____ **Phone :** _____ **Fax :** _____
 _____ **Date :** _____

Pump Model: Peerless - 3x4-13 5V LTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/7 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-035	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	134.1 hp
Item : 1		Closed Valve Pressure	422.993 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

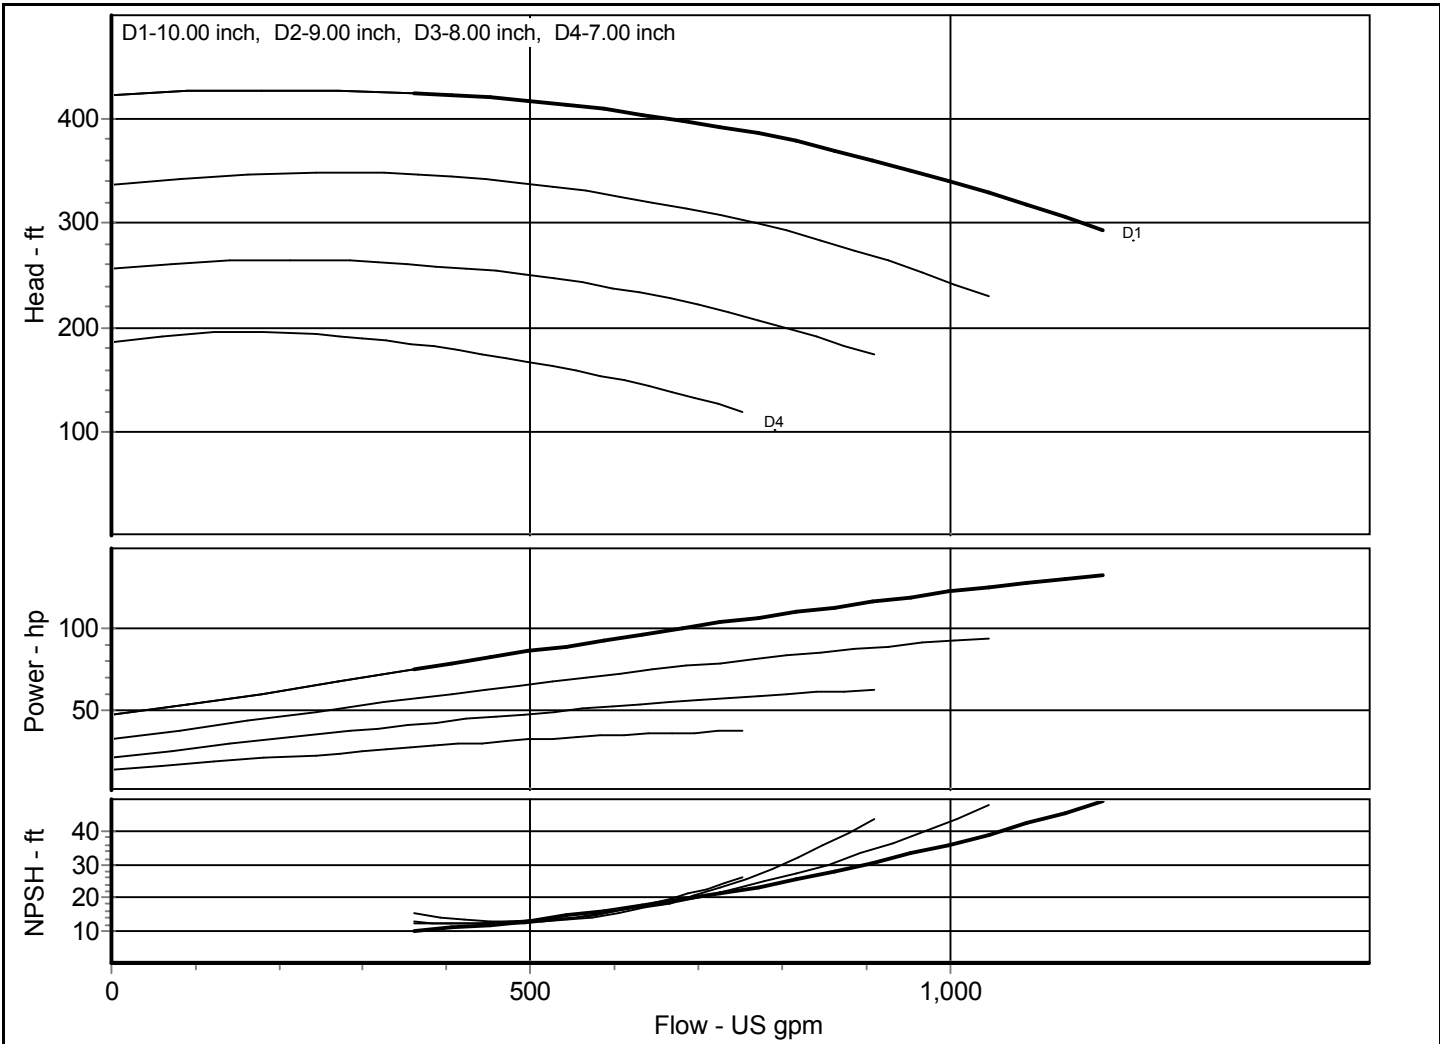

Comments:
 Performance curve represents typical performance.




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 3x4-13 6V MTP 8196	Nom. Speed: 3550 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/7 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-038	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	156 hp
Item : 1		Closed Valve Pressure	456.997 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

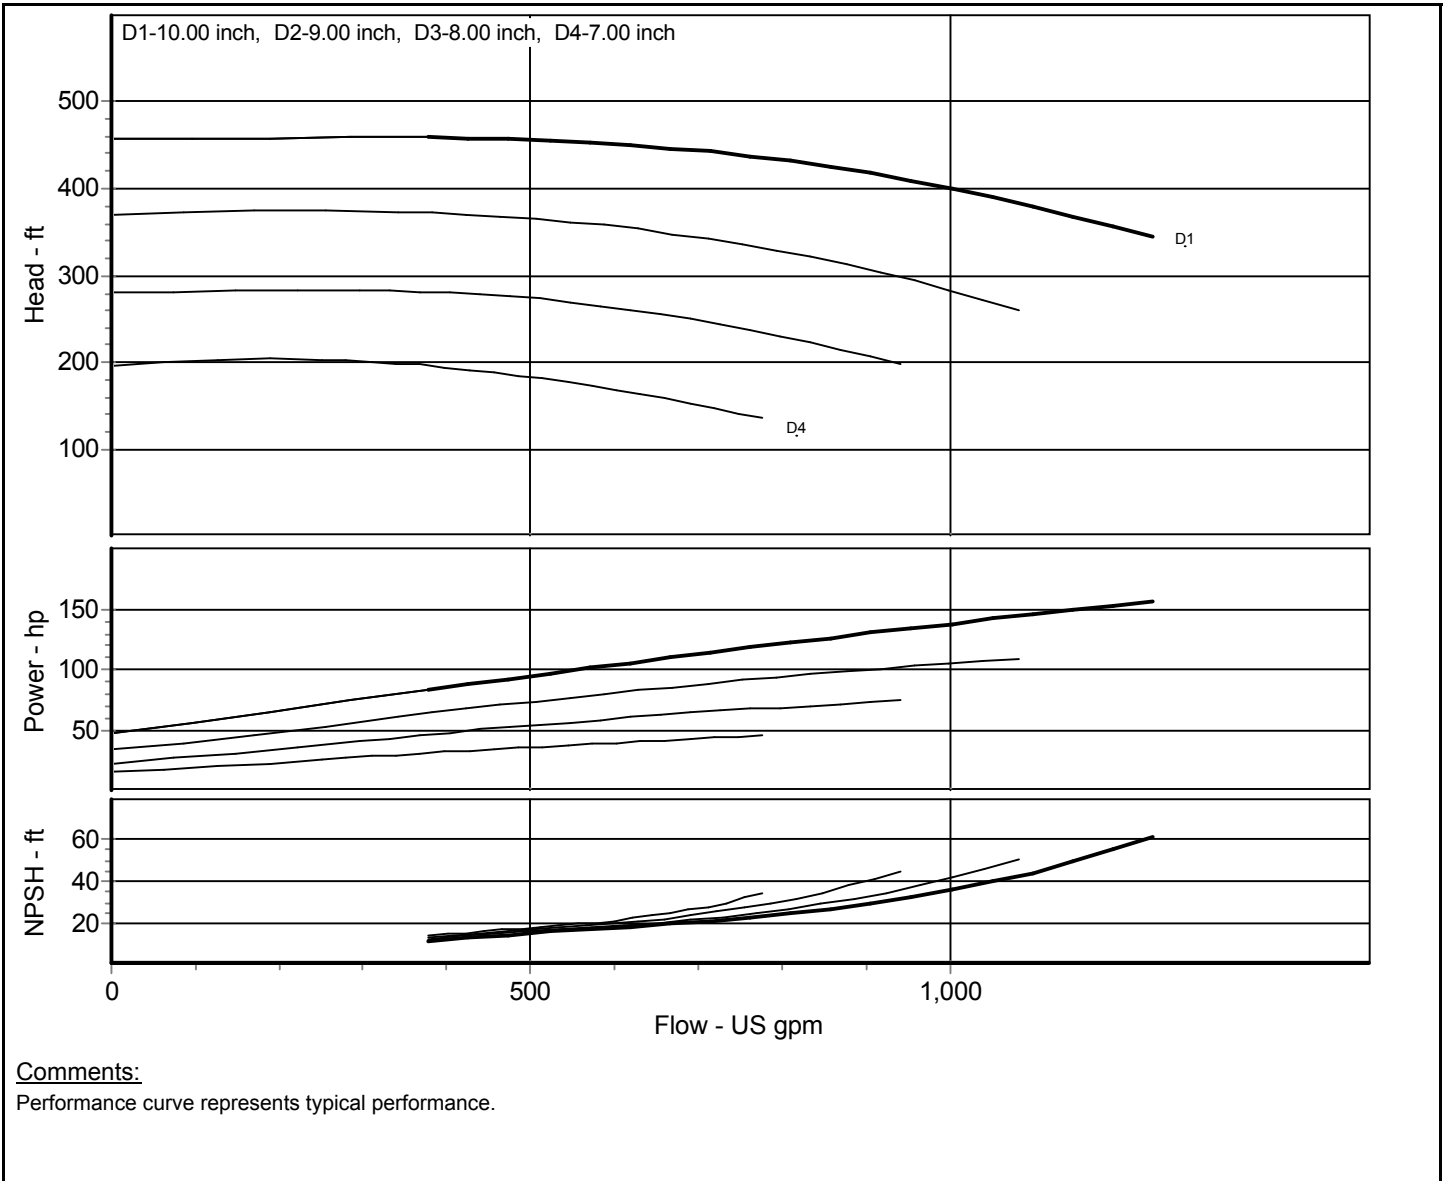




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-13 6V LTP 8196** Nom. Speed: **3550** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **10/7** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **156** hp
 Fluid: **Water** Closed Valve Pressure **456.997** ft
 Curve No.: **8196-038**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

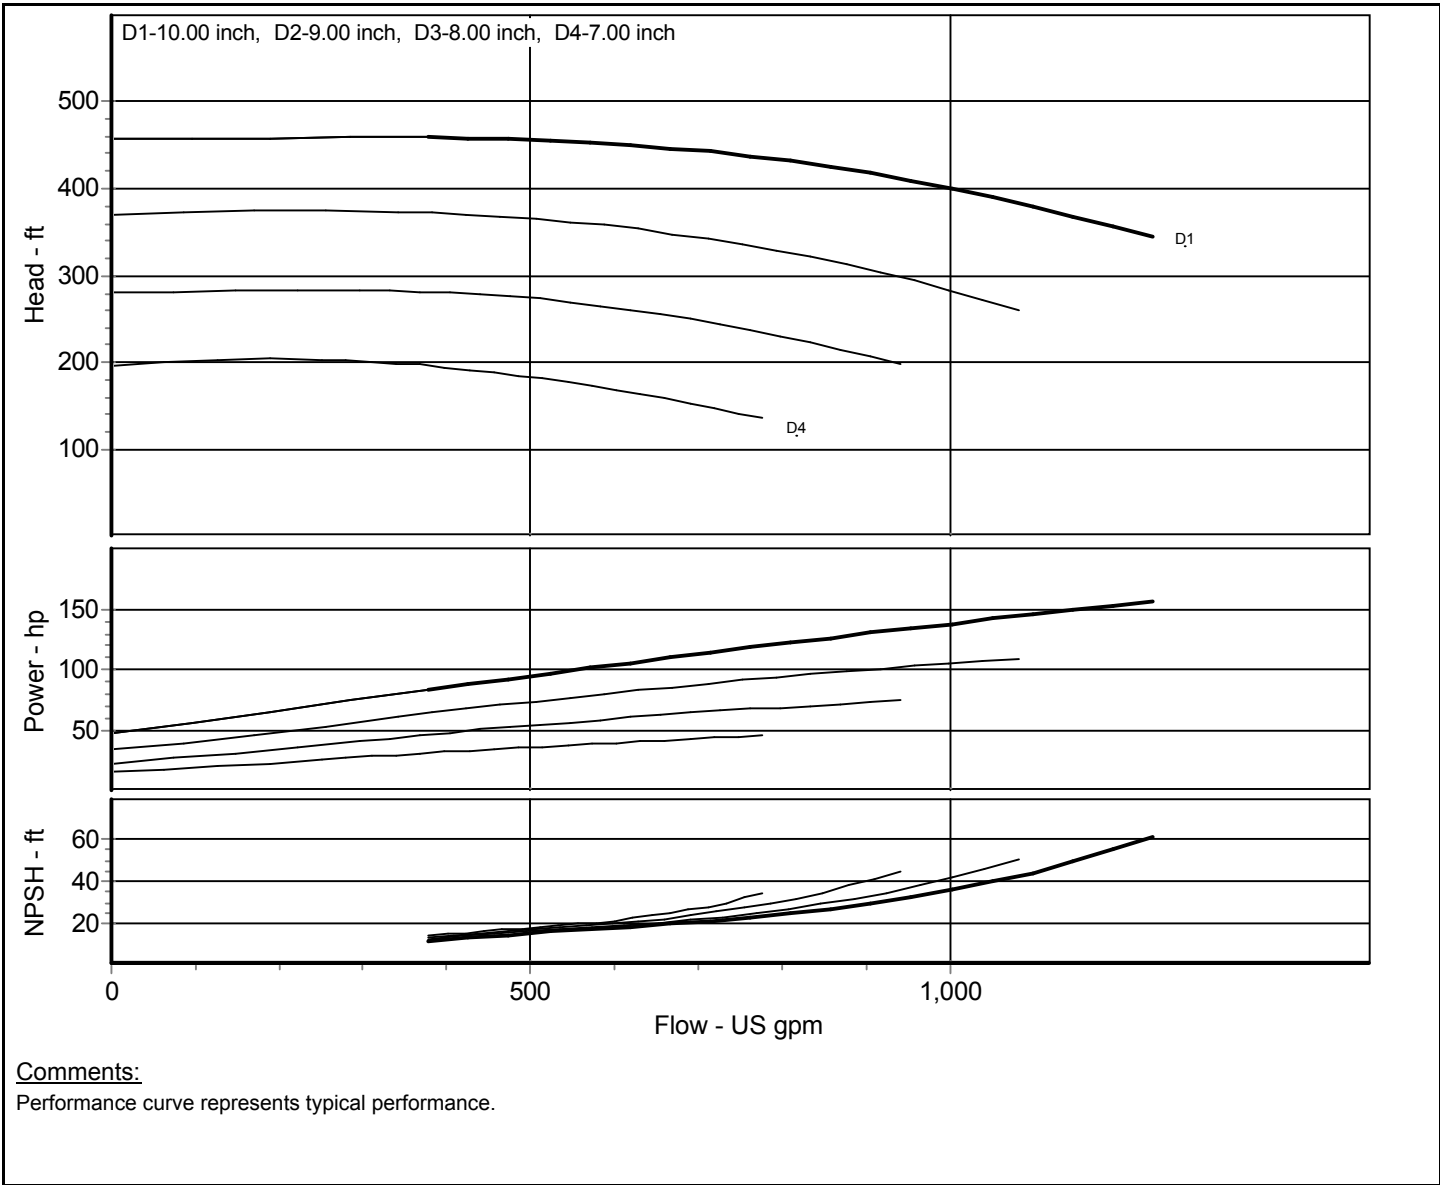

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 1x1.5-6 STP 8196LF** Nom. Speed: **1750** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **6.06/4** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **0.69** hp
 Fluid: **Water** Closed Valve Pressure **38.317** ft
 Curve No.: **8196LF-002**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

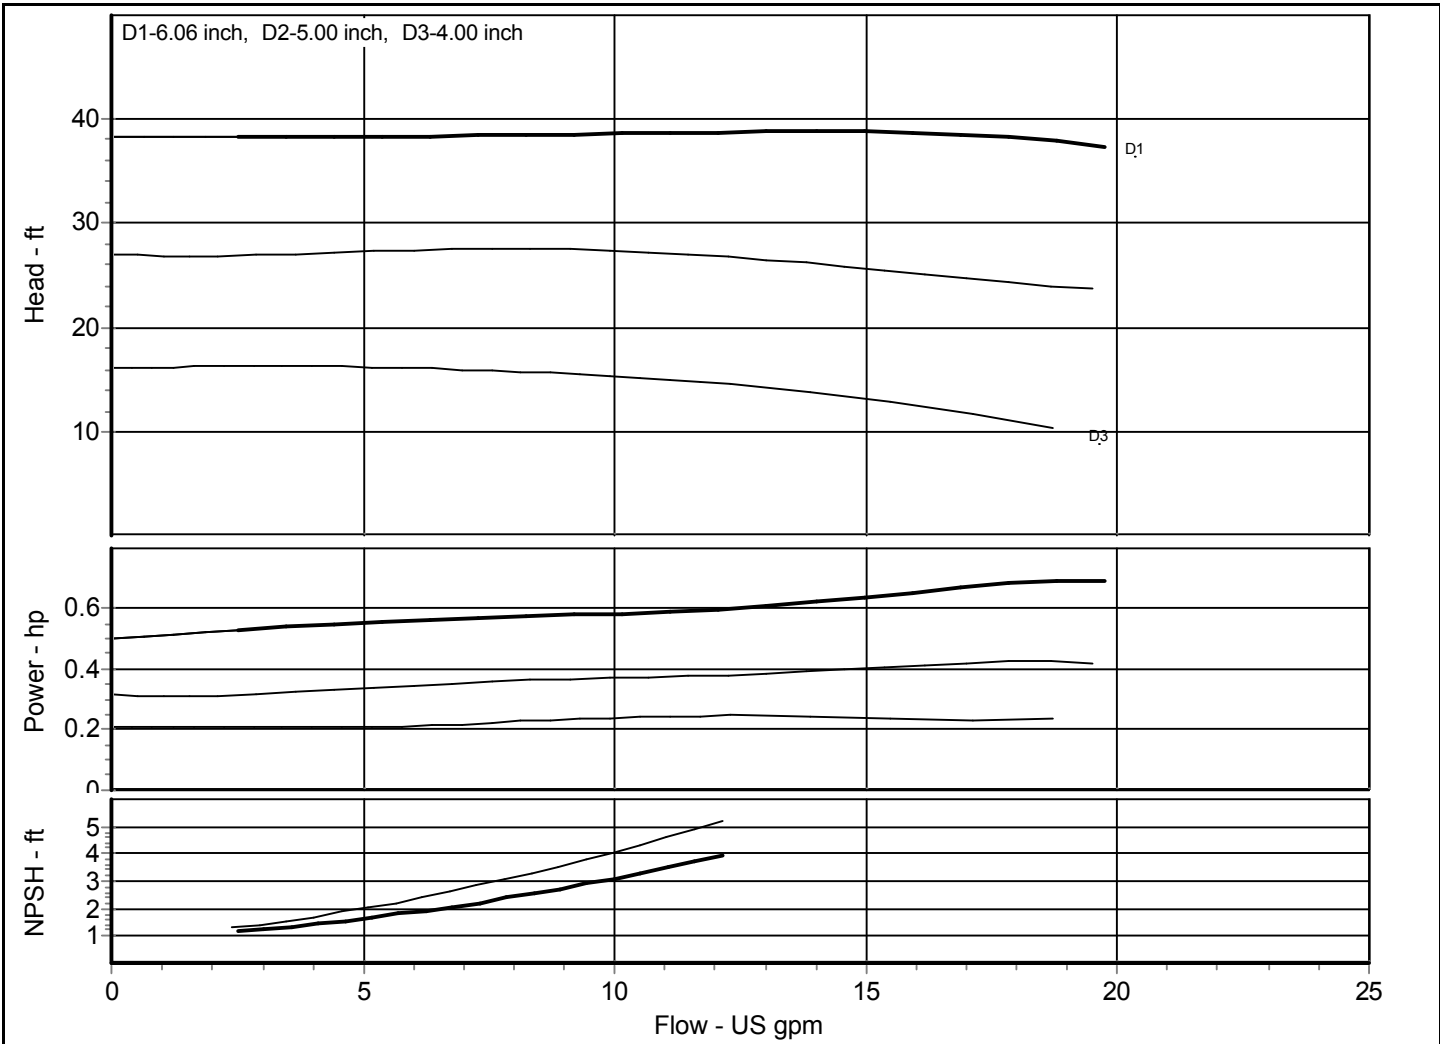

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 1x1.5- 6 STP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750** RPM, 60 Hz Electric
 Impeller Dia.: **6.06/3.5** inch


Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **0.98** hp
 Closed Valve Pressure **37.628** ft

Curve No.: **8196-001**
 Impeller No.
 Item : **1**
 Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

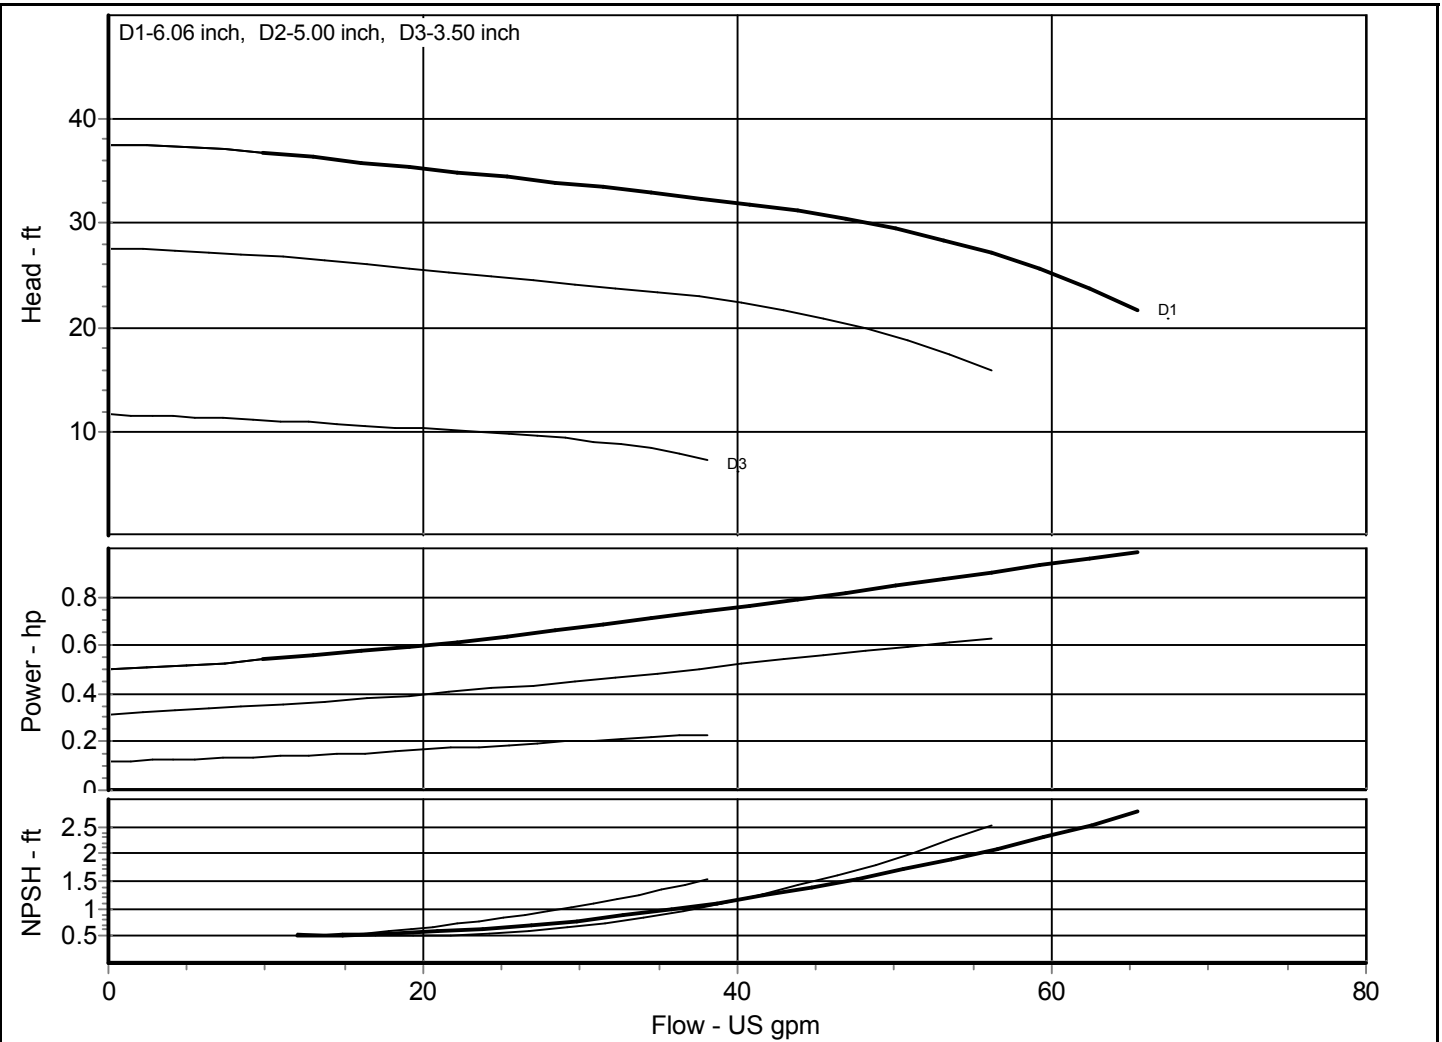

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 1x1.5-8 STP 8196LF	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-004	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	1.56 hp
Item : 1		Closed Valve Pressure	63.018 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

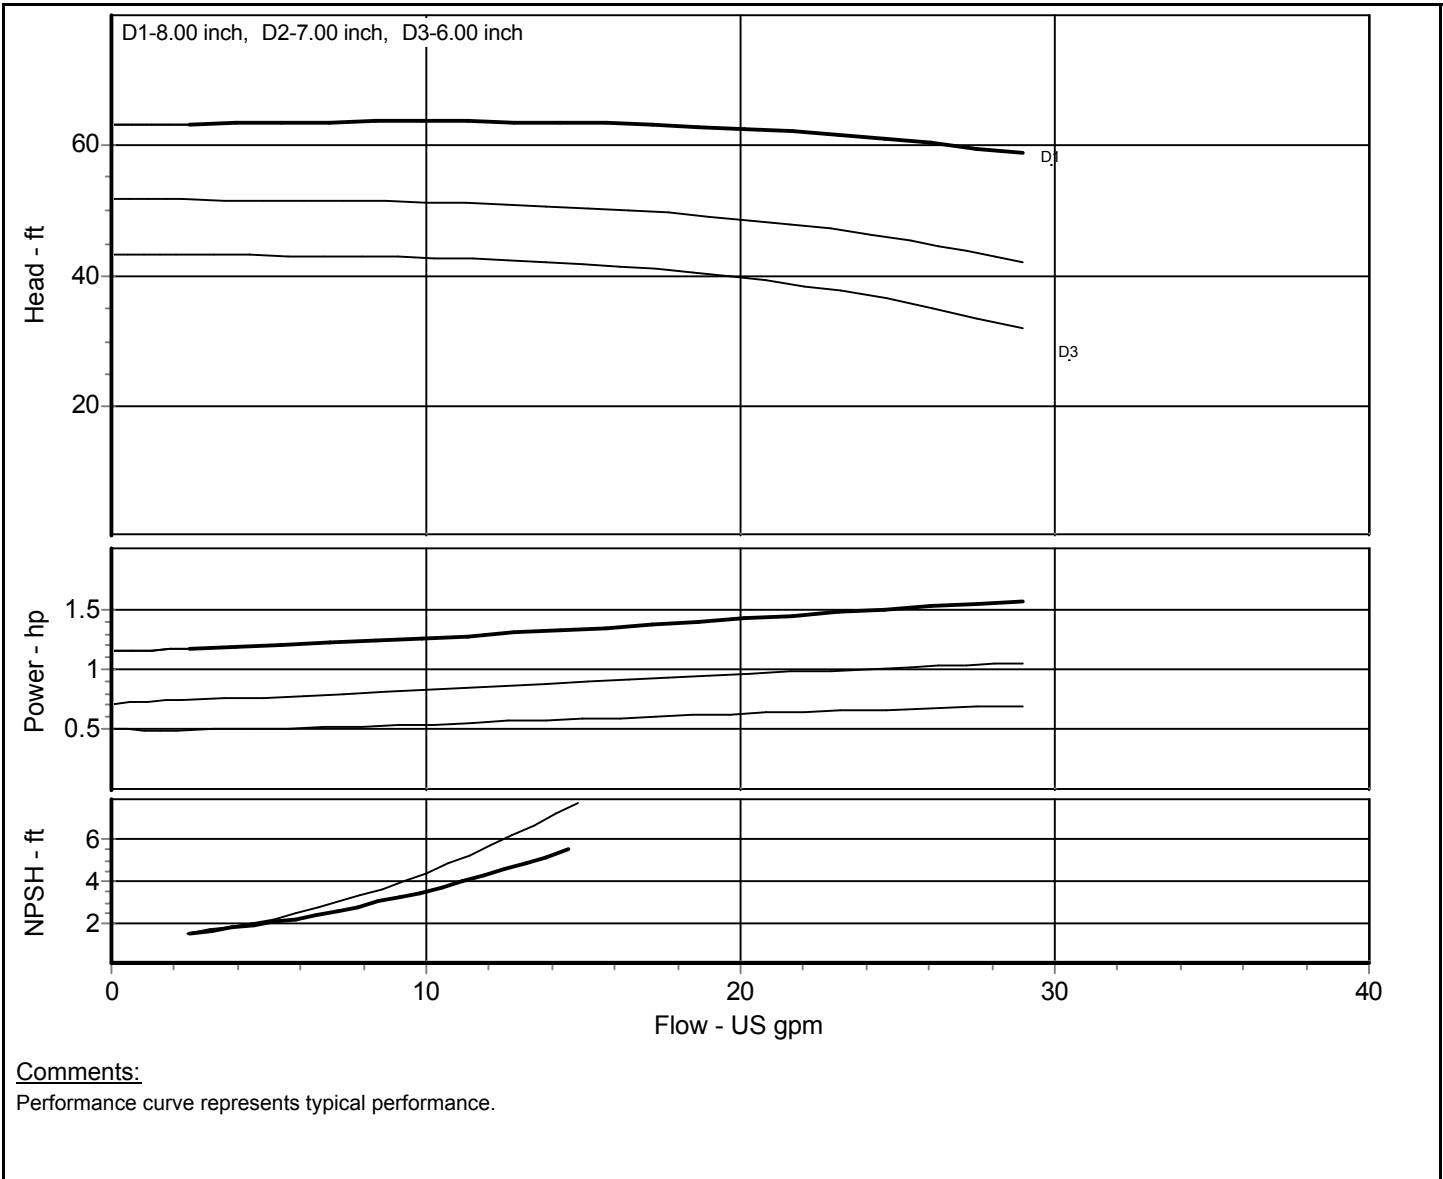




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : _____ **Contact :** _____
Quote No. : _____ **Page No. :** _____ **Phone :** _____ **Fax :** _____
Date : _____

Pump Model: Peerless - 1x1.5-8 STP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-005	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	2.41 hp
Item : 1		Closed Valve Pressure	73.206 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

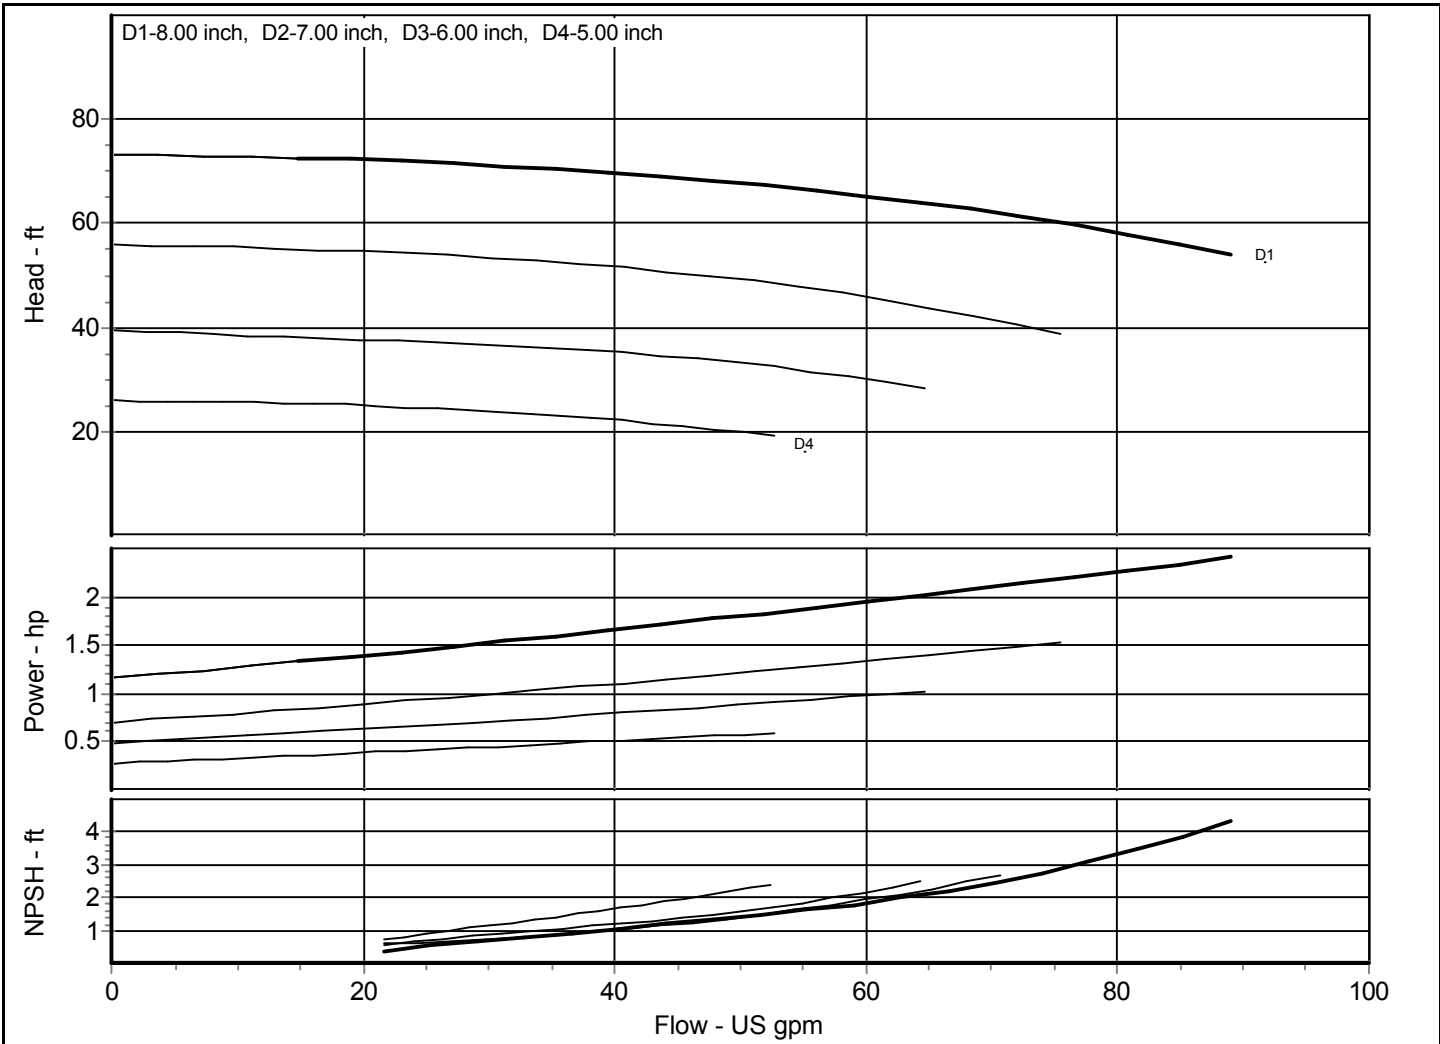

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.




Customer :

Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Project :		Contact :	
Quote No. :	Page No. :	Phone :	Fax :
		Date :	

Pump Model: Peerless - 1x2-10 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-020	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	5.47 hp
Item : 1		Closed Valve Pressure	119.075 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

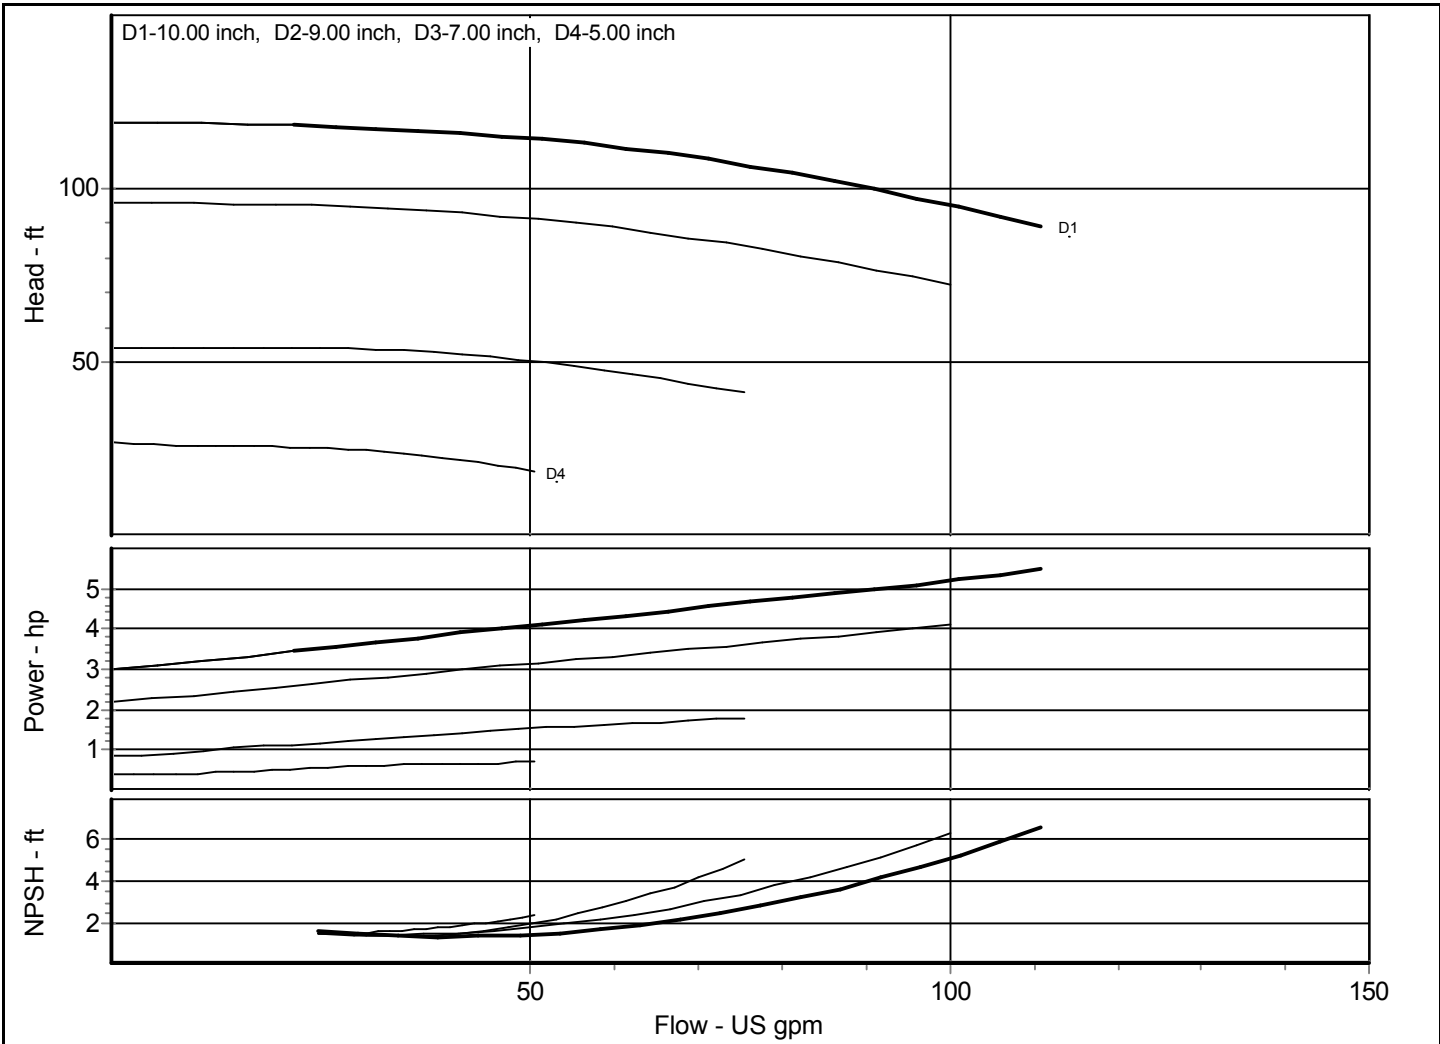

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1x2-10 LTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-020	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	5.47 hp
Item : 1		Closed Valve Pressure	119.075 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

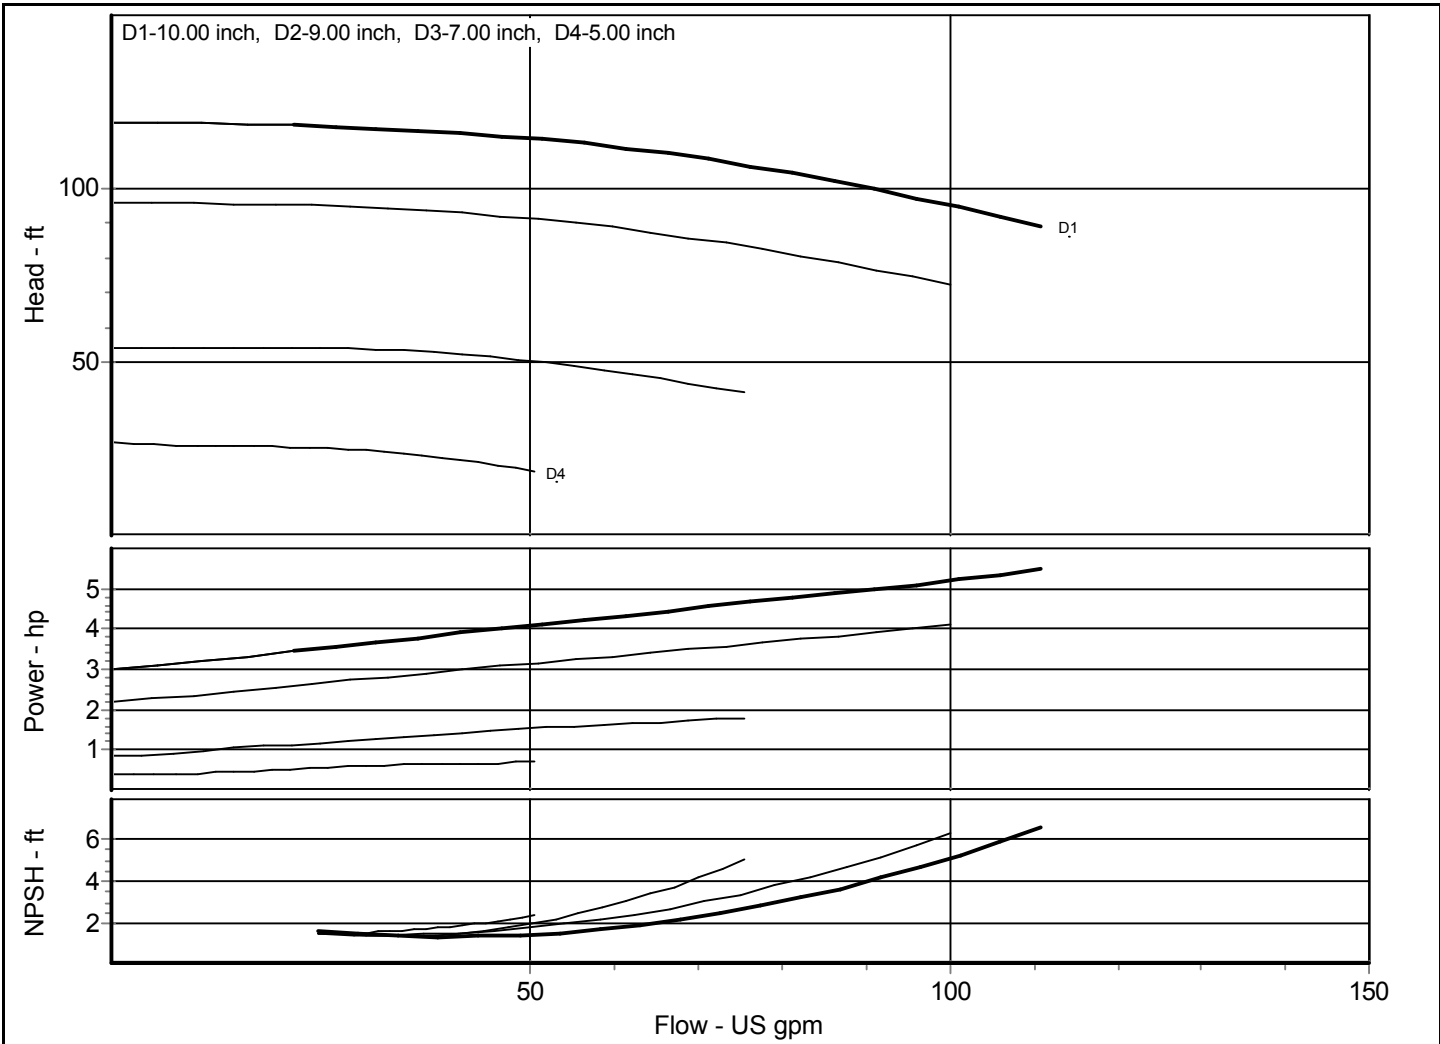

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Customer :

Peerless Pump Company LLC
P O Box 7026, Indianapolis, Indiana, 46202


Project :
Quote No. :

Page No. :

Contact :
Phone :
Date :

Fax :

Pump Model: Peerless - 1.5x3-6 STP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-003	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	1.56 hp
Item : 1		Closed Valve Pressure	37.638 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

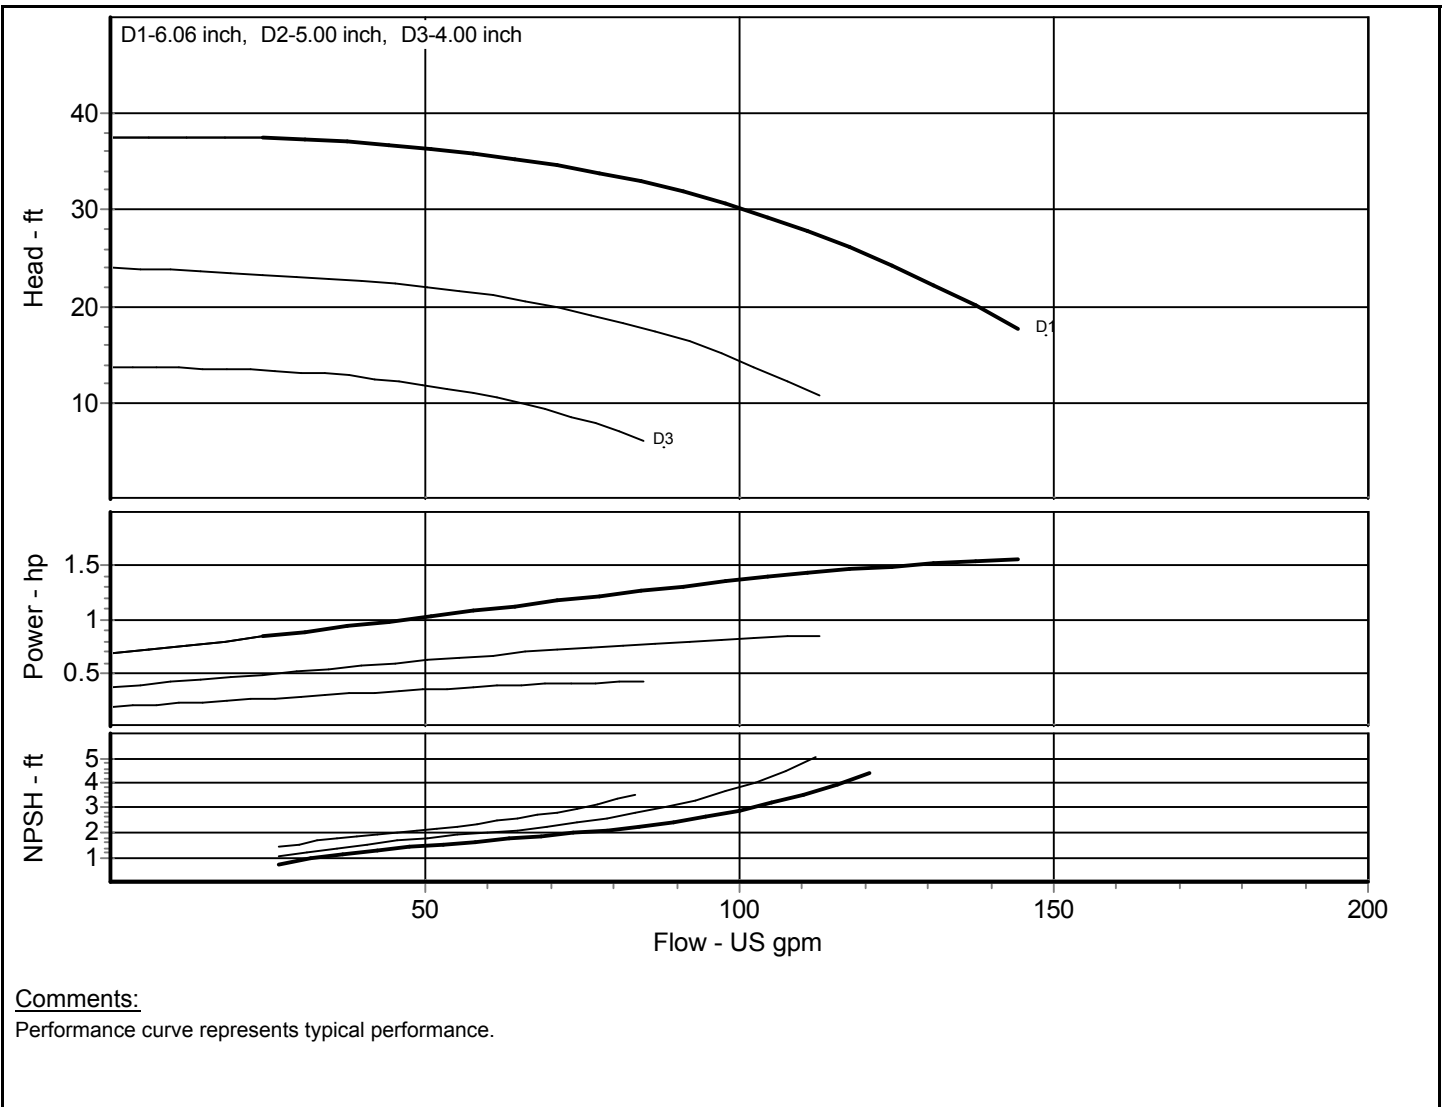




Customer :

Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Project :	Contact :		
Quote No. :	Phone :	Fax :	
	Date :		
Page No. :			

Pump Model: Peerless - 1.5x3-8 STP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
		Efficiency :	%
	Temperature: 68 °F	Power Required :	hp
	Viscosity: 1.009 cP	NPSH Required :	ft
Curve No.: 8196-007	Sp. Gravity: 1.000	Peak Power:	3.31 hp
Impeller No.	Fluid: Water	Closed Valve Pressure	70.437 ft
Item : 1			
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

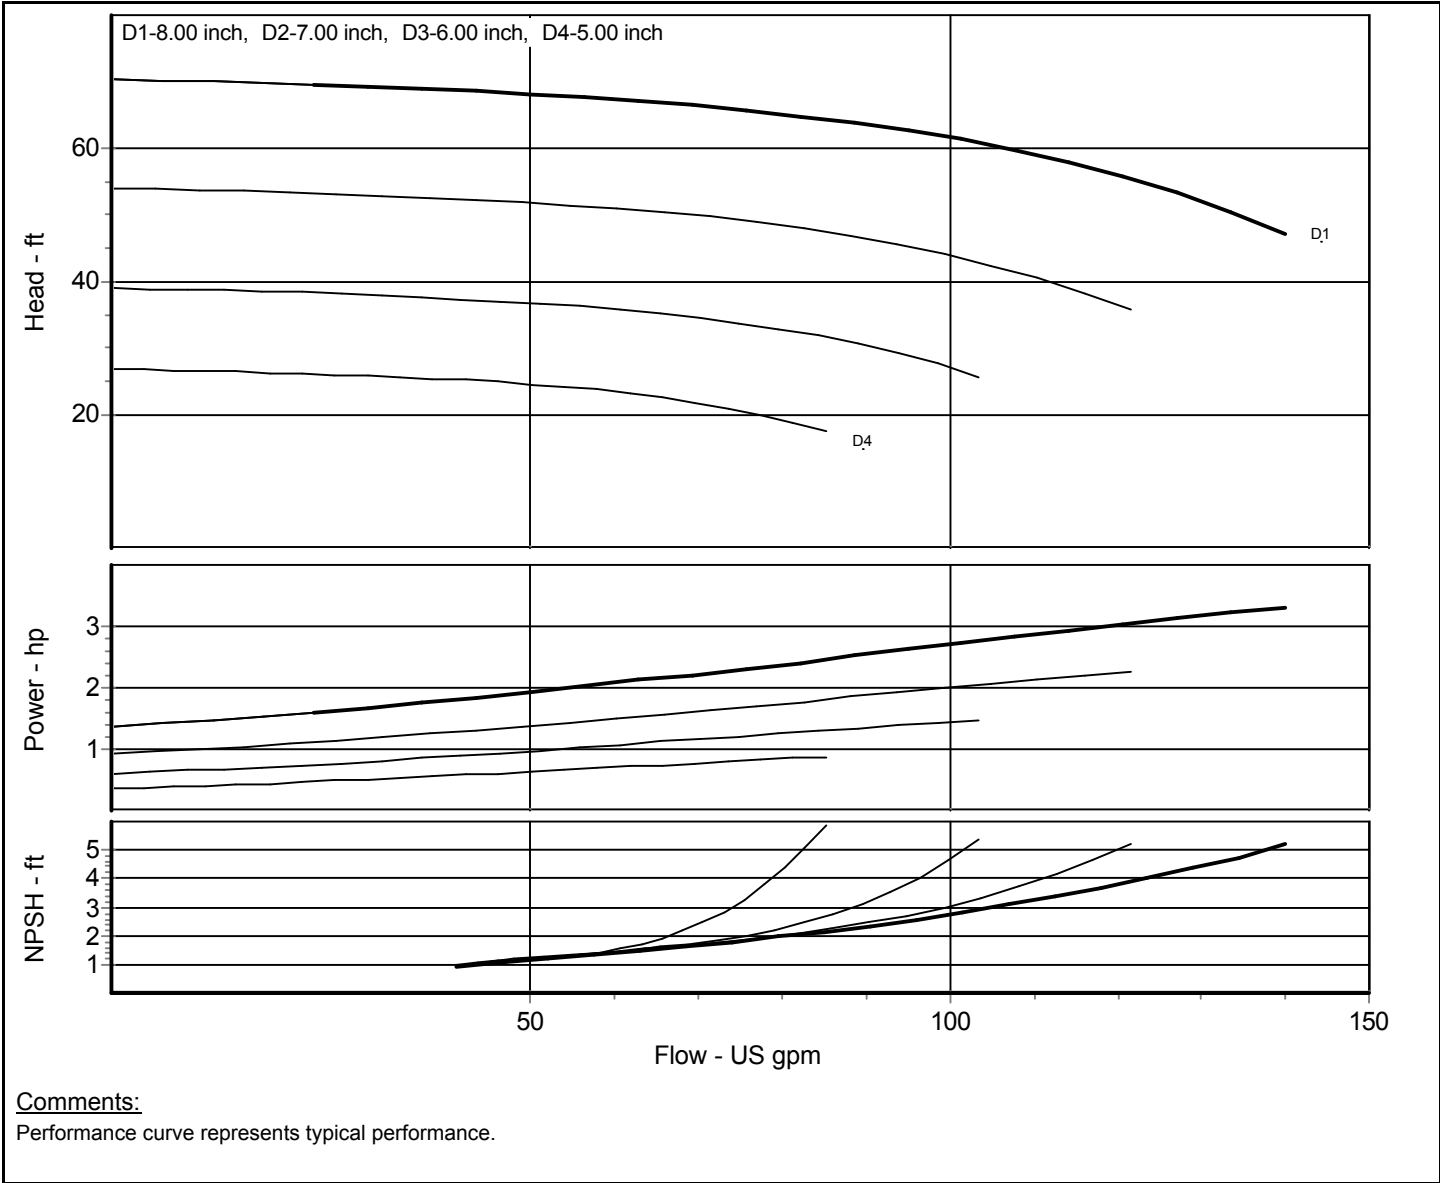



Peerless Pump Company LLC
 P O Box 7026, Indianapolis, Indiana, 46202

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 1.5x3-10 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-022	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	6.5 hp
Item : 1		Closed Valve Pressure	106.975 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

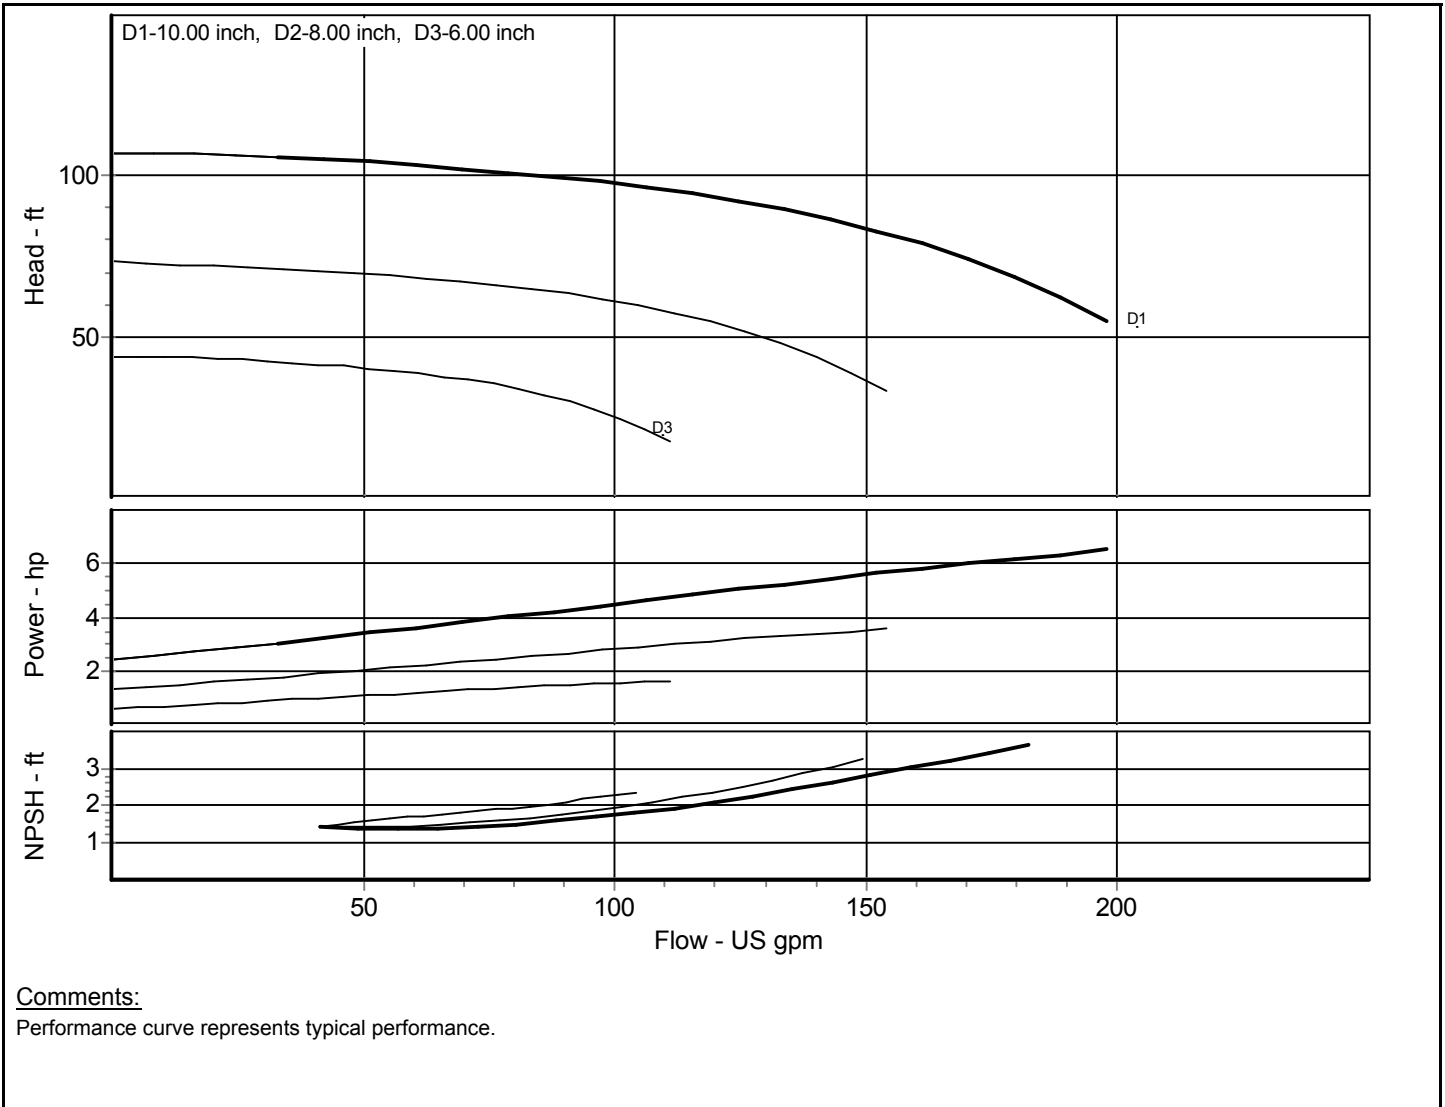




Customer :

Peerless Pump Company LLC
P O Box 7026, Indianapolis, Indiana, 46202

Project :		Contact :	
Quote No. :	Page No. :	Phone :	Fax :
Pump Model: Peerless - 1.5x3-10 LTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-022	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	6.5 hp
Item : 1		Closed Valve Pressure	106.975 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

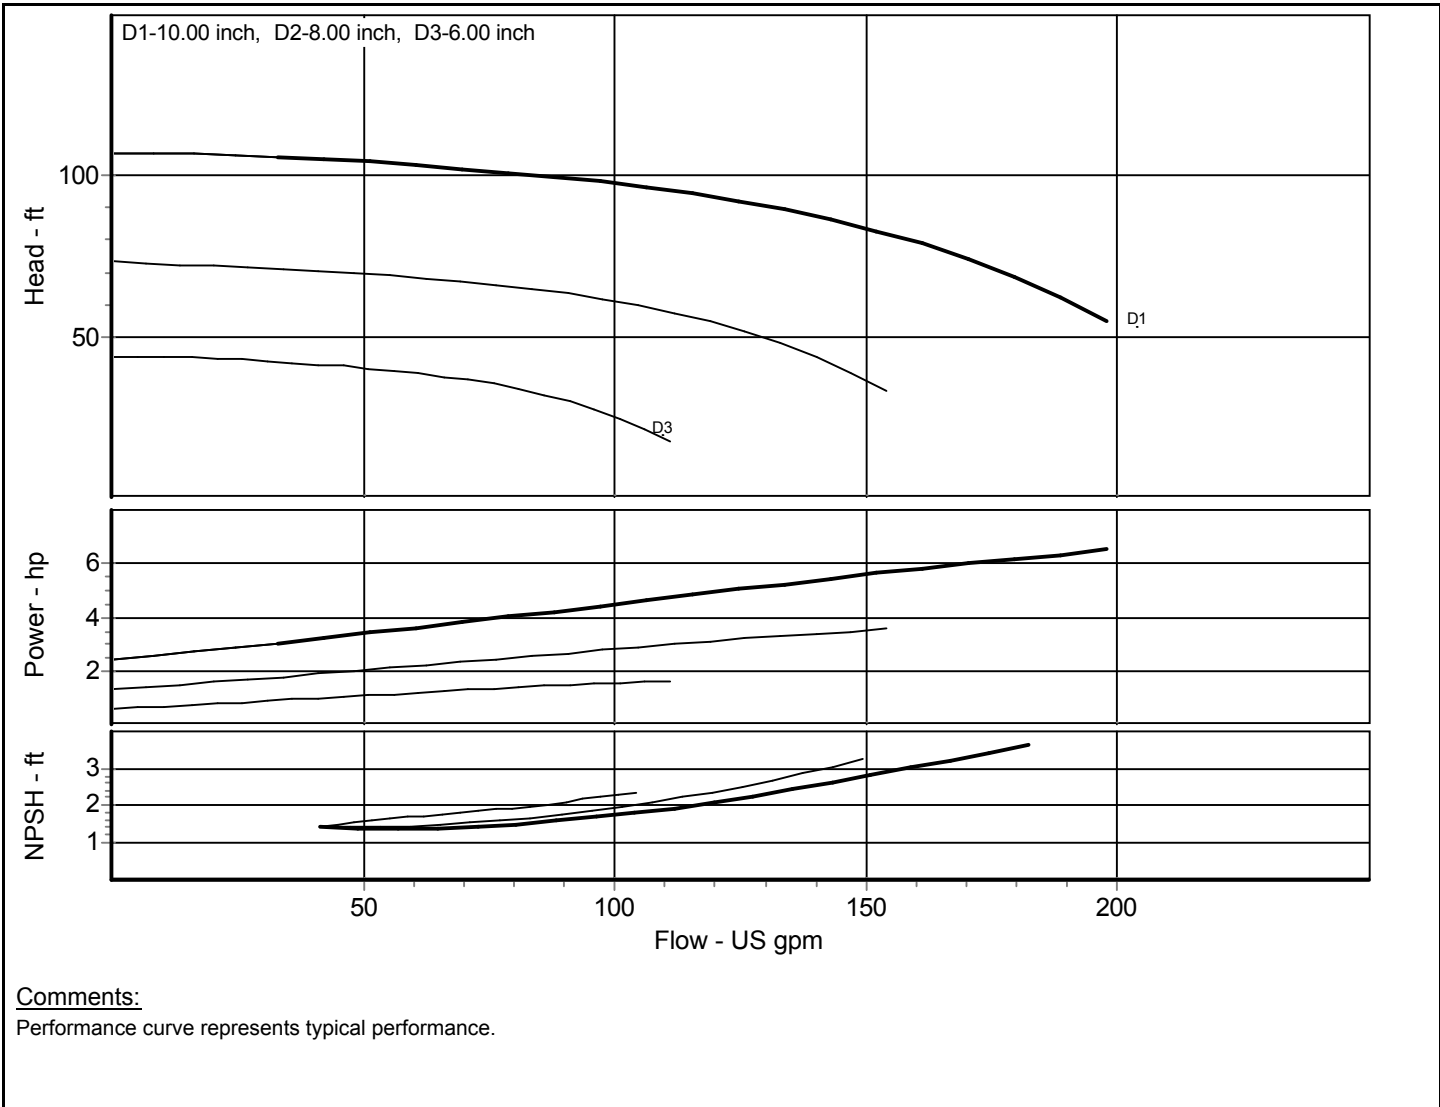




Peerless Pump Company LLC
 P O Box 7026, Indianapolis, Indiana, 46202

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 1.5x3-13 MTP 8196** Nom. Speed: **1750** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Curve No.: **8196-030** Sp. Gravity: **1.000** Peak Power: **14.55** hp
 Impeller No. Fluid: **Water** Closed Valve Pressure **157.94** ft
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

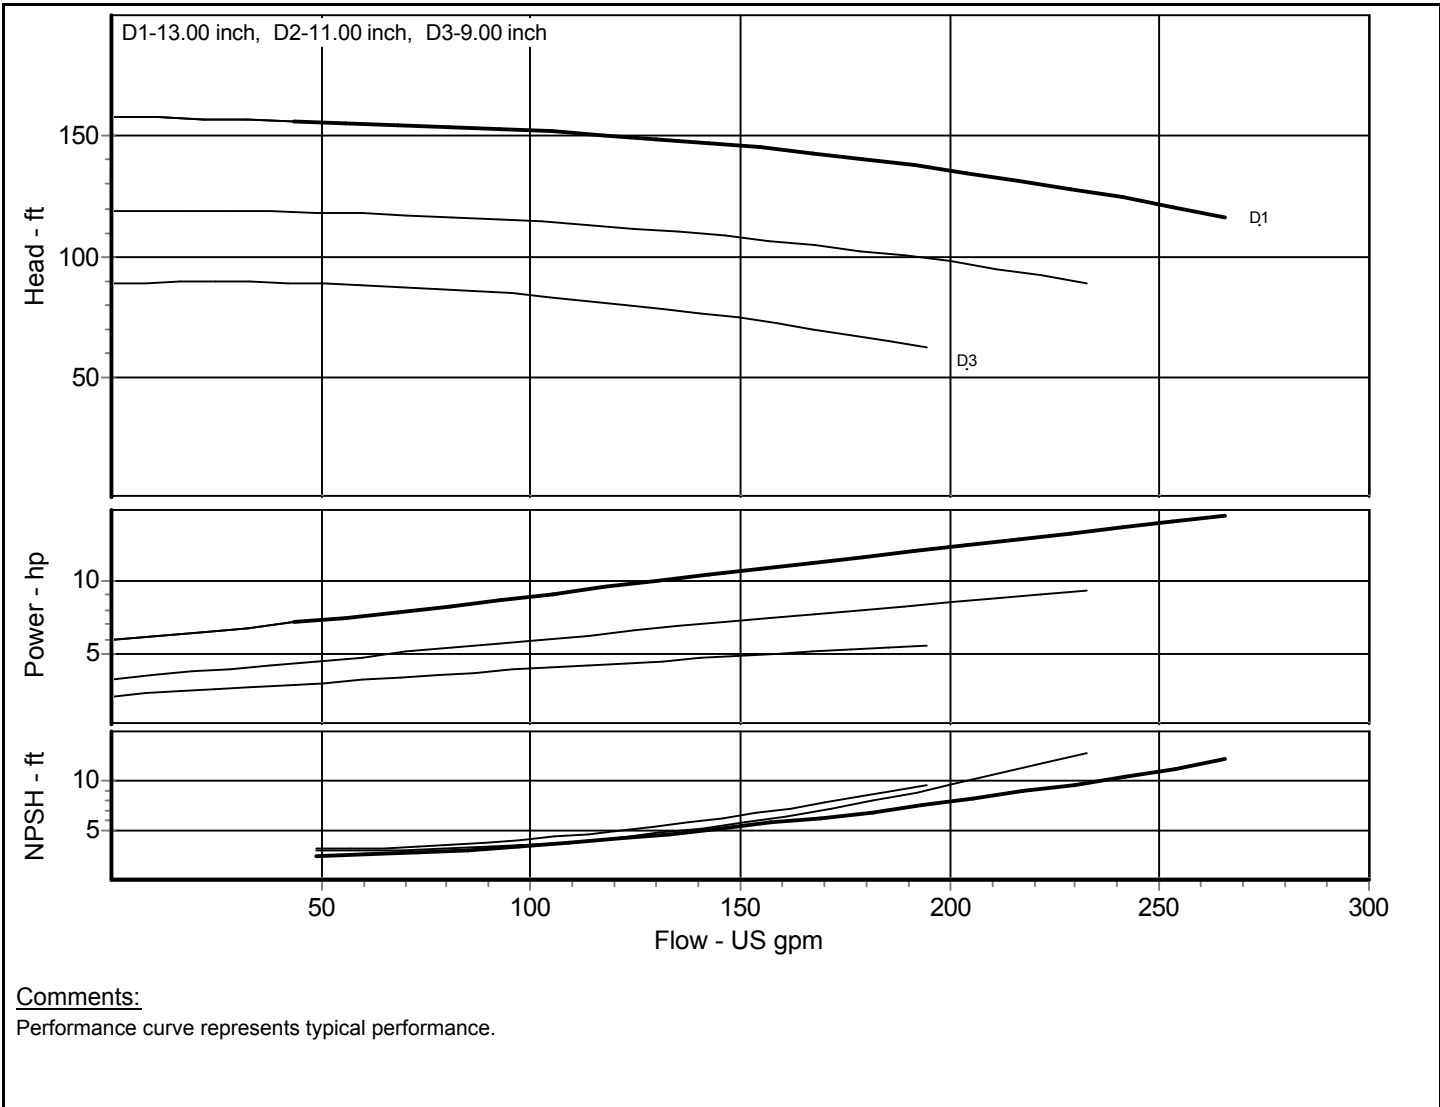

Customer :



Peerless Pump Company LLC
P O Box 7026, Indianapolis, Indiana, 46202


Project :
Quote No. :

Page No. :

Contact :
Phone :
Date :

Fax :

Pump Model:	Peerless - 1.5x3-13 LTP 8196	Nom. Speed:	1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type:	8196 - ANSI Standard End Suction	Impeller Dia.:	13/9 inch	Duty Head :	ft
		Temperature:	68 °F	Efficiency :	%
		Viscosity:	1.009 cP	Power Required :	hp
Curve No.:	8196-030	Sp. Gravity:	1.000	NPSH Required :	ft
Impeller No.		Fluid:	Water	Peak Power:	14.55 hp
Item :	1			Closed Valve Pressure	157.94 ft
Your Ref.:		Tolerance :	Hyd Inst-Peerless Std		

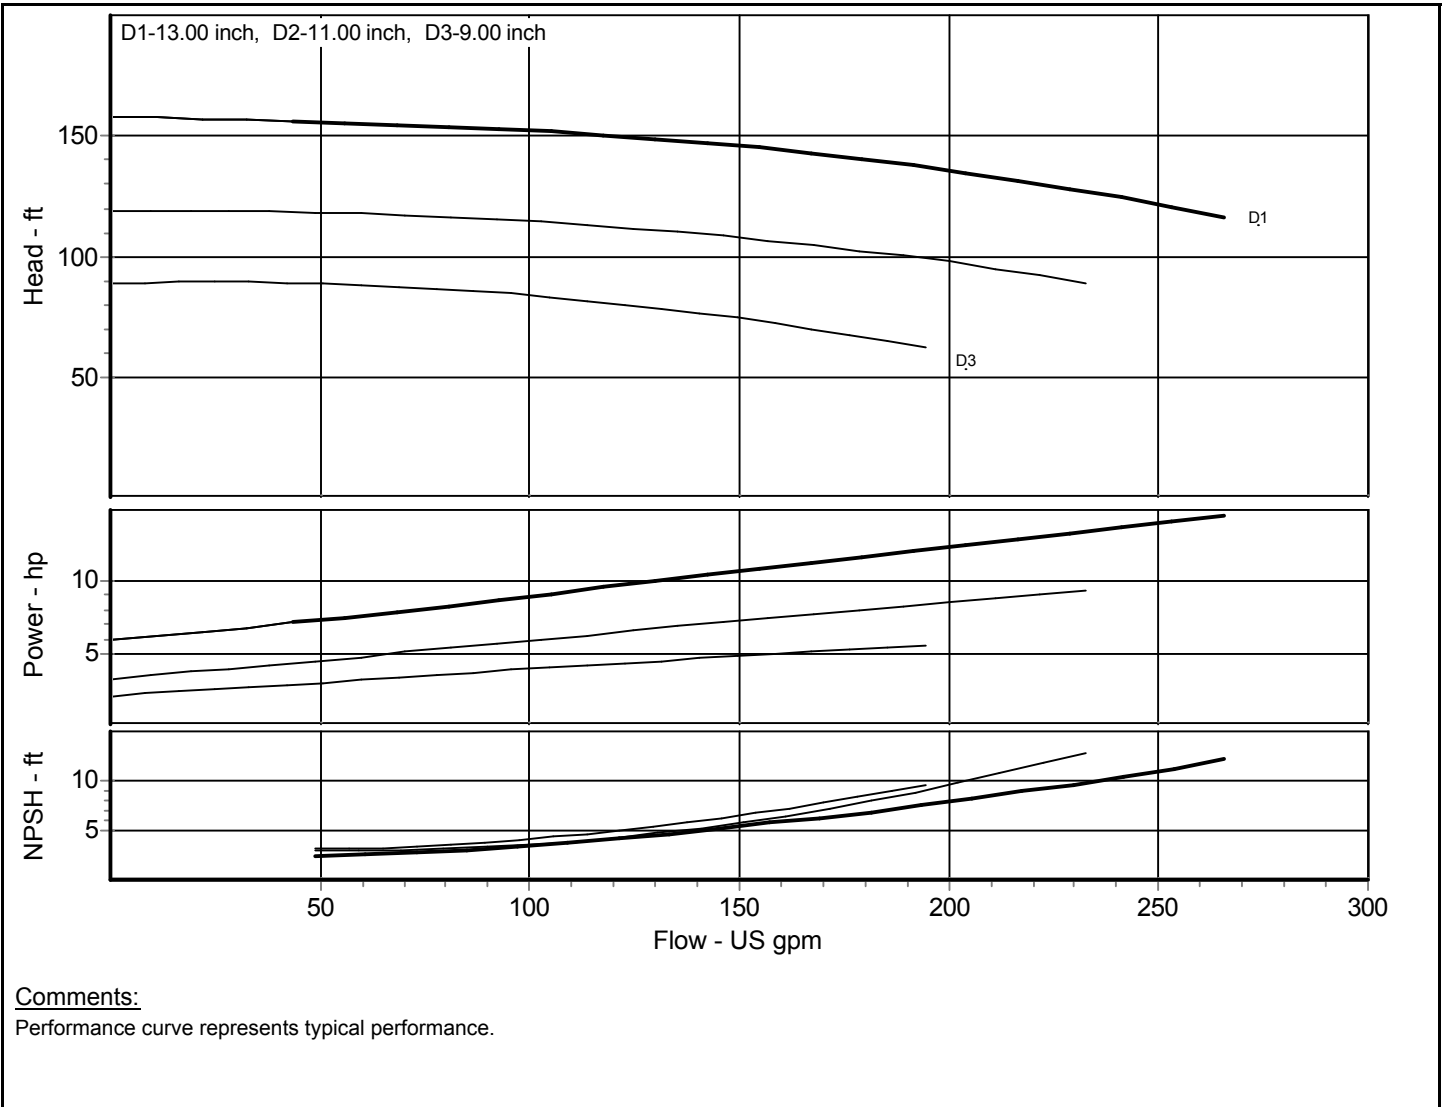



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. : 1

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-6 STP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750** RPM, 60 Hz Electric
 Impeller Dia.: **6.06/4** inch


Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **2.39** hp
 Closed Valve Pressure **37.63** ft

Curve No.: **8196-010**
 Impeller No.
 Item : **1**
 Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

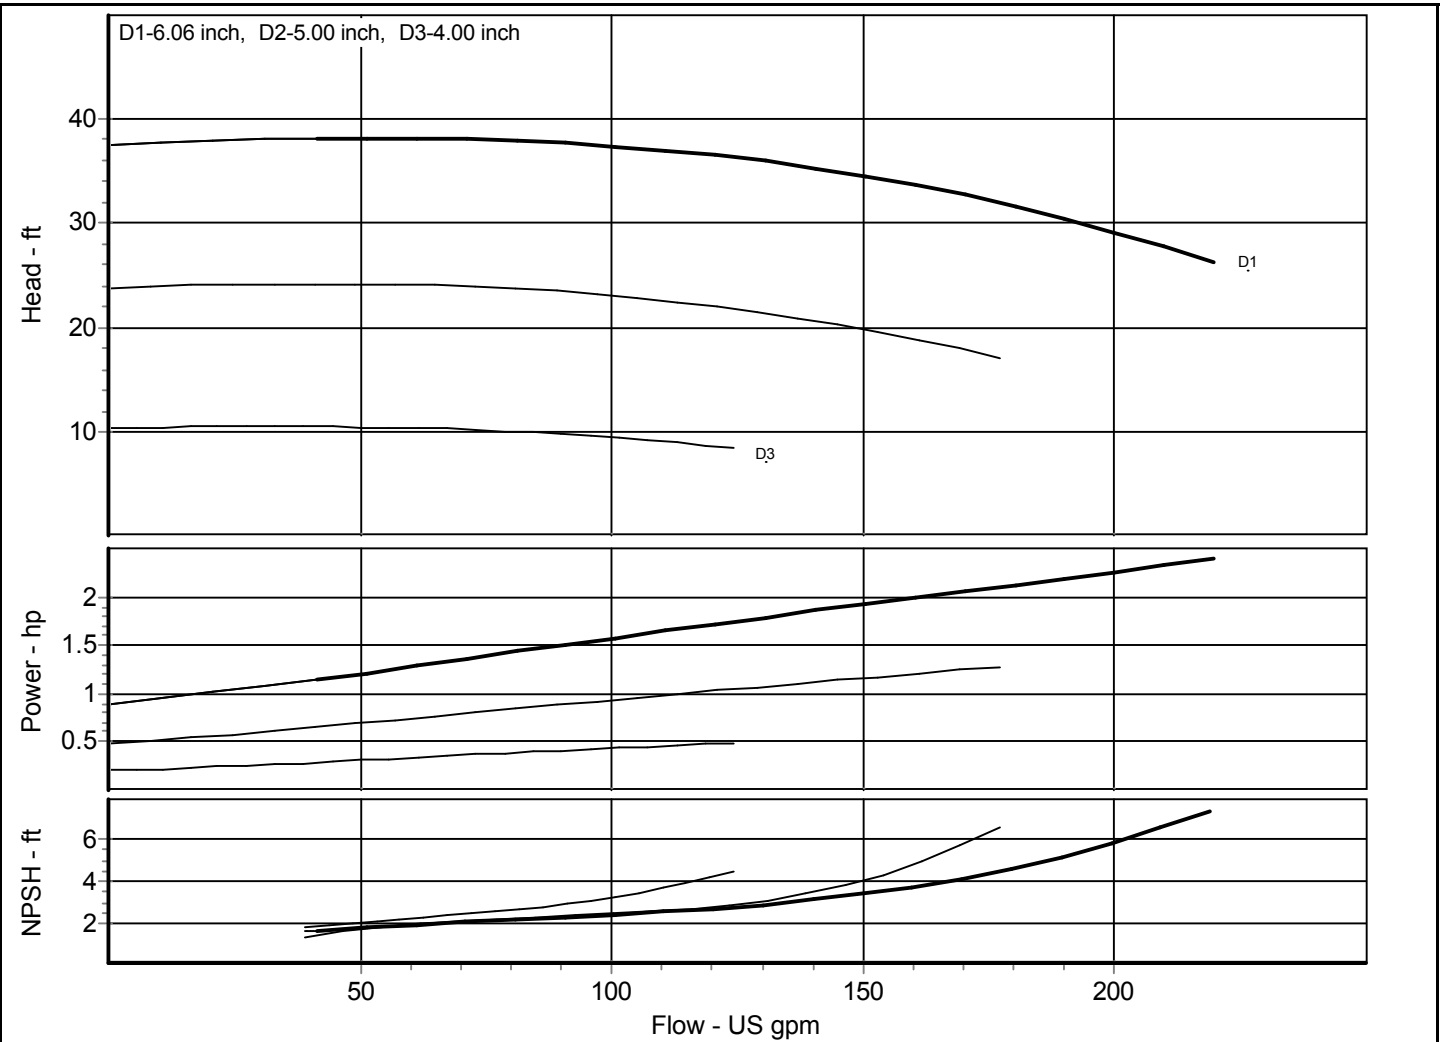

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-6 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750** RPM, 60 Hz Electric
 Impeller Dia.: **5.88/4** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **2.37** hp
 Closed Valve Pressure **40.8** ft


Curve No.: **8196-011**

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

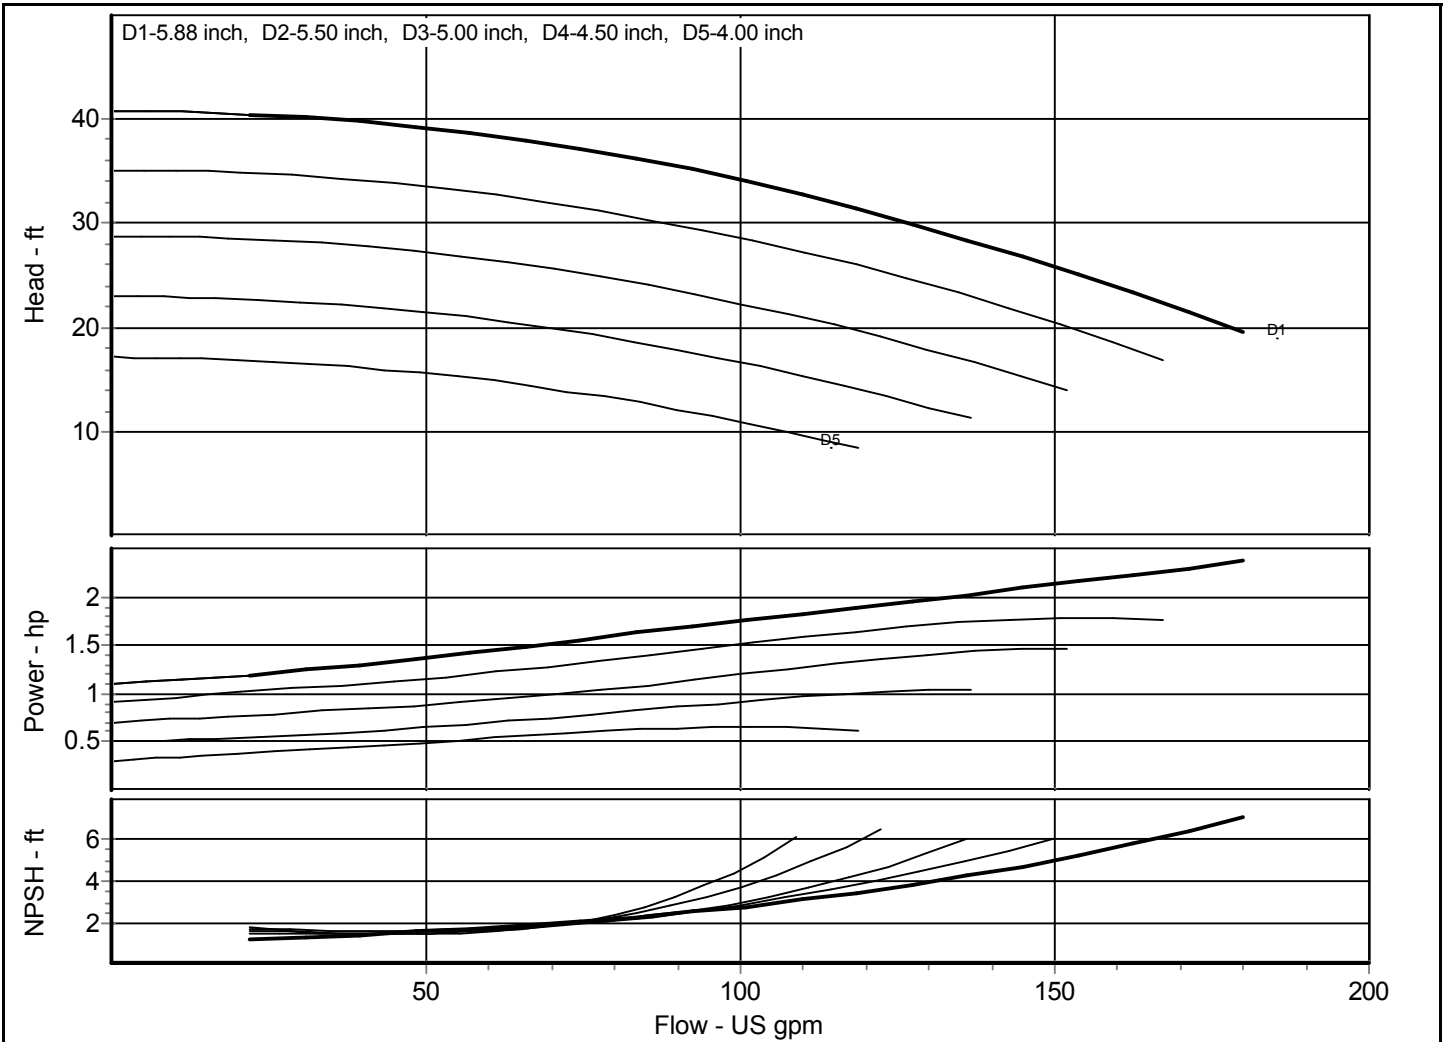

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-8 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/5.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-014	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	4.75 hp
Item : 1		Closed Valve Pressure	76.813 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

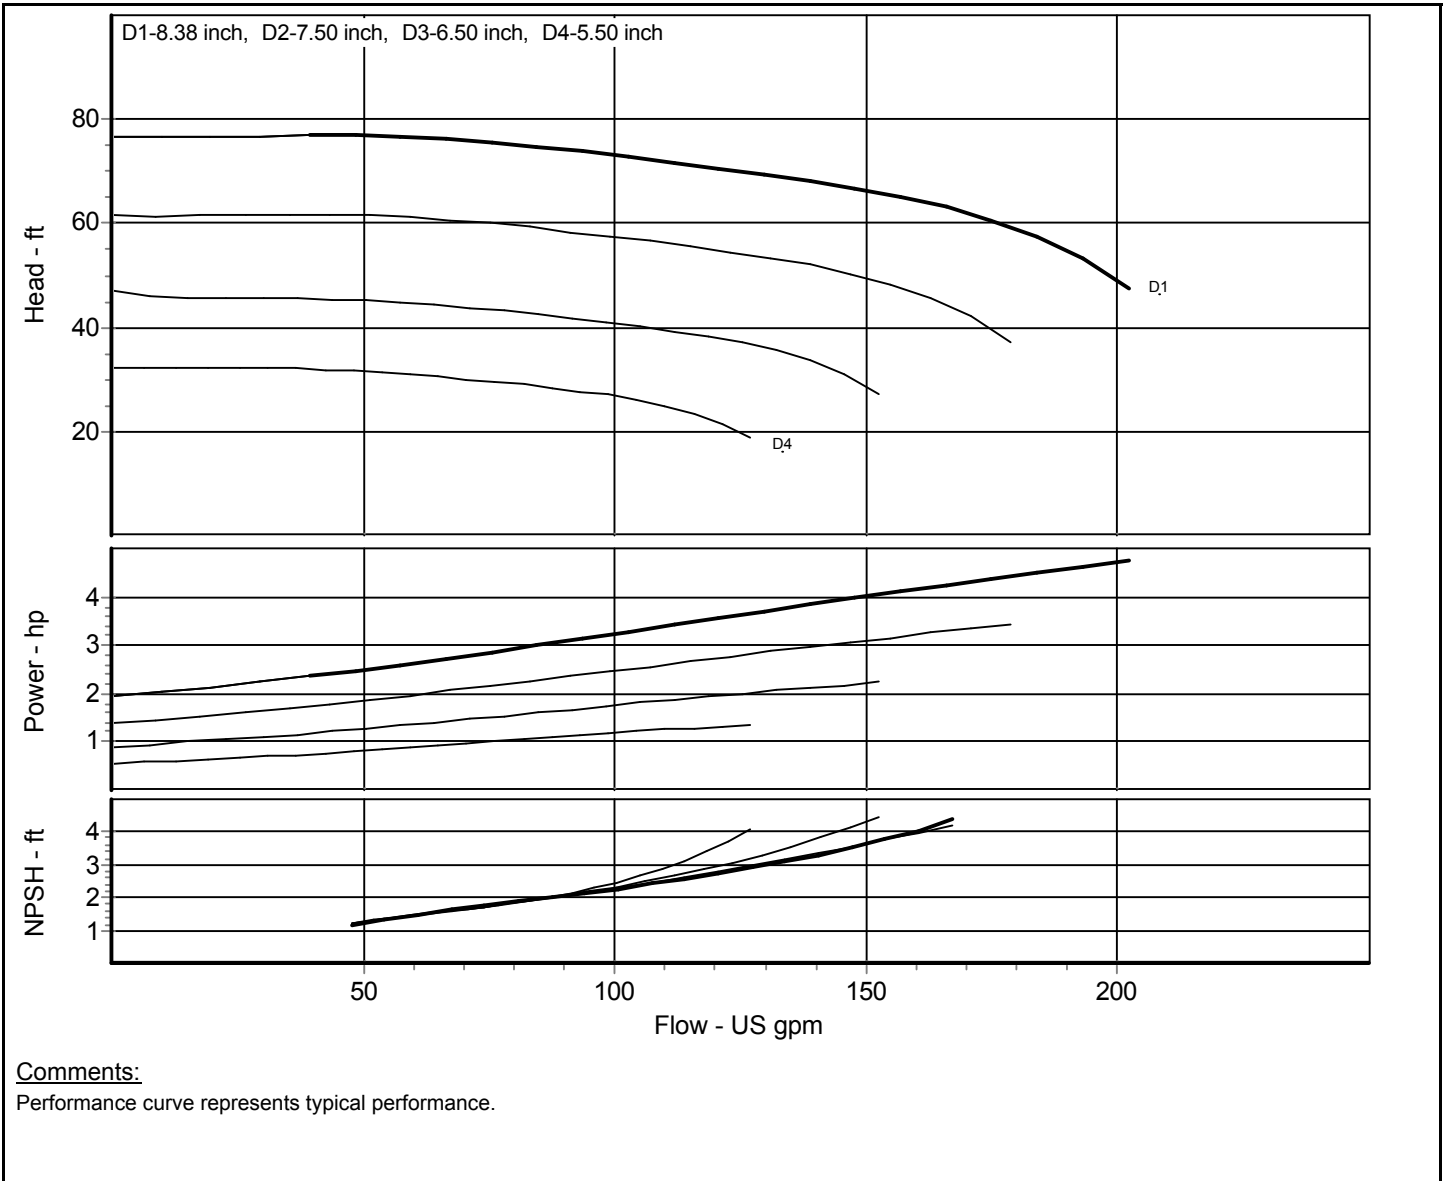




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-10 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-024	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	10.23 hp
Item : 1		Closed Valve Pressure	110.545 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

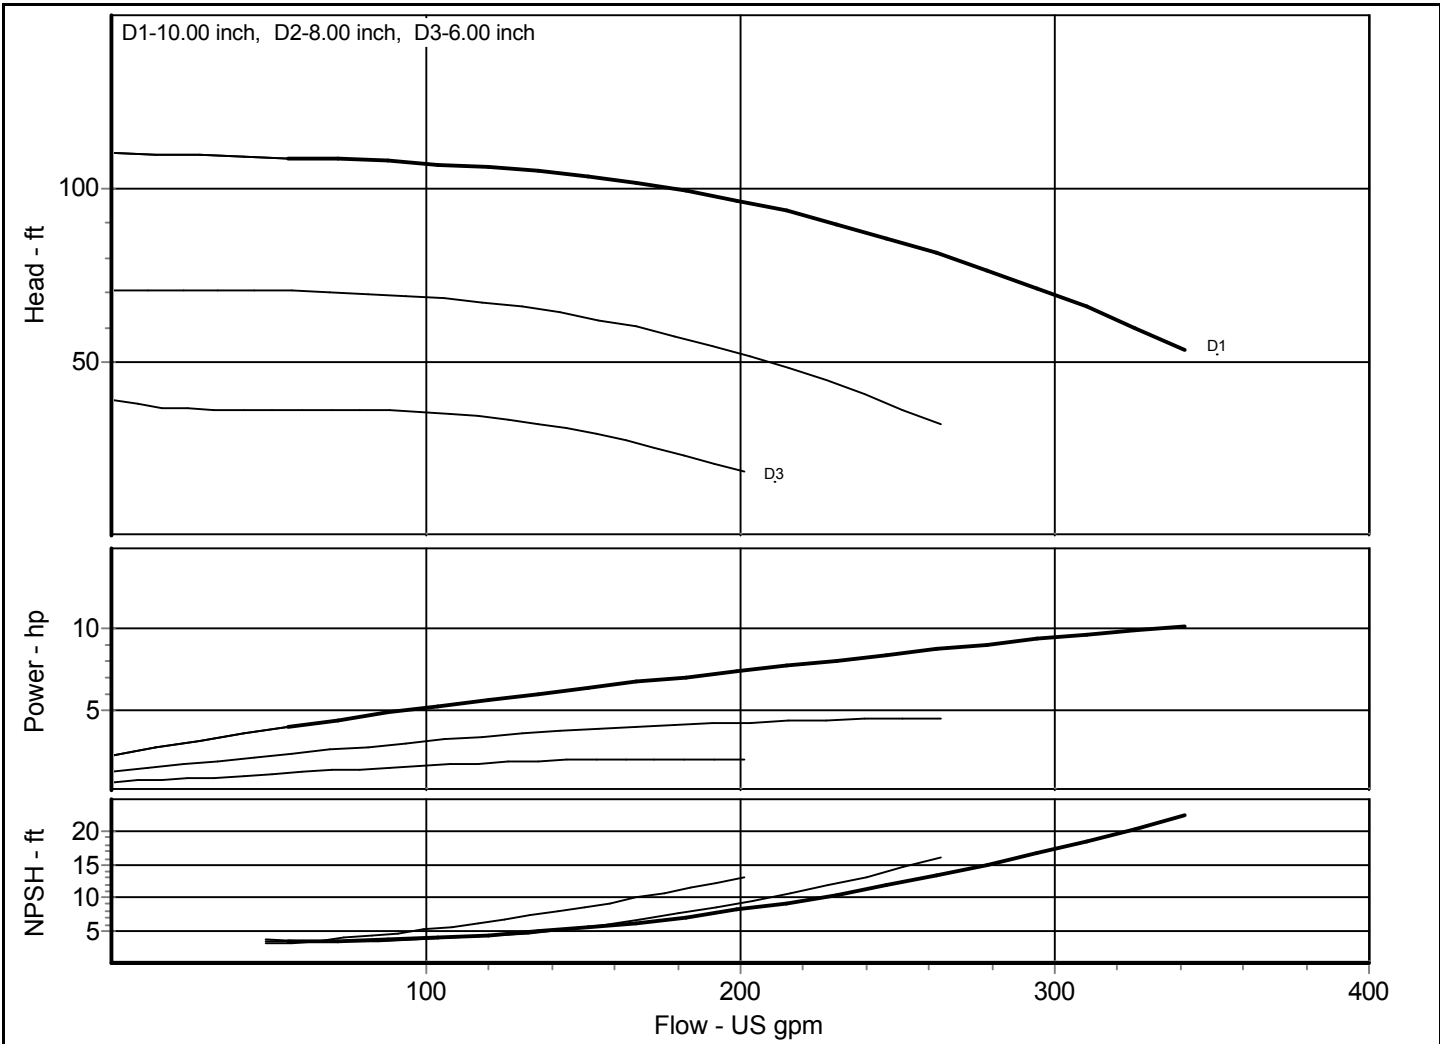

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-10 LTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-024	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	10.23 hp
Item : 1		Closed Valve Pressure	110.545 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

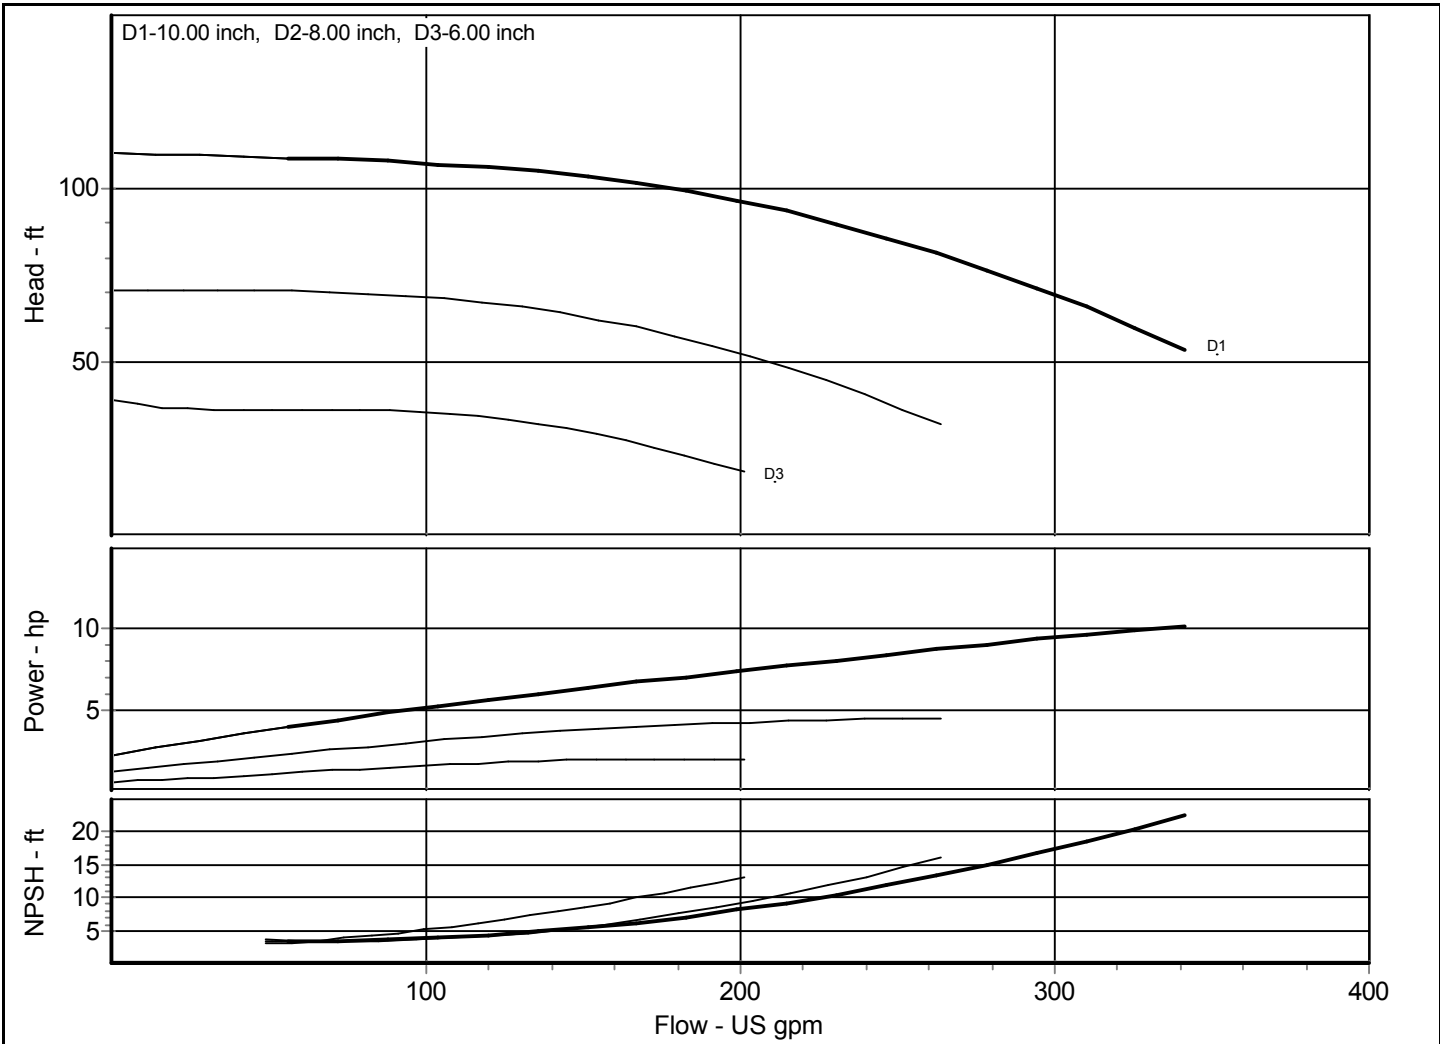

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-13 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750** RPM, 60 Hz Electric
 Impeller Dia.: **13/9** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-033**

Fluid: **Water**


Peak Power: **21.94** hp
 Closed Valve Pressure **180.132** ft

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

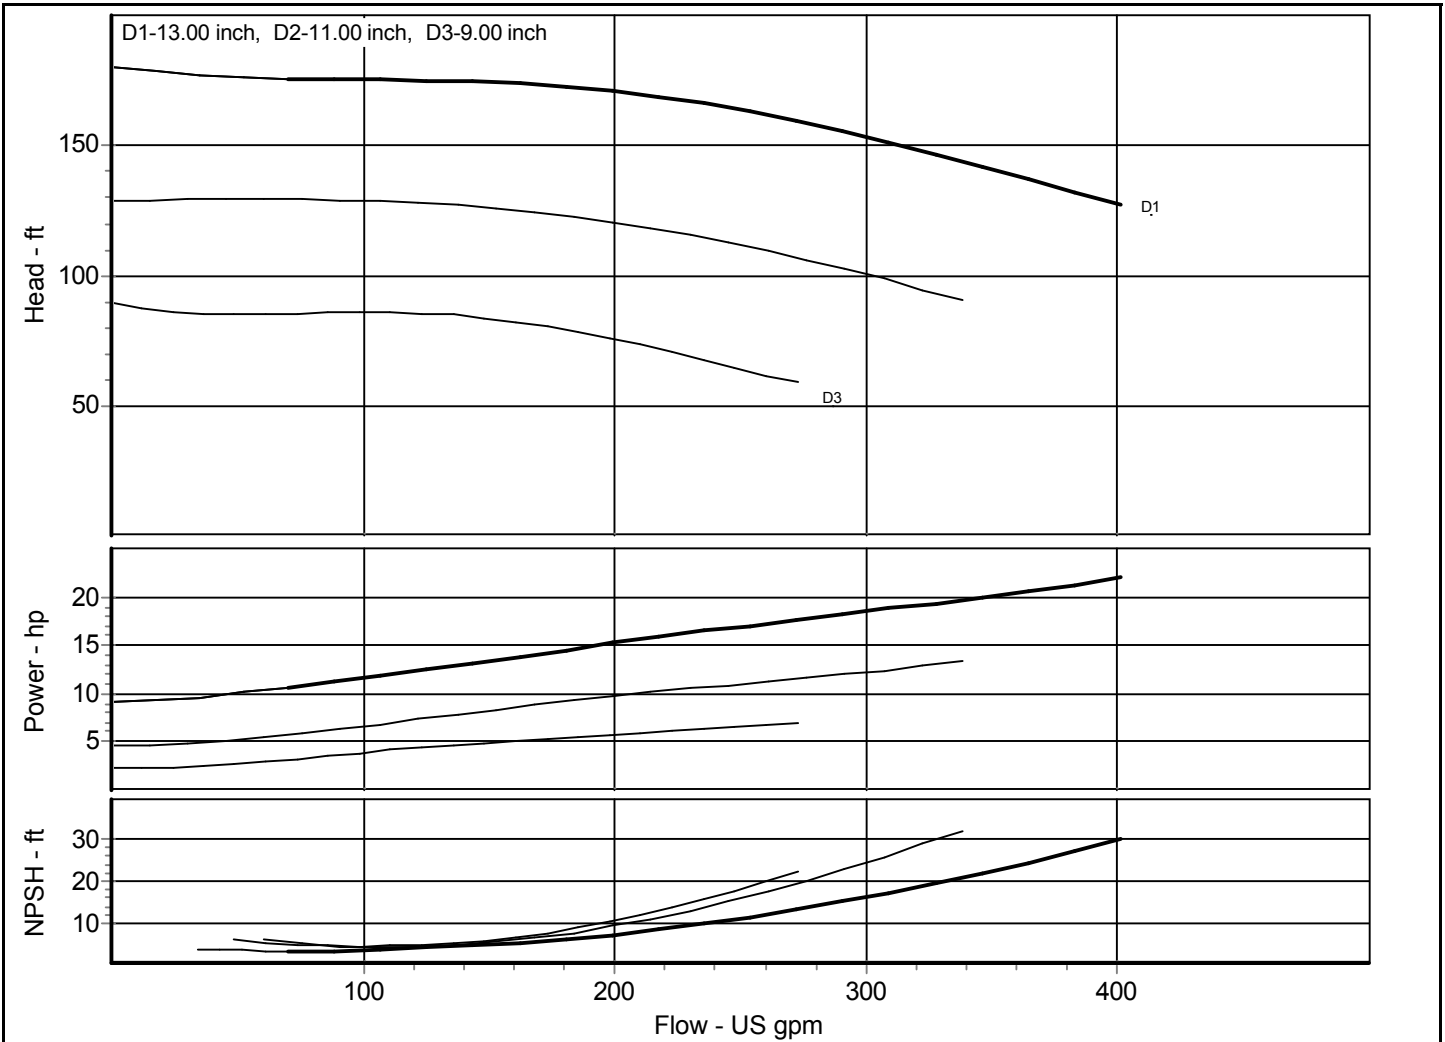

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-13 LTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750** RPM, 60 Hz Electric
 Impeller Dia.: **13/9** inch


Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **21.94** hp
 Closed Valve Pressure **180.132** ft

Curve No.: **8196-033**
 Impeller No.
 Item : **1**
 Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

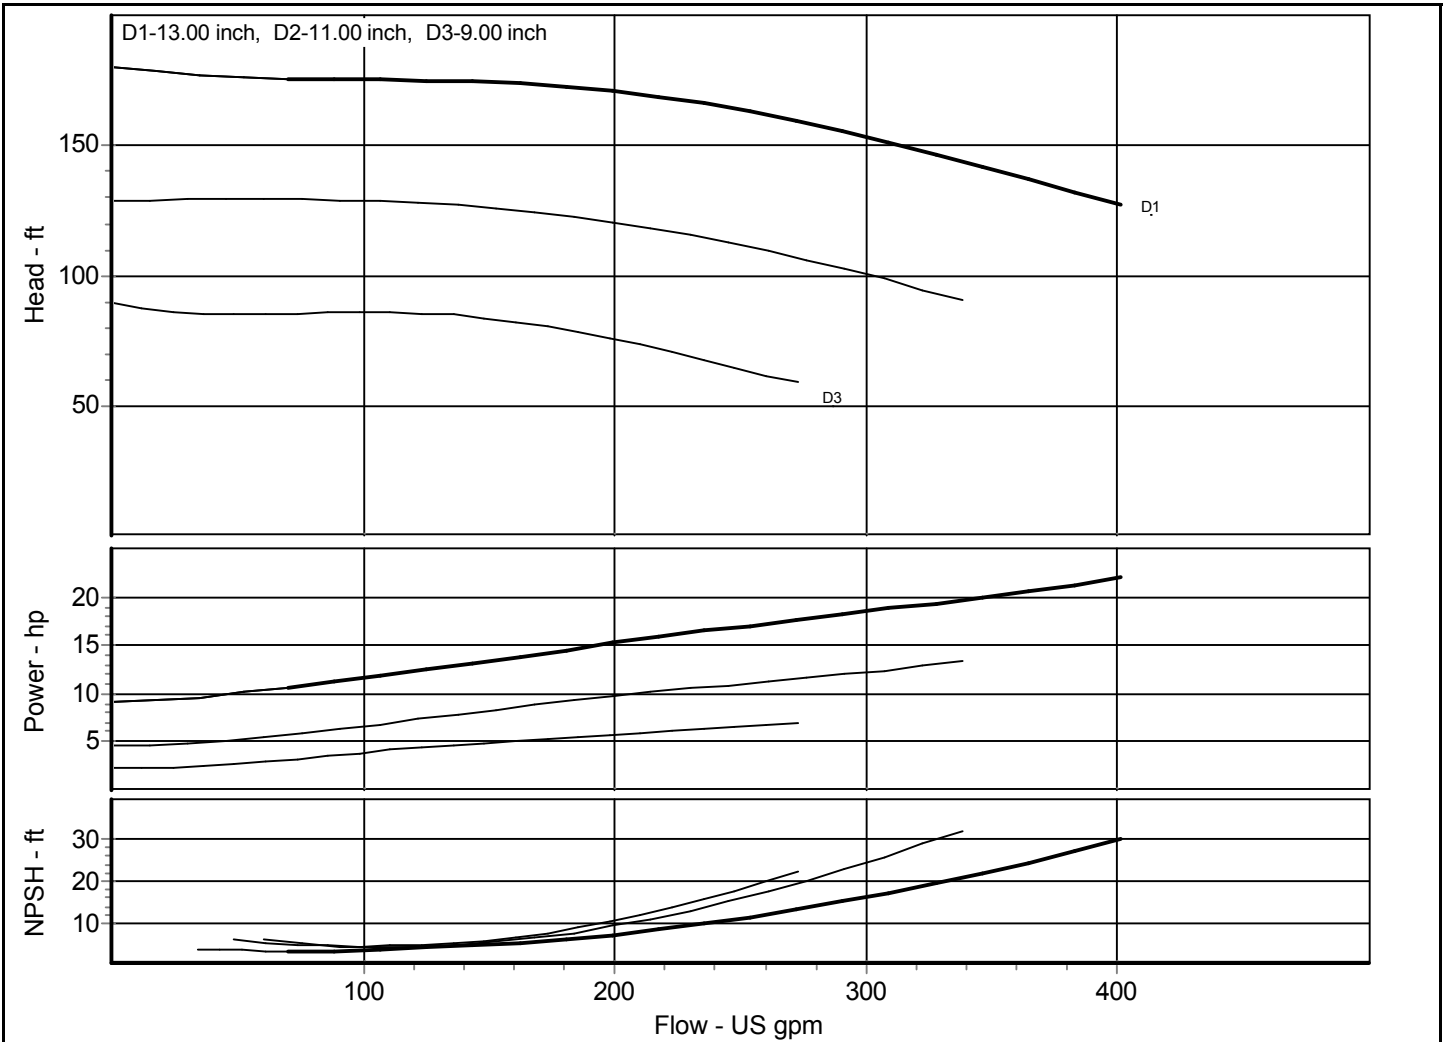

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-7 MTP 8196** Nom. Speed: **1750** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **7.19/5** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **3.69** hp
 Fluid: **Water** Closed Valve Pressure **49.49** ft
 Curve No.: **8196-054**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

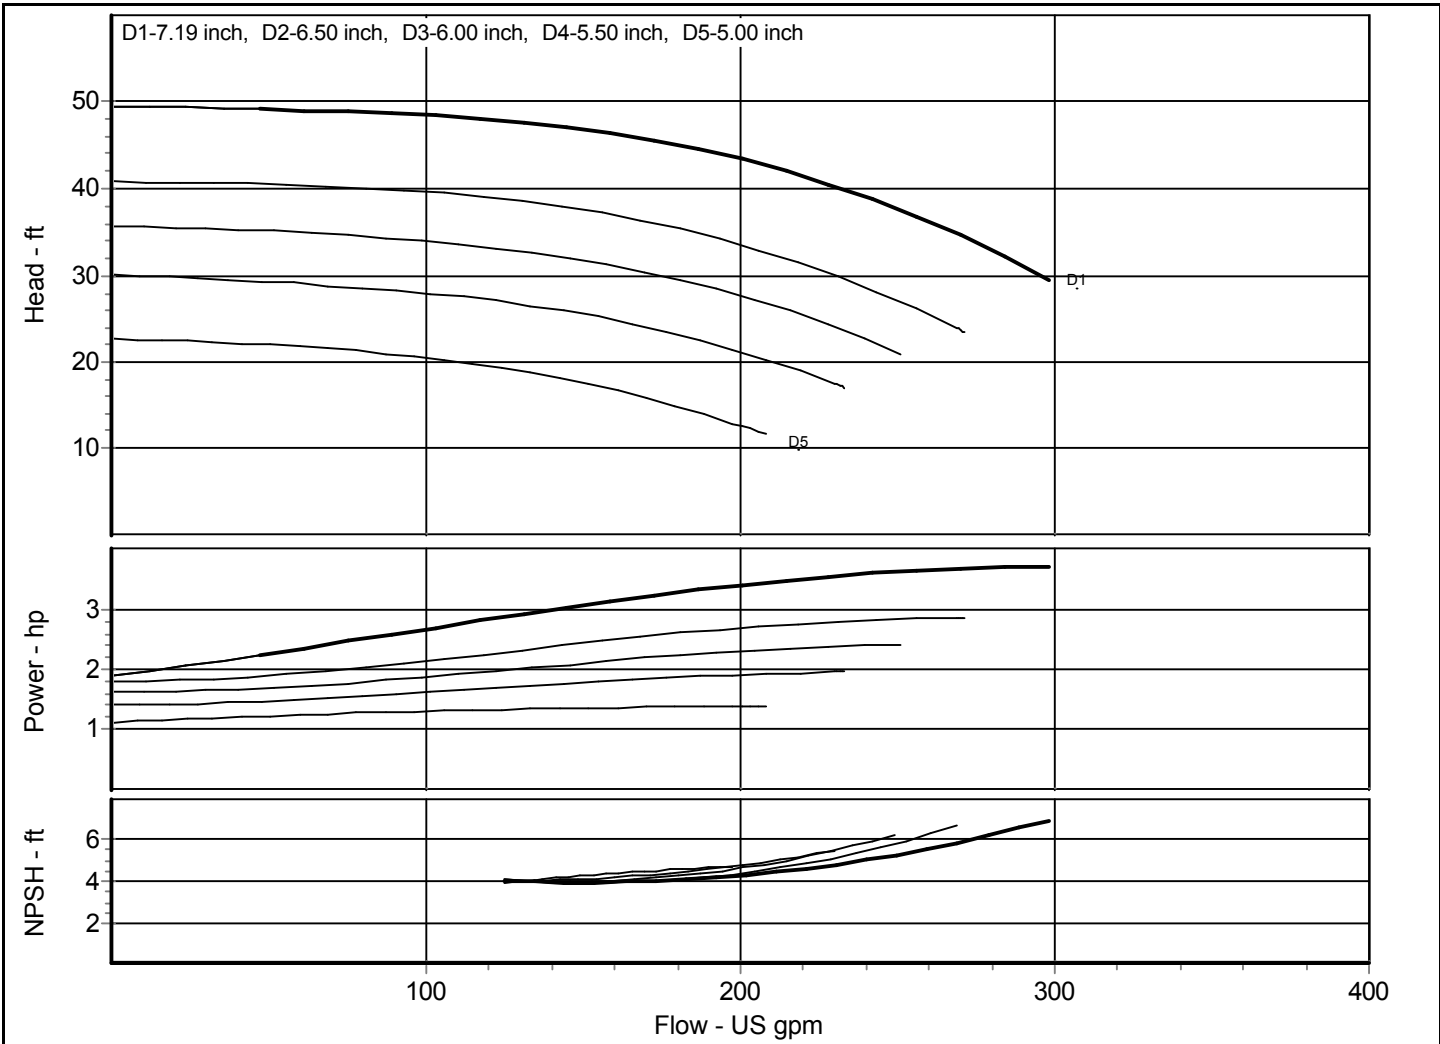

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 3x4-8 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-015	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	11.26 hp
Item : 1		Closed Valve Pressure	76.997 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

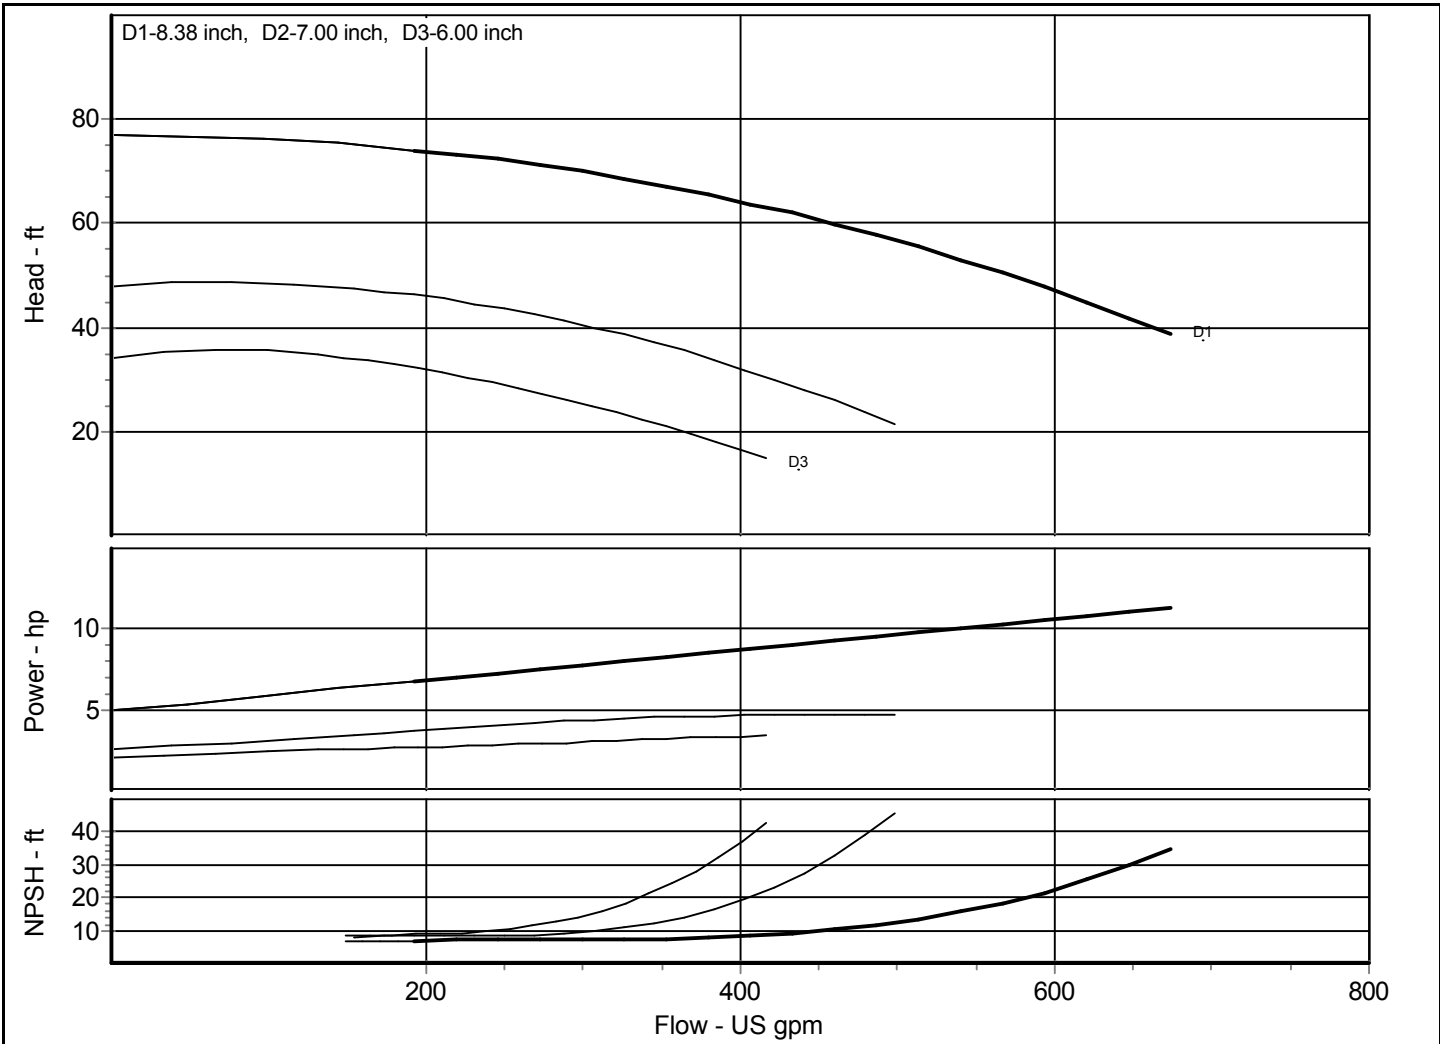

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 3x4-8G MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750** RPM, 60 Hz Electric
 Impeller Dia.: **8.38/5.5** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-018**

Fluid: **Water**

Peak Power: **7.37** hp


Impeller No.

Closed Valve Pressure **75.019** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

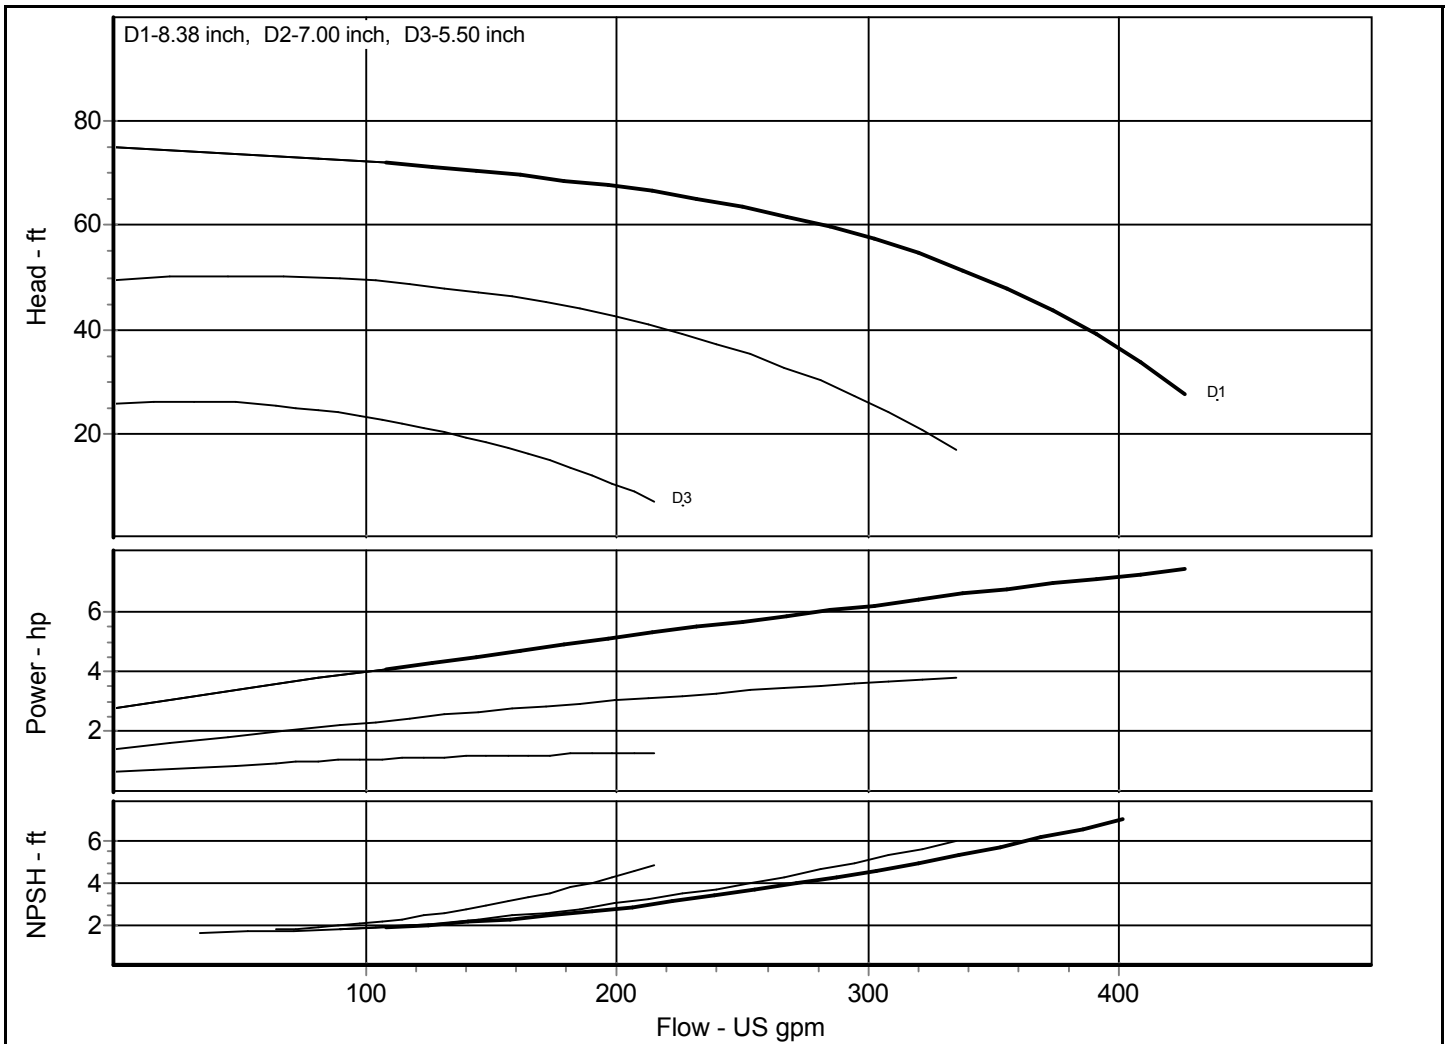

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 3x4-10 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750 RPM, 60 Hz Electric**
 Impeller Dia.: **10/6 inch**


Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68 °F**
 Viscosity: **1.009 cP**
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **12.19 hp**
 Closed Valve Pressure **108.382 ft**

Curve No.: **8196-026**
 Impeller No.
 Item : **1**
 Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

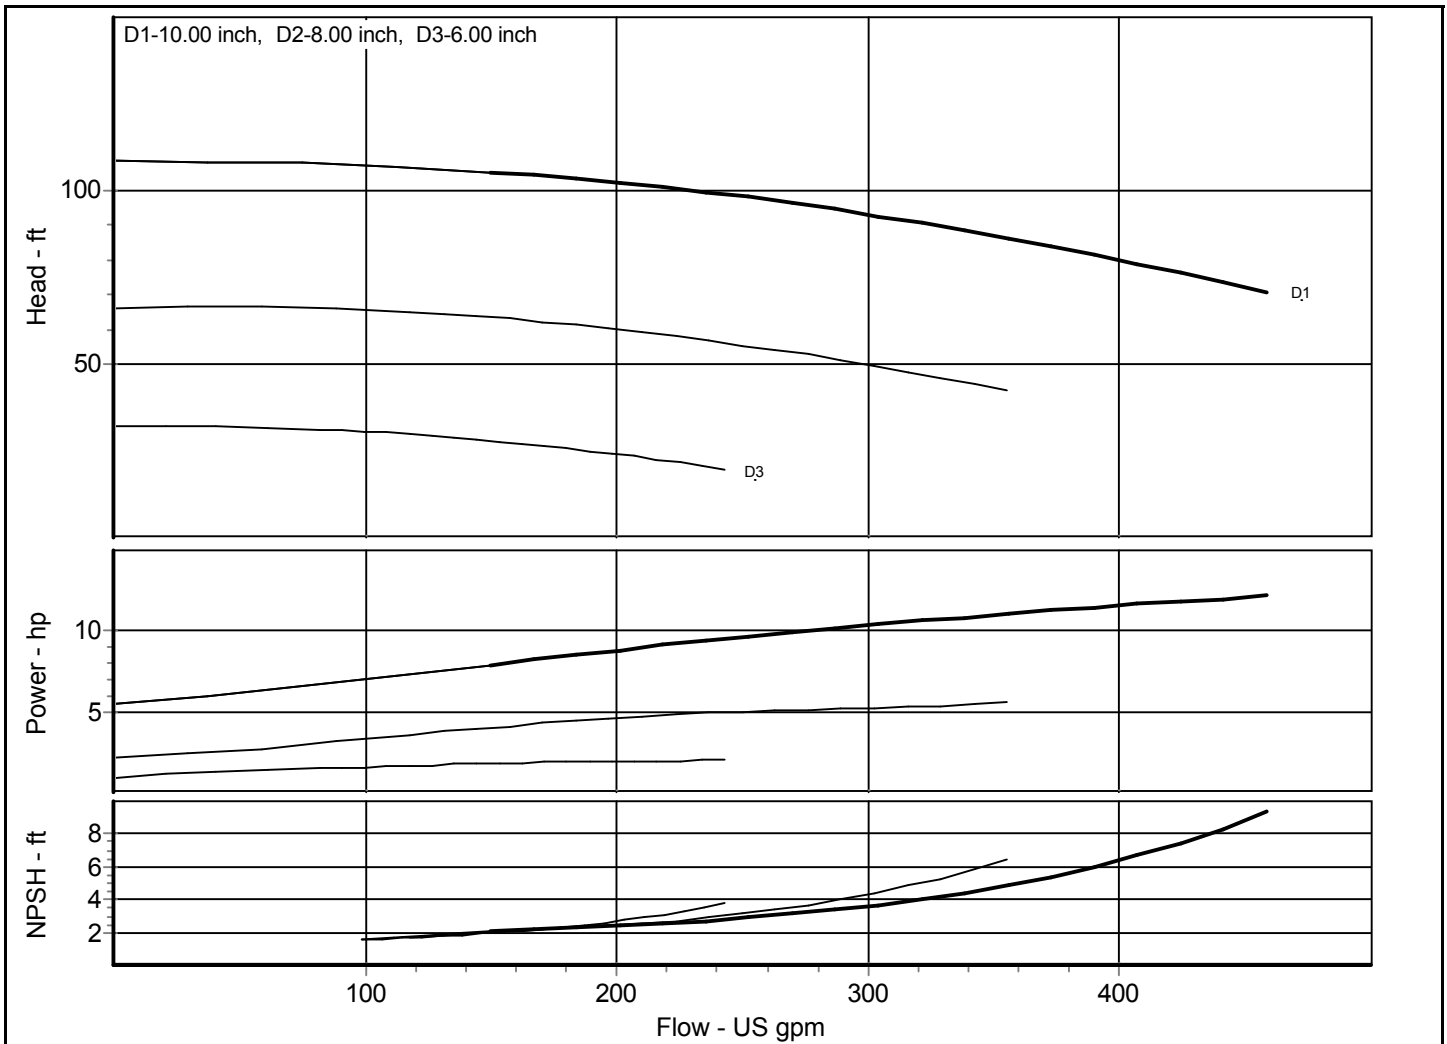

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 3x4-10 LTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750 RPM, 60 Hz Electric**
 Impeller Dia.: **10/6 inch**

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68 °F**
 Viscosity: **1.009 cP**
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-026**

Fluid: **Water**

Peak Power: **12.19 hp**


Impeller No.

Closed Valve Pressure **108.382 ft**

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

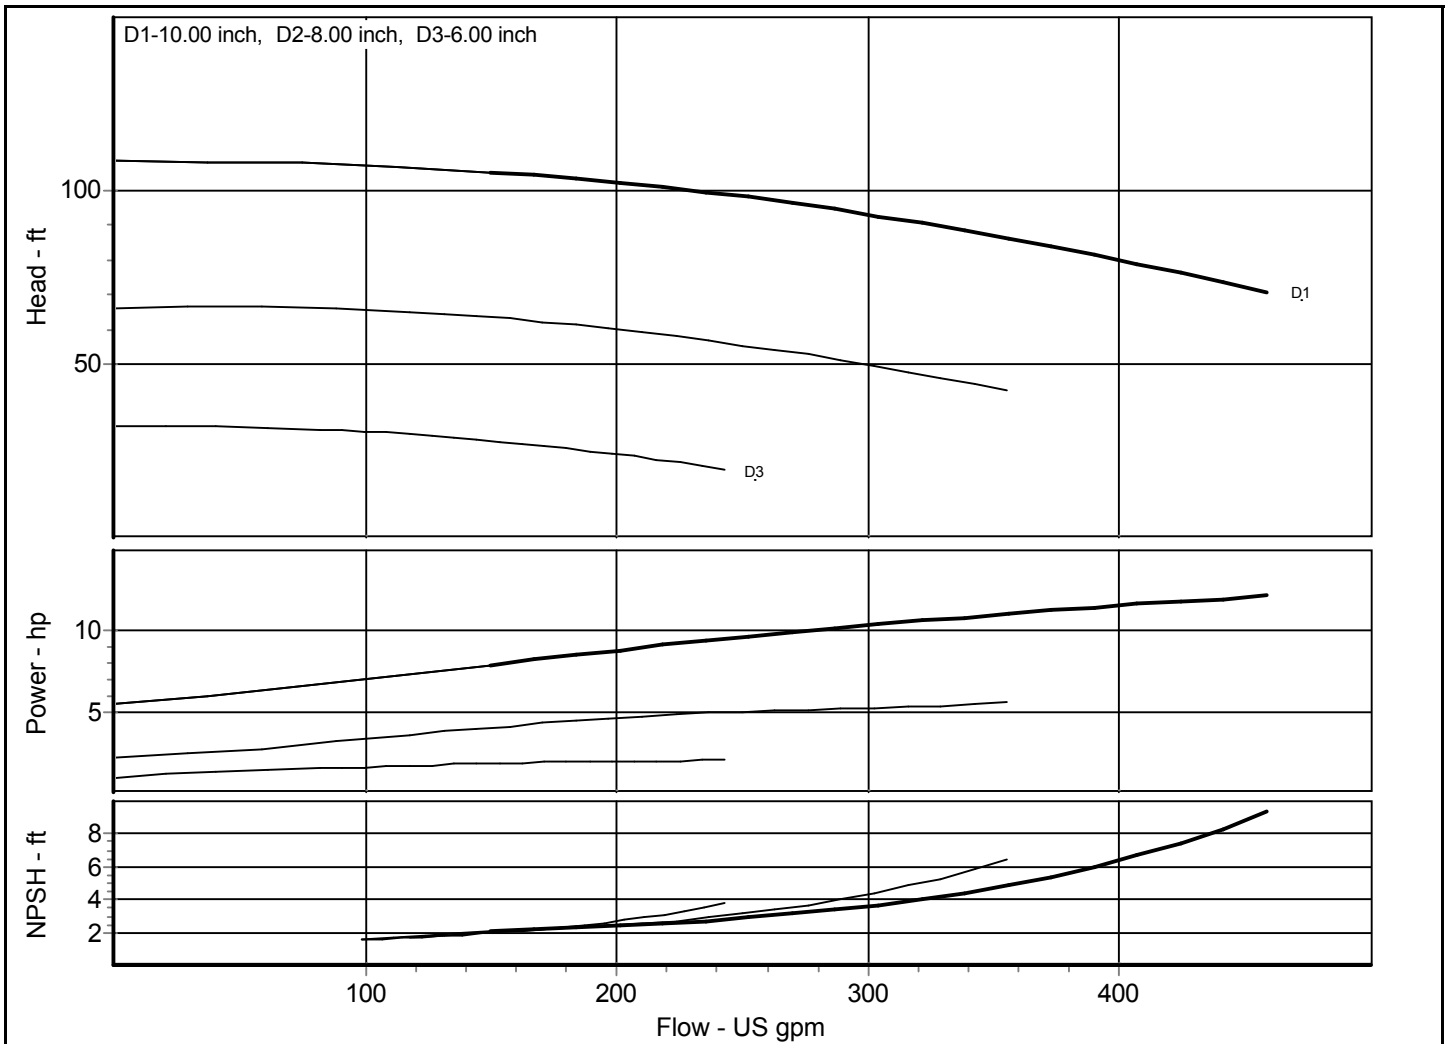

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 3x4-13 5V MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-036	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	40 hp
Item : 1		Closed Valve Pressure	179.992 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

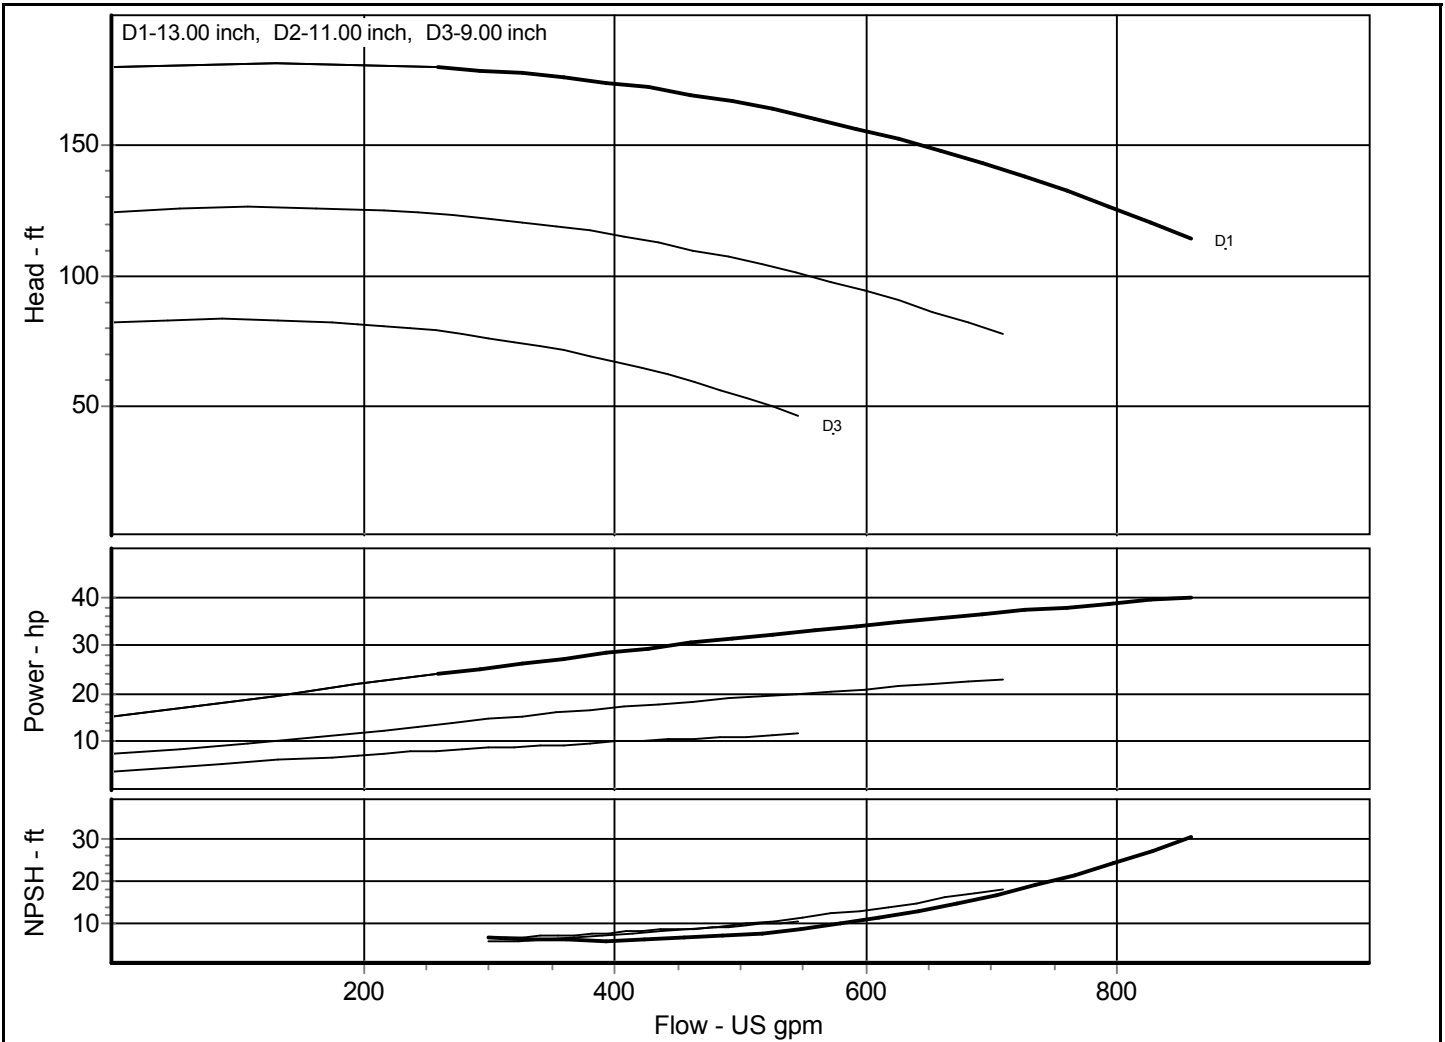

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 3x4-13 5V LTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-036	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	40 hp
Item : 1		Closed Valve Pressure	179.992 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

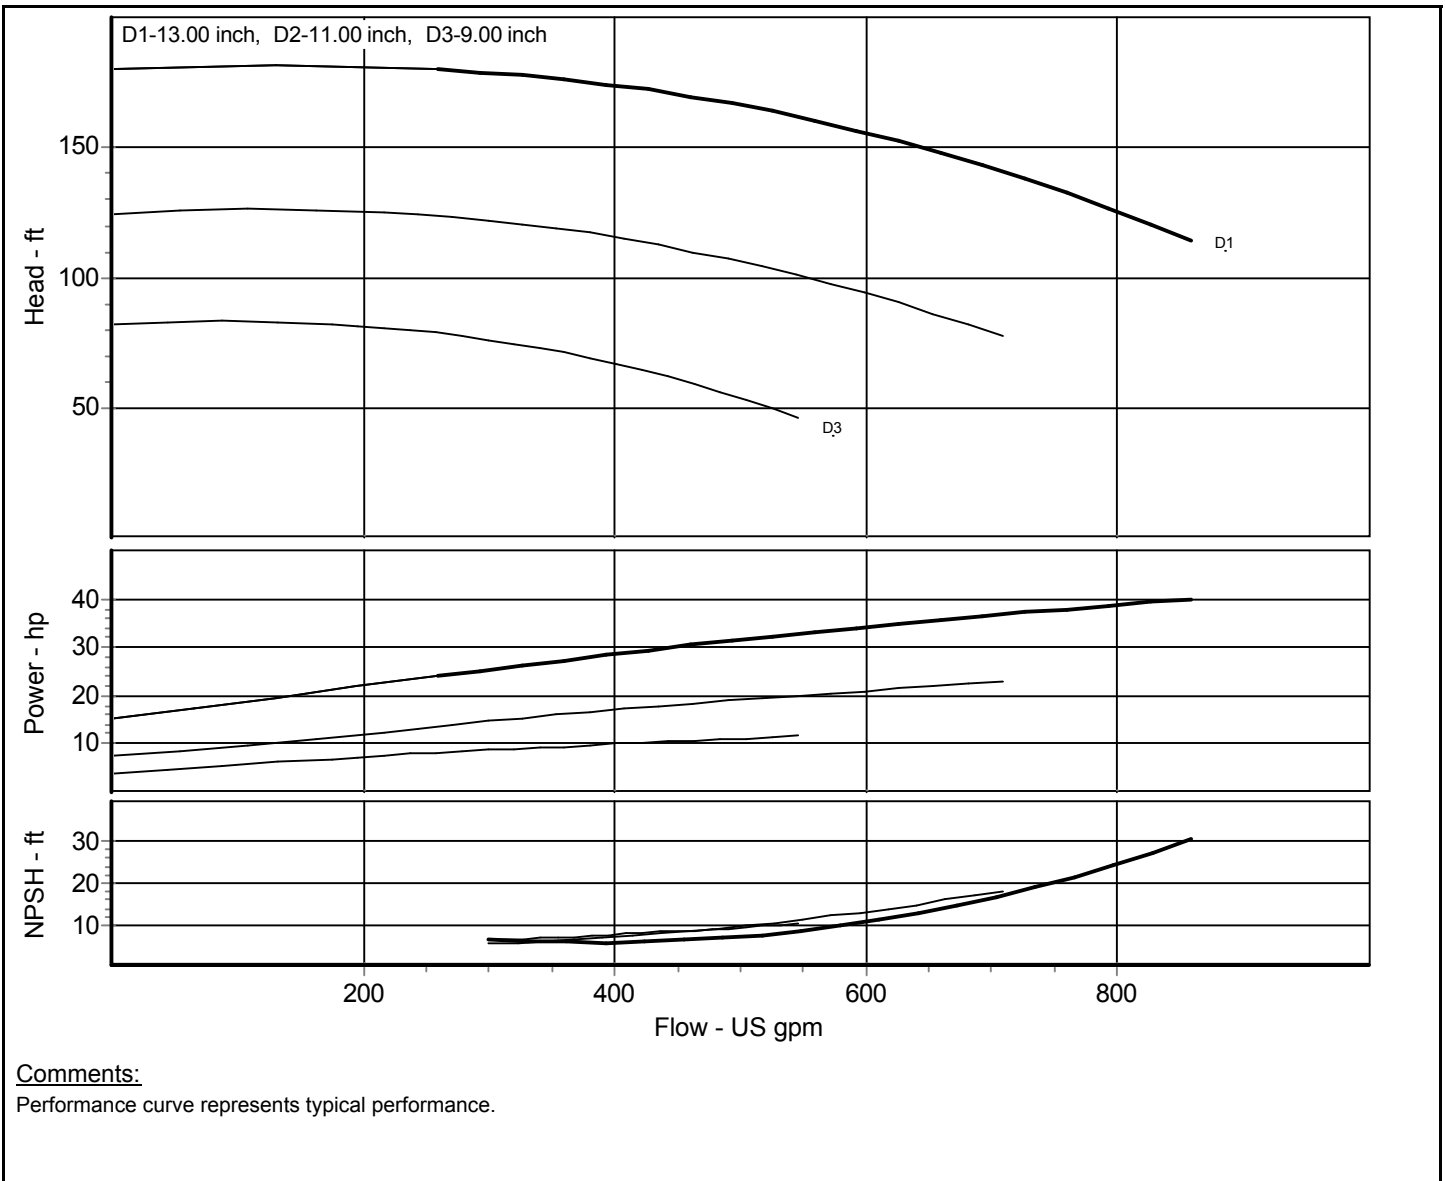



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 3x4-13 6V MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-039	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	49.41 hp
Item : 1		Closed Valve Pressure	183.974 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

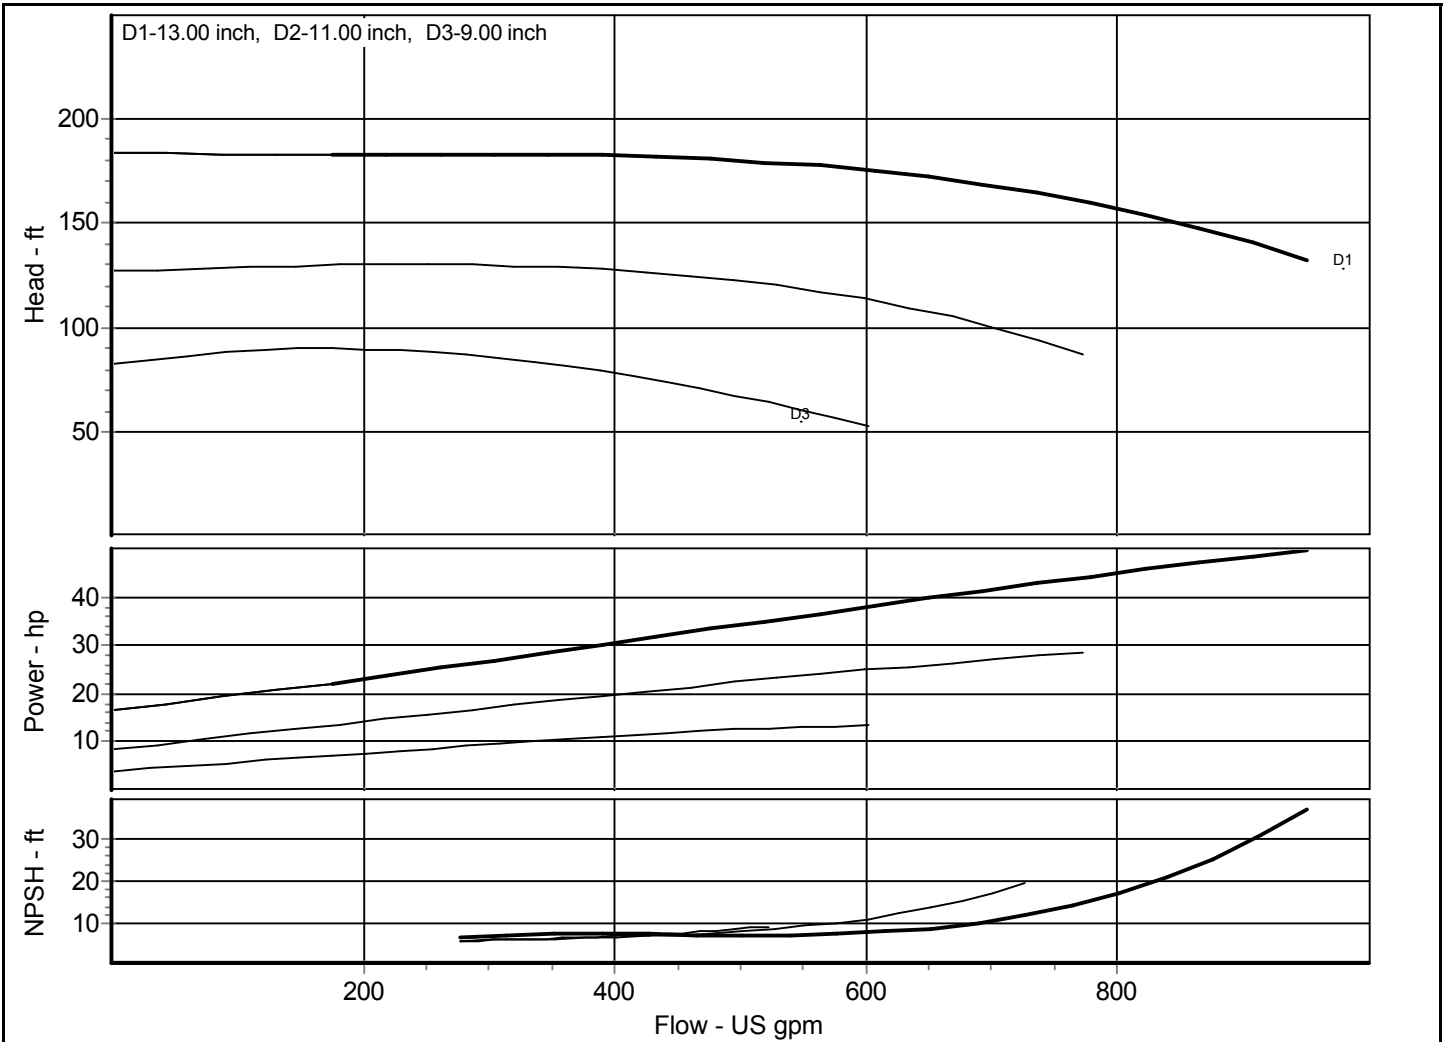

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-13 6V LTP 8196** Nom. Speed: **1750** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **49.41** hp
 Fluid: **Water** Closed Valve Pressure **183.974** ft
 Curve No.: **8196-039**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

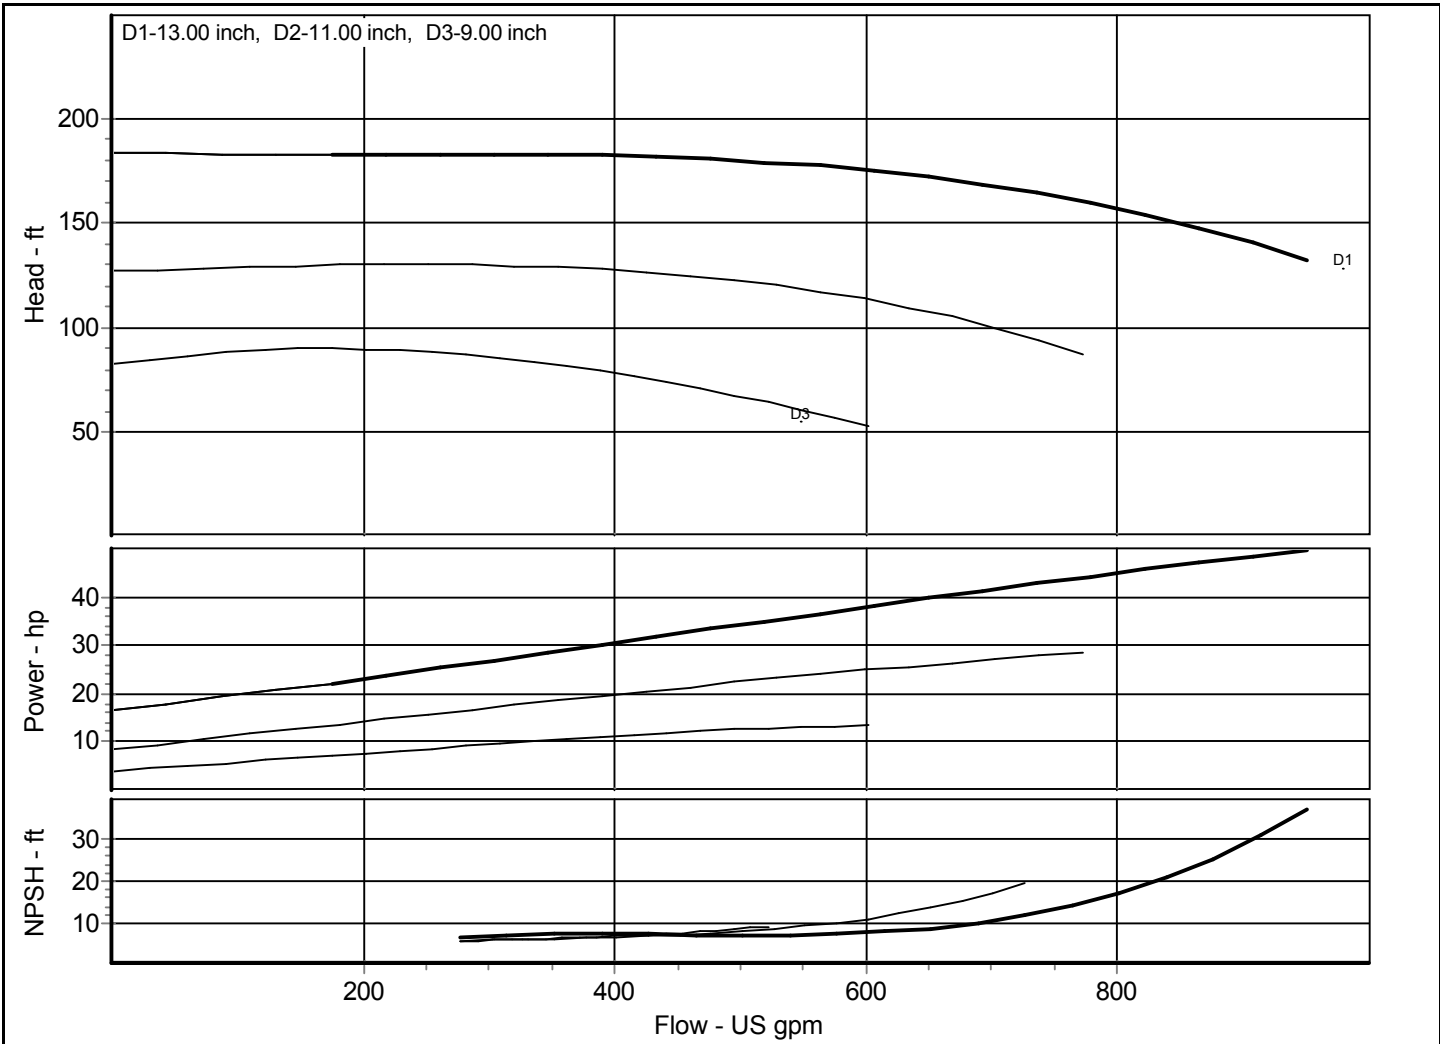

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 4x6-10 MTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-027	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	27.58 hp
Item : 1		Closed Valve Pressure	101.002 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

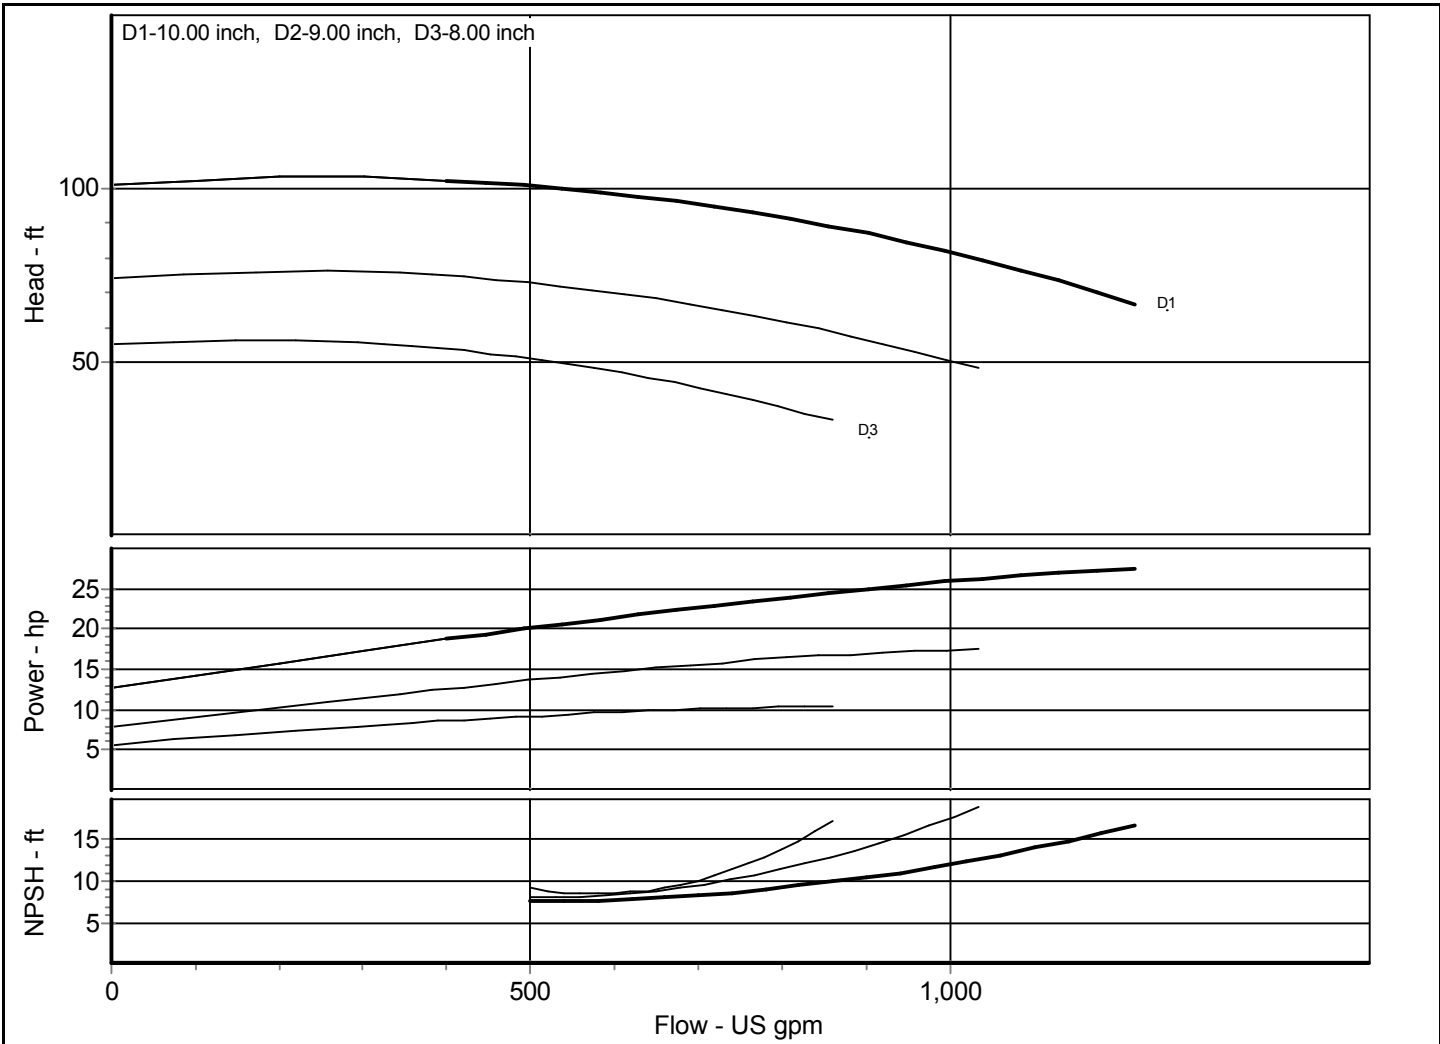

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : _____ **Contact :** _____
Quote No. : _____ **Page No. :** _____ **Phone :** _____ **Fax :** _____
Date : _____

Pump Model: Peerless - 4x6-10H MTP 8196	Nom. Speed: 1780 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10.25/8 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-057	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	31.52 hp
Item : 1		Closed Valve Pressure	108.233 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

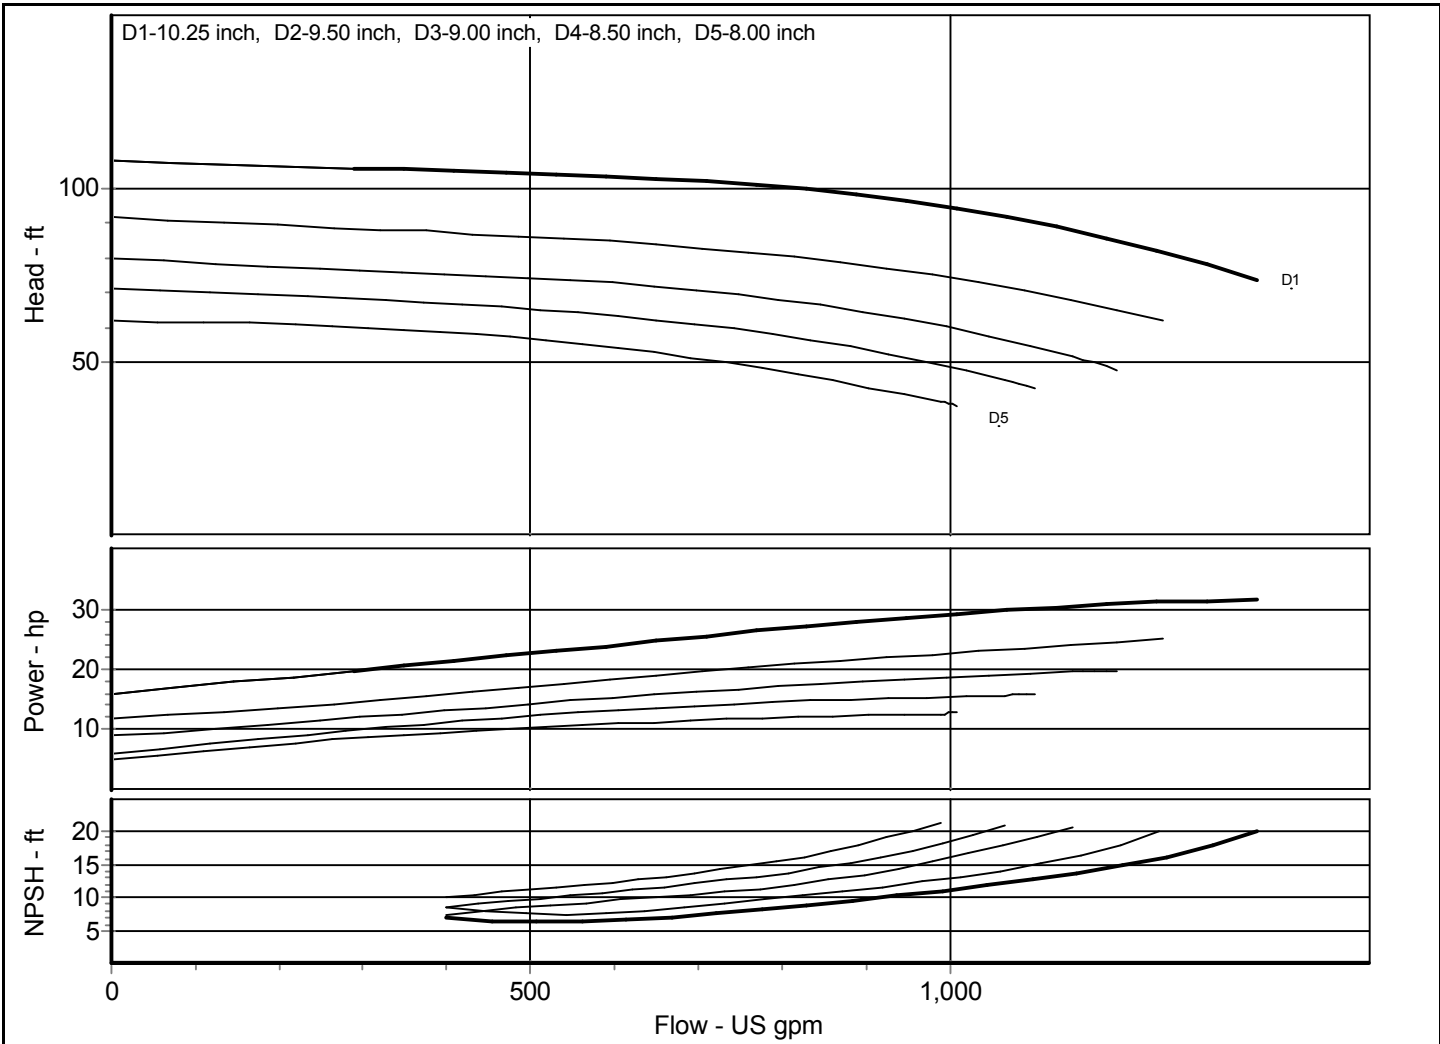

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 4x6-10 LTP 8196** Nom. Speed: **1750** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **10/8** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **27.58** hp
 Fluid: **Water** Closed Valve Pressure **101.002** ft
 Curve No.: **8196-027**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

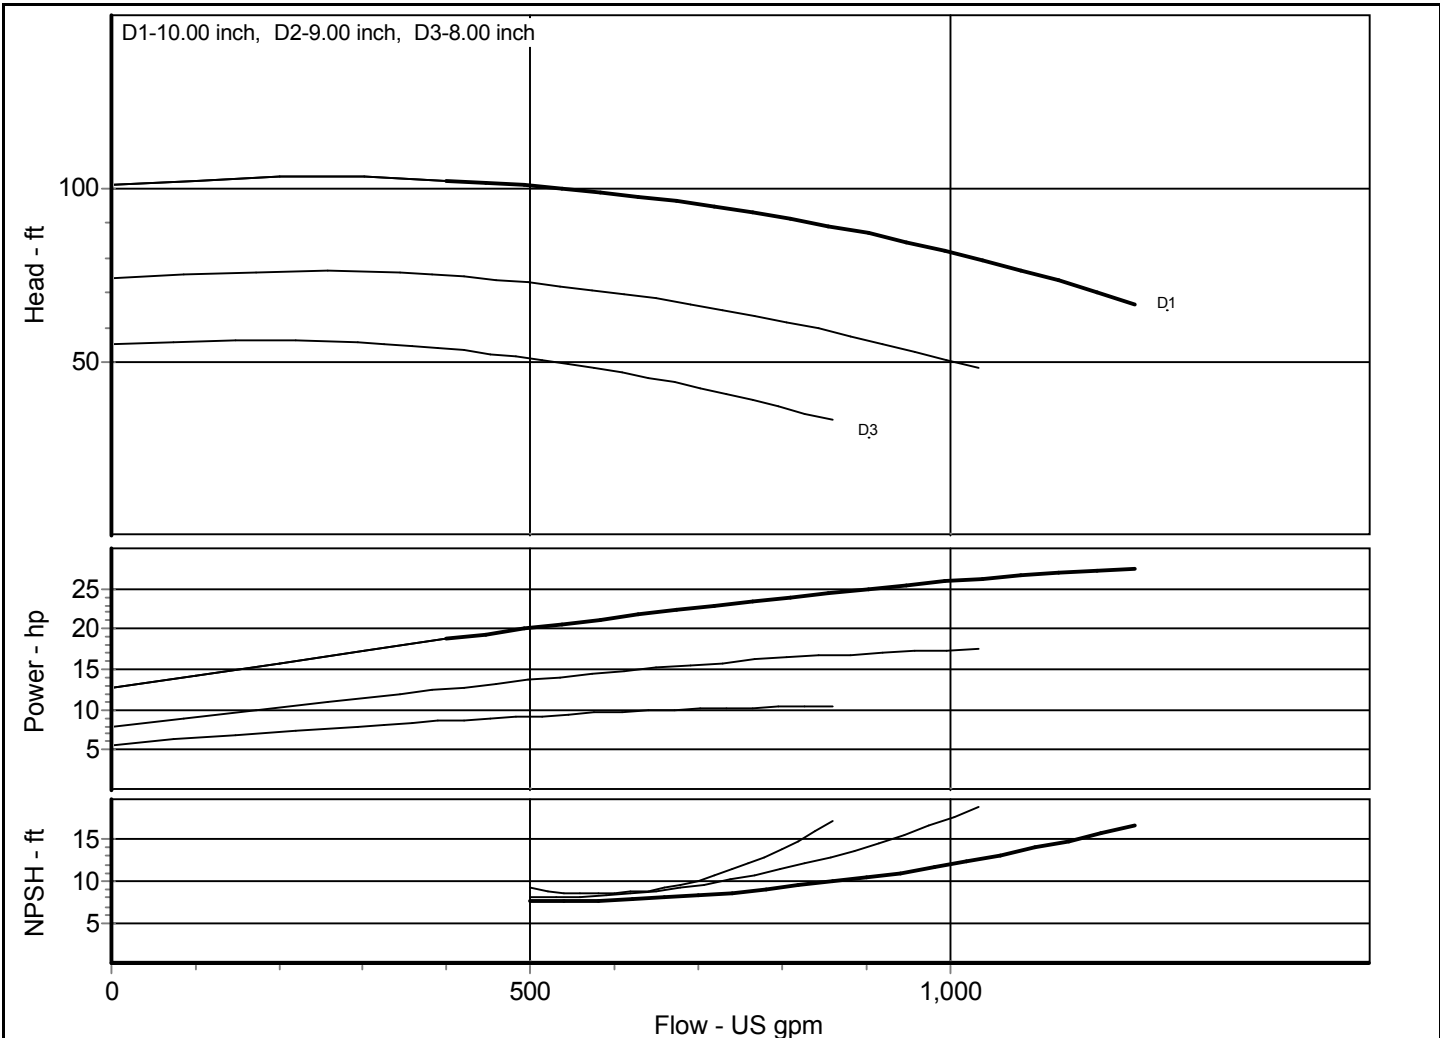

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 4x6-13 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750** RPM, 60 Hz Electric
 Impeller Dia.: **13/9** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **62.7** hp
 Closed Valve Pressure **173.999** ft


Curve No.: **8196-041**

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

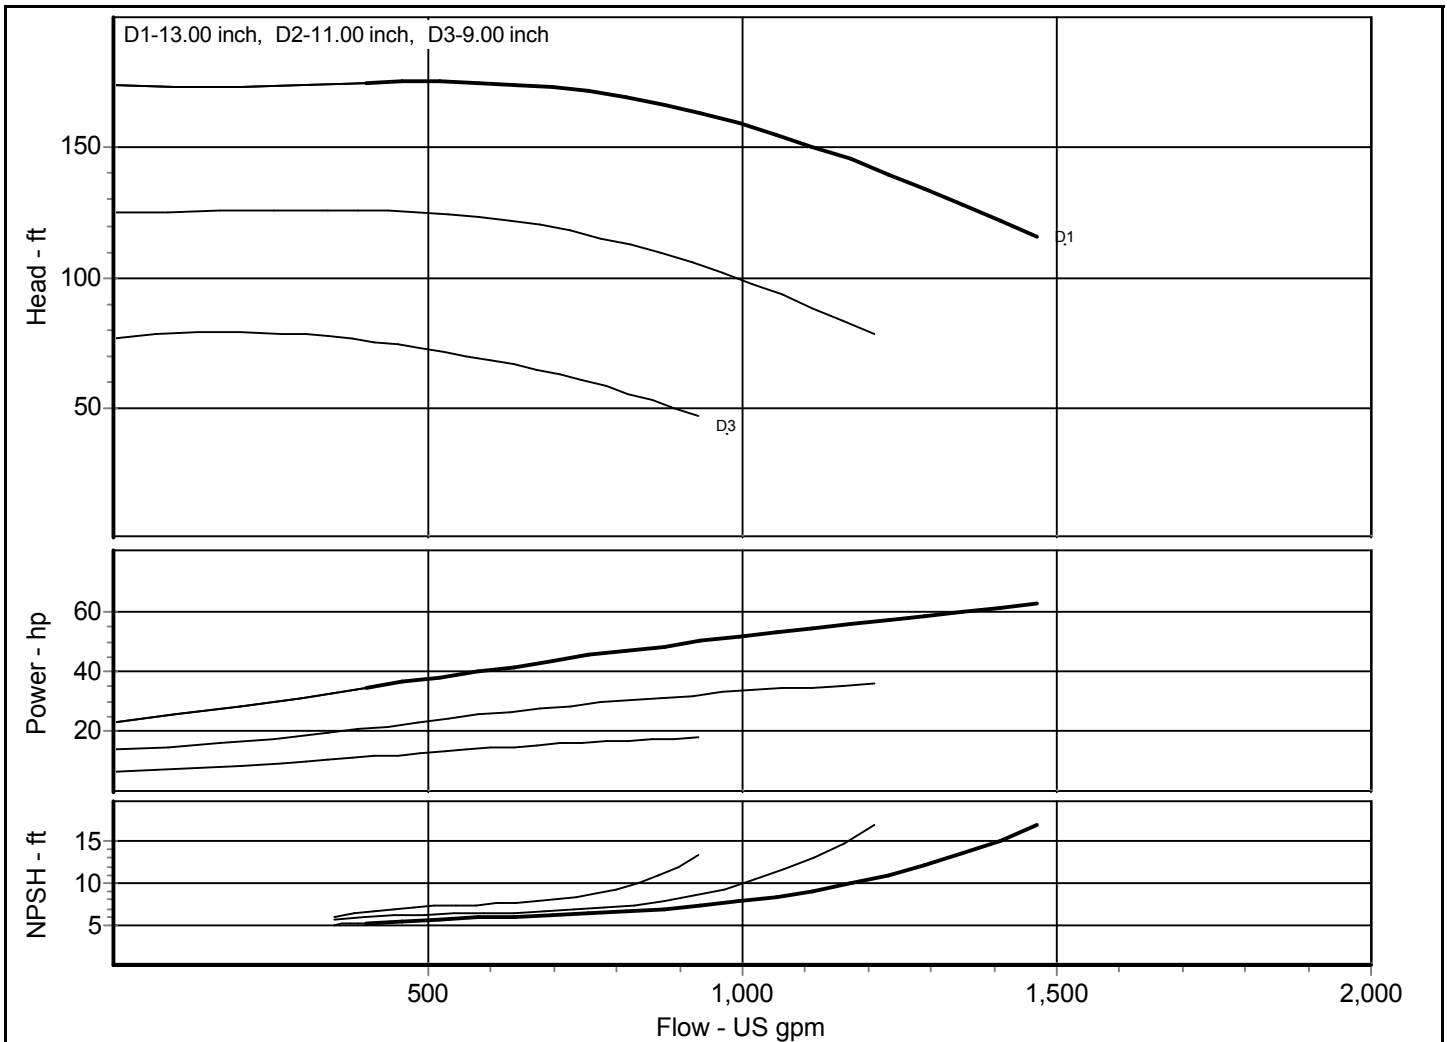

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 4x6-13 LTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750** RPM, 60 Hz Electric
 Impeller Dia.: **13/9** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-041**

Fluid: **Water**

Peak Power: **62.7** hp


Impeller No.

Closed Valve Pressure **173.999** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

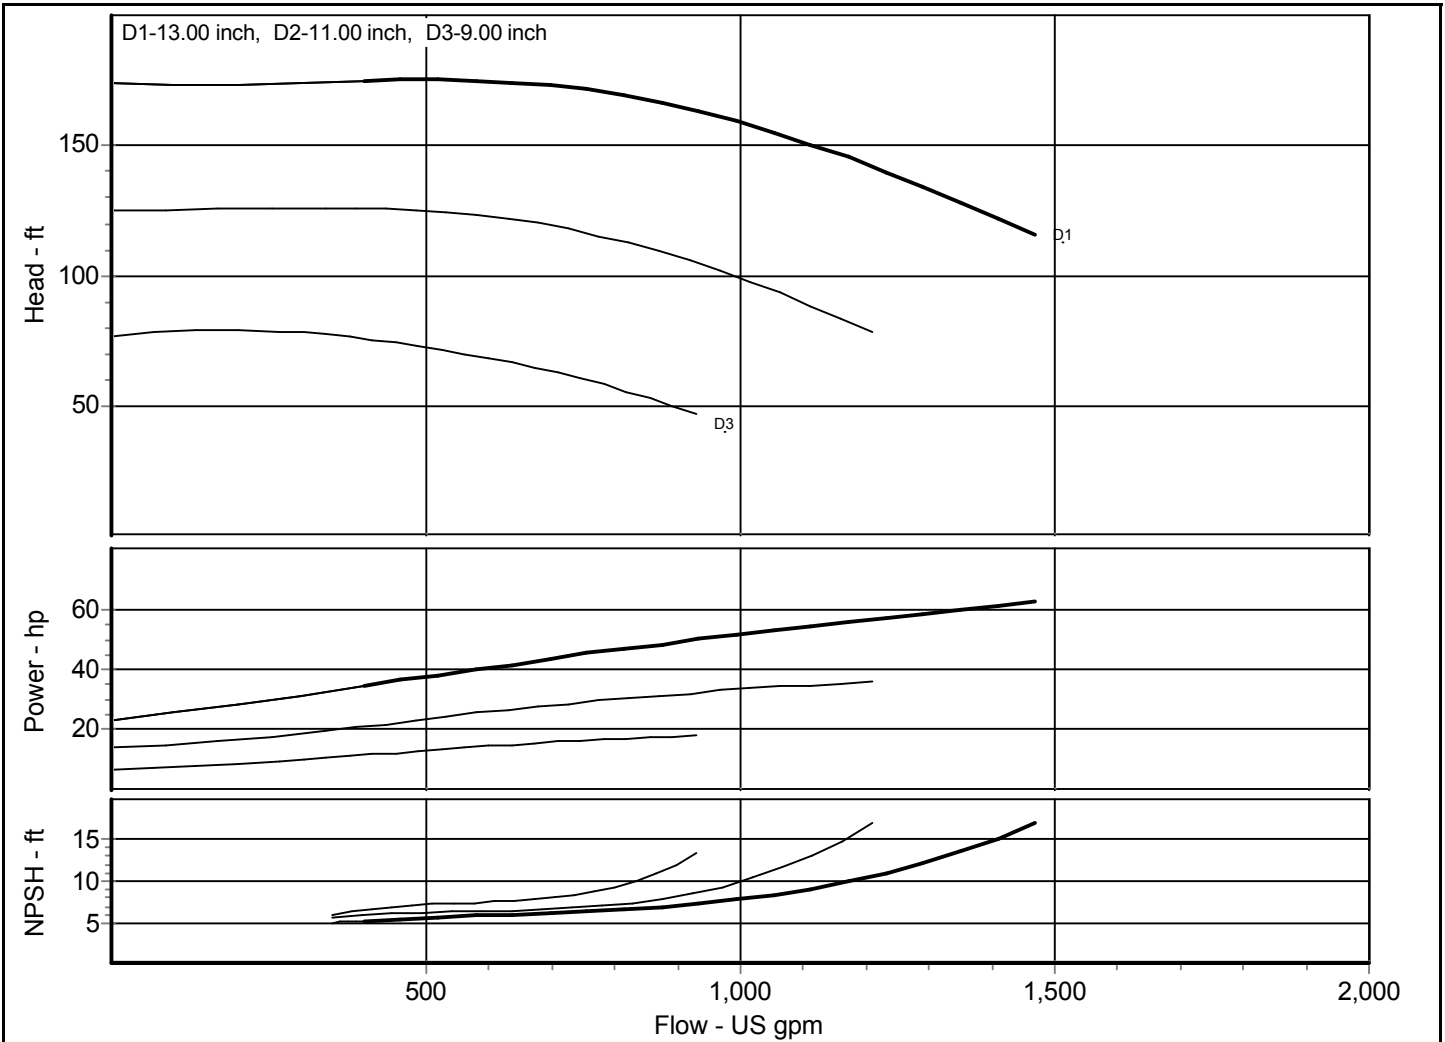

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 4x6-17 XLTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1780** RPM, 60 Hz Electric
 Impeller Dia.: **16.75/13** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft
 Peak Power: **164.59** hp
 Closed Valve Pressure **312.086** ft


Curve No.: **8196-059**

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

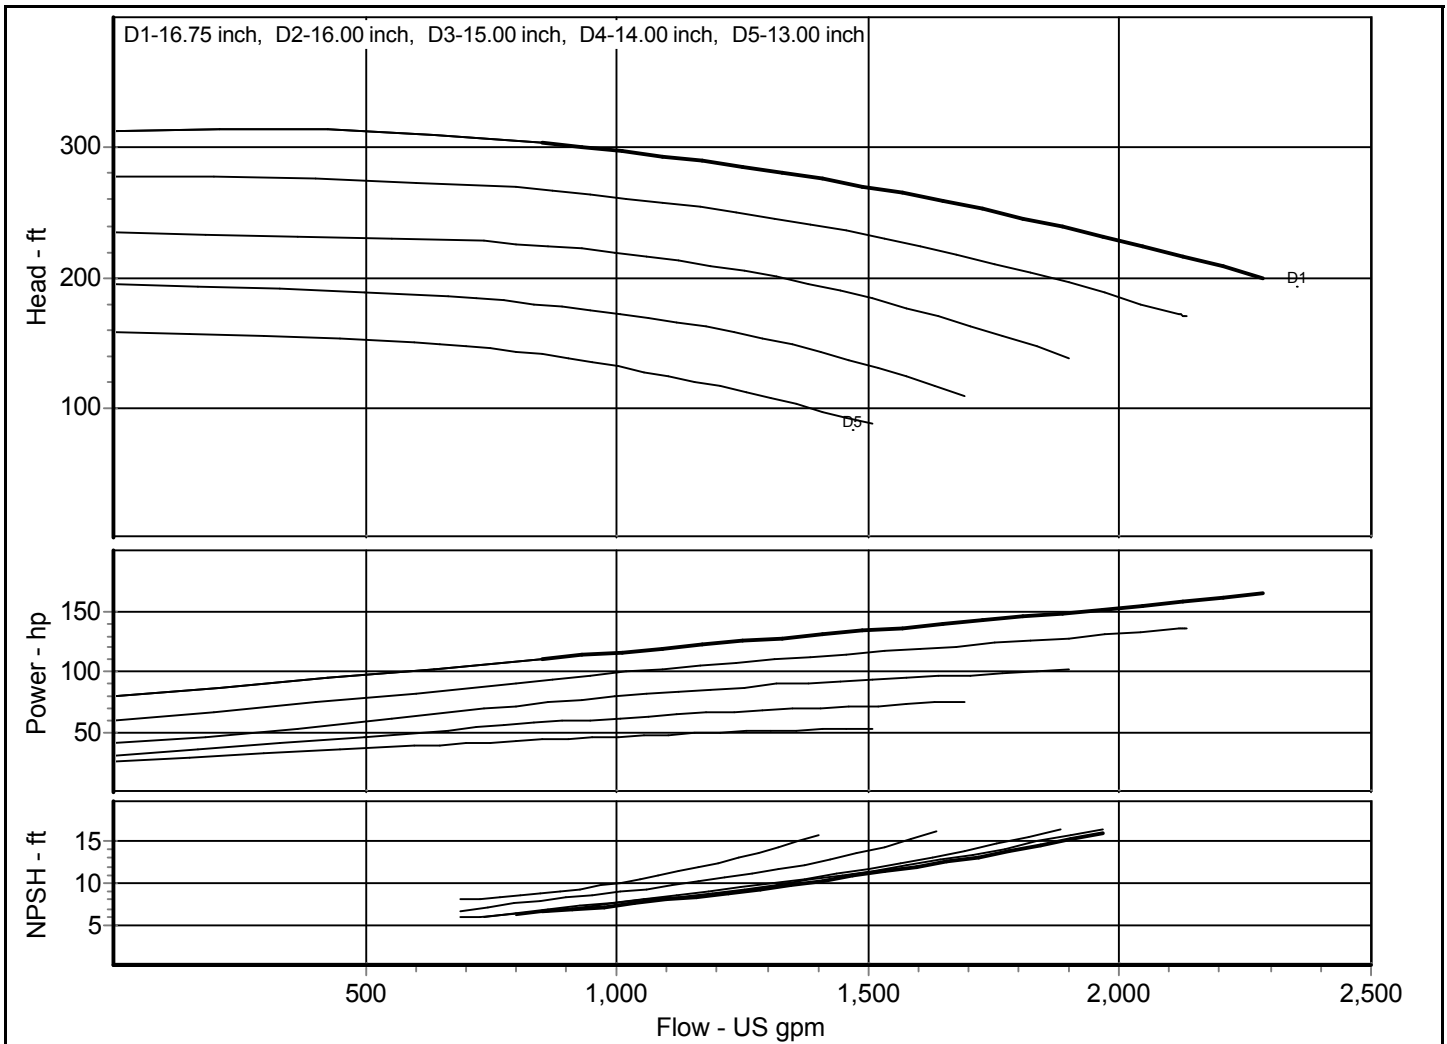

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 6x8-13 XLTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1750** RPM, 60 Hz Electric
 Impeller Dia.: **13/10** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **101.31** hp
 Closed Valve Pressure **196** ft


Curve No.: **8196-043**

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

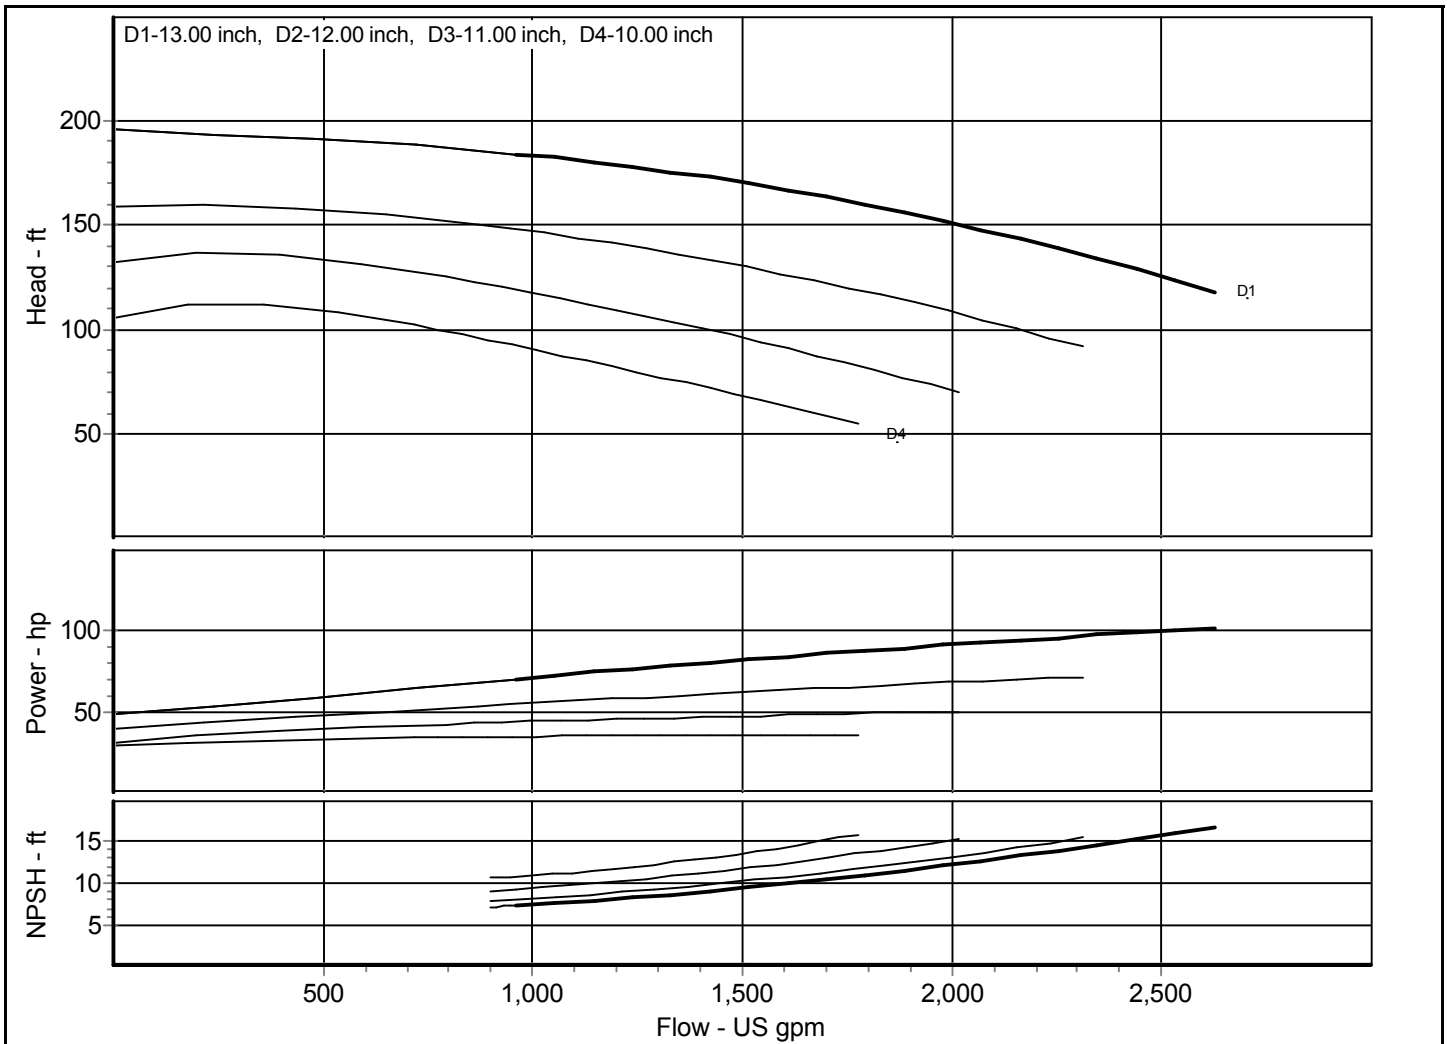

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 6x8-17 XLTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1780** RPM, 60 Hz Electric
 Impeller Dia.: **16.75/13** inch

Duty Flow : US gpm

Duty Head : ft

Efficiency : %

Power Required : hp

NPSH Required : ft

Peak Power: **270.98** hp

Closed Valve Pressure **314.001** ft


Curve No.: **8196-061**

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

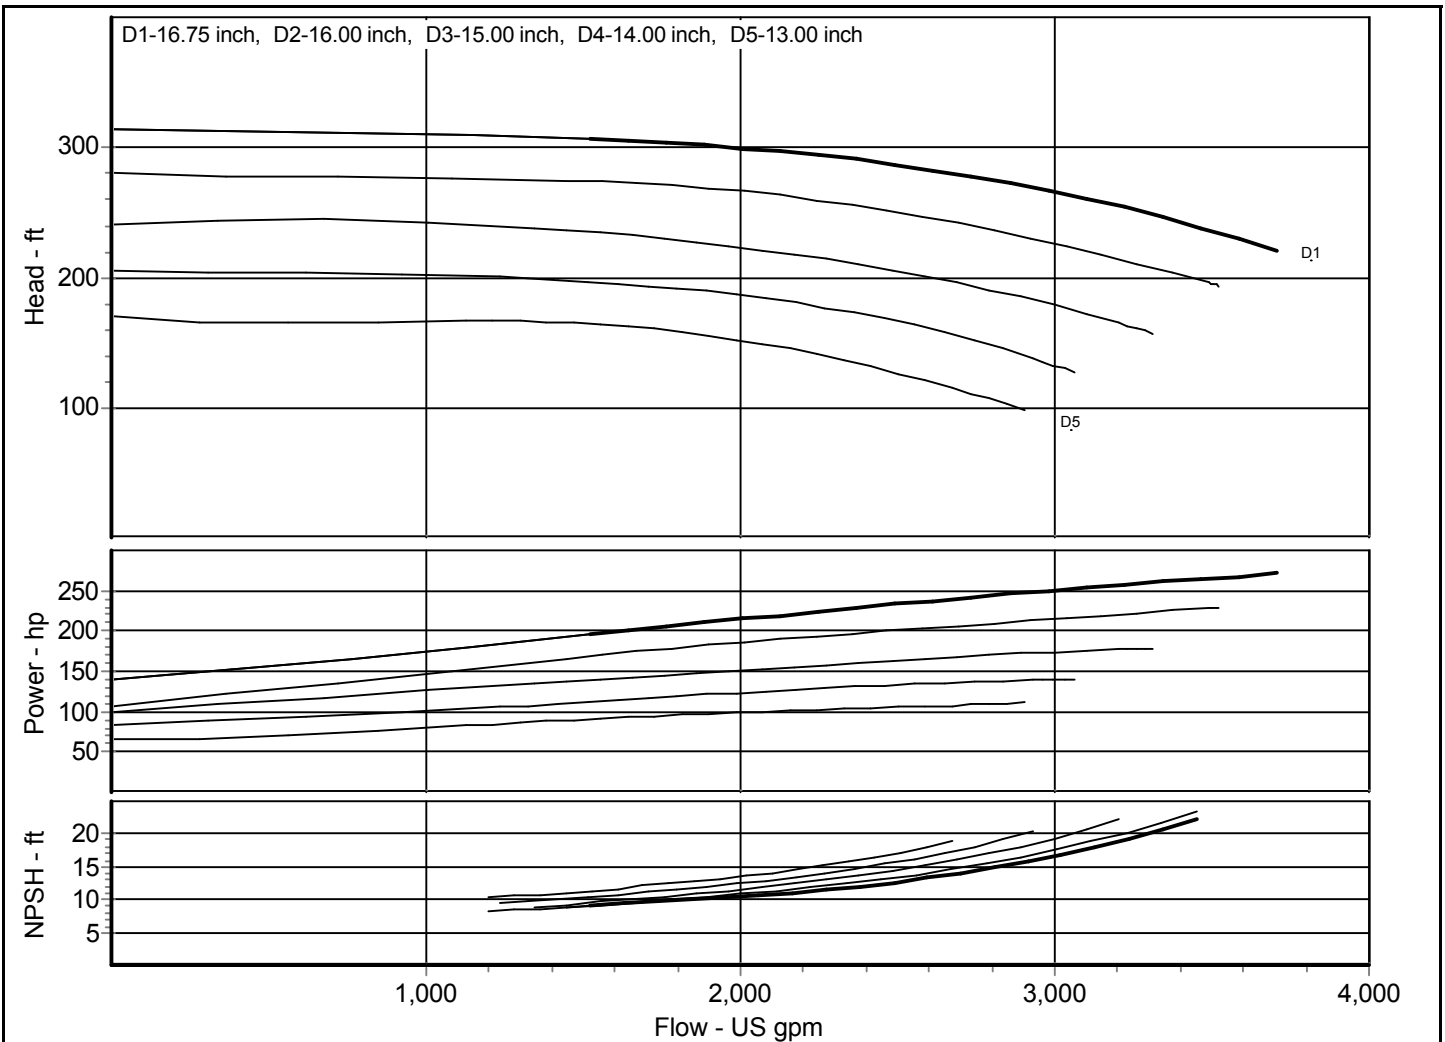

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 8x10-13 XLTP 8196	Nom. Speed: 1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/10.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-045	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 141.64 hp	
Item : 1		Closed Valve Pressure 181.999 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

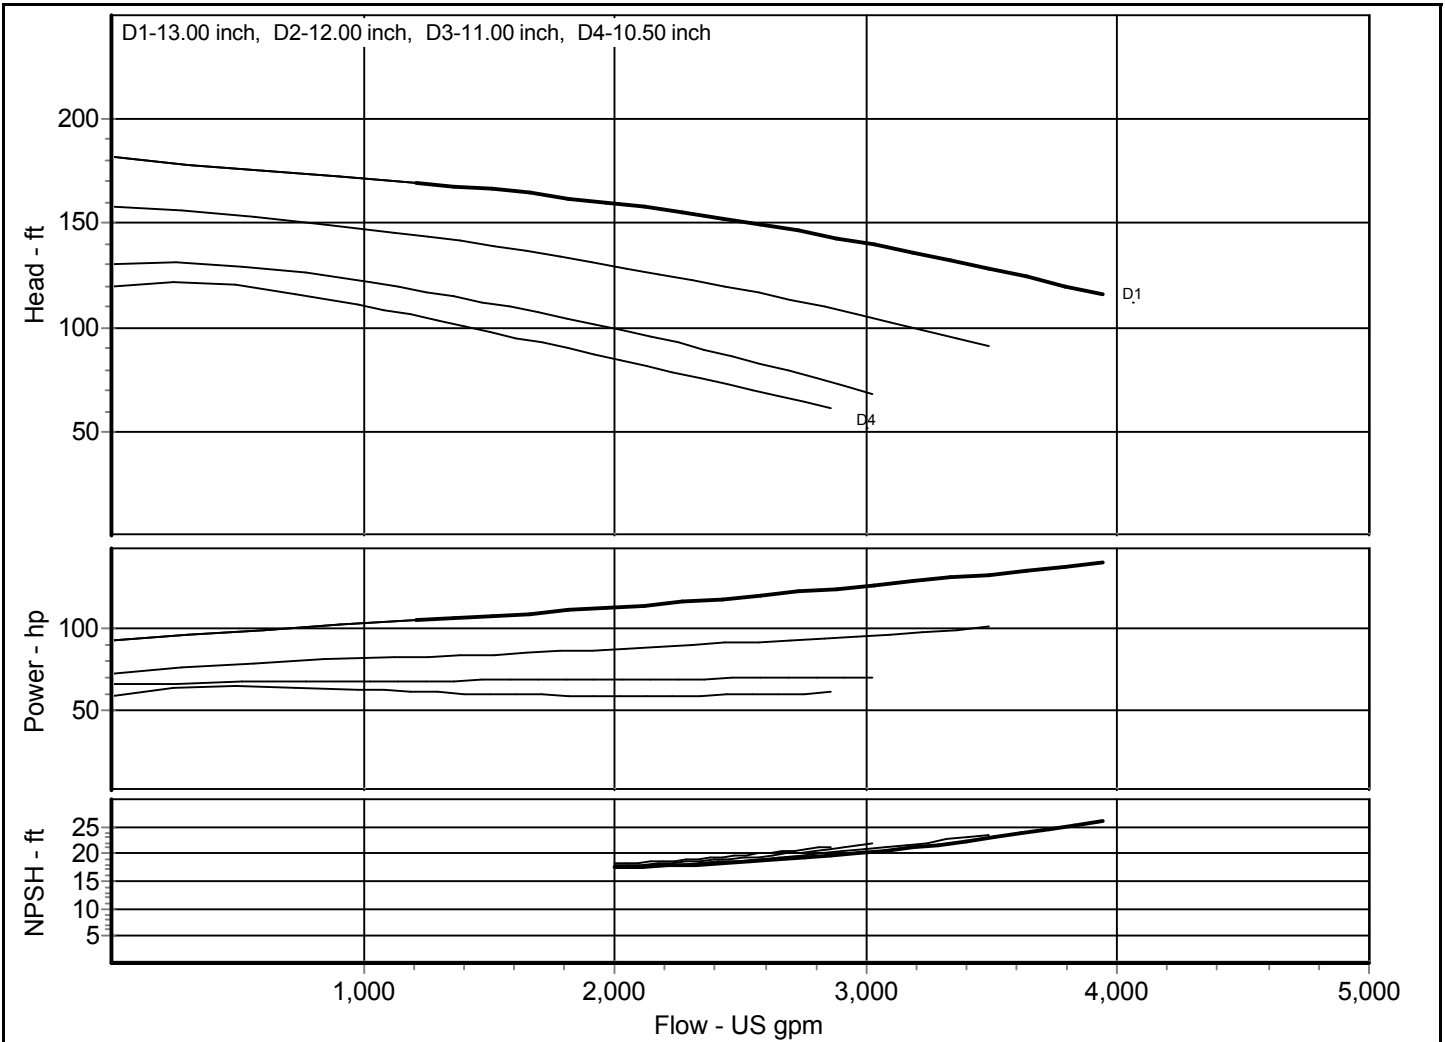

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model:	Peerless - 8x10-15G XLTP 8196	Nom. Speed:	1750 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type:	8196 - ANSI Standard End Suction	Impeller Dia.:	15/12 inch	Duty Head :	ft
		Temperature:	68 °F	Efficiency :	%
		Viscosity:	1.009 cP	Power Required :	hp
Curve No.:	8196-051	Sp. Gravity:	1.000	NPSH Required :	ft
Impeller No.		Fluid:	Water	Peak Power:	219.61 hp
Item :	1			Closed Valve Pressure	225 ft
Your Ref.:		Tolerance :	Hyd Inst-Peerless Std		

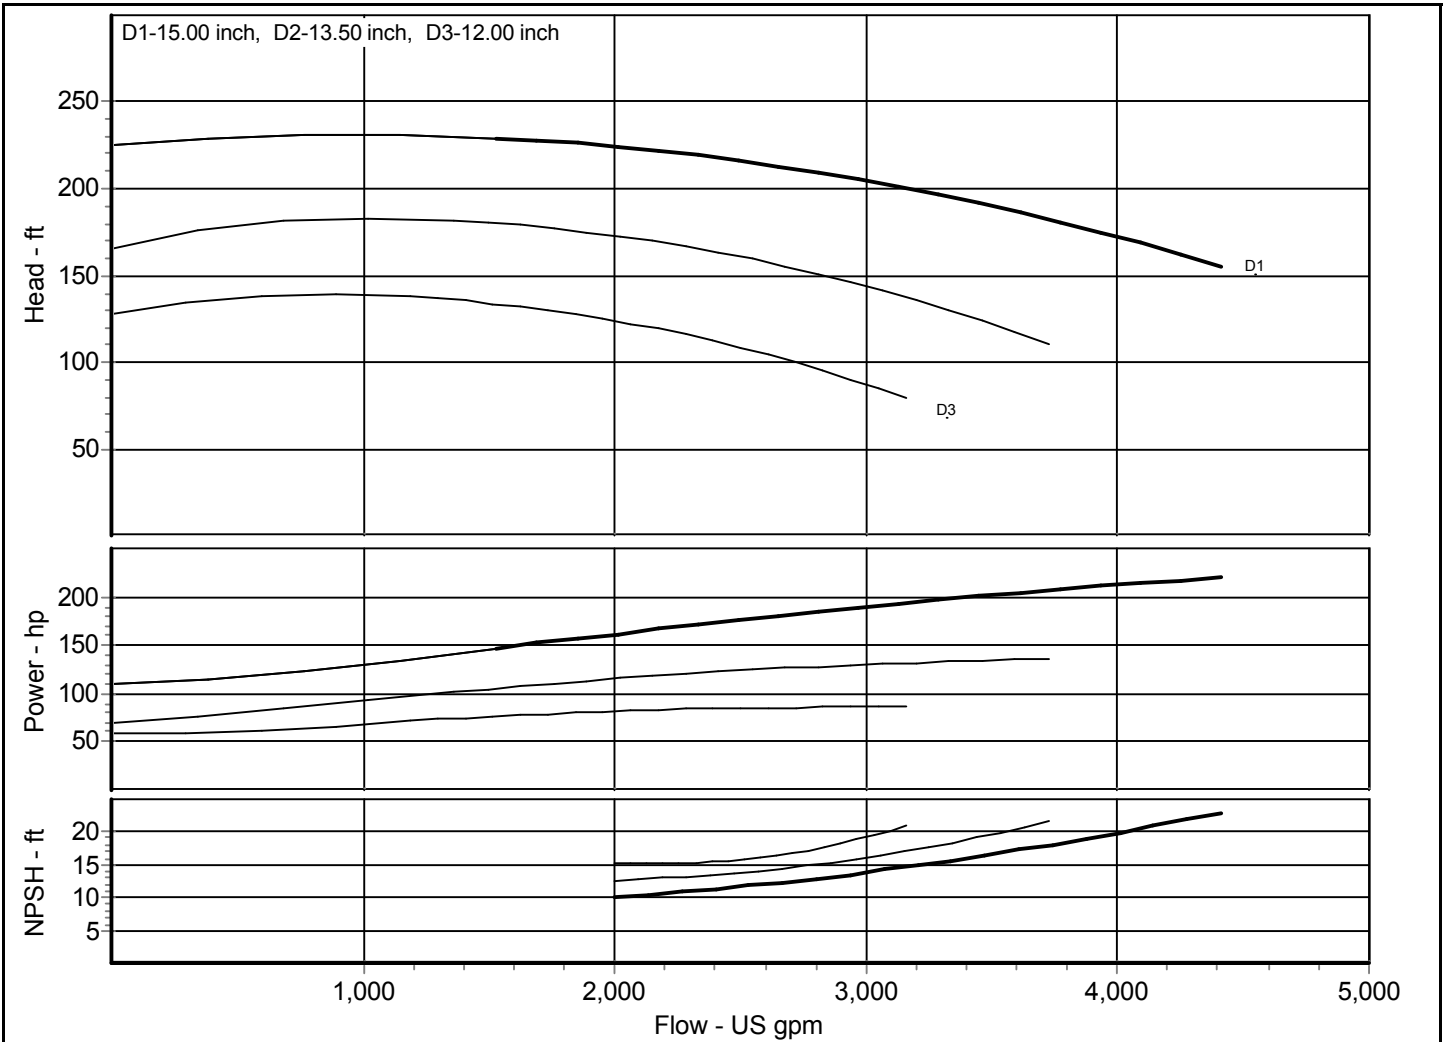

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 8x10-17 XLTP 8196	Nom. Speed: 1780 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 16.38/13 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-063	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	325.05 hp
Item : 1		Closed Valve Pressure	289.56 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

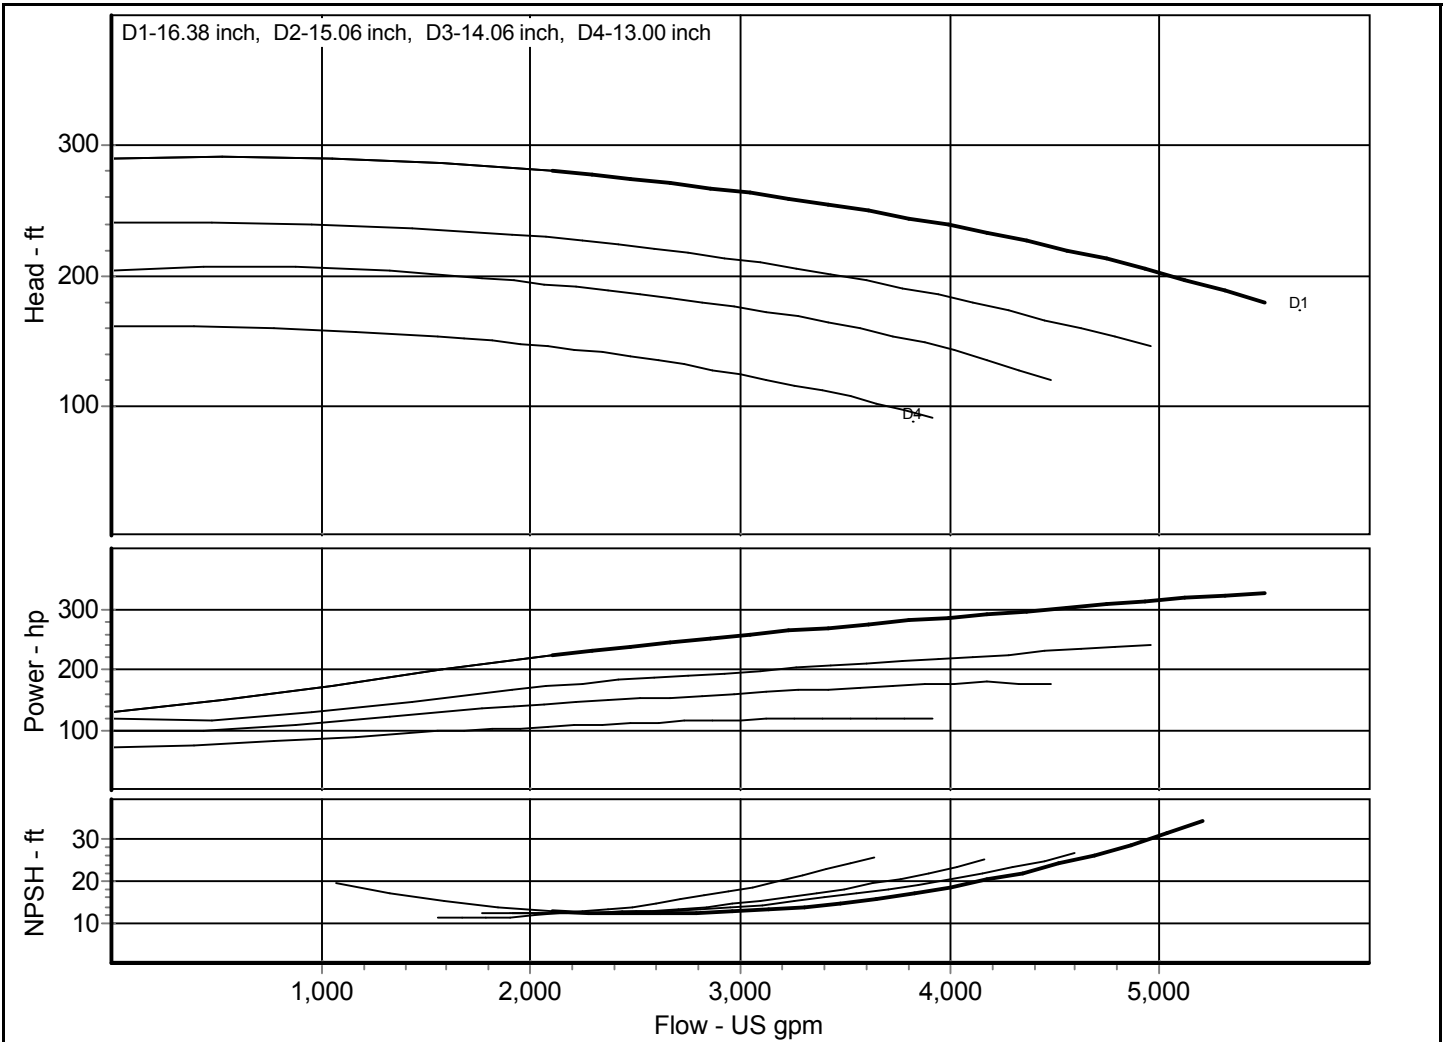

Comments:

Performance curve represents typical performance.




Customer :

Peerless Pump Company LLC
 P O Box 7026, Indianapolis, Indiana, 46202

Project : _____ **Contact :** _____
Quote No. : _____ **Page No.** _____ **Phone :** _____ **Fax :** _____
 _____ **Date :** _____

Pump Model: Peerless - 1.5x3-13 LTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-031	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No. _____	Fluid: Water	Peak Power:	4.13 hp
Item : 1		Closed Valve Pressure	68.205 ft
Your Ref.: _____	Tolerance : Hyd Inst-Peerless Std		

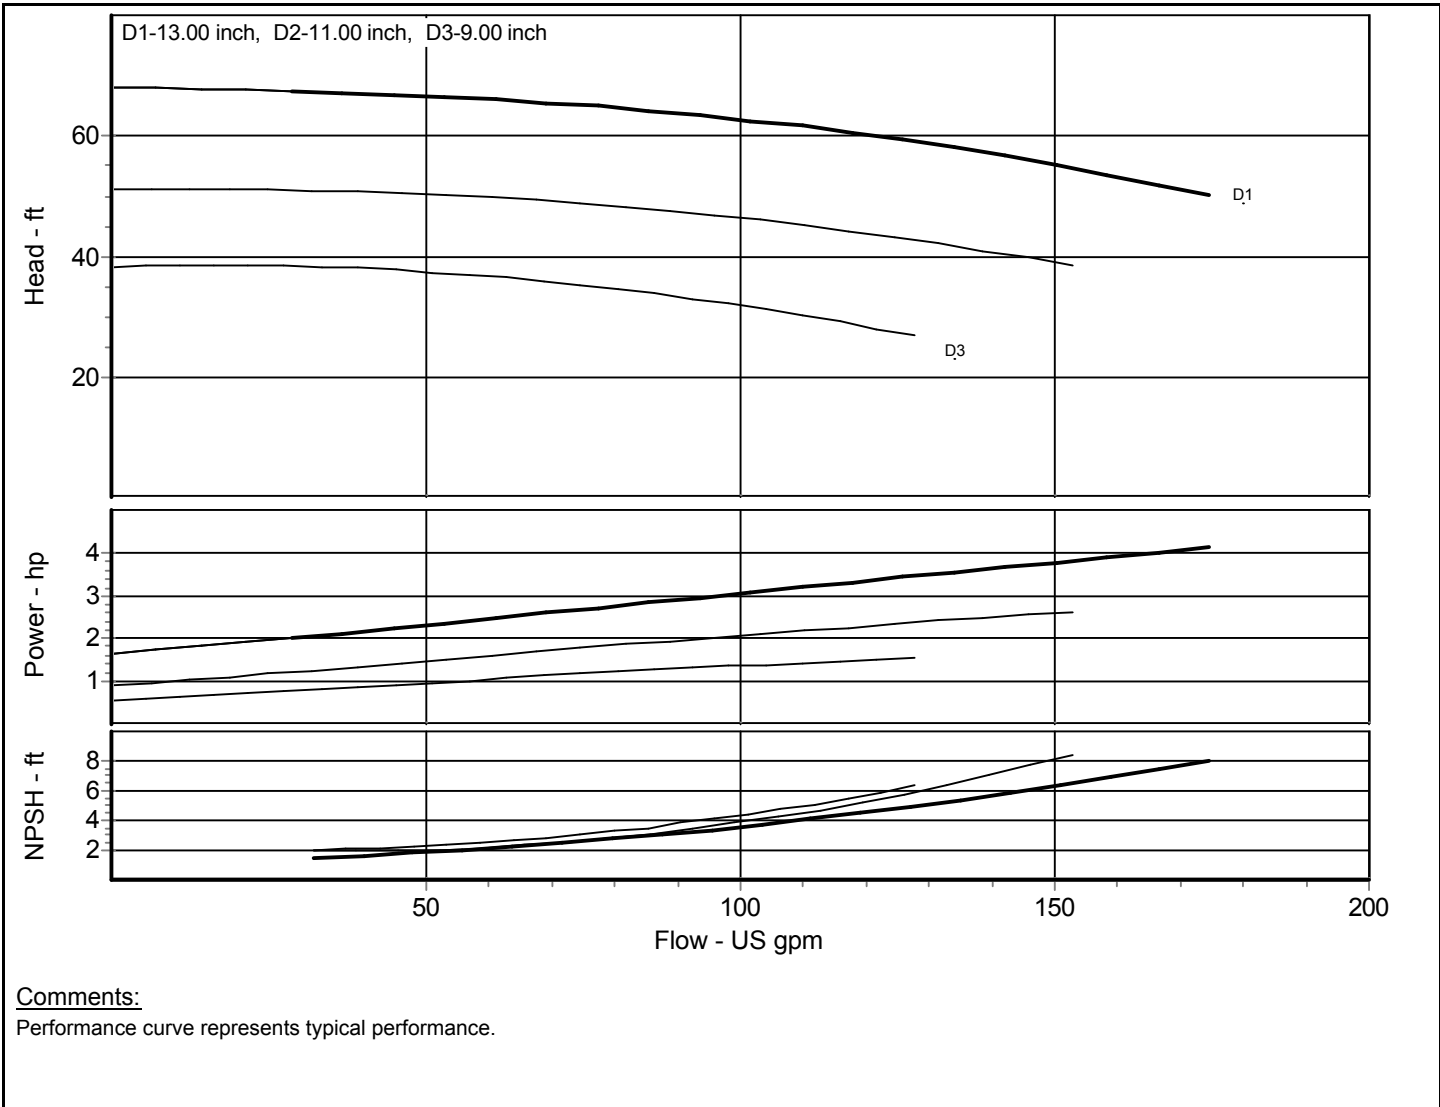




Peerless Pump Company LLC
 P O Box 7026, Indianapolis, Indiana, 46202

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1.5x3-13 LTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-031	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	4.13 hp
Item : 1		Closed Valve Pressure	68.205 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

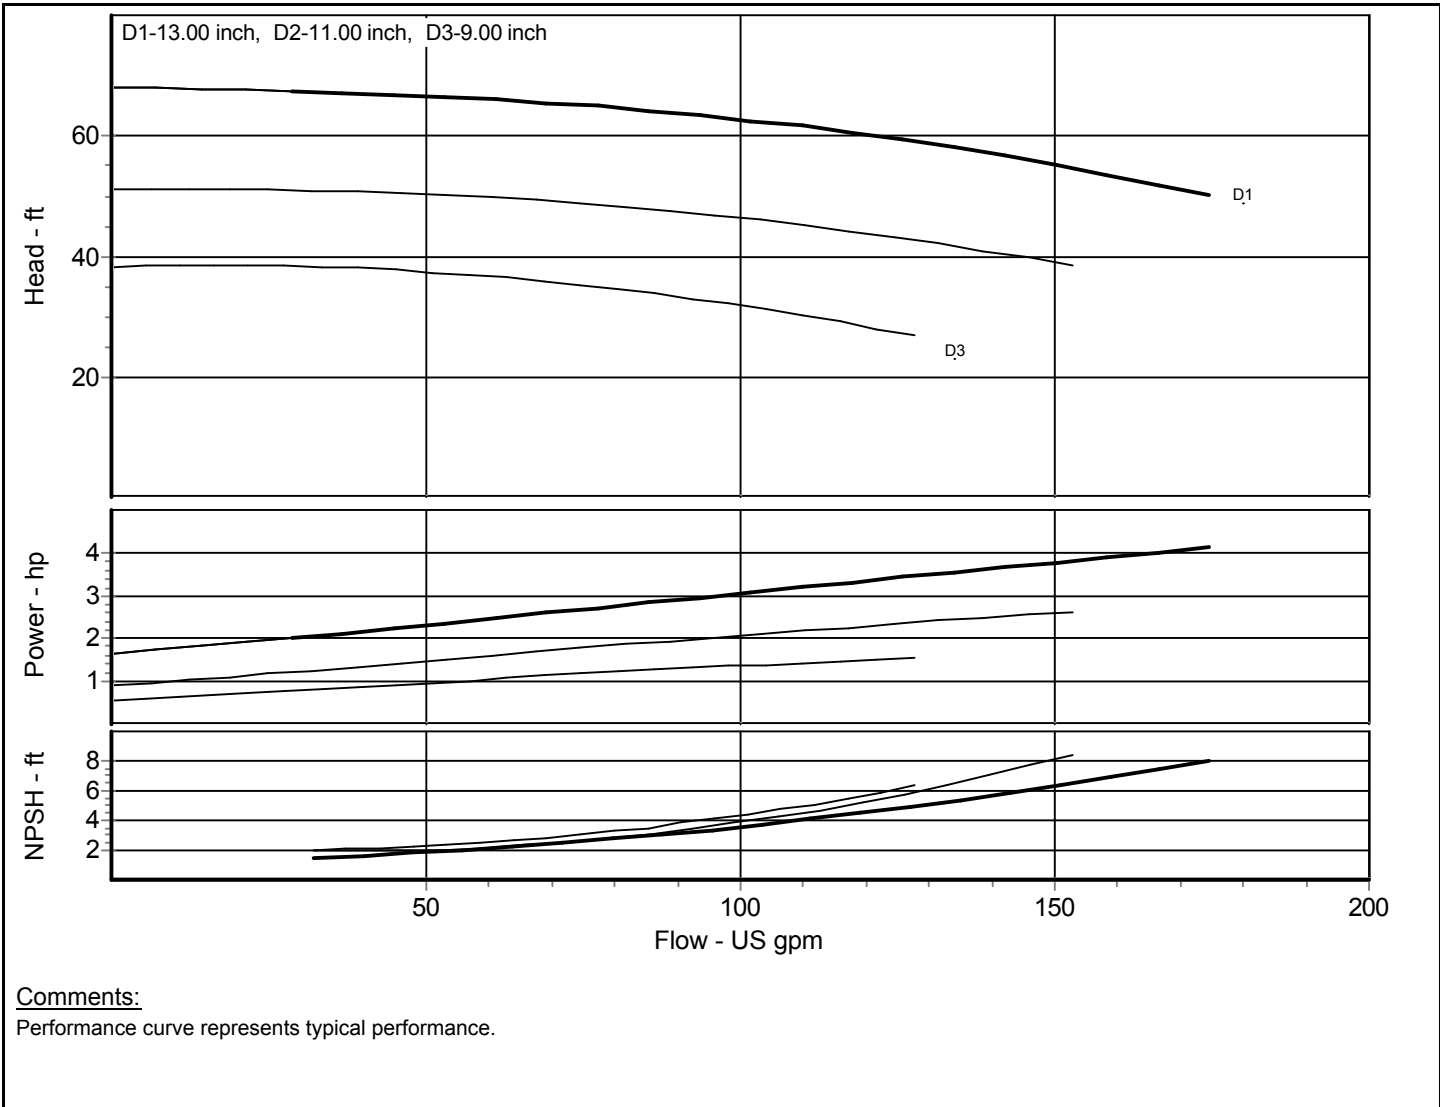



Peerless Pump Company LLC
 P O Box 7026, Indianapolis, Indiana, 46202

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 1.5x3-13 MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-031	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	4.13 hp
Item : 1		Closed Valve Pressure	68.205 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

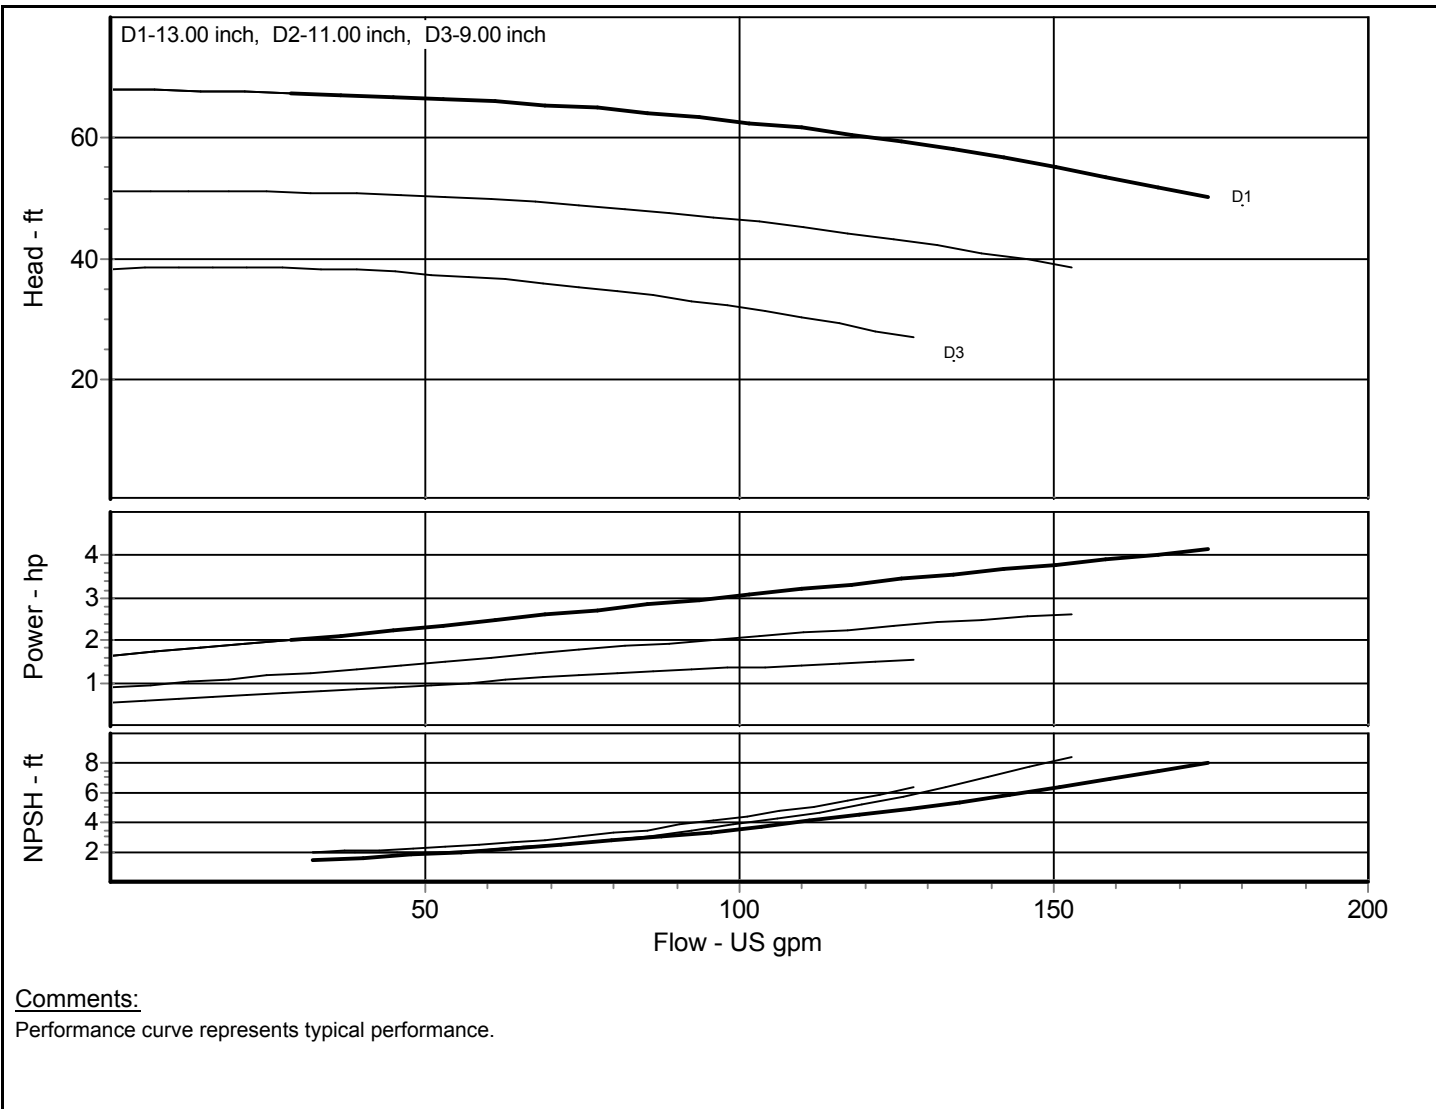




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1.5x3-13 LTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-031	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	4.13 hp
Item : 1		Closed Valve Pressure	68.205 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

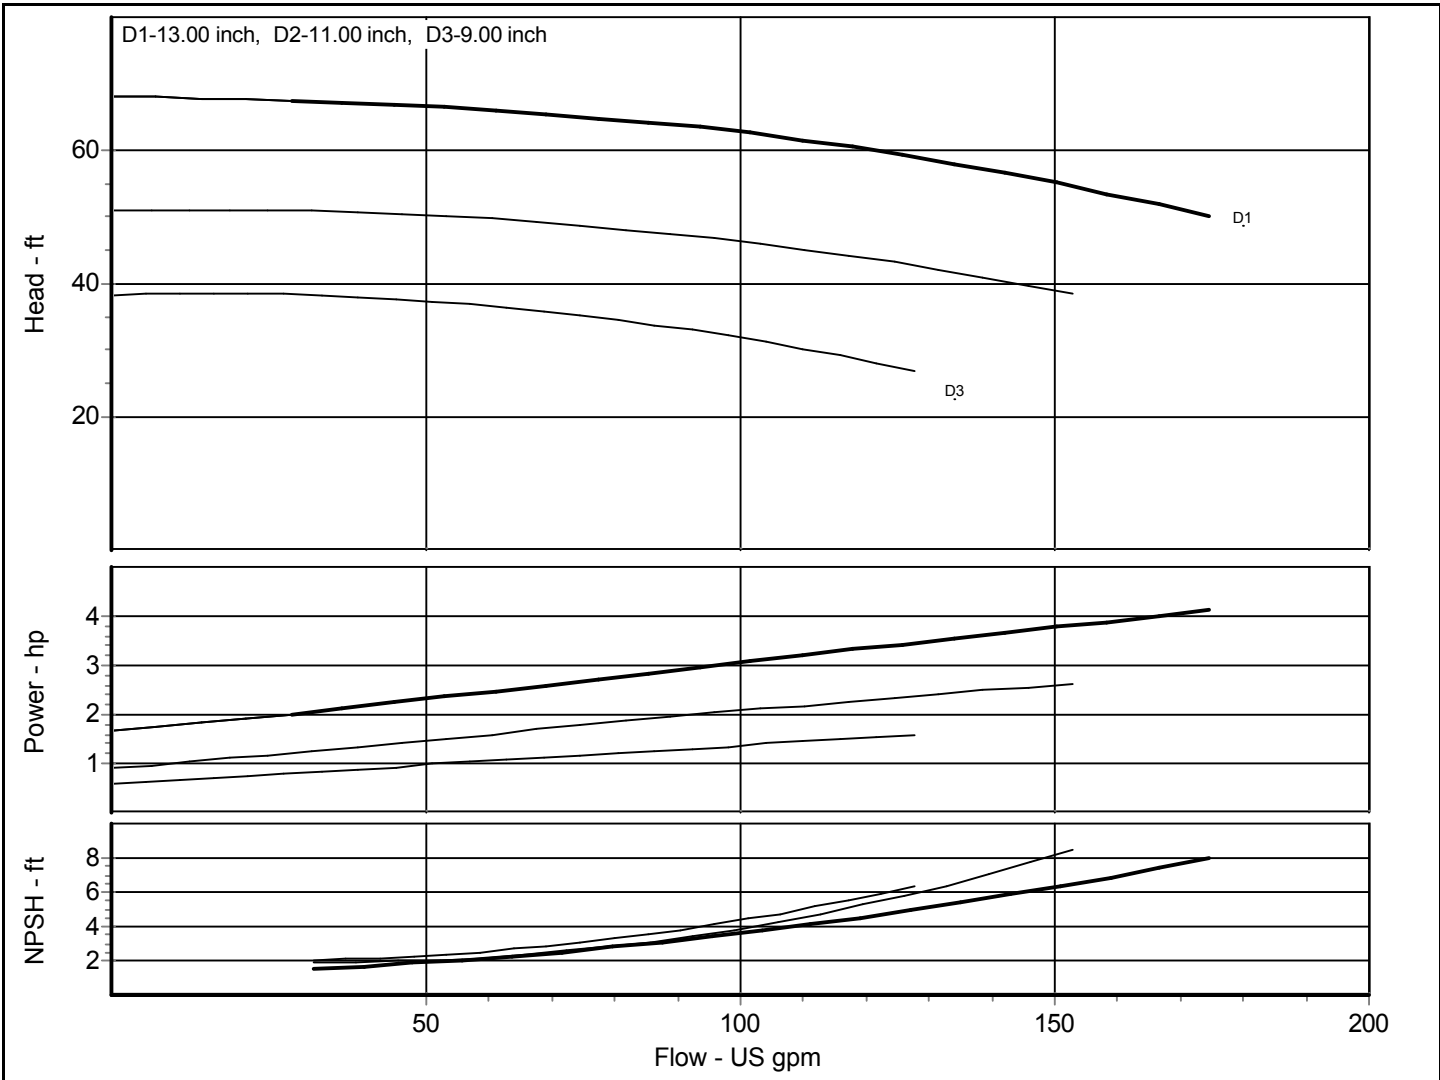

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-13 MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-034	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	6.23 hp
Item : 1		Closed Valve Pressure	77.788 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

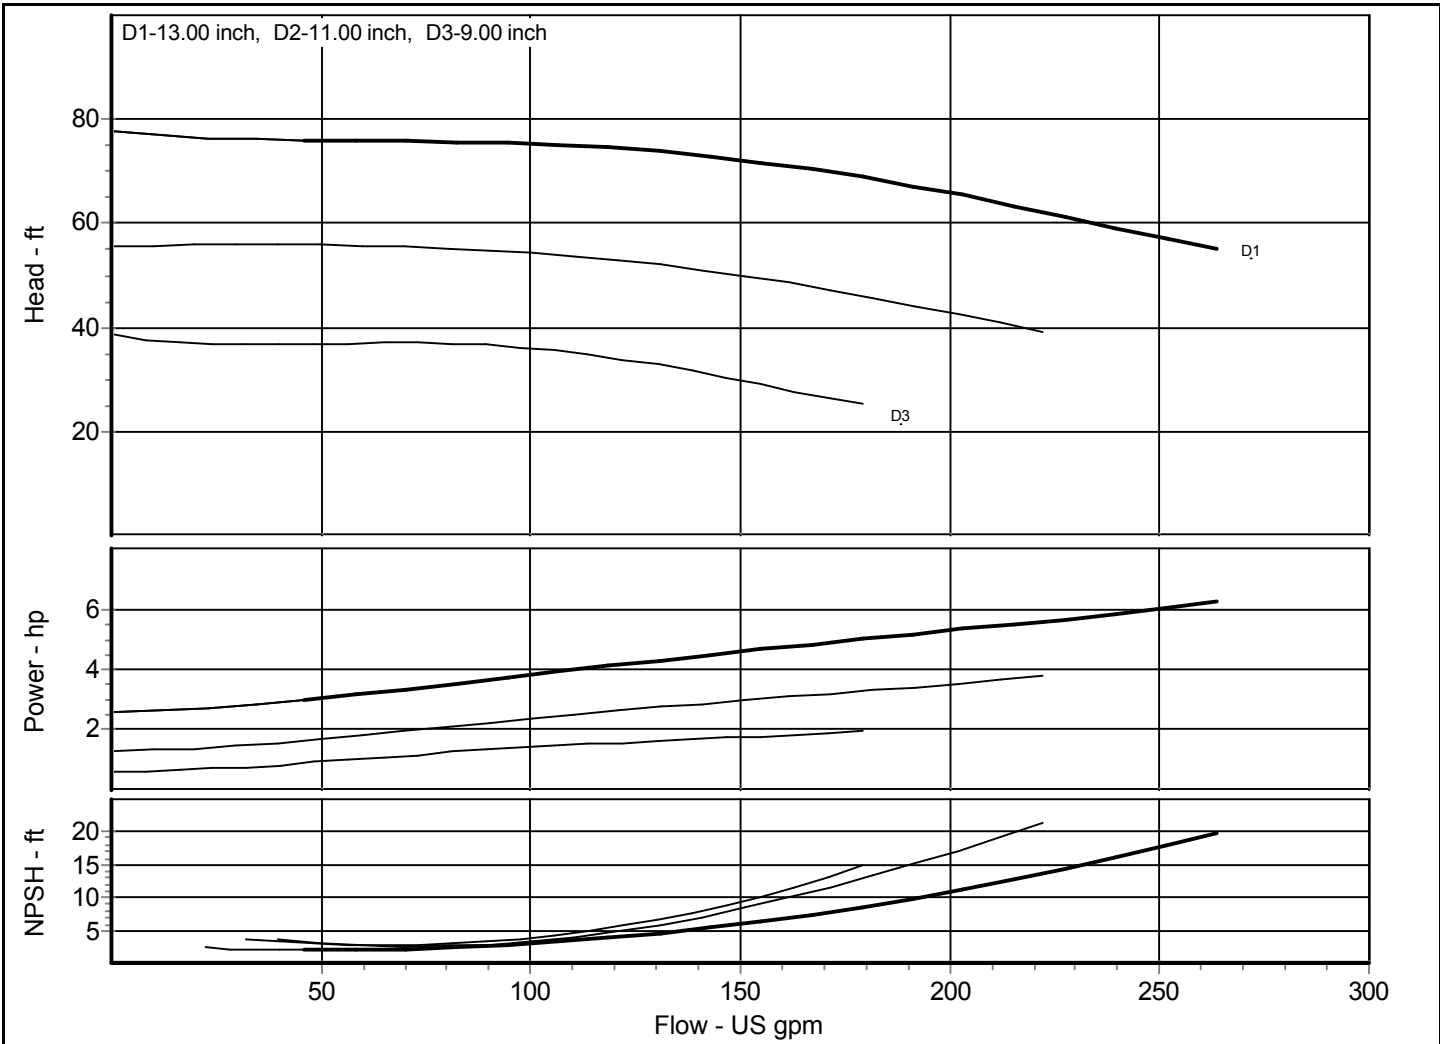

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-13 LTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-034	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	6.23 hp
Item : 1		Closed Valve Pressure	77.788 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

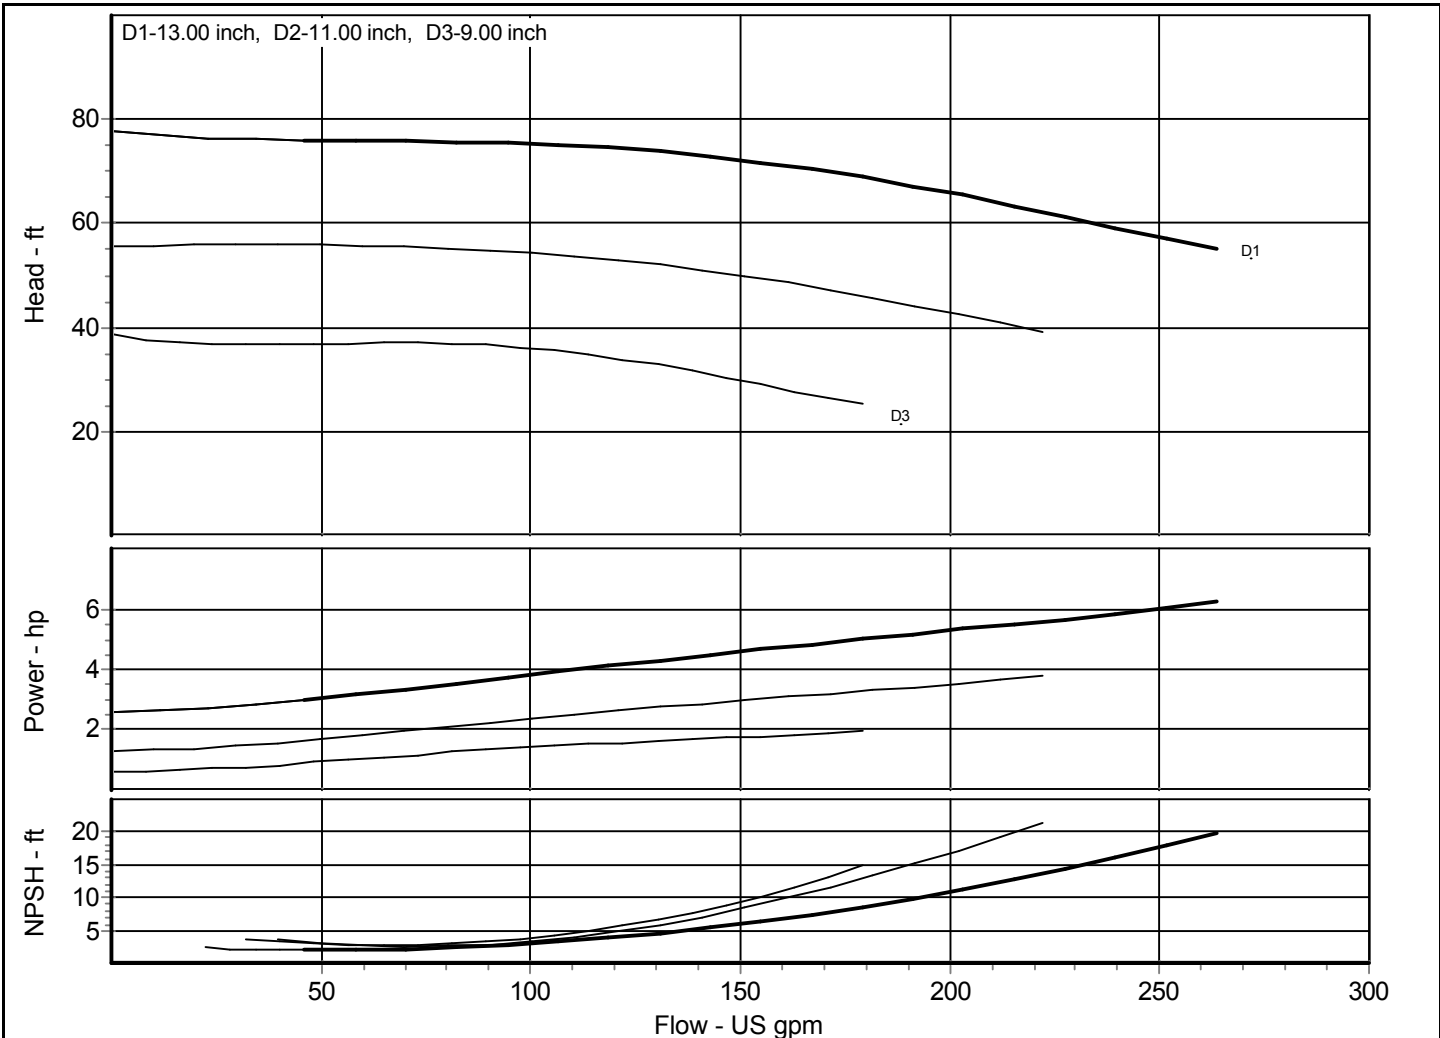

Comments:

Performance curve represents typical performance. See Standard Hydraulic Performance document in the selective printing area of RAPID for testing tolerances & contractual guarantees.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 3x4-8 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1150** RPM, 60 Hz Electric
 Impeller Dia.: **8.38/6** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-016**

Fluid: **Water**

Peak Power: **3.2** hp


Impeller No.

Closed Valve Pressure **33.25** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

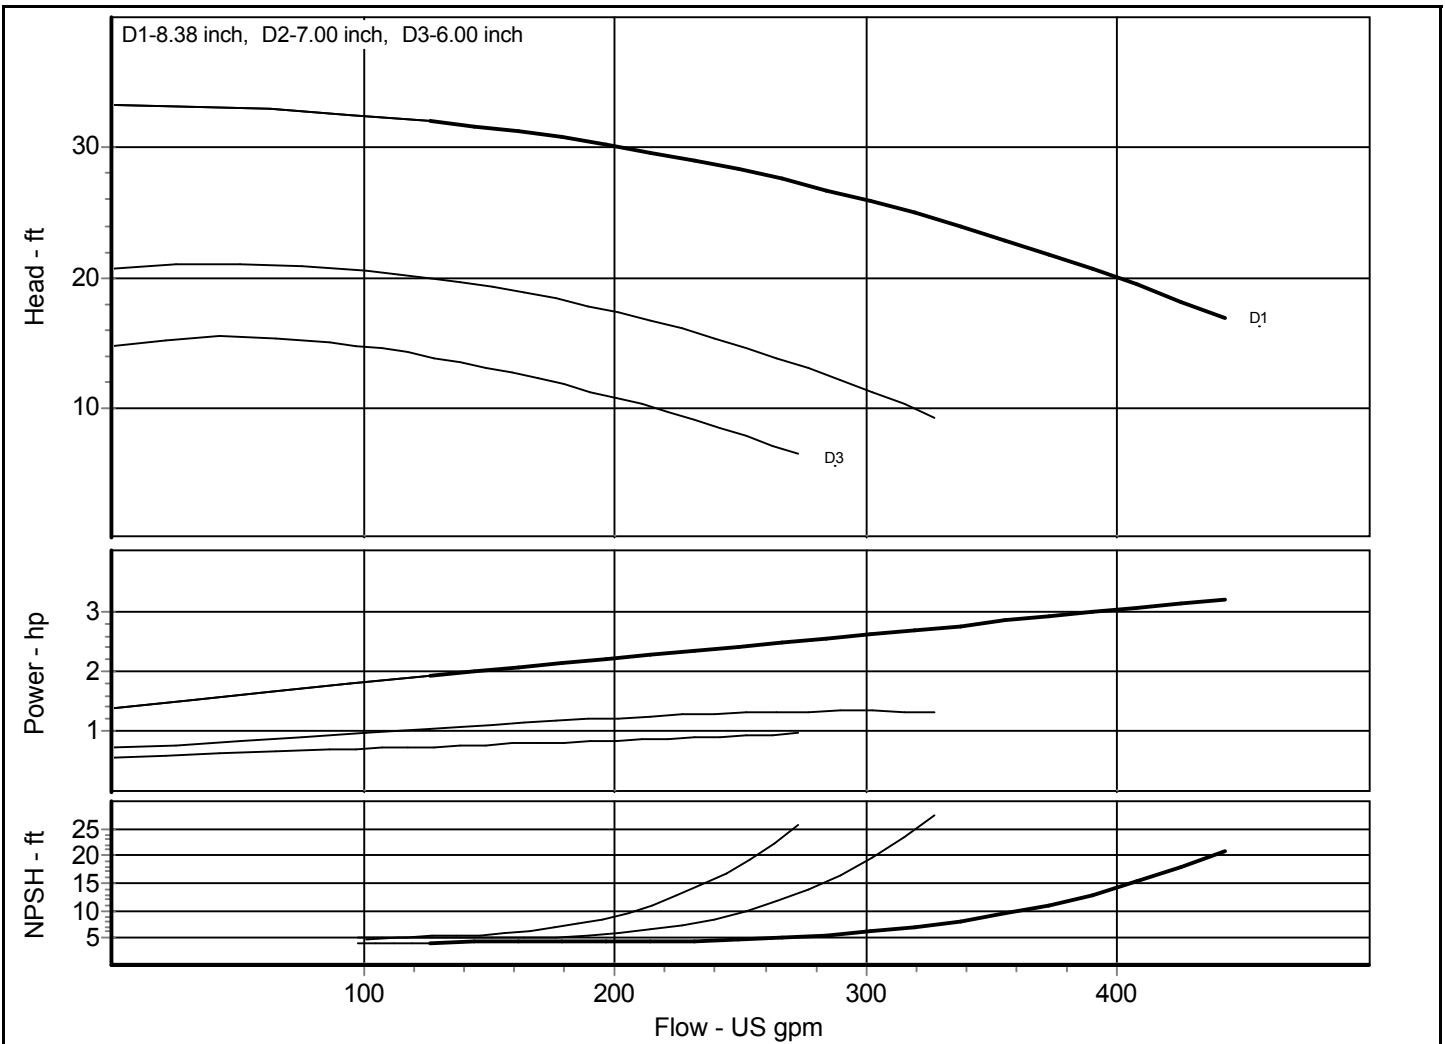

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-10H MTP 8196** Nom. Speed: **1150** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **10/7** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **5.97** hp
 Fluid: **Water** Closed Valve Pressure **43.767** ft
 Curve No.: **8196-056**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

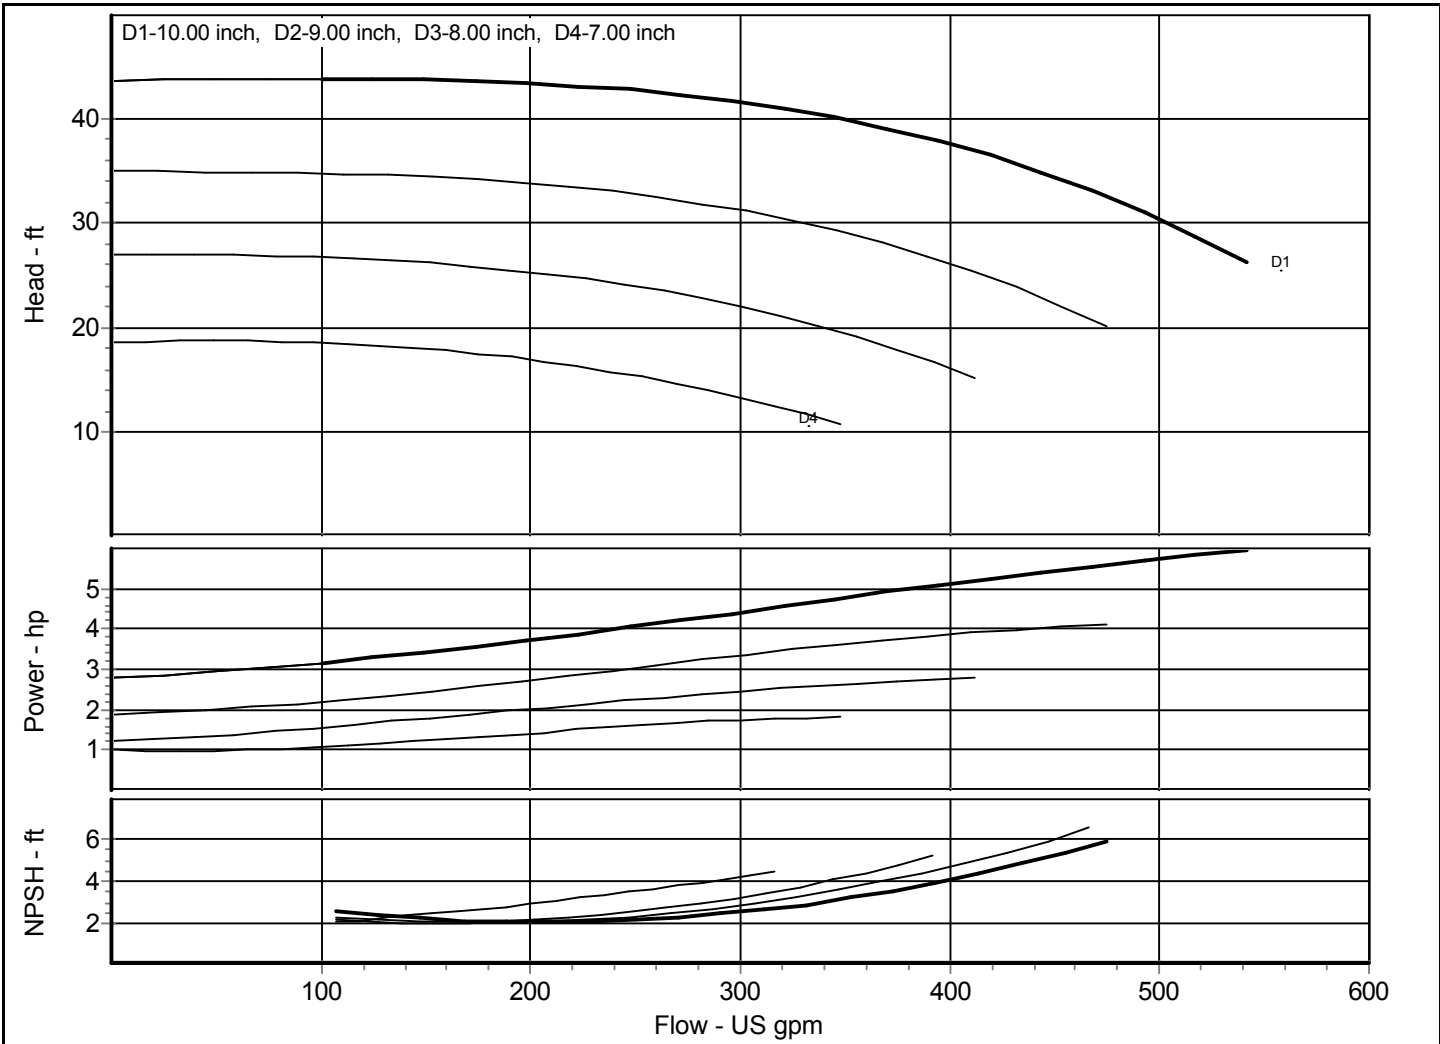

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-13 5V MTP 8196** Nom. Speed: **1150** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **11.51** hp
 Fluid: **Water** Closed Valve Pressure **77.727** ft
 Curve No.: **8196-037**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

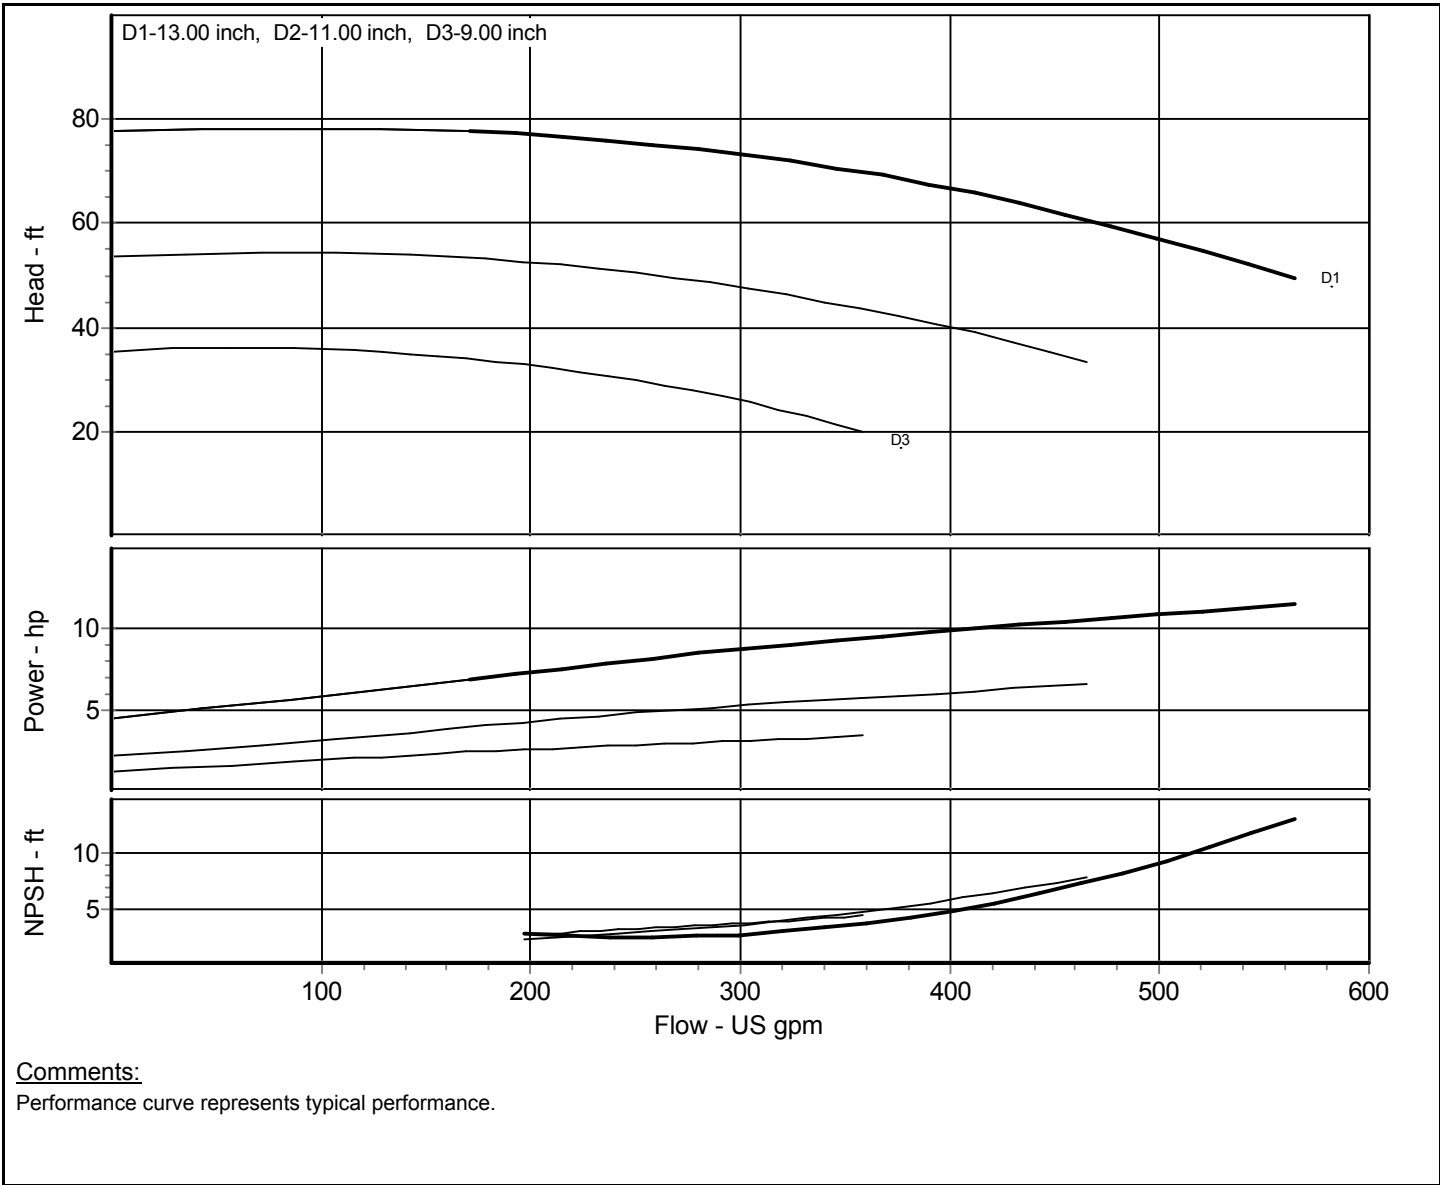




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-13 5V LTP 8196** Nom. Speed: **1150** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **11.51** hp
 Fluid: **Water** Closed Valve Pressure **77.727** ft
 Curve No.: **8196-037**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

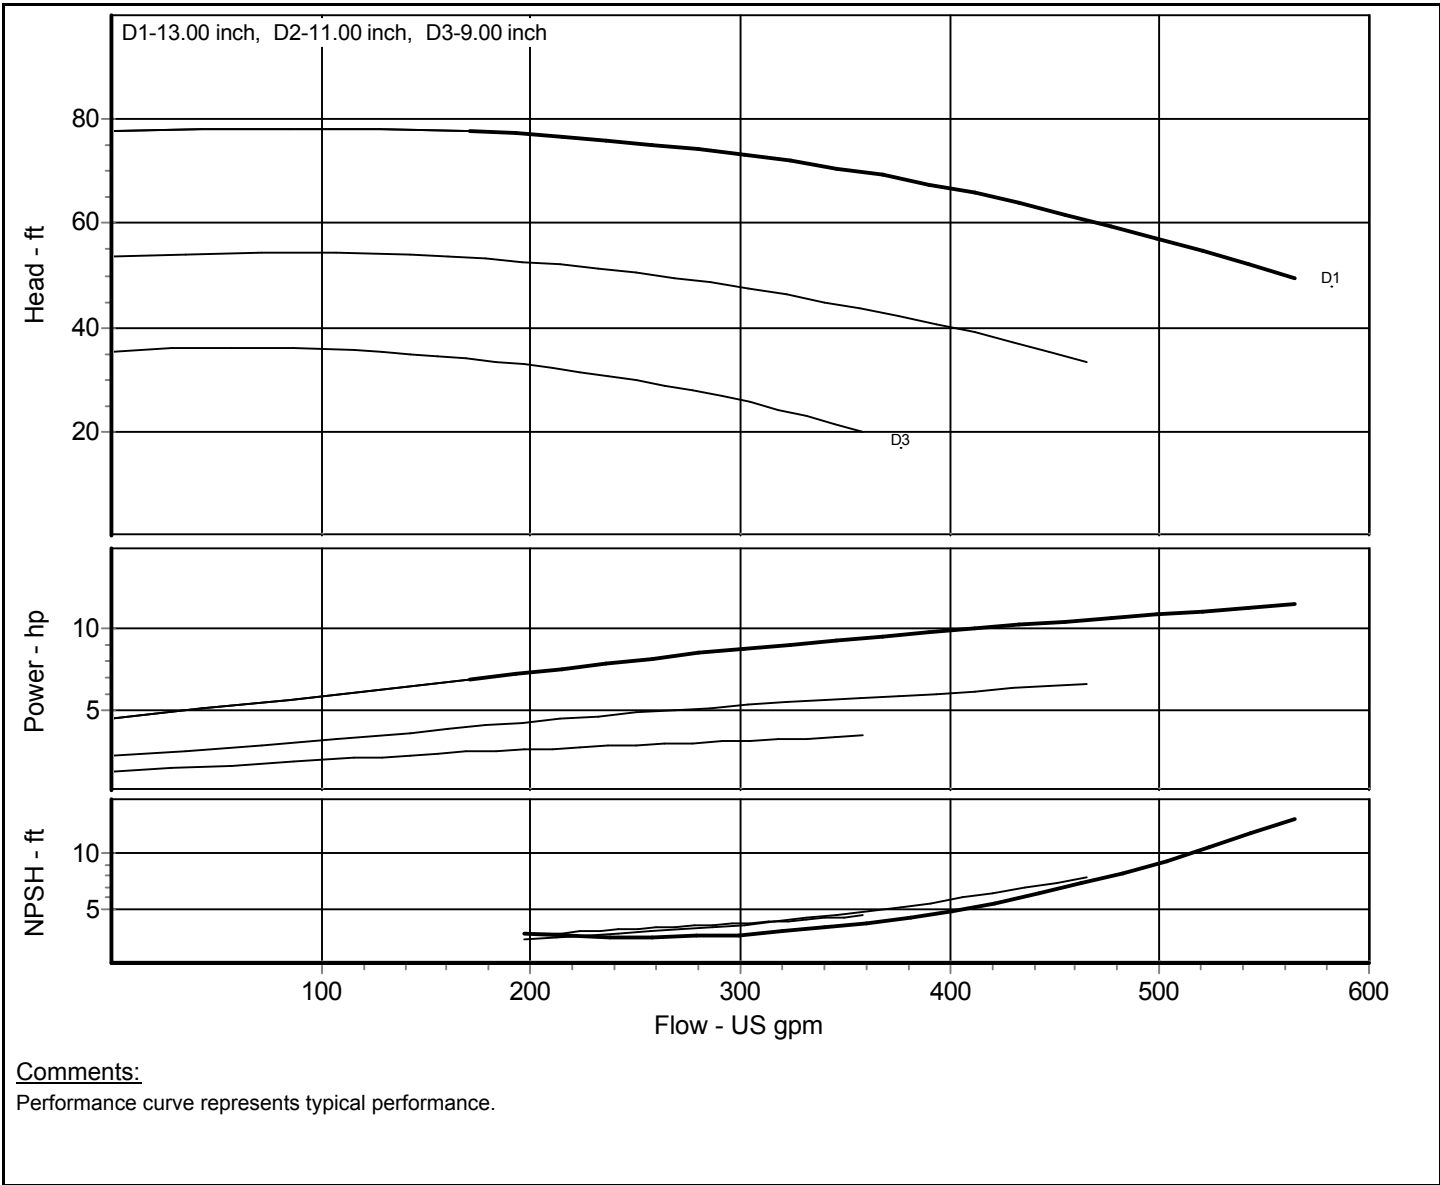



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 3x4-13 6V MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-040	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	14.22 hp
Item : 1		Closed Valve Pressure	79.447 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

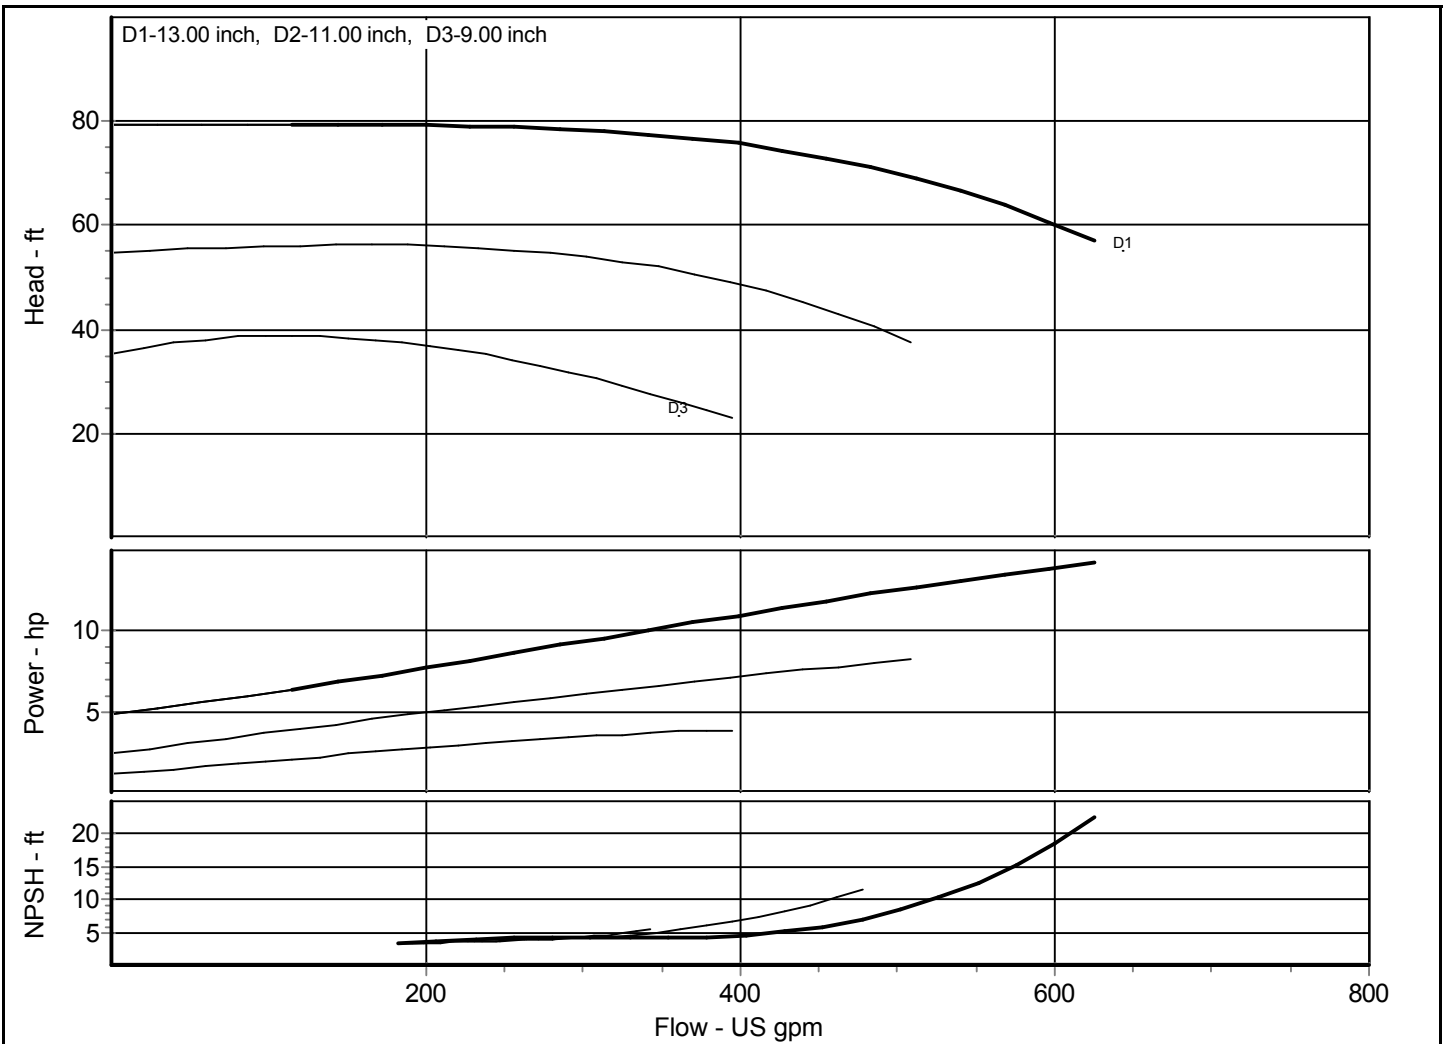

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-13 6V LTP 8196** Nom. Speed: **1150** RPM, 60 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **14.22** hp
 Fluid: **Water** Closed Valve Pressure **79.447** ft
 Curve No.: **8196-040**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

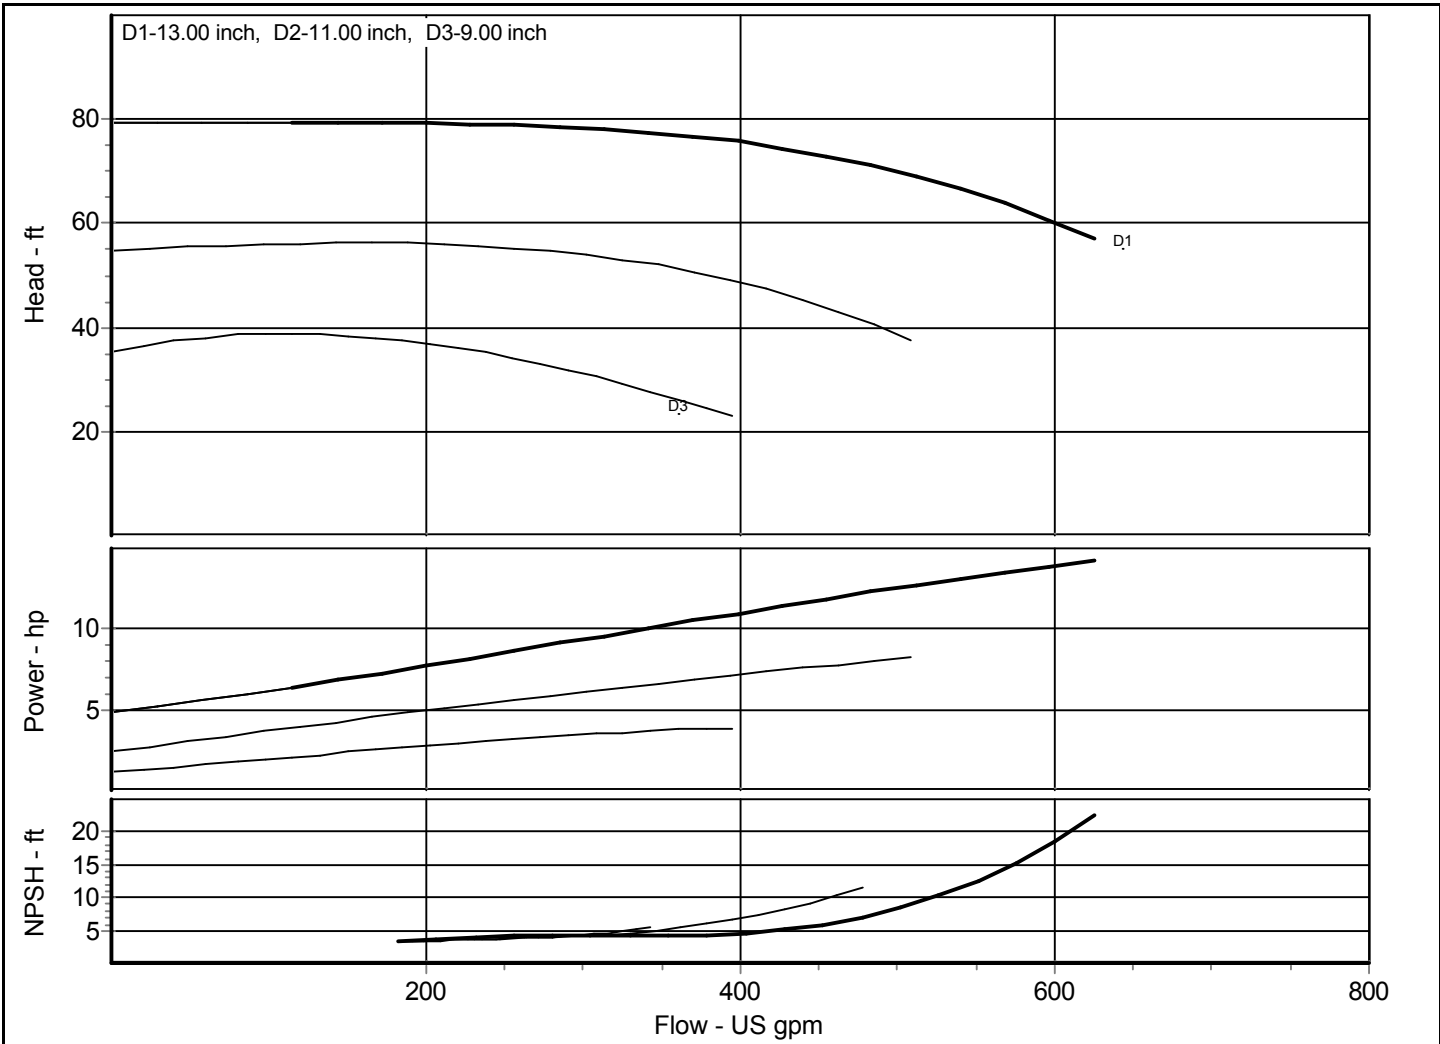

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : _____ **Contact :** _____
Quote No. : _____ **Page No. :** _____ **Phone :** _____ **Fax :** _____
Date : _____

Pump Model: Peerless - 4x6-10 MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-028	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	7.93 hp
Item : 1		Closed Valve Pressure	43.616 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

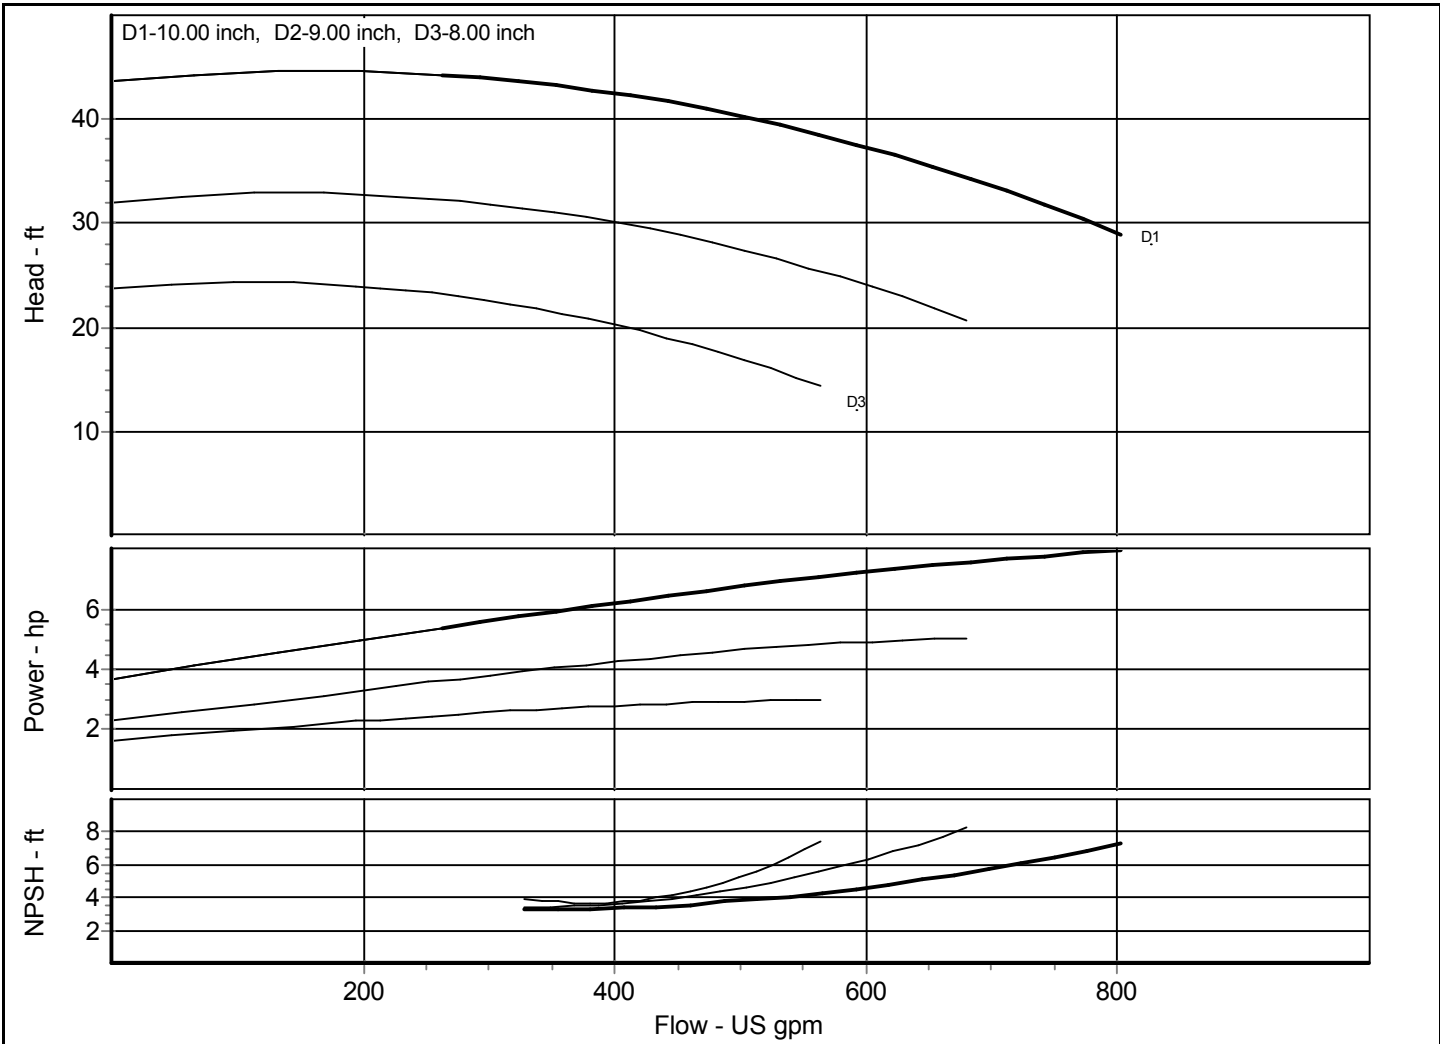

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 4x6-10H MTP 8196	Nom. Speed: 1180 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10.25/8 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-058	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	9.46 hp
Item : 1		Closed Valve Pressure	47.921 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

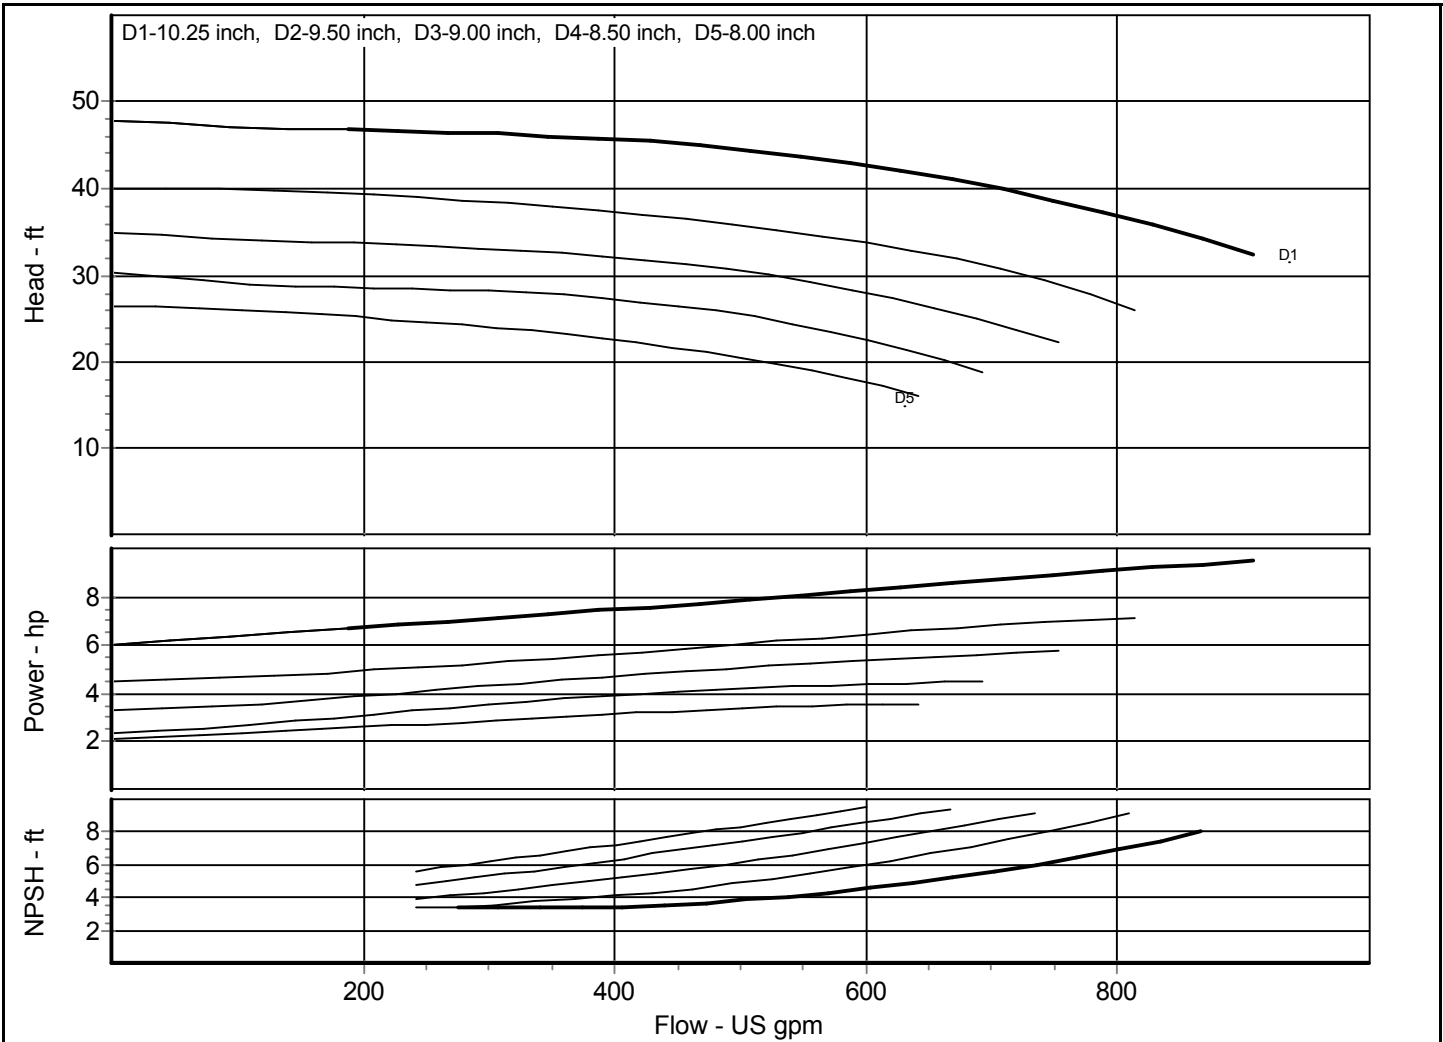

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
Quote No. : **Page No. :** **Contact :**
Phone : **Fax :**
Date :

Pump Model: Peerless - 4x6-10 LTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow : US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head : ft
	Temperature: 68 °F	Efficiency : %
	Viscosity: 1.009 cP	Power Required : hp
Curve No.: 8196-028	Sp. Gravity: 1.000	NPSH Required : ft
Impeller No.	Fluid: Water	Peak Power: 7.93 hp
Item : 1		Closed Valve Pressure 43.616 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std	

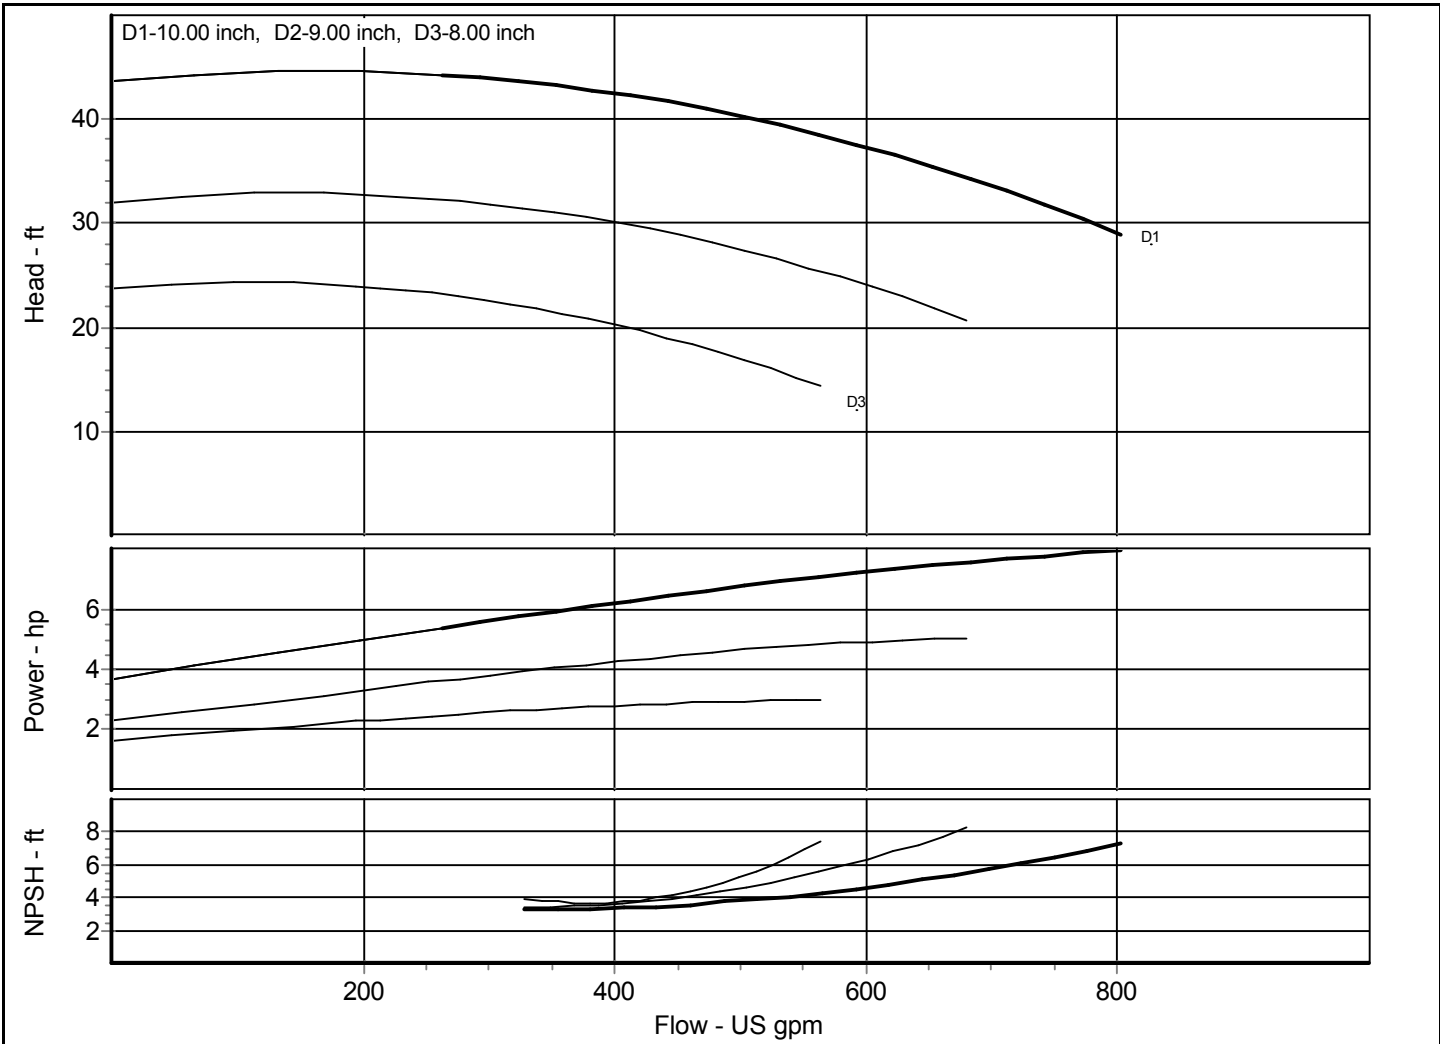

Comments:

Performance curve represents typical performance.




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 4x6-13 MTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-042	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	18.02 hp
Item : 1		Closed Valve Pressure	75.139 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

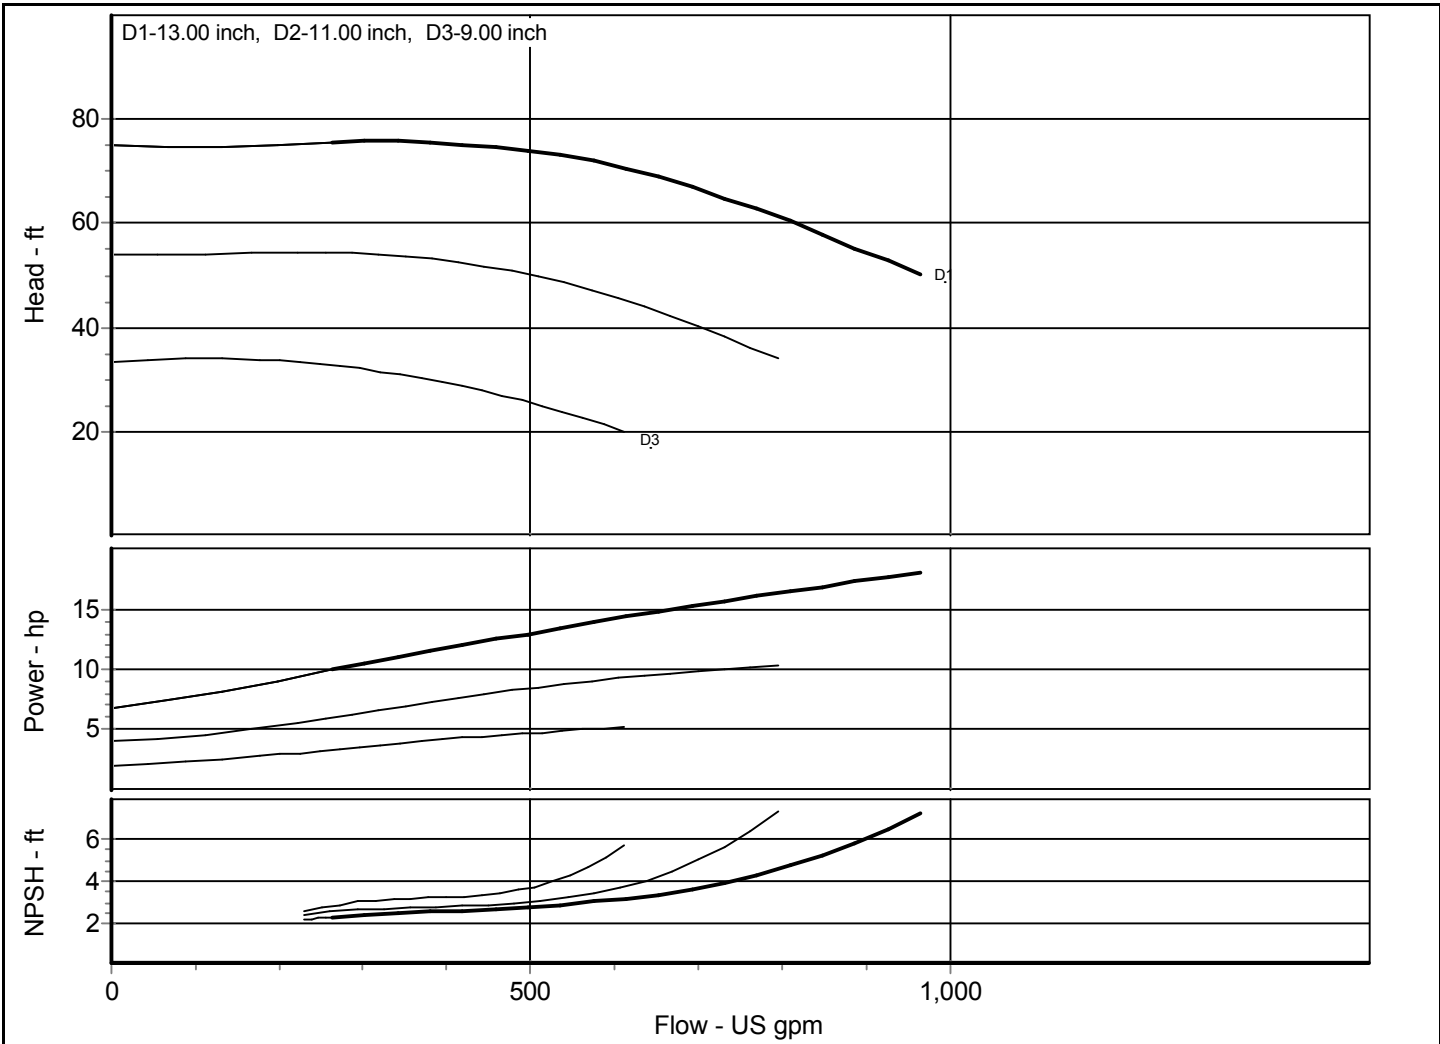

Comments:
Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 4x6-13 LTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1150** RPM, 60 Hz Electric
 Impeller Dia.: **13/9** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-042**

Fluid: **Water**

Peak Power: **18.02** hp


Impeller No.

Closed Valve Pressure **75.139** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

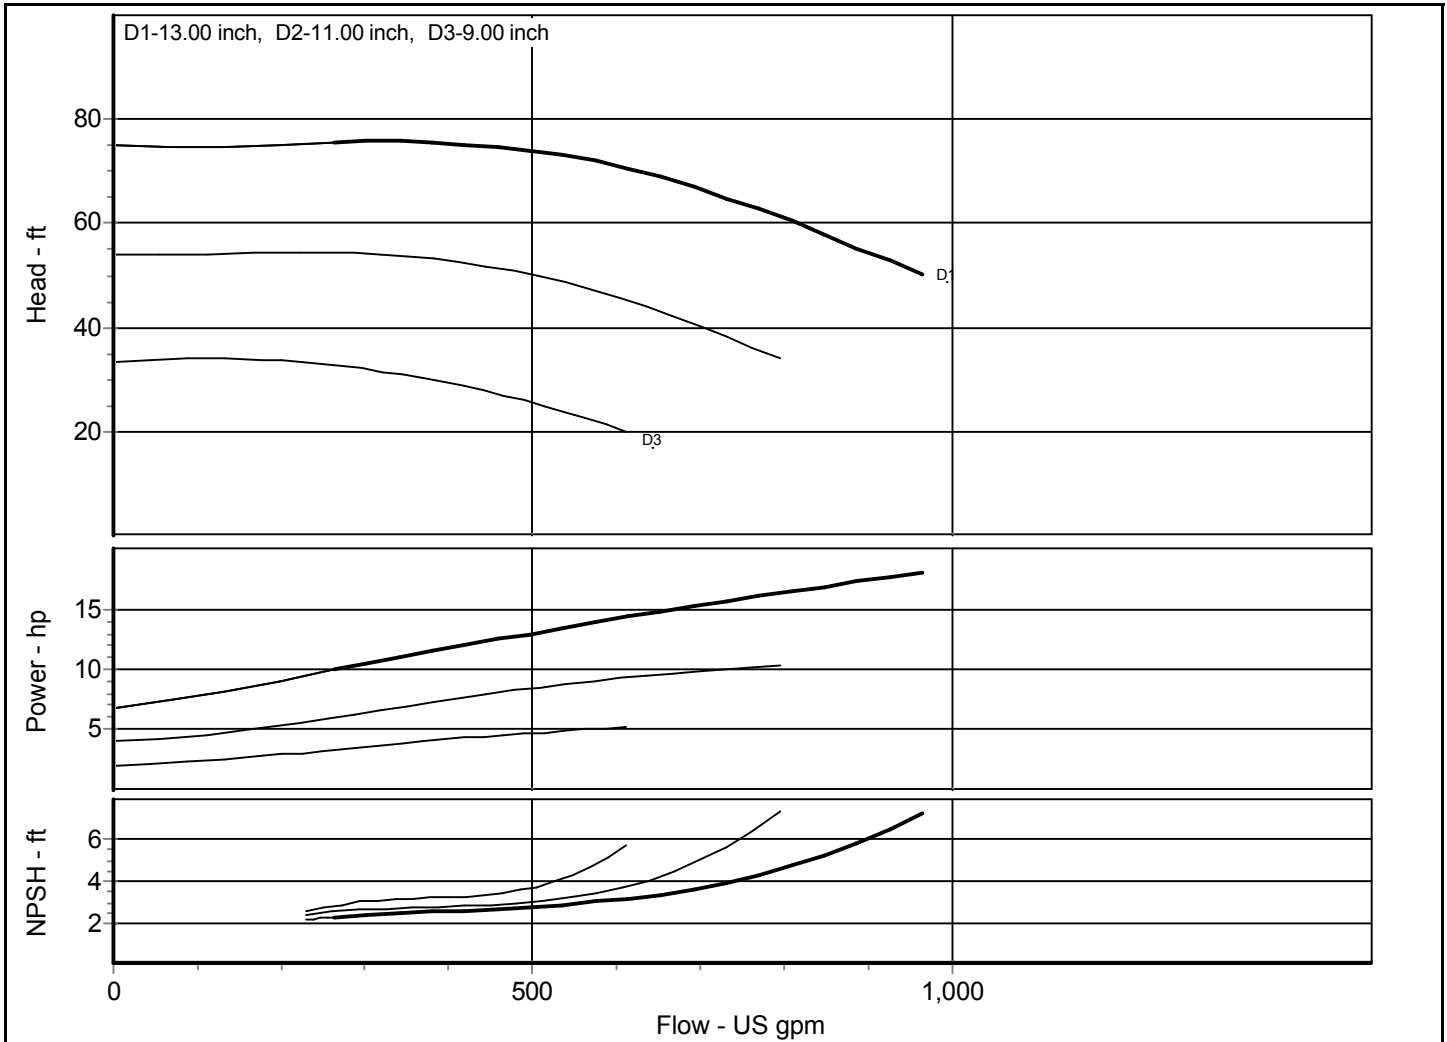

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 4x6-17 XLTP 8196	Nom. Speed: 1180 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 16.75/13 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-060	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 47.09 hp	
Item : 1		Closed Valve Pressure 135.834 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

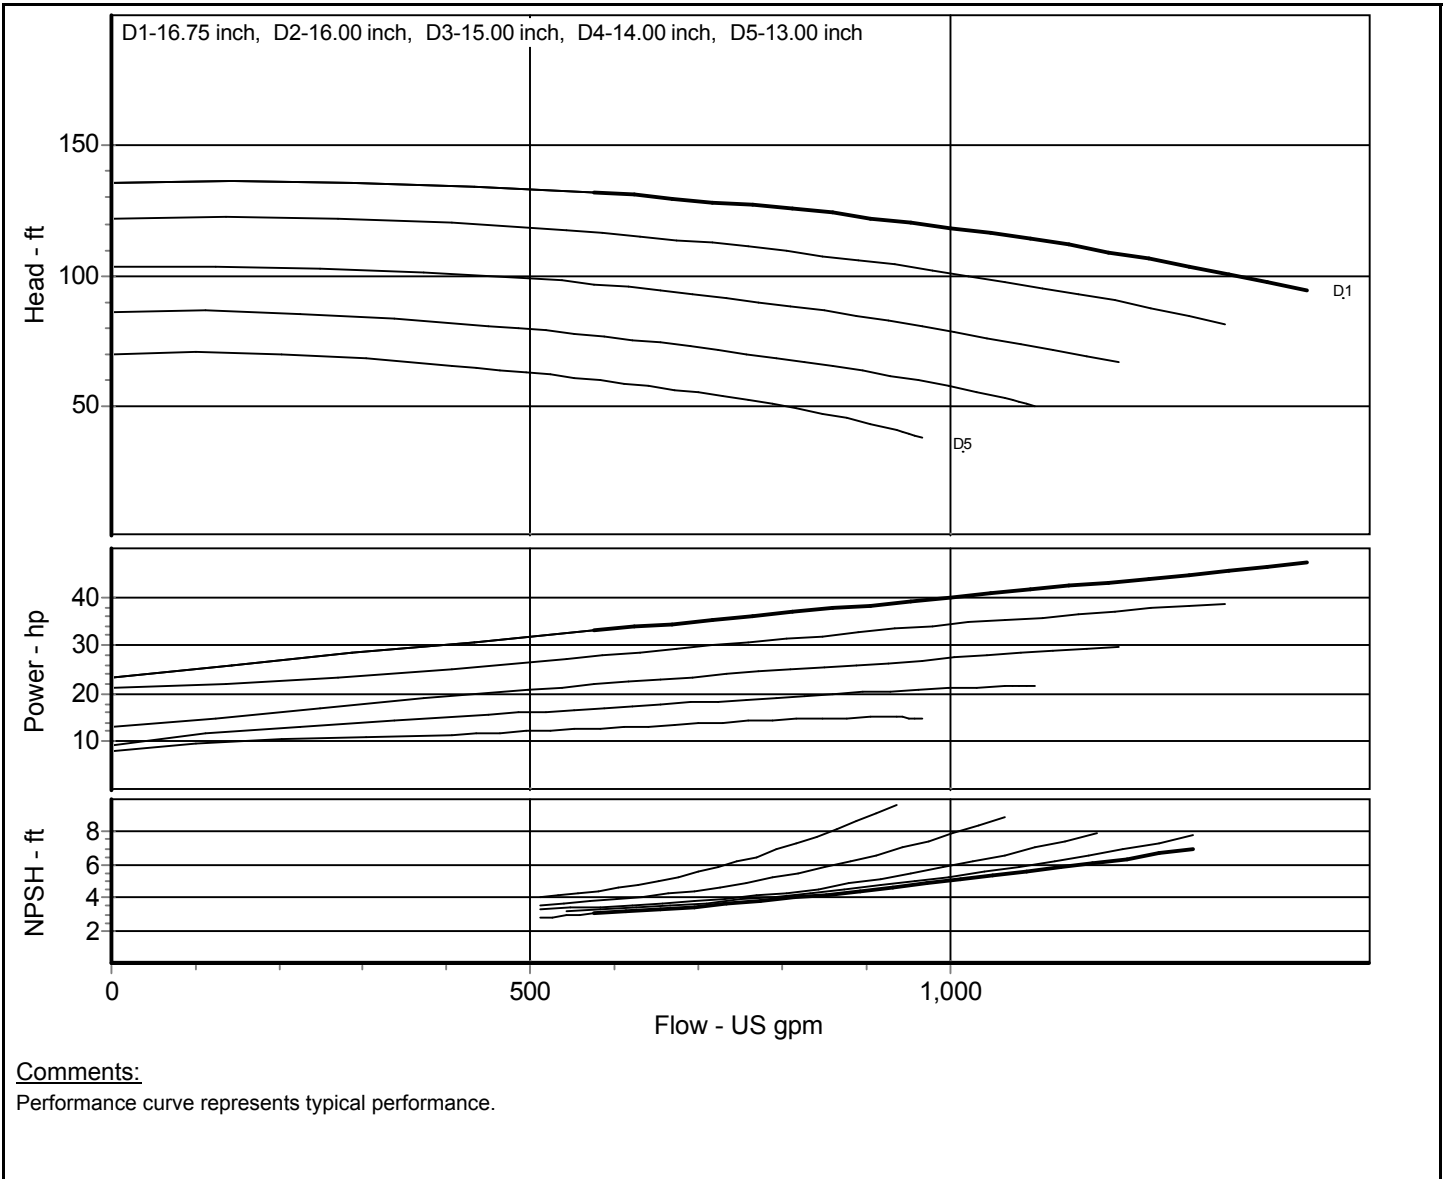



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 6x8-13 XLTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1150 RPM, 60 Hz Electric**
 Impeller Dia.: **13/10 inch**

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68 °F**
 Viscosity: **1.009 cP**
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-044**

Impeller No.:

Fluid: **Water**


Peak Power: **28.95 hp**

Item : **1**

Closed Valve Pressure **84.64 ft**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

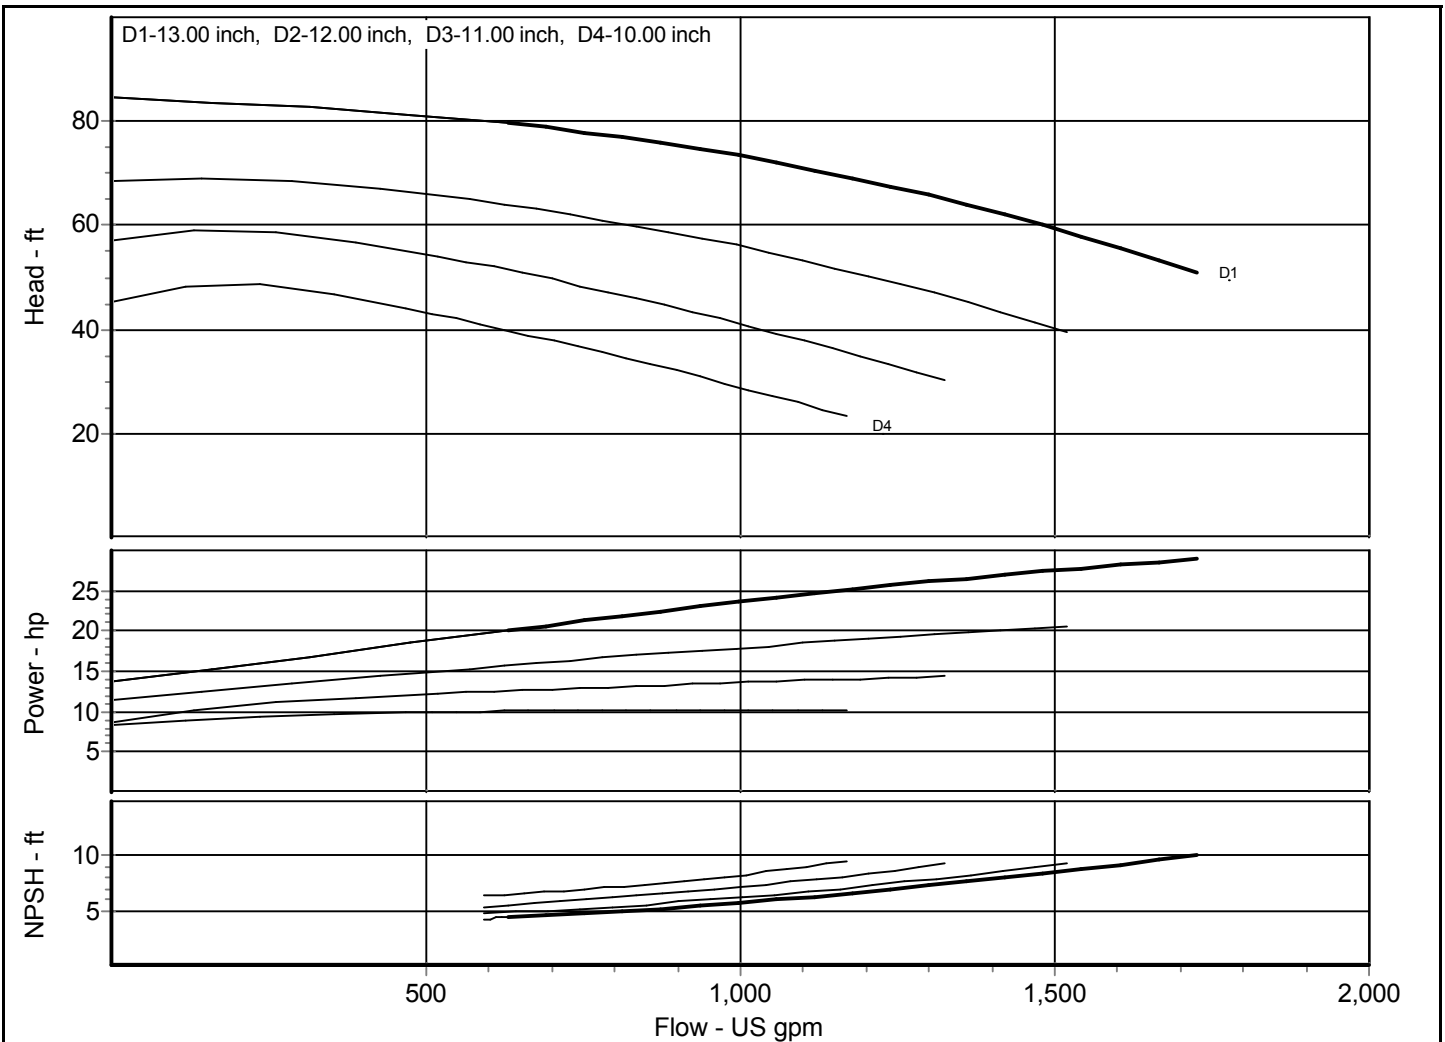

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 6x8-17 XLTP 8196	Nom. Speed: 1180 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 16.75/13 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-062	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 90.46 hp	
Item : 1		Closed Valve Pressure 139.998 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

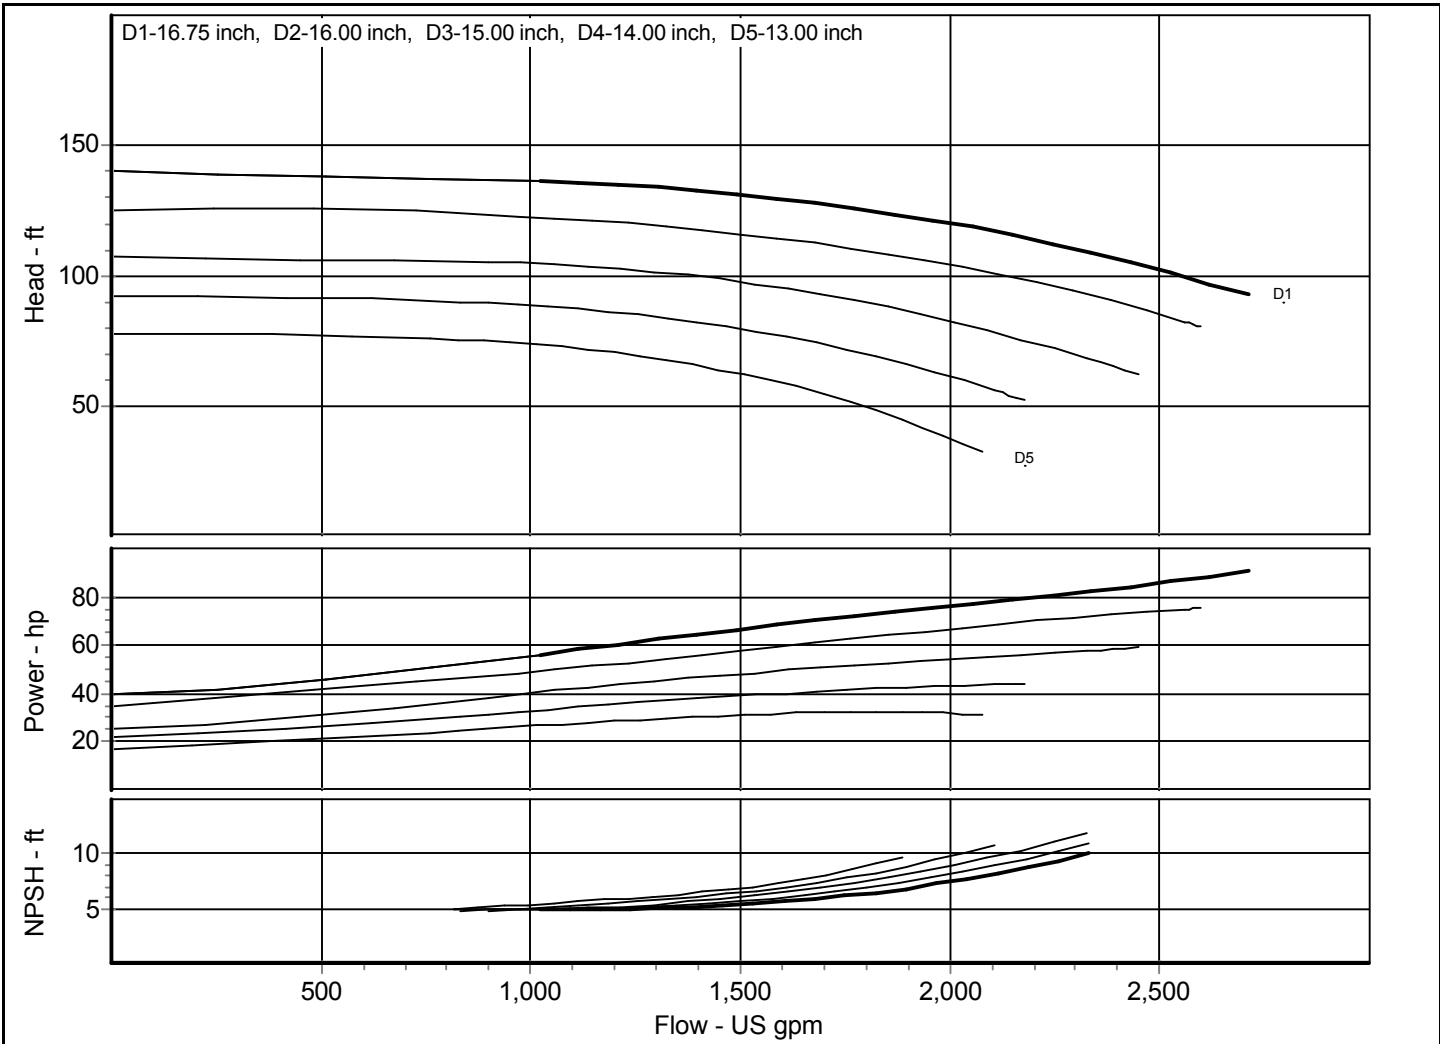

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 8x10-13 XLTP 8196	Nom. Speed: 1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/10.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-046	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	39.45 hp
Item : 1		Closed Valve Pressure	78.594 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

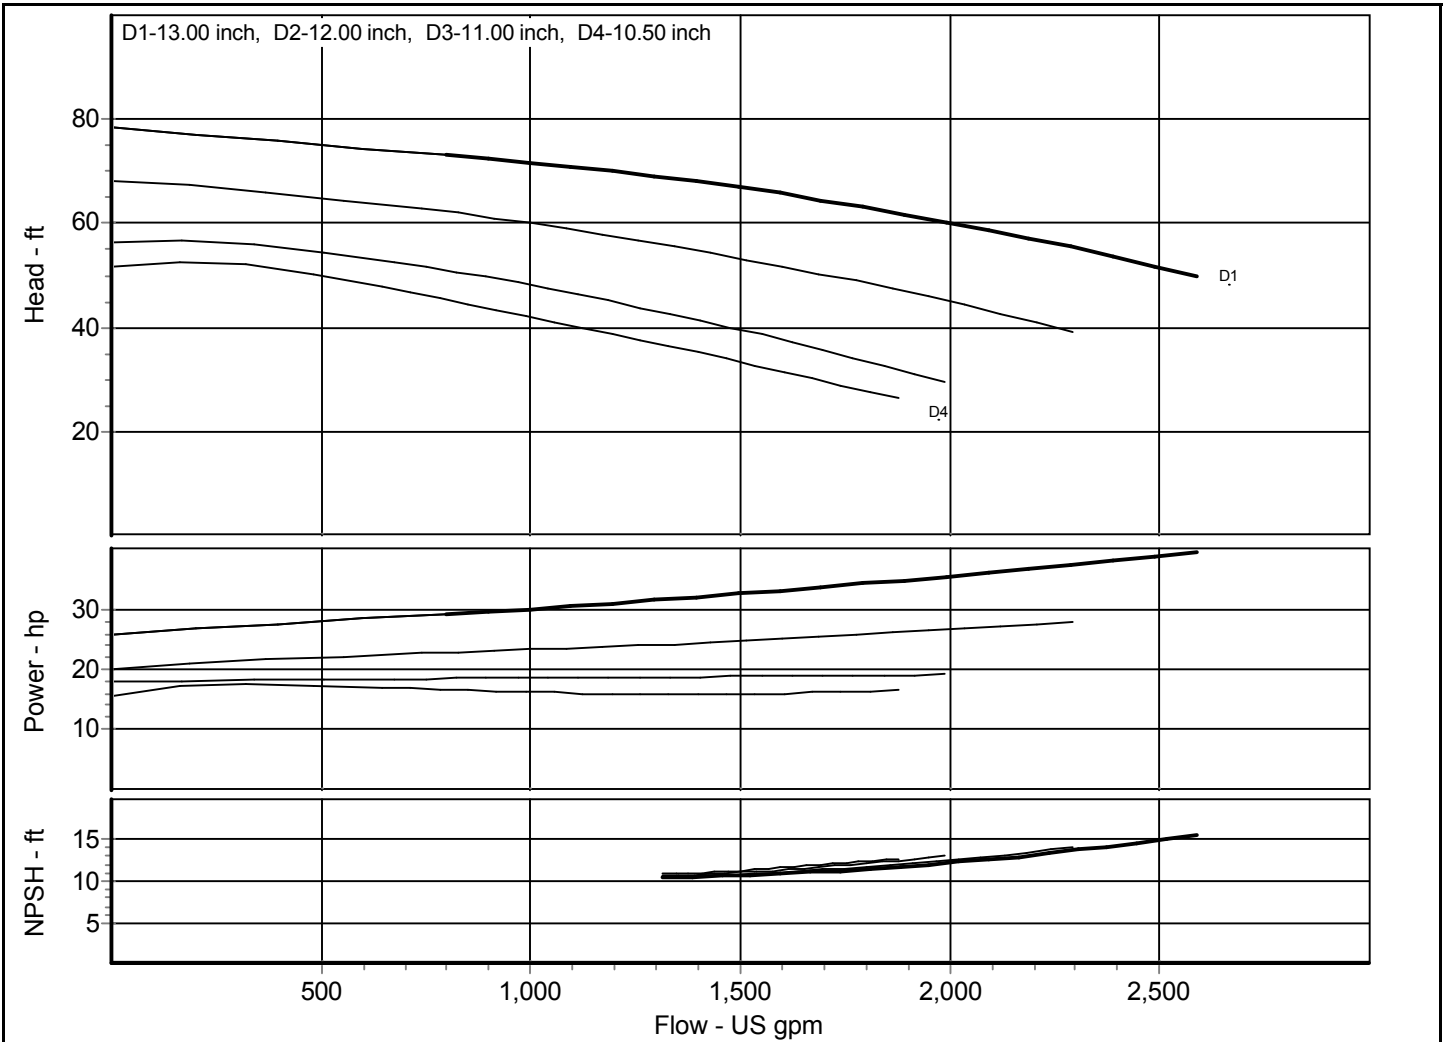

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 8x10-15 XLTP 8196	Nom. Speed: 1180 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 15/12.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-049	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	87.46 hp
Item : 1		Closed Valve Pressure	94 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

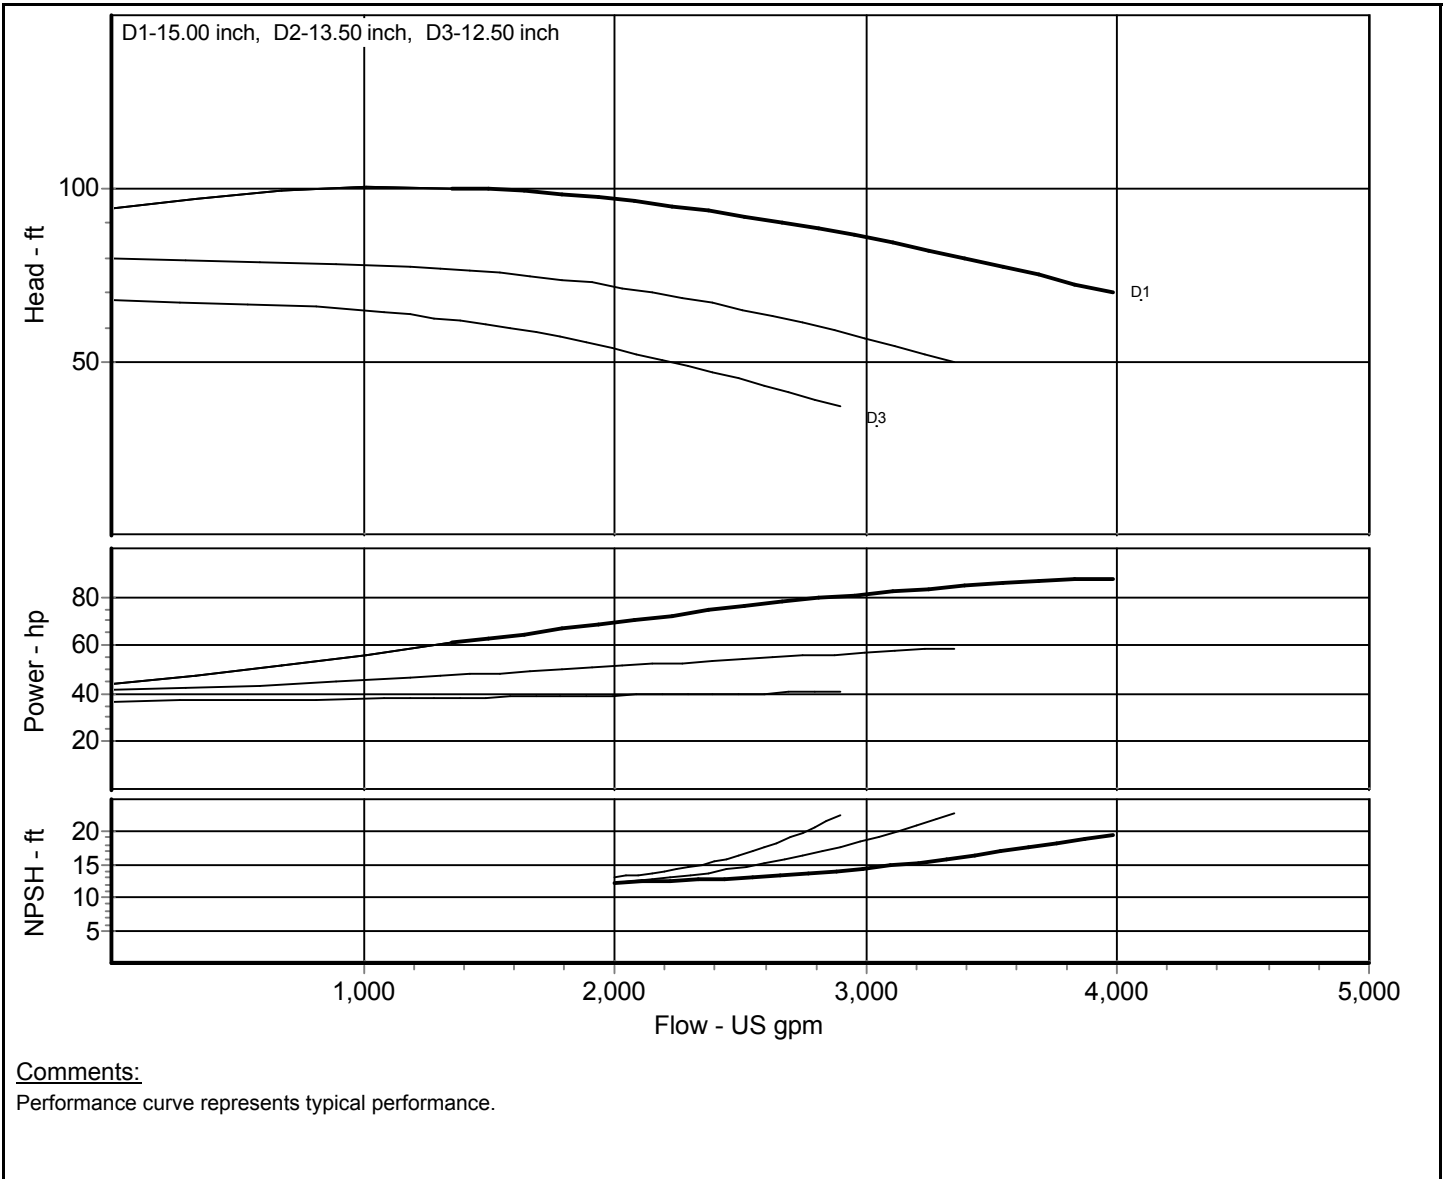



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model:	Peerless - 8x10-15G XLTP 8196	Nom. Speed:	1150 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type:	8196 - ANSI Standard End Suction	Impeller Dia.:	15/12 inch	Duty Head :	ft
		Temperature:	68 °F	Efficiency :	%
		Viscosity:	1.009 cP	Power Required :	hp
Curve No.:	8196-052	Sp. Gravity:	1.000	NPSH Required :	ft
Impeller No.		Fluid:	Water	Peak Power:	62.32 hp
Item :	1			Closed Valve Pressure	97.163 ft
Your Ref.:		Tolerance :	Hyd Inst-Peerless Std		

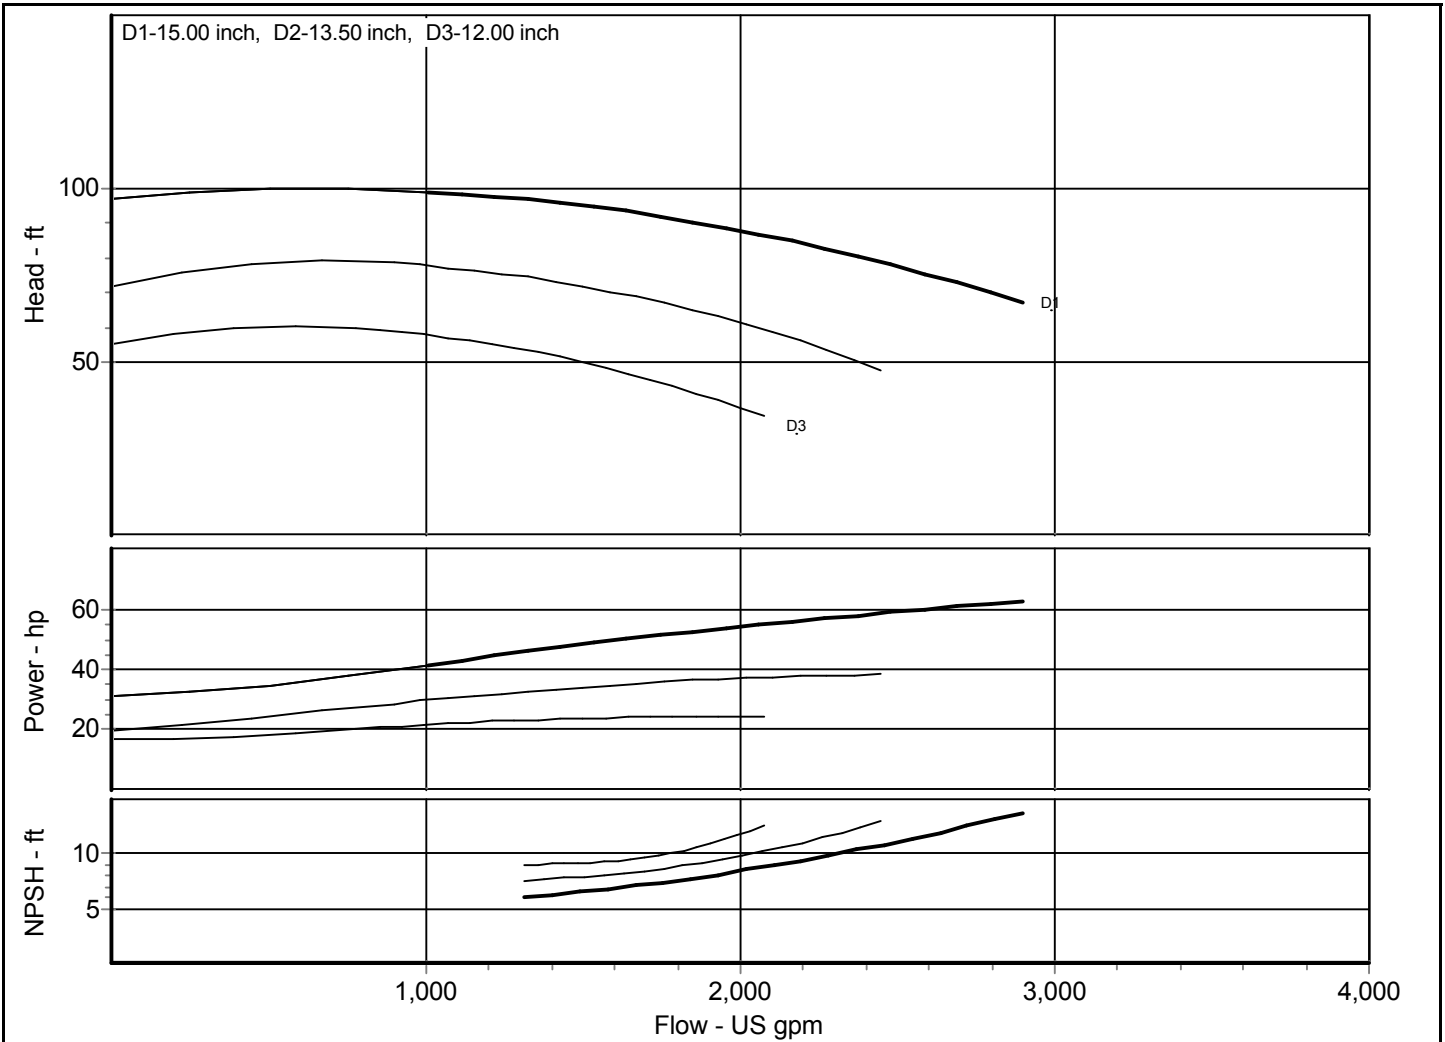

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model:	Peerless - 8x10-17 XLTP 8196	Nom. Speed:	1180 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type:	8196 - ANSI Standard End Suction	Impeller Dia.:	16.38/13 inch	Duty Head :	ft
		Temperature:	68 °F	Efficiency :	%
		Viscosity:	1.009 cP	Power Required :	hp
Curve No.:	8196-064	Sp. Gravity:	1.000	NPSH Required :	ft
Impeller No.		Fluid:	Water	Peak Power:	96.73 hp
Item :	1			Closed Valve Pressure	125.923 ft
Your Ref.:		Tolerance :	Hyd Inst-Peerless Std		

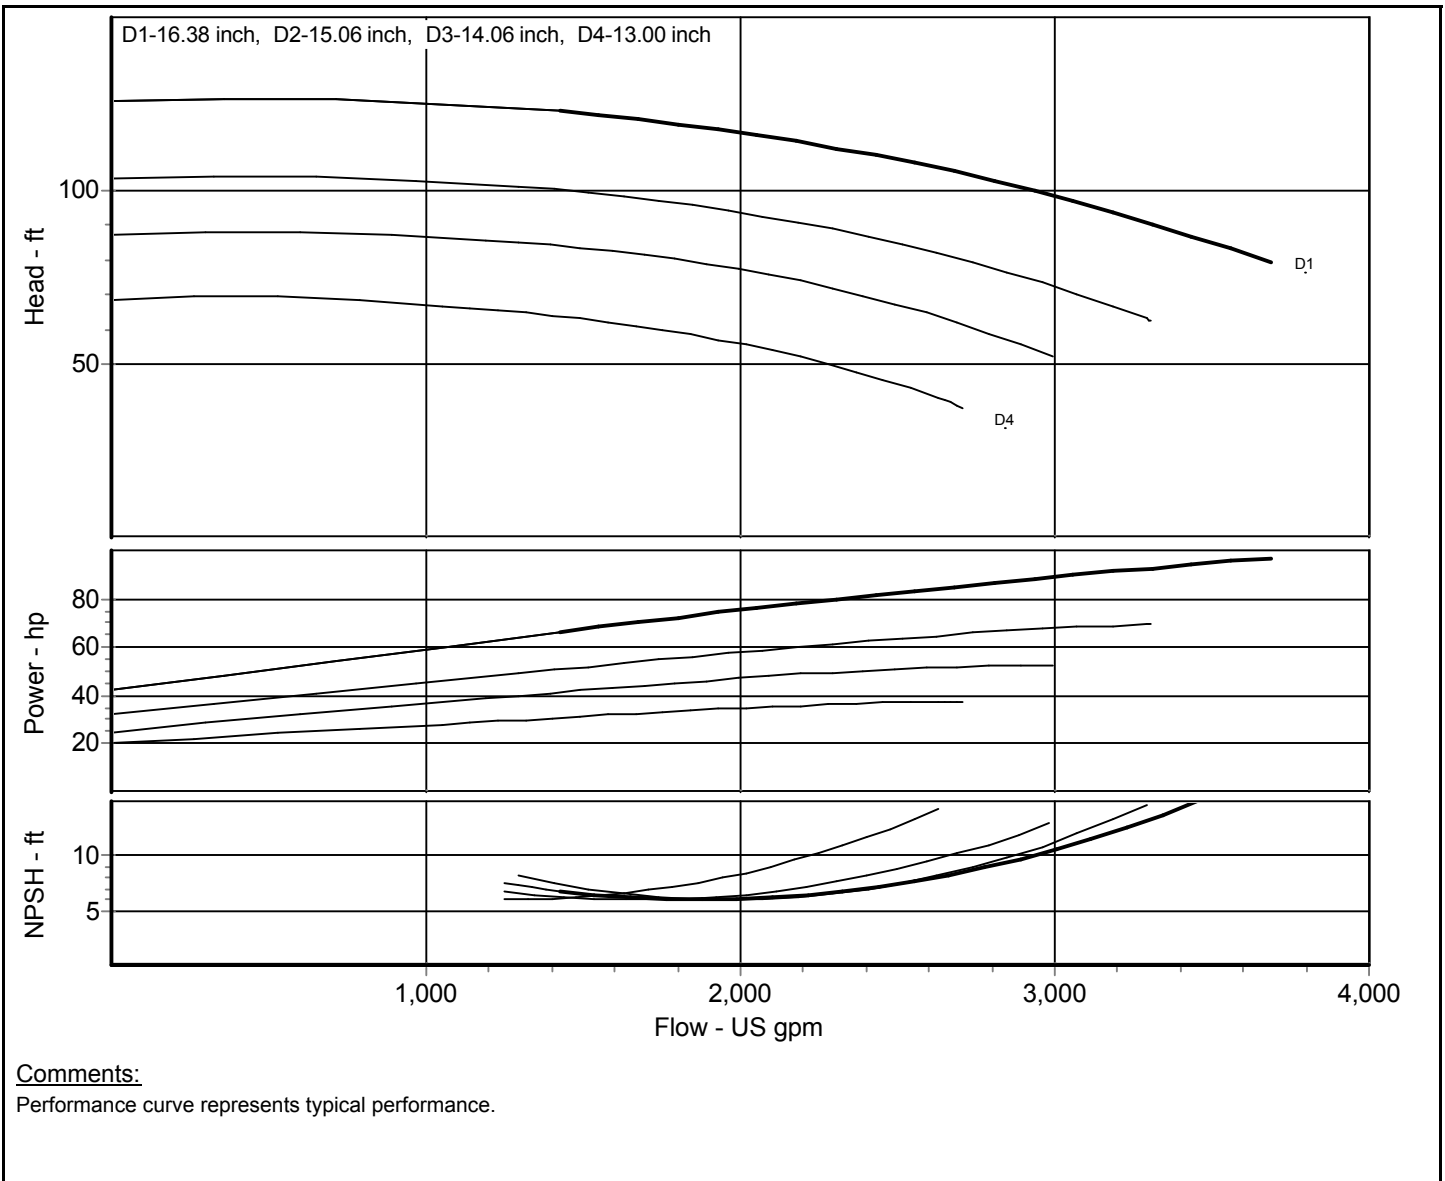



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 8x10-15 XLTP 8196	Nom. Speed: 880 RPM, 60 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 15/12.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-050	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 36.46 hp	
Item : 1		Closed Valve Pressure 52.279 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

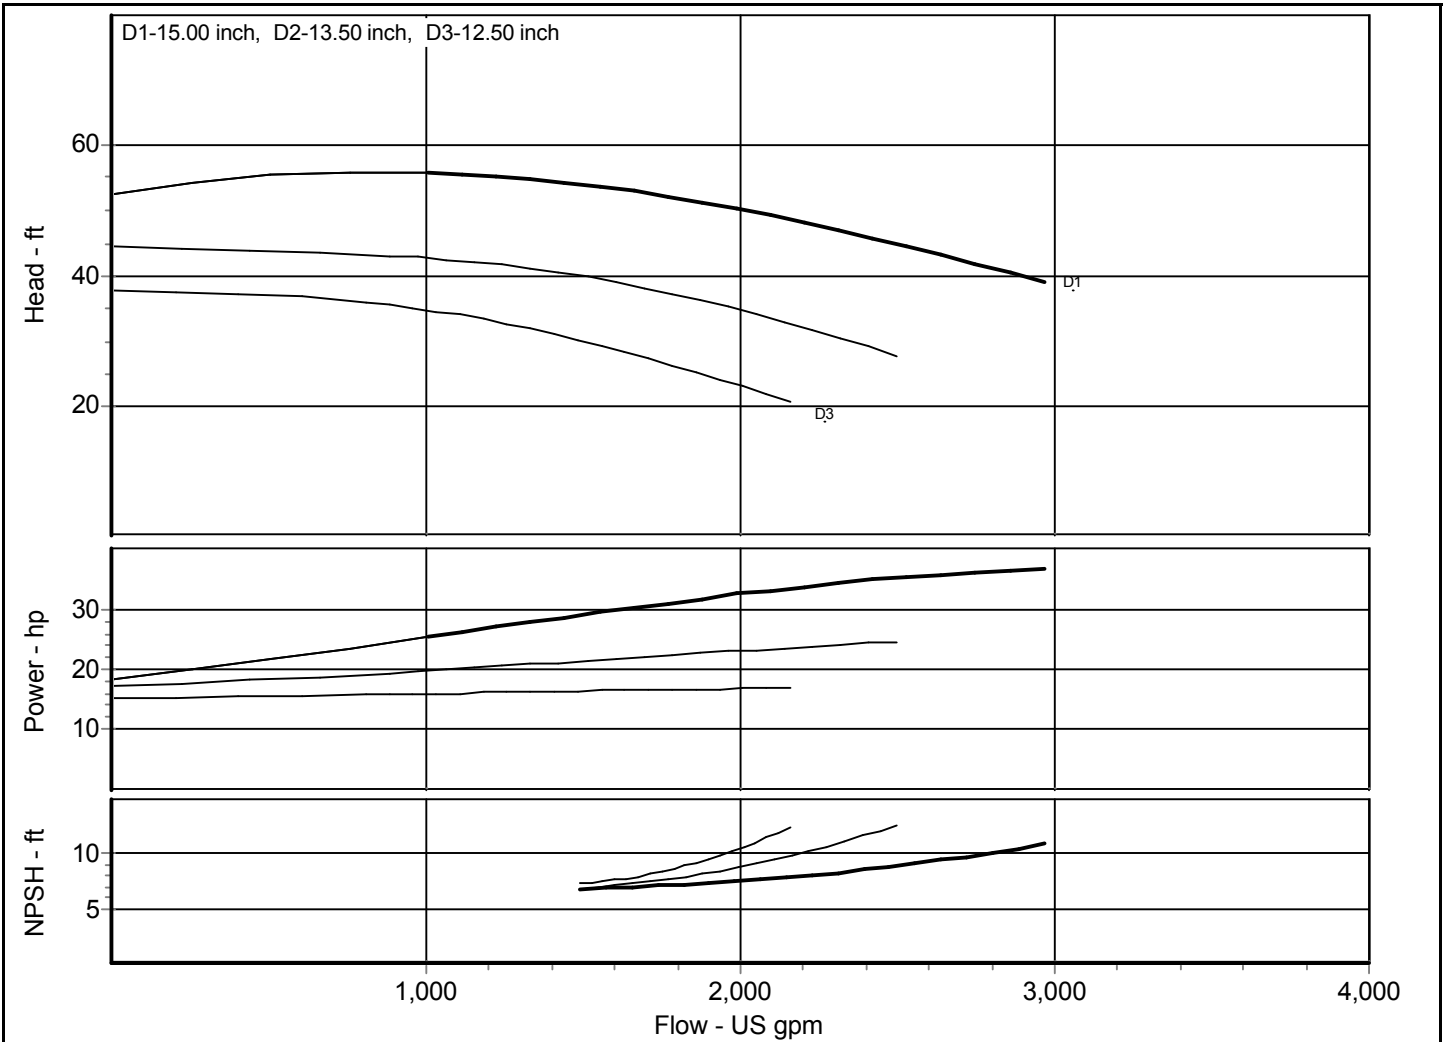

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 1x1.5-6 STP 8196LF** Nom. Speed: **2950** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **6.06/4** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **2.78** hp
 Fluid: **Water** Closed Valve Pressure **109.051** ft
 Curve No.: **8196LF-50hz001**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

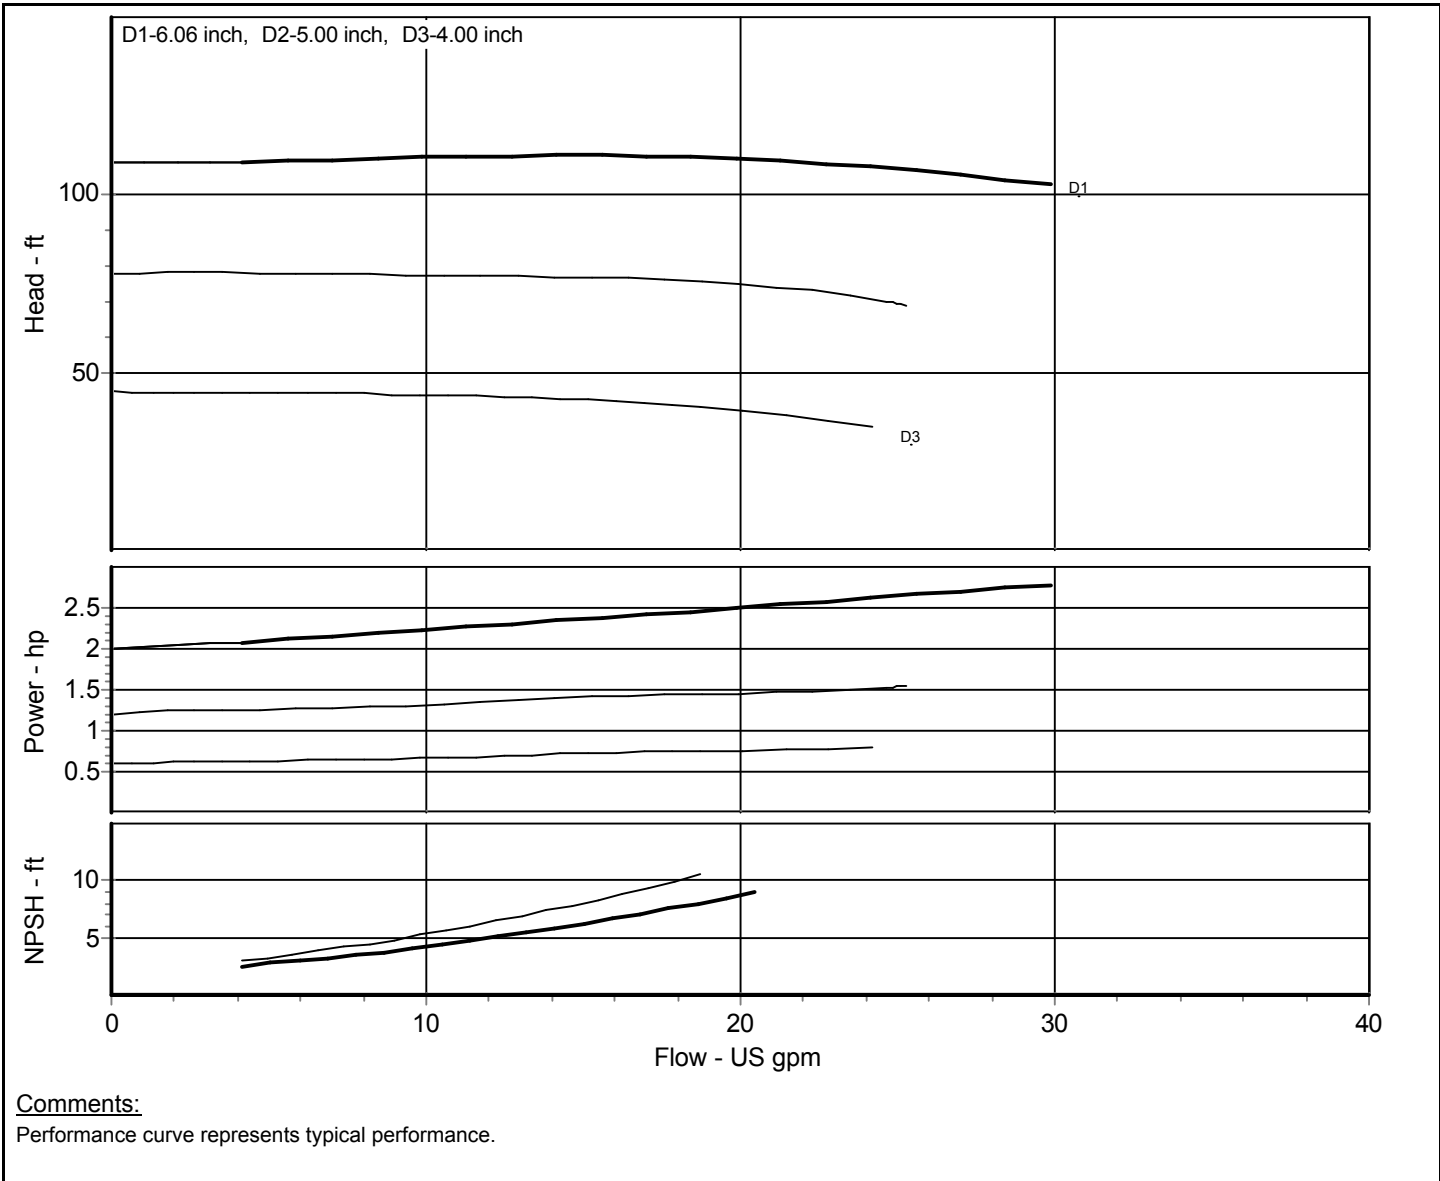



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 1x1.5- 6 STP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **2900** RPM, 50 Hz Electric
 Impeller Dia.: **6.06/3.5** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-50hz002**

Sp. Gravity: **1.000**

Peak Power: **4.23** hp

Impeller No.


Fluid: **Water**

Closed Valve Pressure **103.33** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

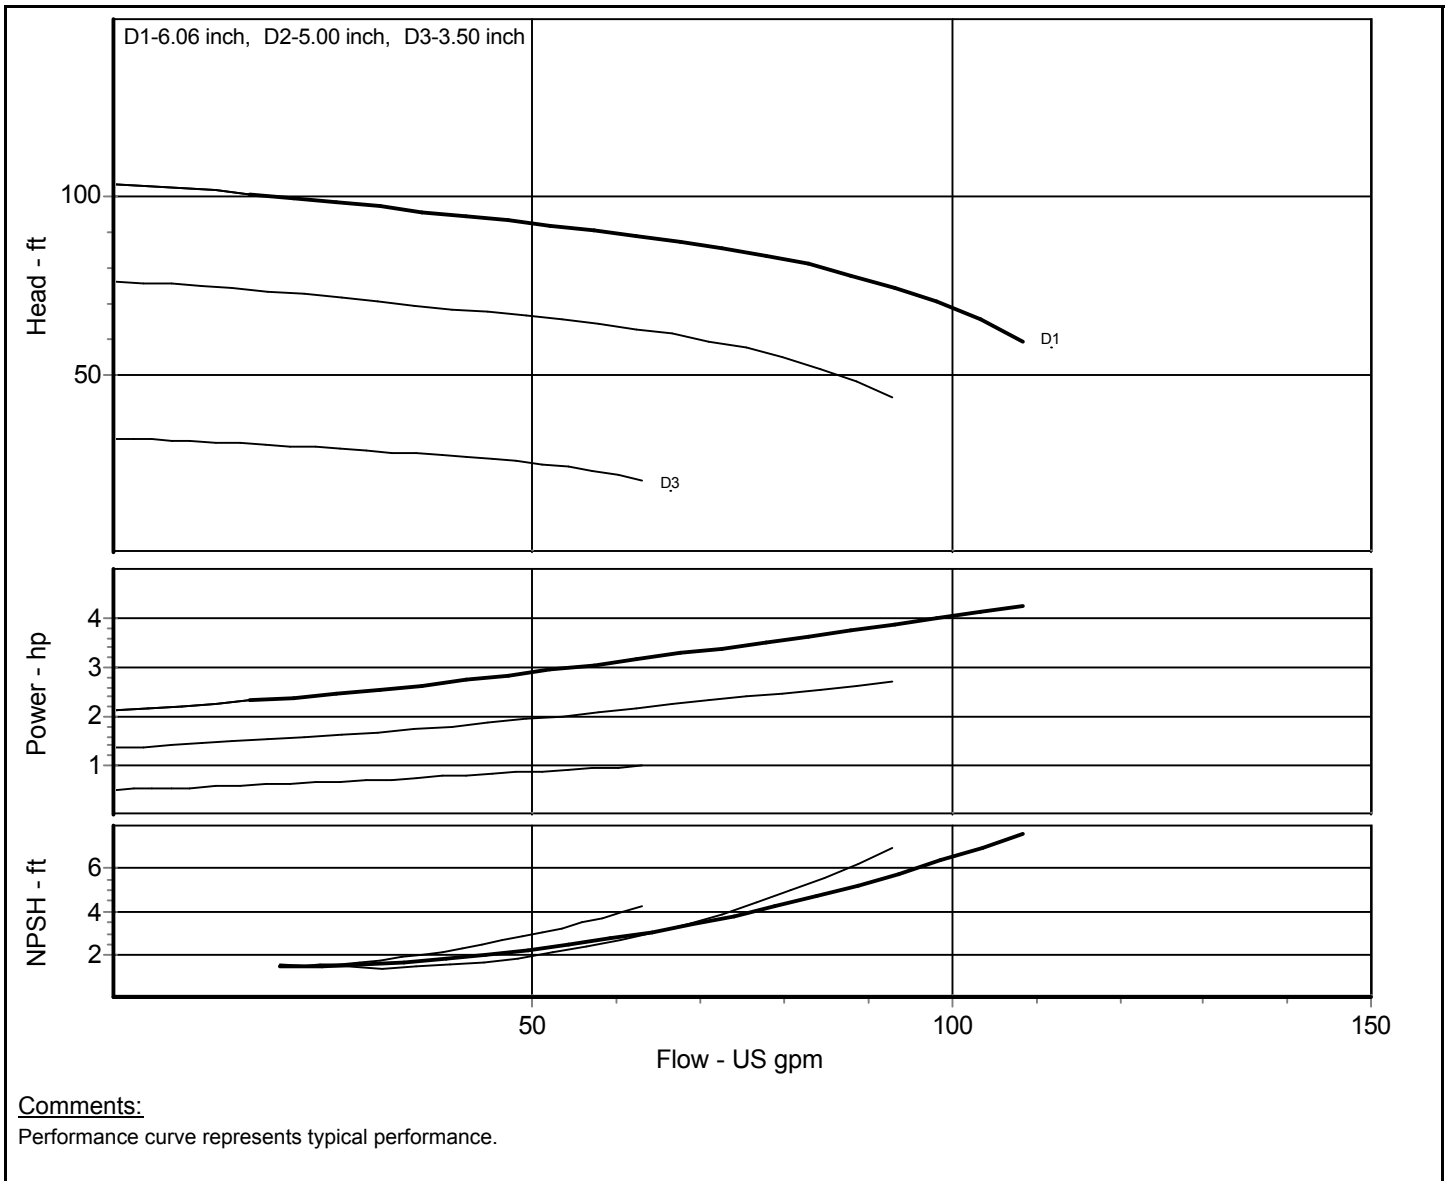



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model:	Peerless - 1x1.5-8 STP 8196LF	Nom. Speed:	2950 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type:	8196 - ANSI Standard End Suction	Impeller Dia.:	8/6 inch	Duty Head :	ft
		Temperature:	68 °F	Efficiency :	%
		Viscosity:	1.009 cP	Power Required :	hp
Curve No.:	8196LF-50hz003	Sp. Gravity:	1.000	NPSH Required :	ft
Impeller No.:		Fluid:	Water	Peak Power:	6.52 hp
Item :	1			Closed Valve Pressure	178.147 ft
Your Ref.:		Tolerance :	Hyd Inst-Peerless Std		

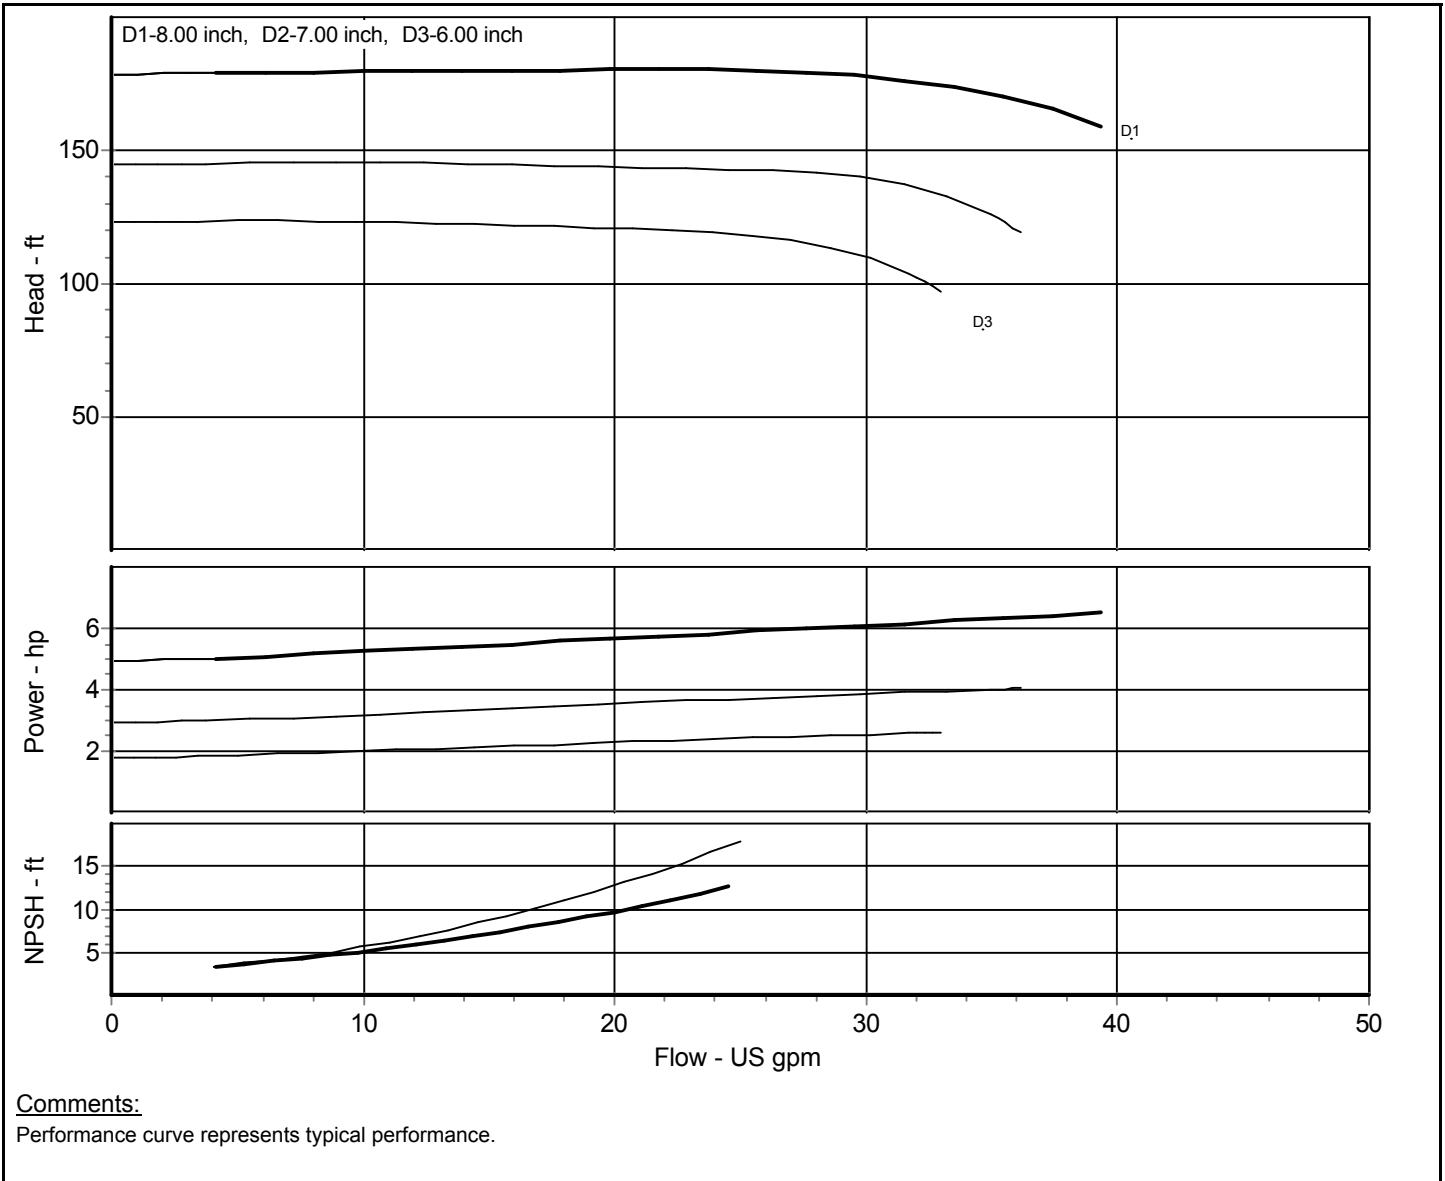




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1x1.5-8 STP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz006	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	10.73 hp
Item : 1		Closed Valve Pressure	201.317 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

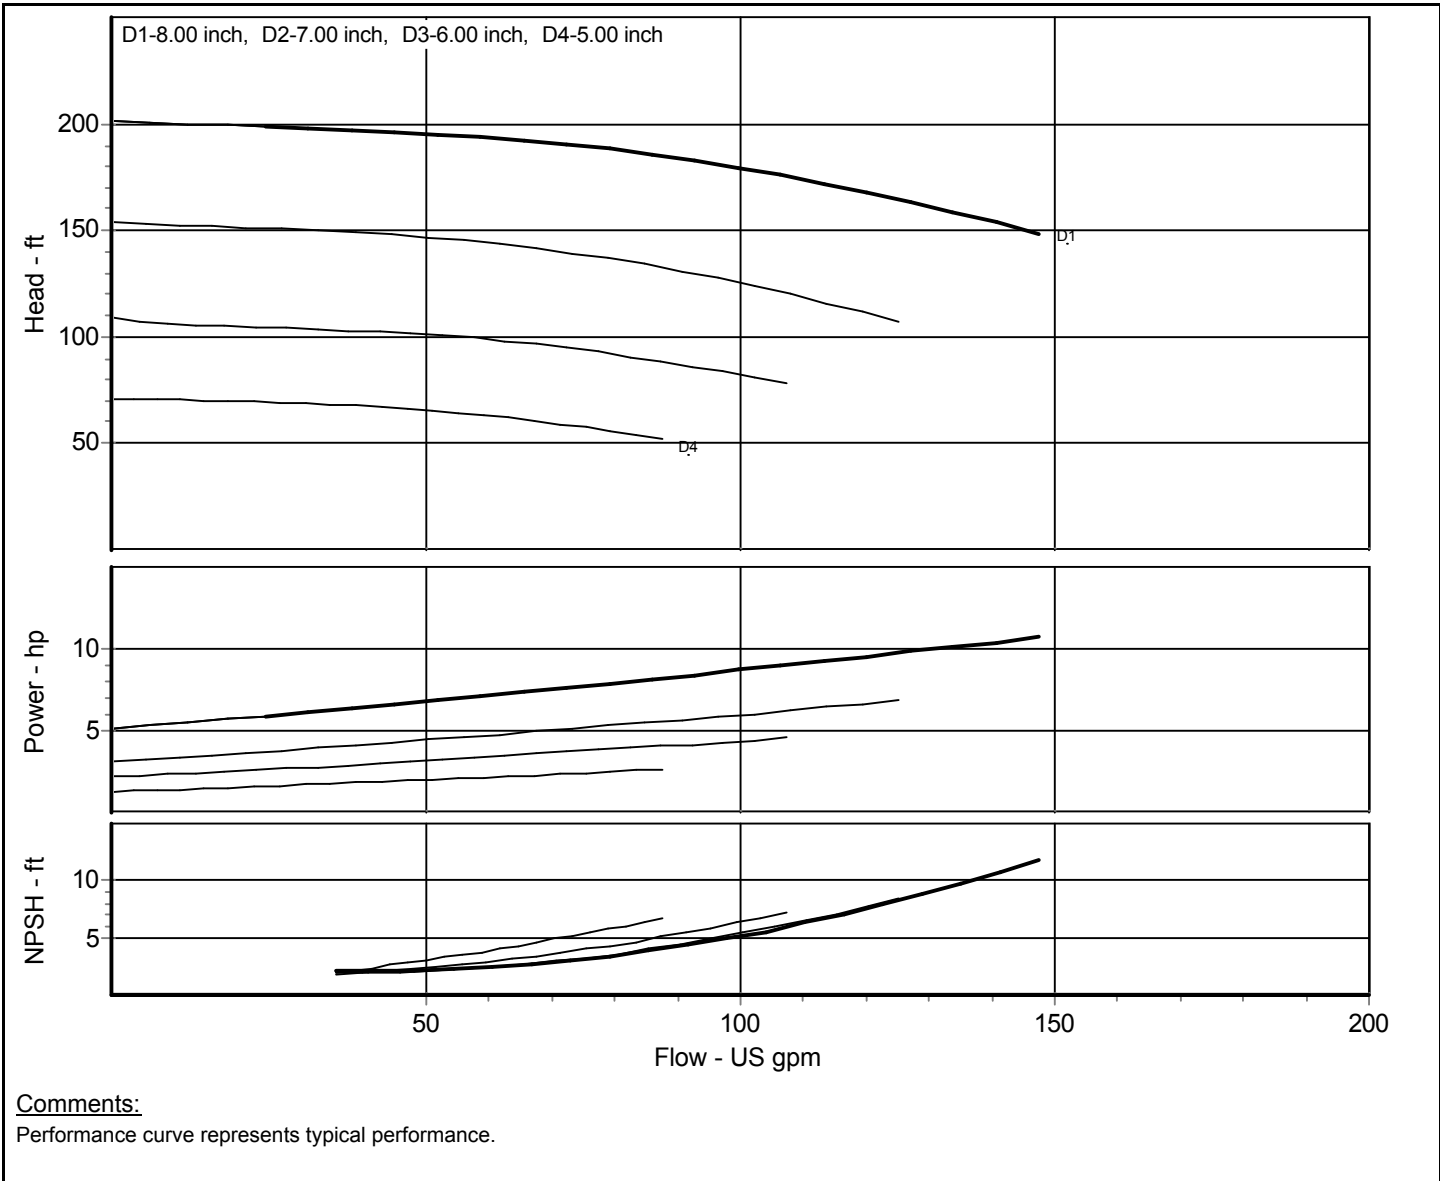



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 1x2-10 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **2900** RPM, 50 Hz Electric
 Impeller Dia.: **10/5** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-50hz019**

Sp. Gravity: **1.000**

Peak Power: **23.65** hp

Impeller No.


Fluid: **Water**

Closed Valve Pressure **326.994** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

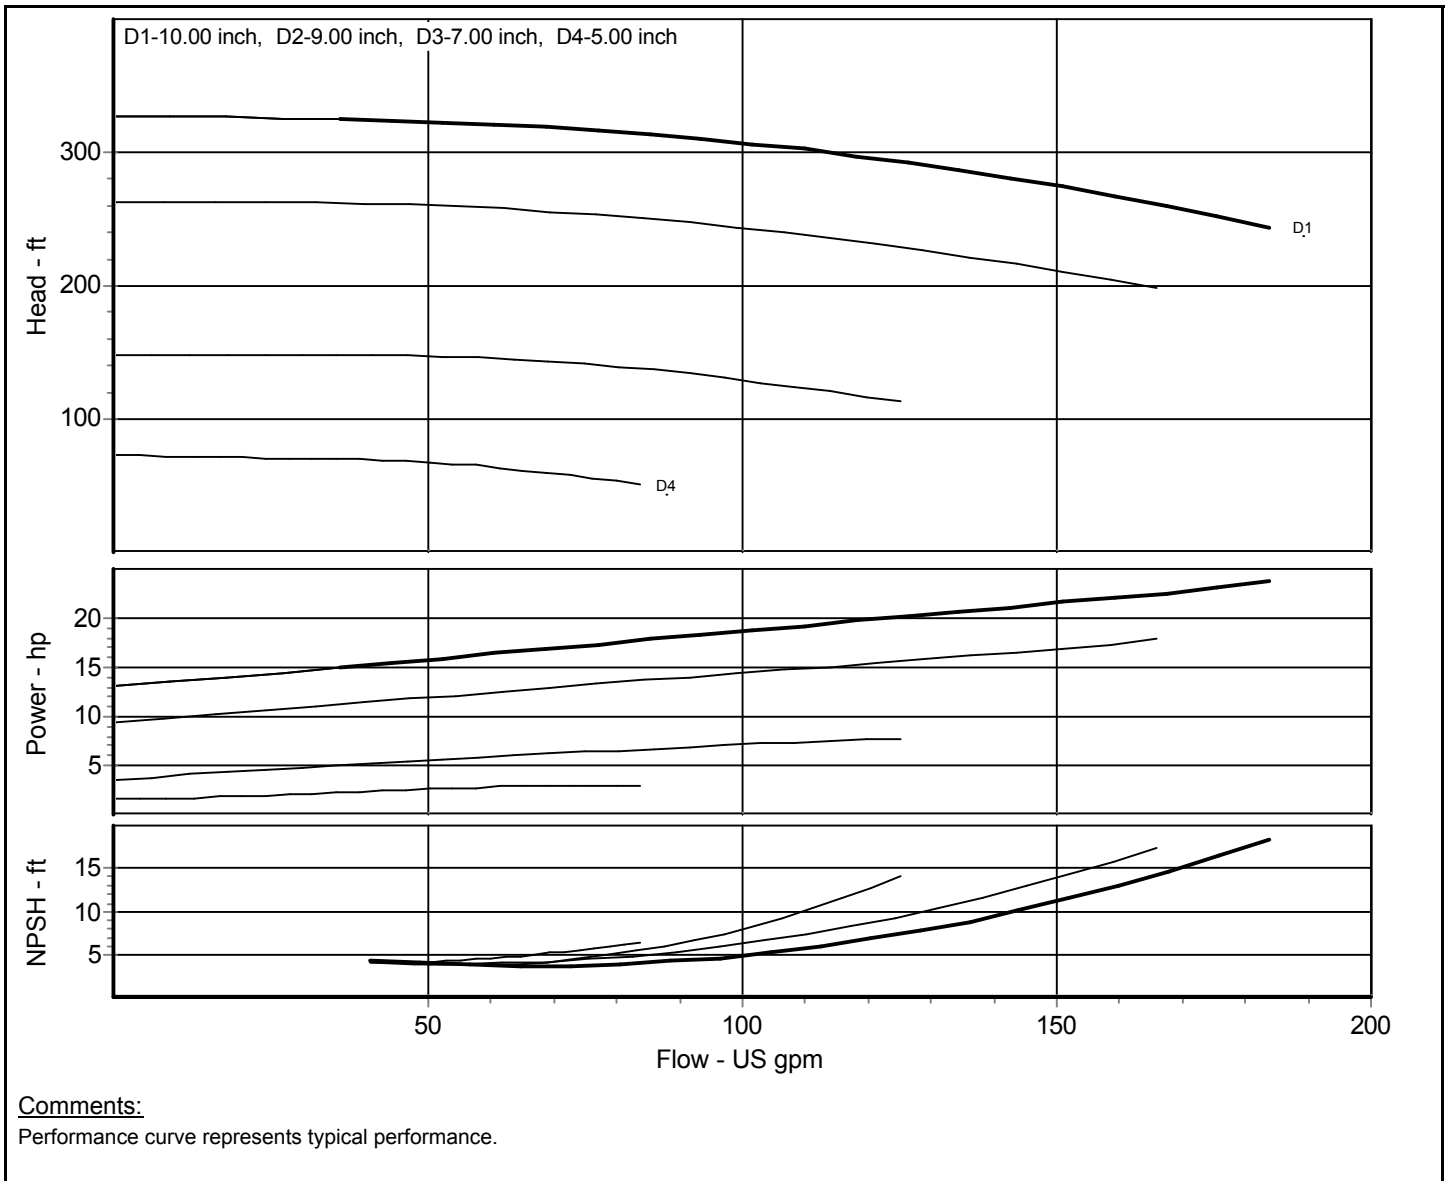



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 1x2-10 LTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **2900** RPM, 50 Hz Electric
 Impeller Dia.: **10/5** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-50hz019**

Sp. Gravity: **1.000**

Peak Power: **23.65** hp

Impeller No.


Fluid: **Water**

Closed Valve Pressure **326.994** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

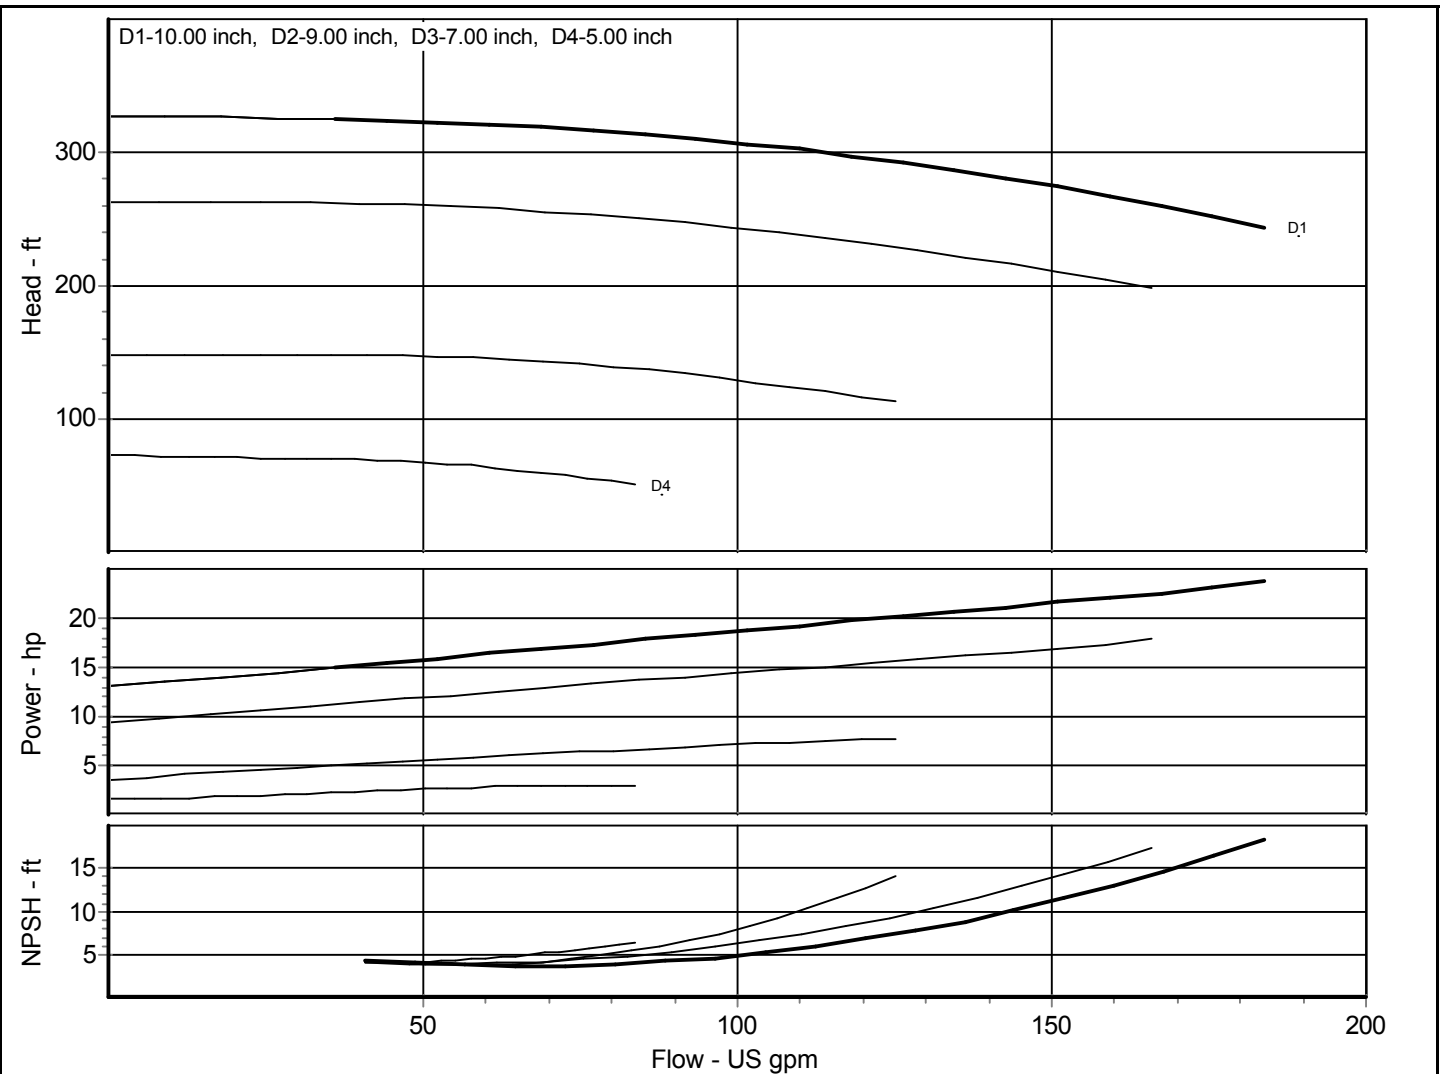

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 1.5x3-6 STP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **2900** RPM, 50 Hz Electric
 Impeller Dia.: **6.06/4** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-50hz004**

Sp. Gravity: **1.000**

Peak Power: **6.78** hp

Impeller No.


Fluid: **Water**

Closed Valve Pressure **103.362** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

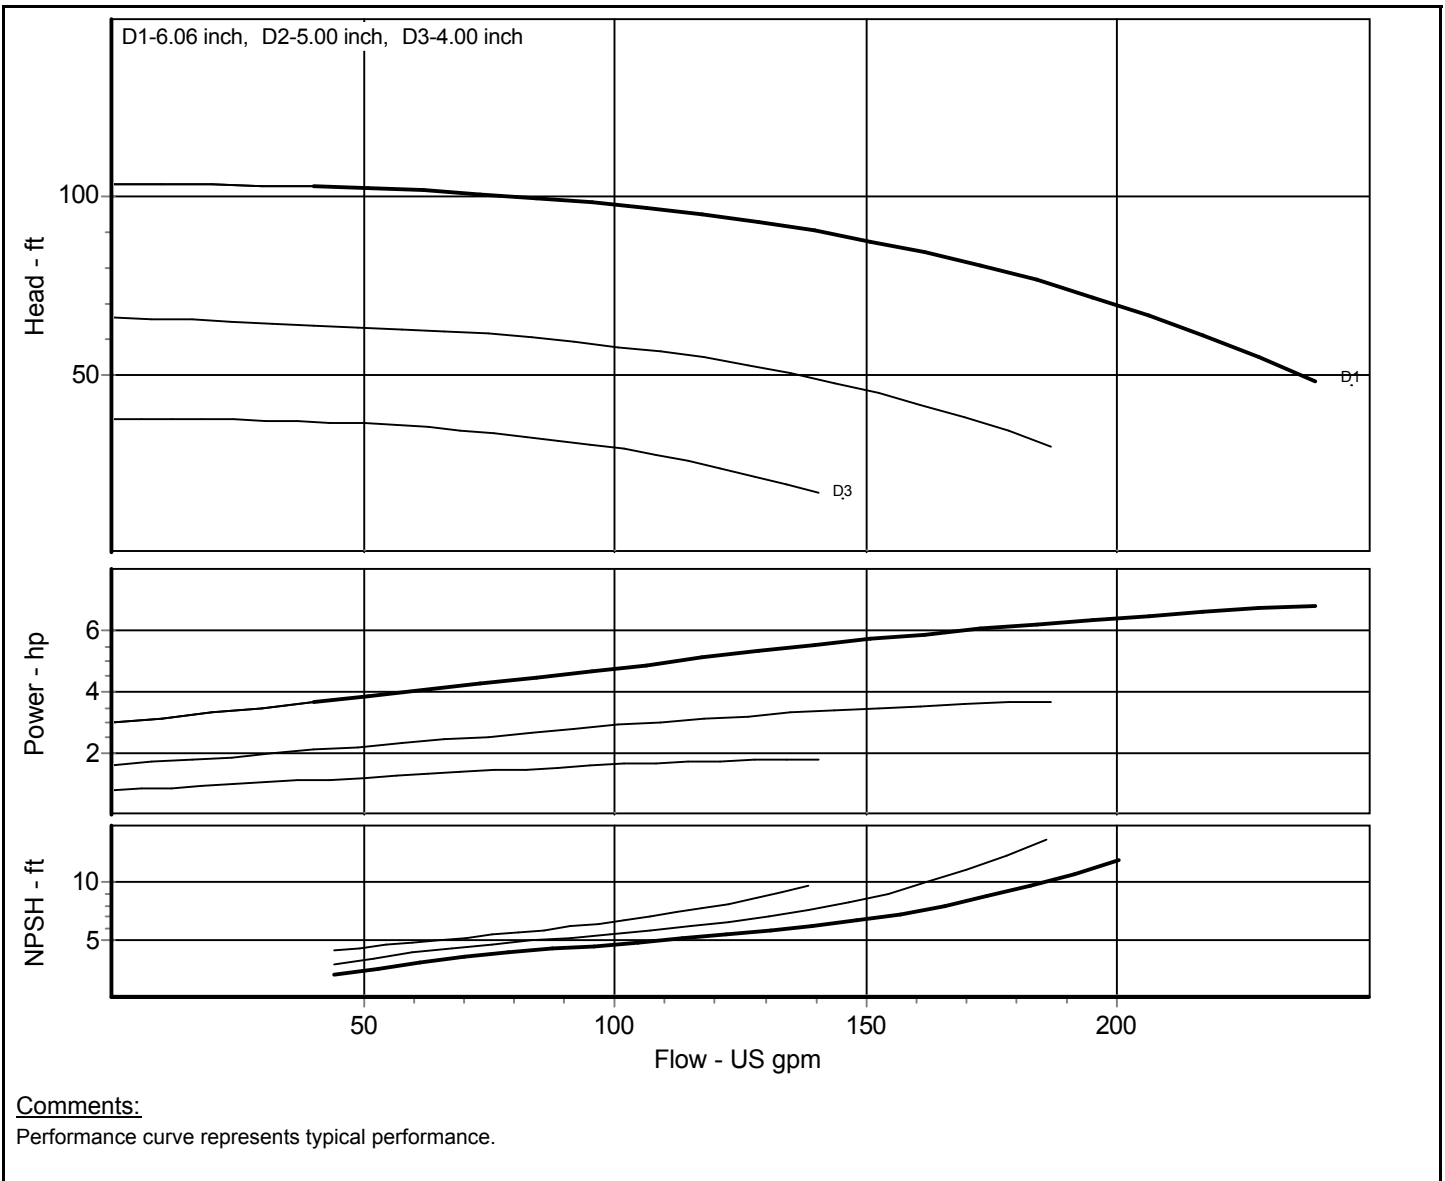




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1.5x3-8 STP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz008	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 14.76 hp	
Item : 1		Closed Valve Pressure 193.43 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

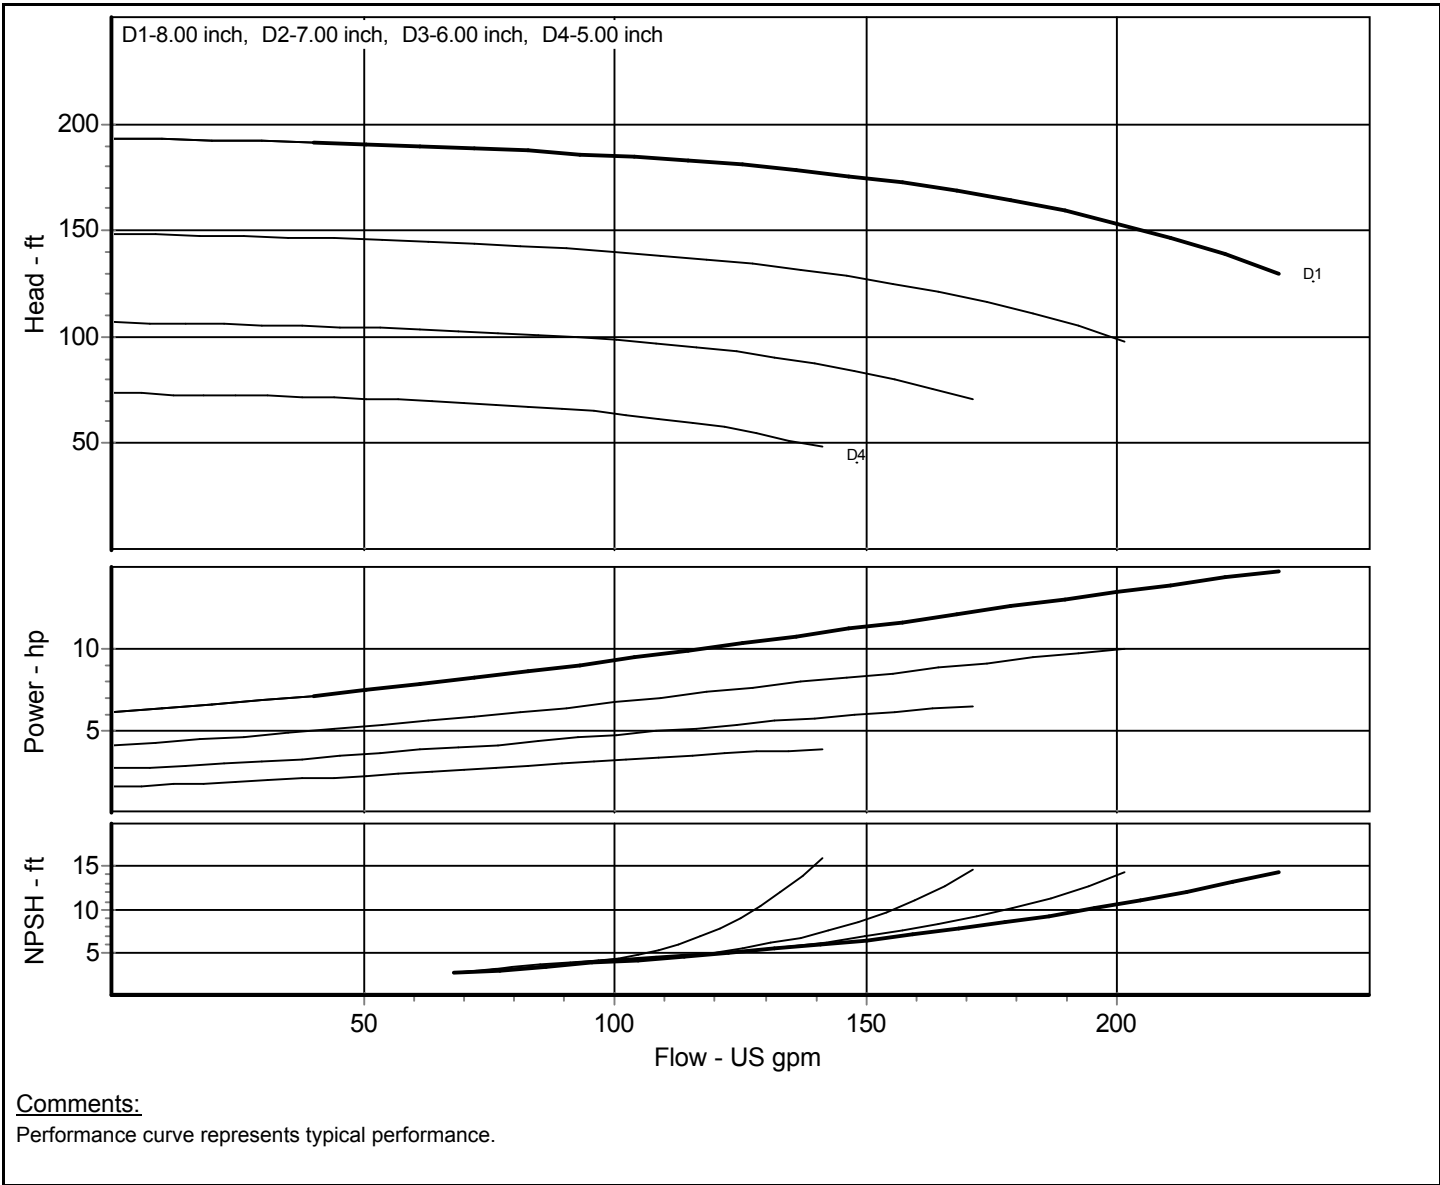

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1.5x3-10 MTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz021	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	29.29 hp
Item : 1		Closed Valve Pressure	293.767 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

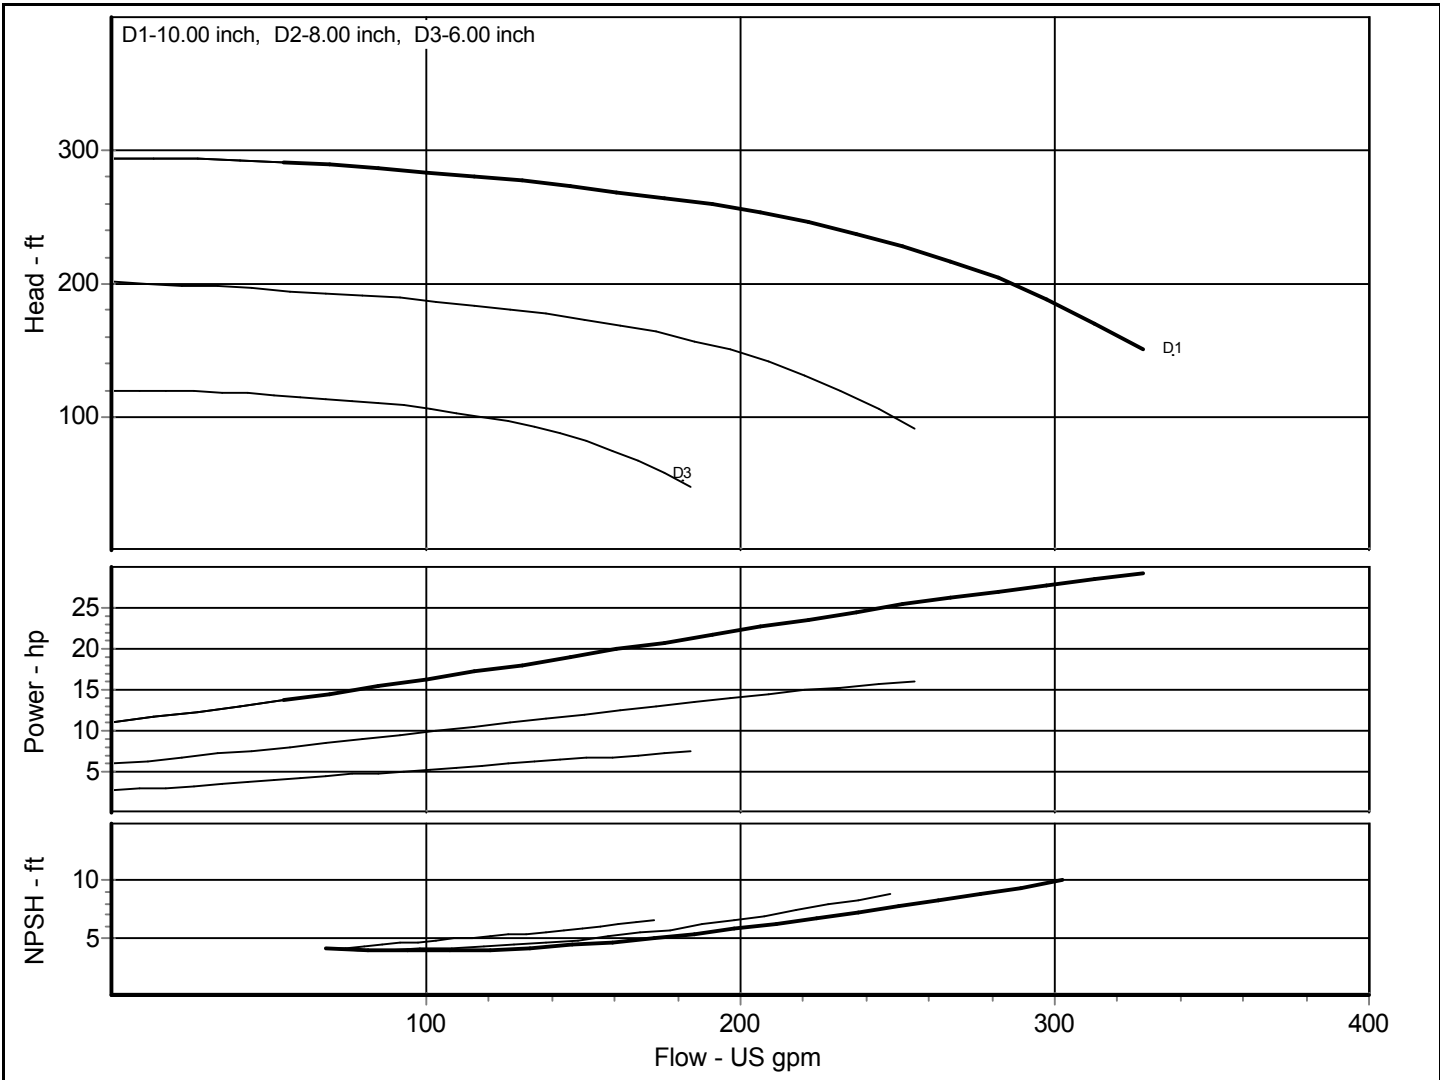

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 1.5x3-10 LTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz021	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 29.29 hp	
Item : 1		Closed Valve Pressure 293.767 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

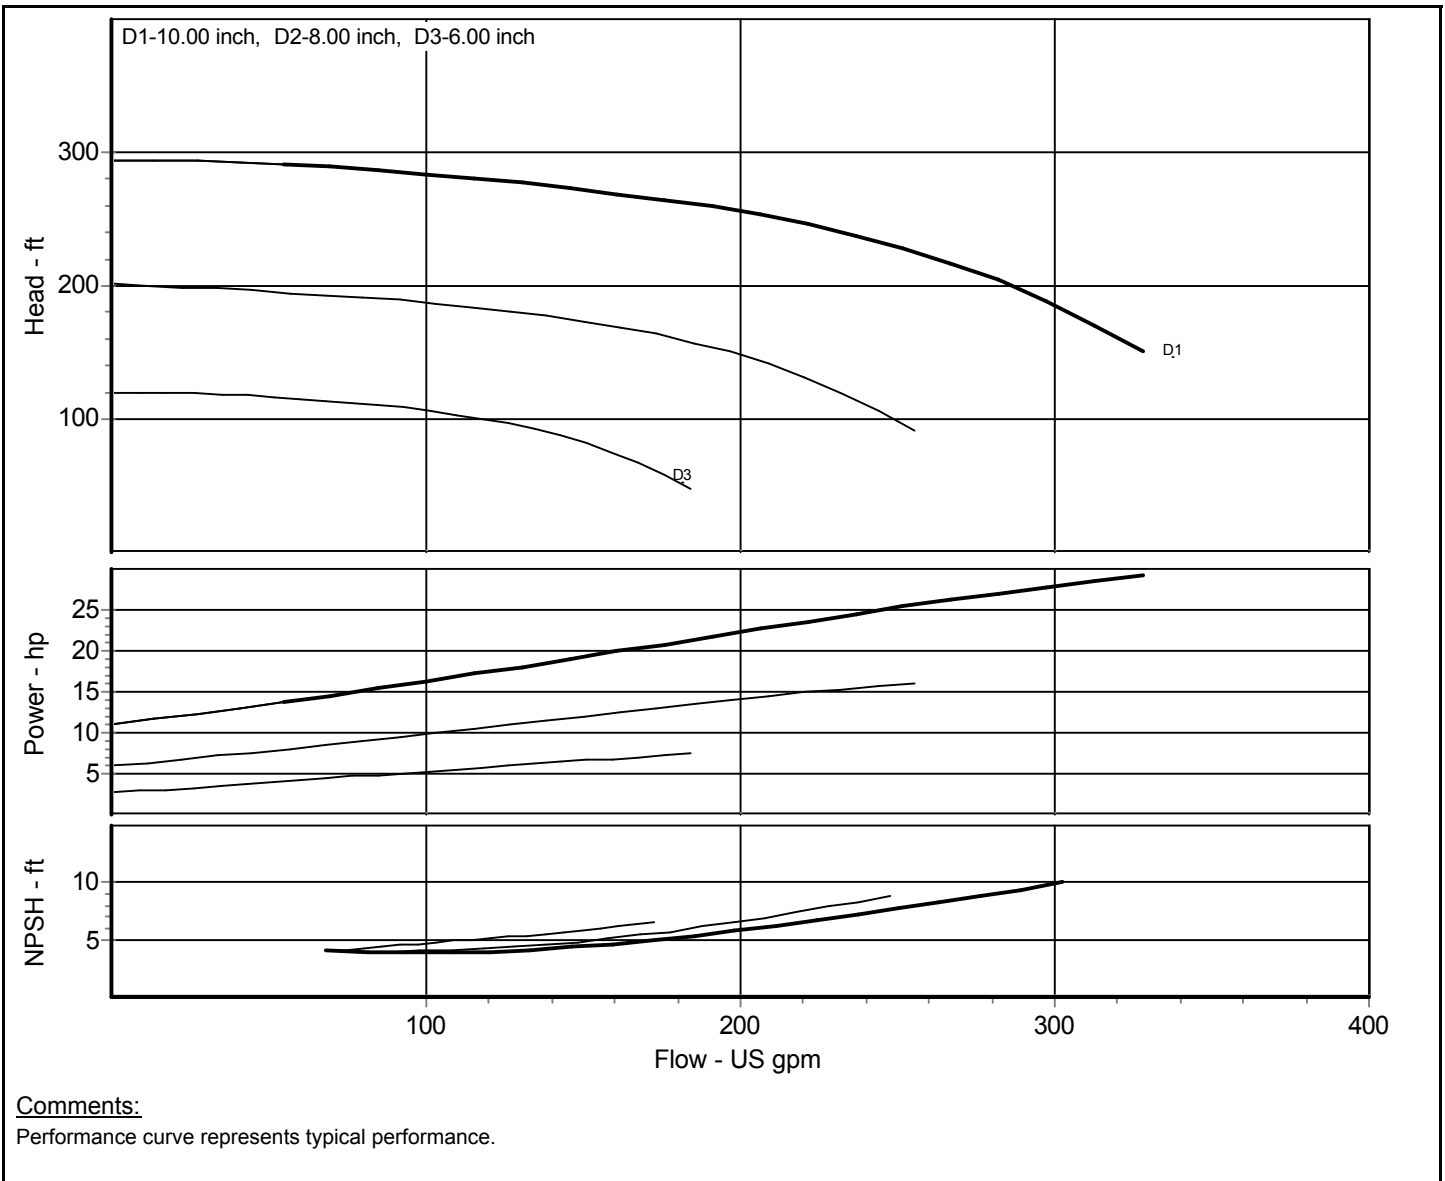

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 1.5x3-13 MTP 8196** Nom. Speed: **2900** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **66.19** hp
 Fluid: **Water** Closed Valve Pressure **433.723** ft
 Curve No.: **8196-50hz029**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

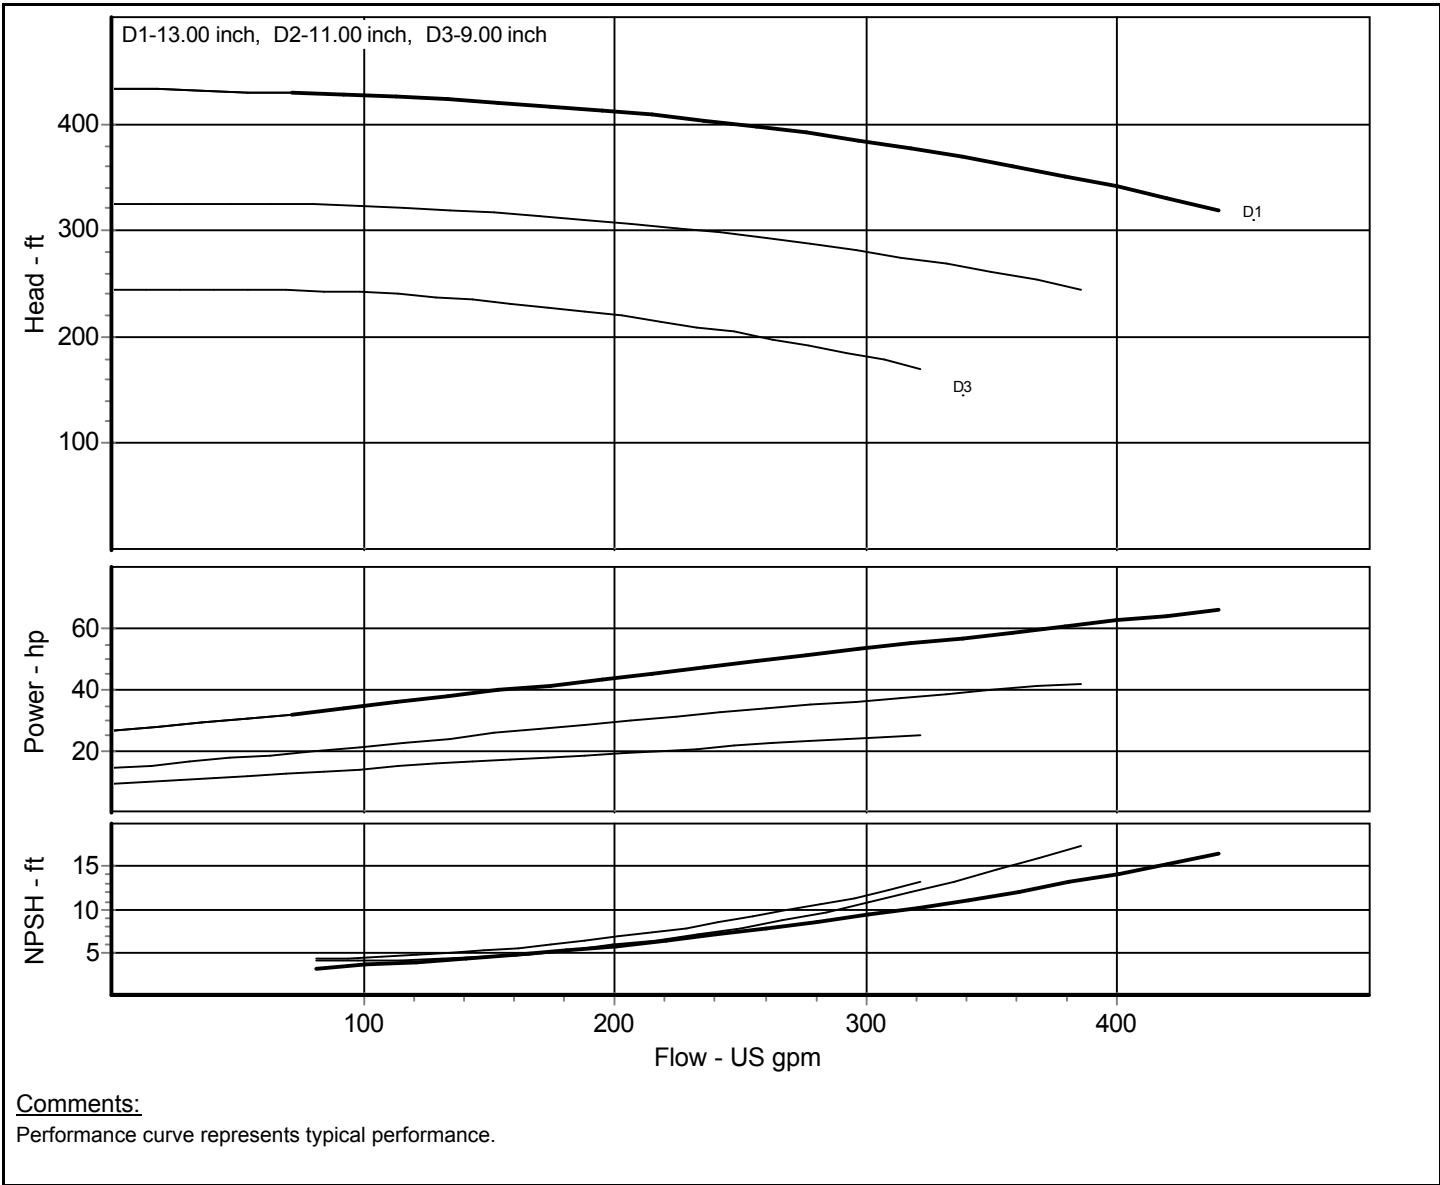




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1.5x3-13 LTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz029	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	66.19 hp
Item : 1		Closed Valve Pressure	433.723 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

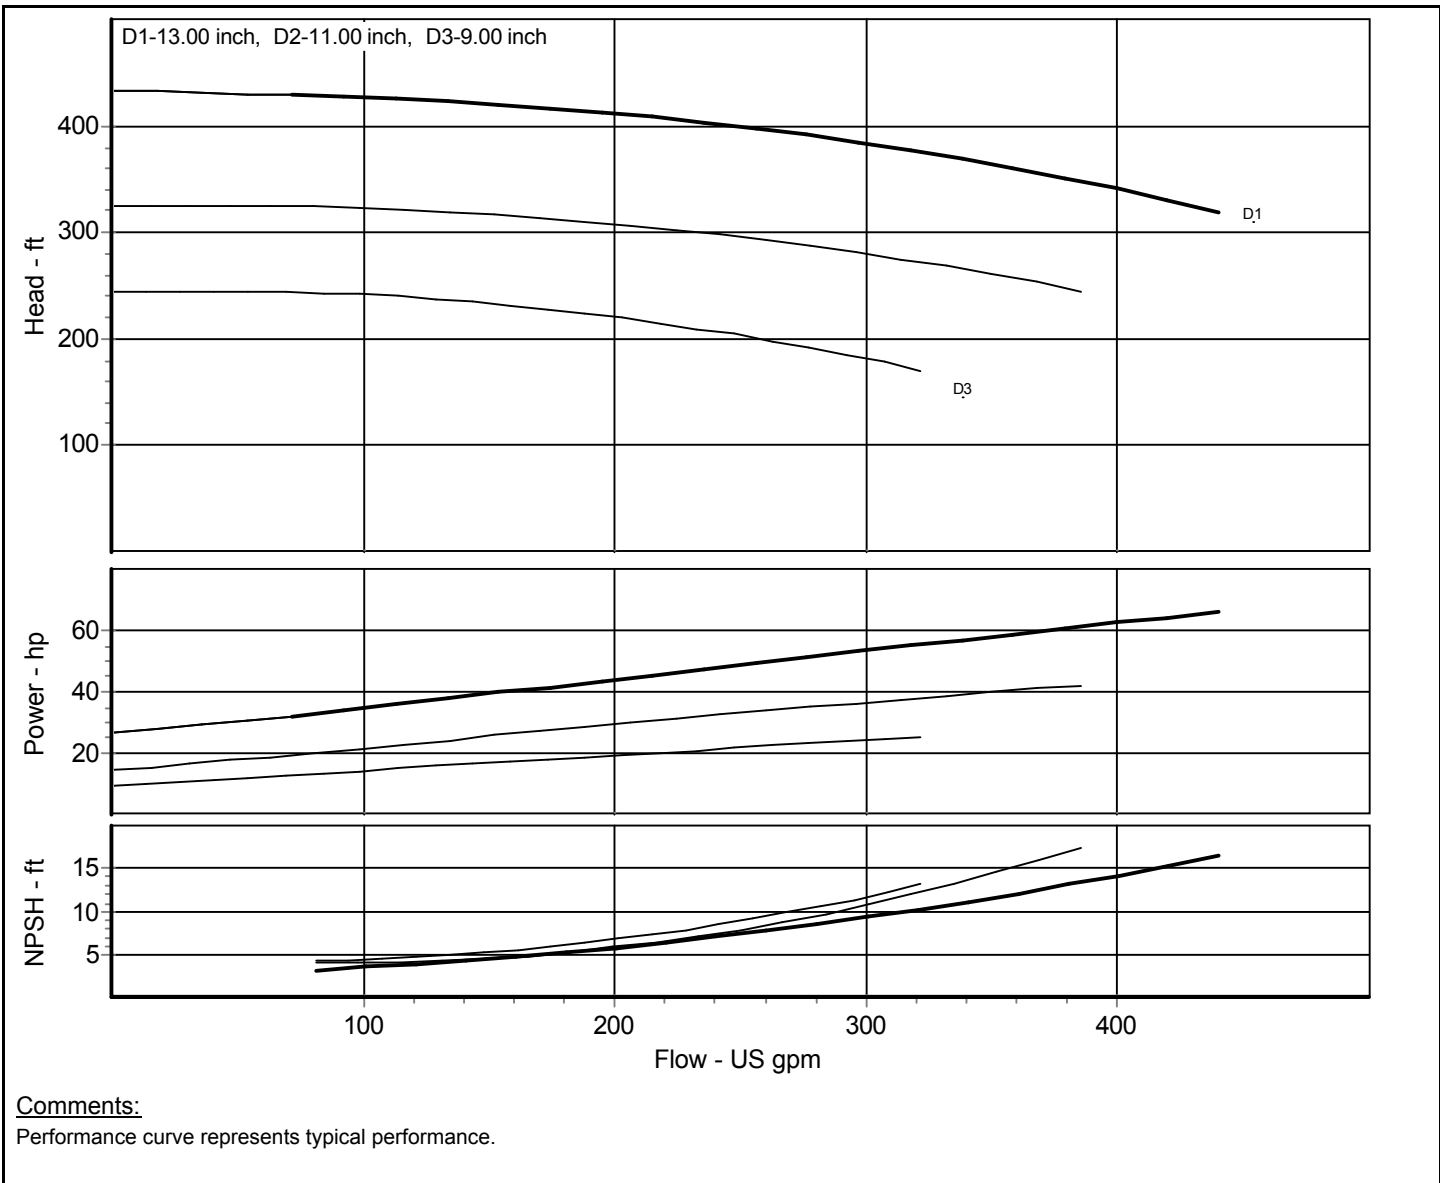




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-6 STP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz009	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 10.54 hp	
Item : 1		Closed Valve Pressure 103.336 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

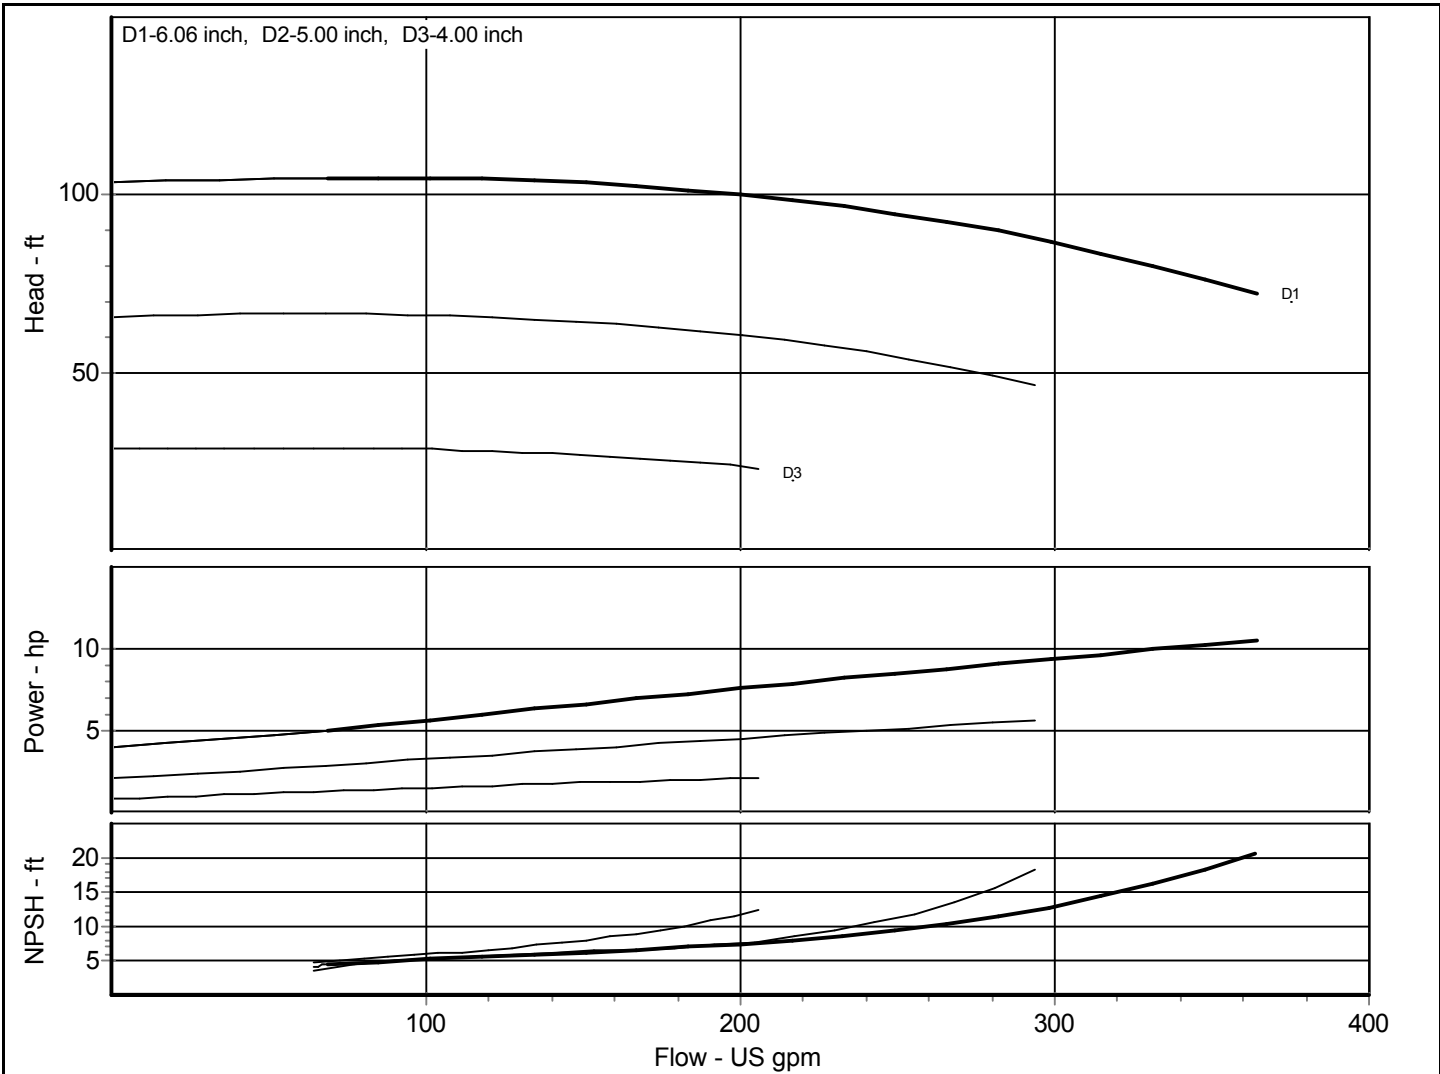

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-6 MTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 5.88/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz012	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	8.73 hp
Item : 1		Closed Valve Pressure	112.751 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

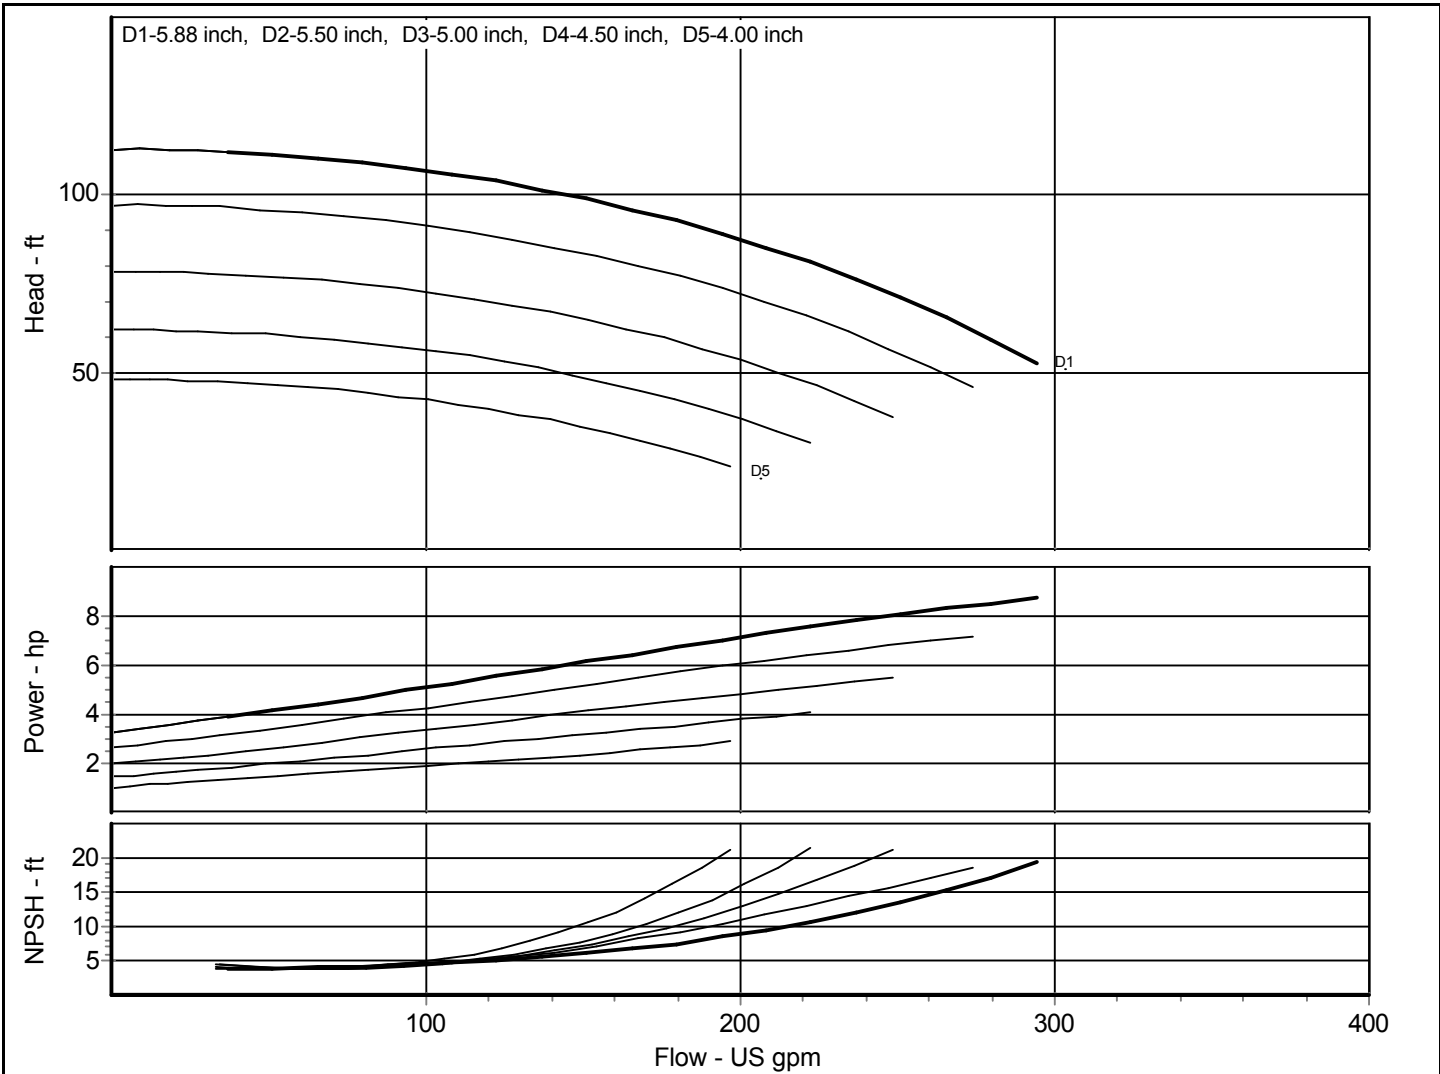

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-8 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **2900** RPM, 50 Hz Electric
 Impeller Dia.: **8.38/5.5** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-50hz013**

Sp. Gravity: **1.000**

Peak Power: **21.16** hp

Impeller No.


Fluid: **Water**

Closed Valve Pressure **210.937** ft

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

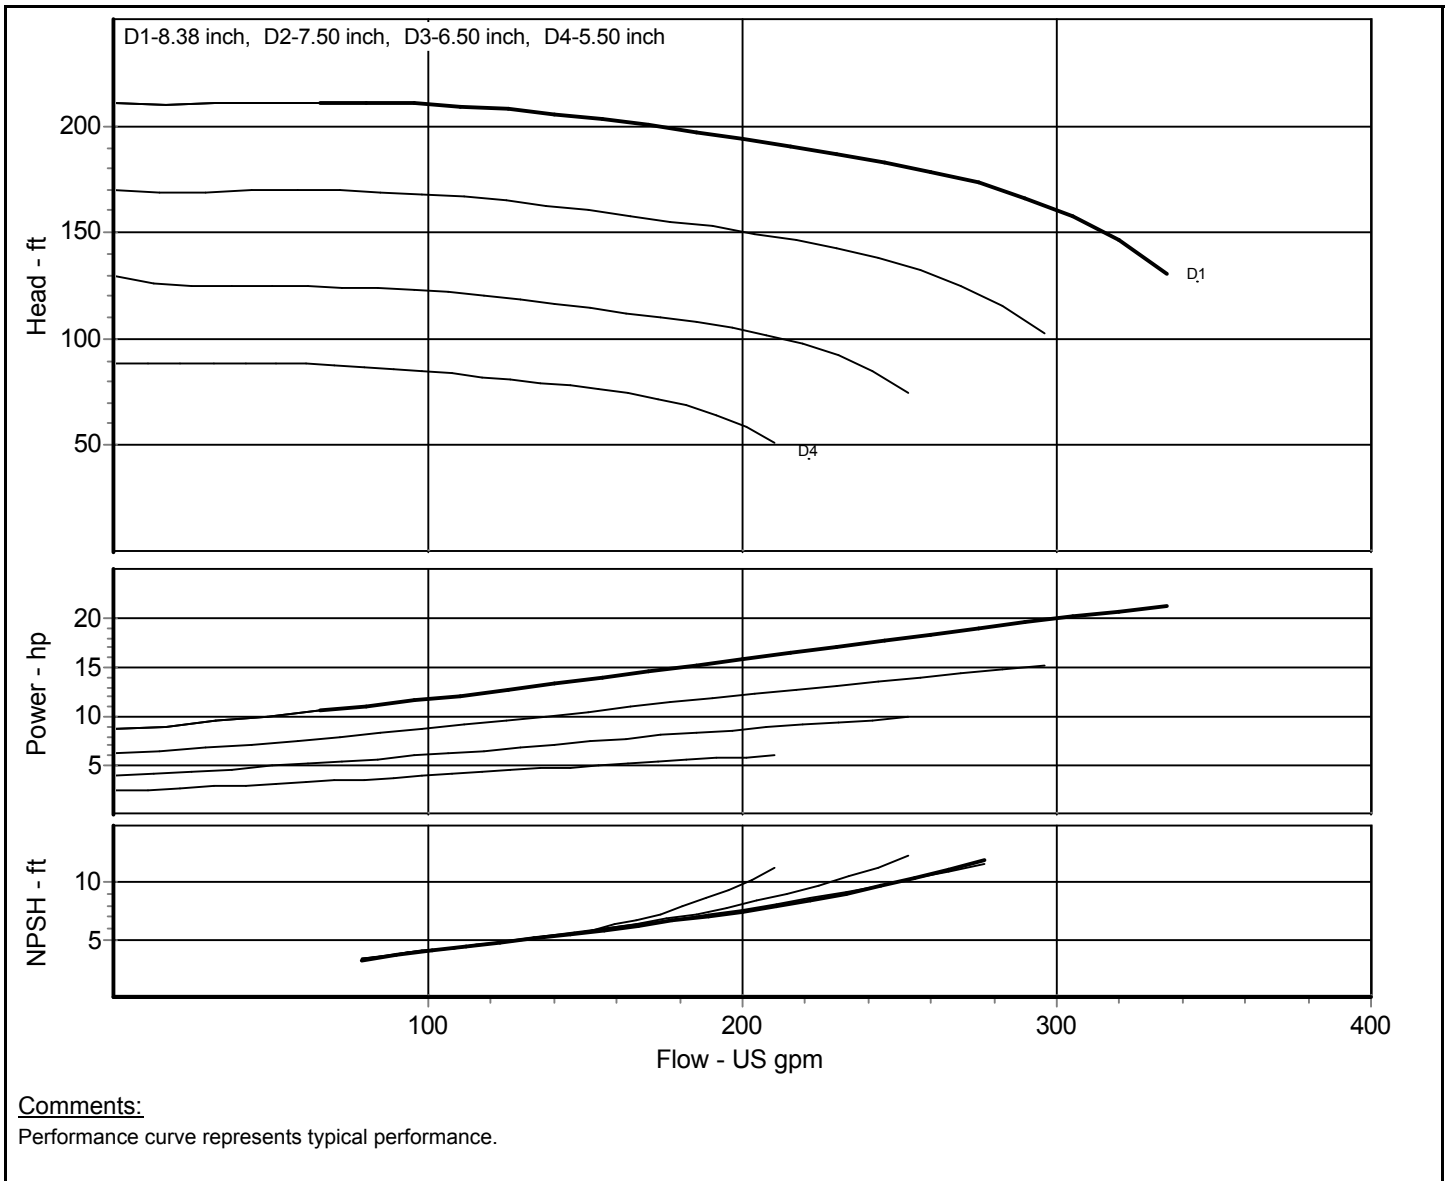




Customer :

Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Project : Page No. : Contact : Fax :
 Quote No. : Date : Phone :

Pump Model: Peerless - 2x3-10 MTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz023	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 46.55 hp	
Item : 1		Closed Valve Pressure 303.571 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

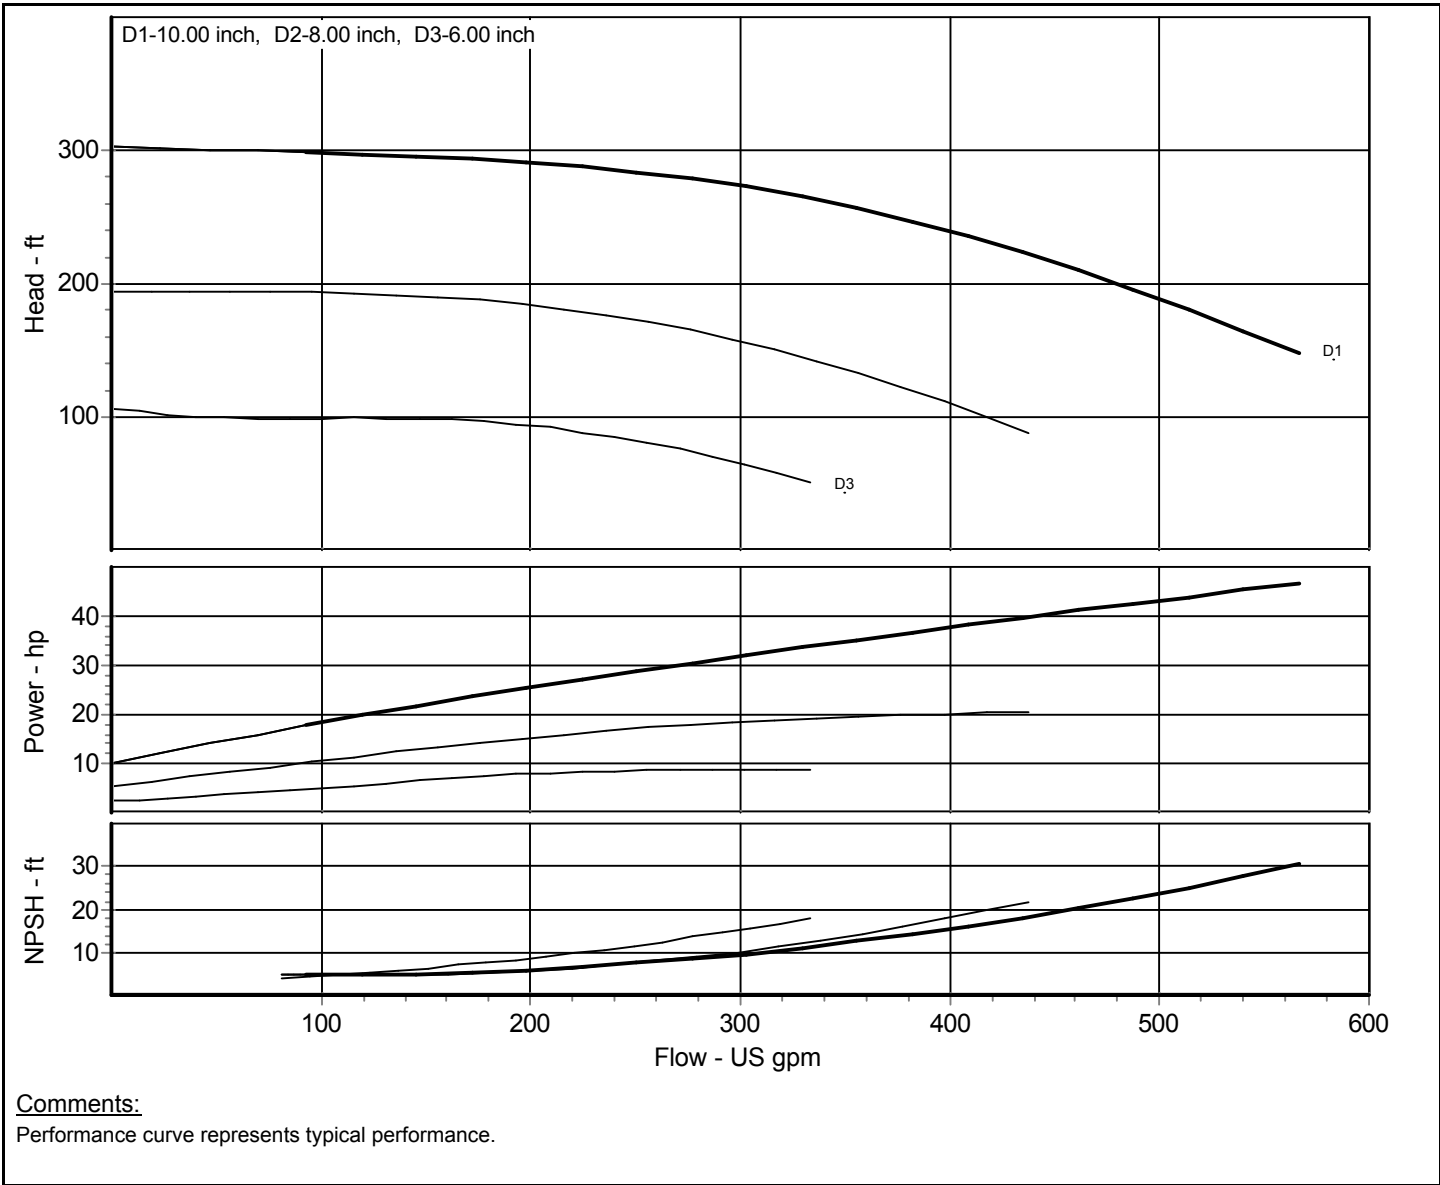




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-10 LTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz023	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	46.55 hp
Item : 1		Closed Valve Pressure	303.571 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

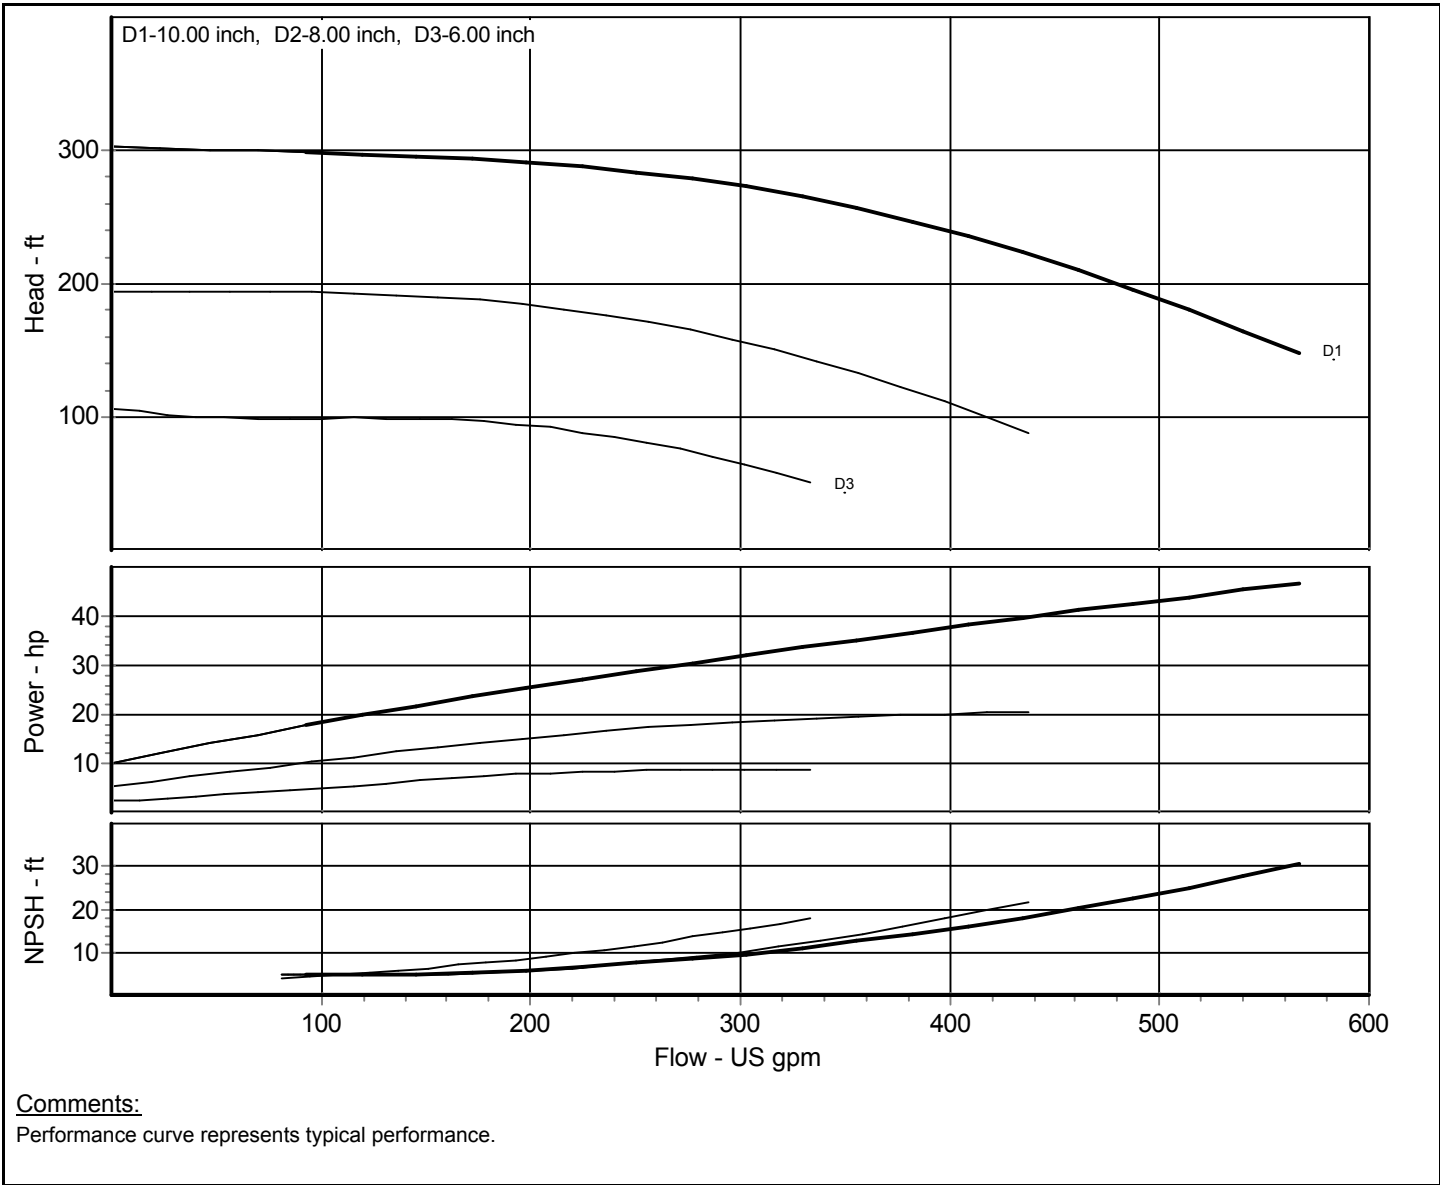

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 2x3-13 LTP 8196** Nom. Speed: **2900** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Curve No.: **8196-50hz032** Sp. Gravity: **1.000** Peak Power: **99.84** hp
 Impeller No. Fluid: **Water** Closed Valve Pressure **494.663** ft
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

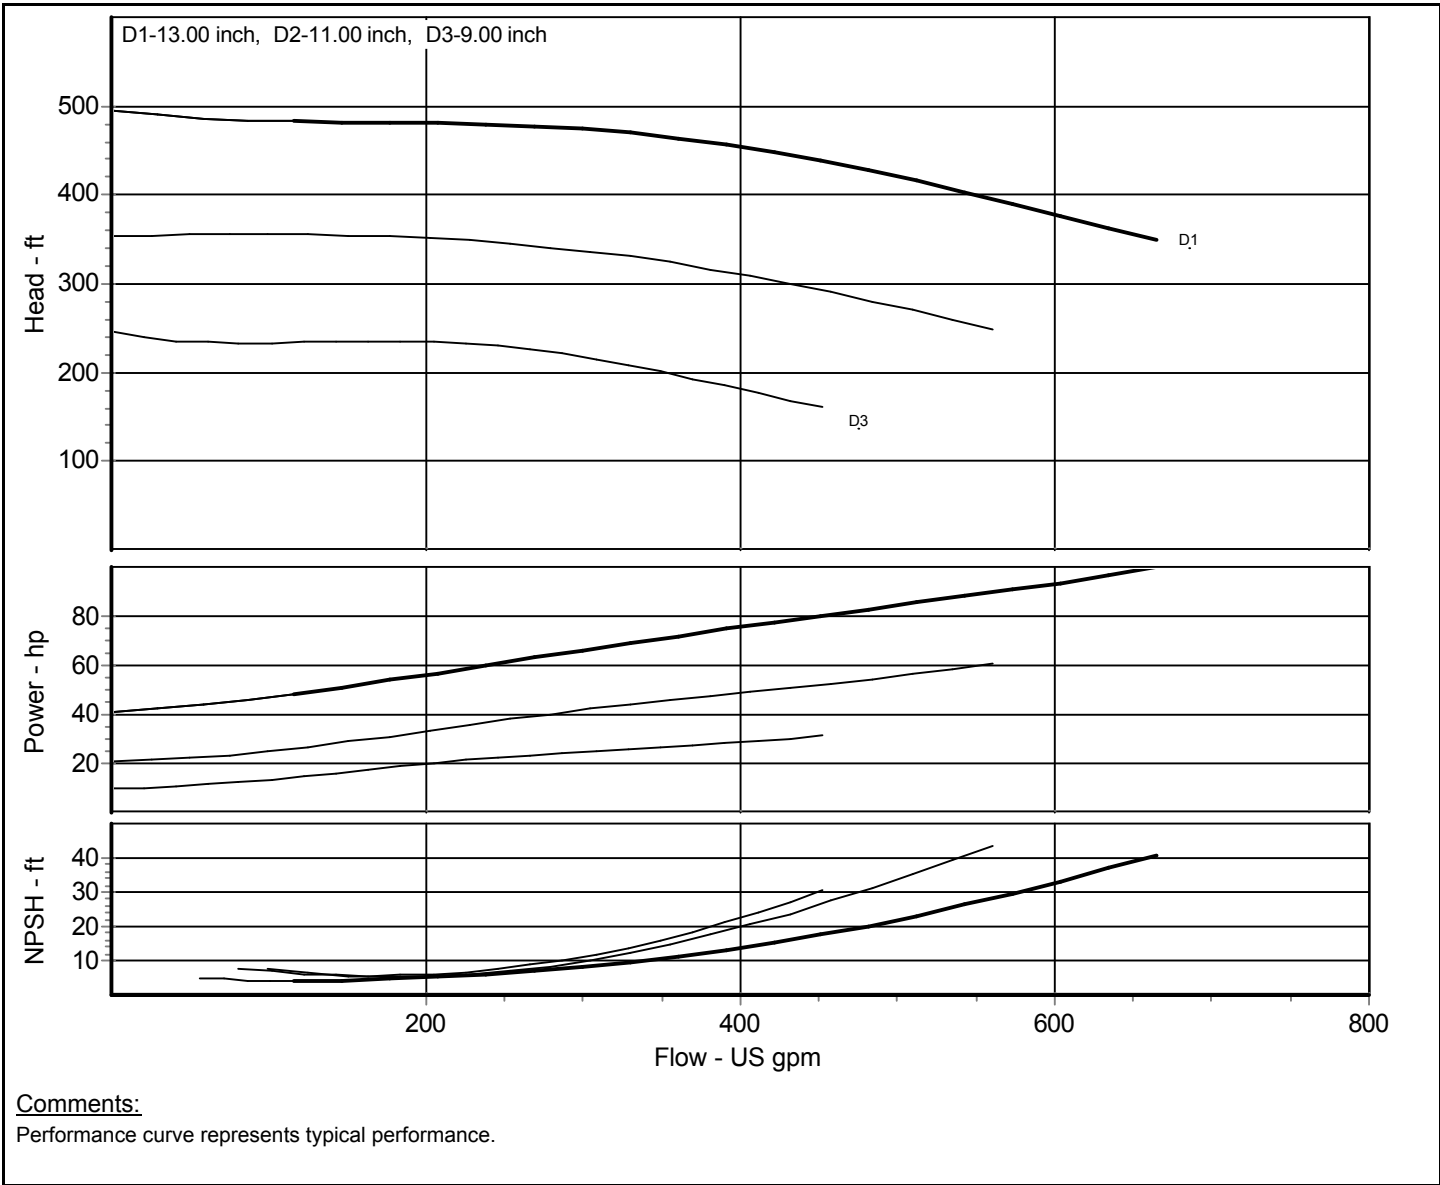




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 3x4-8G MTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/5.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz017	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 33.56 hp	
Item : 1		Closed Valve Pressure 206.013 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

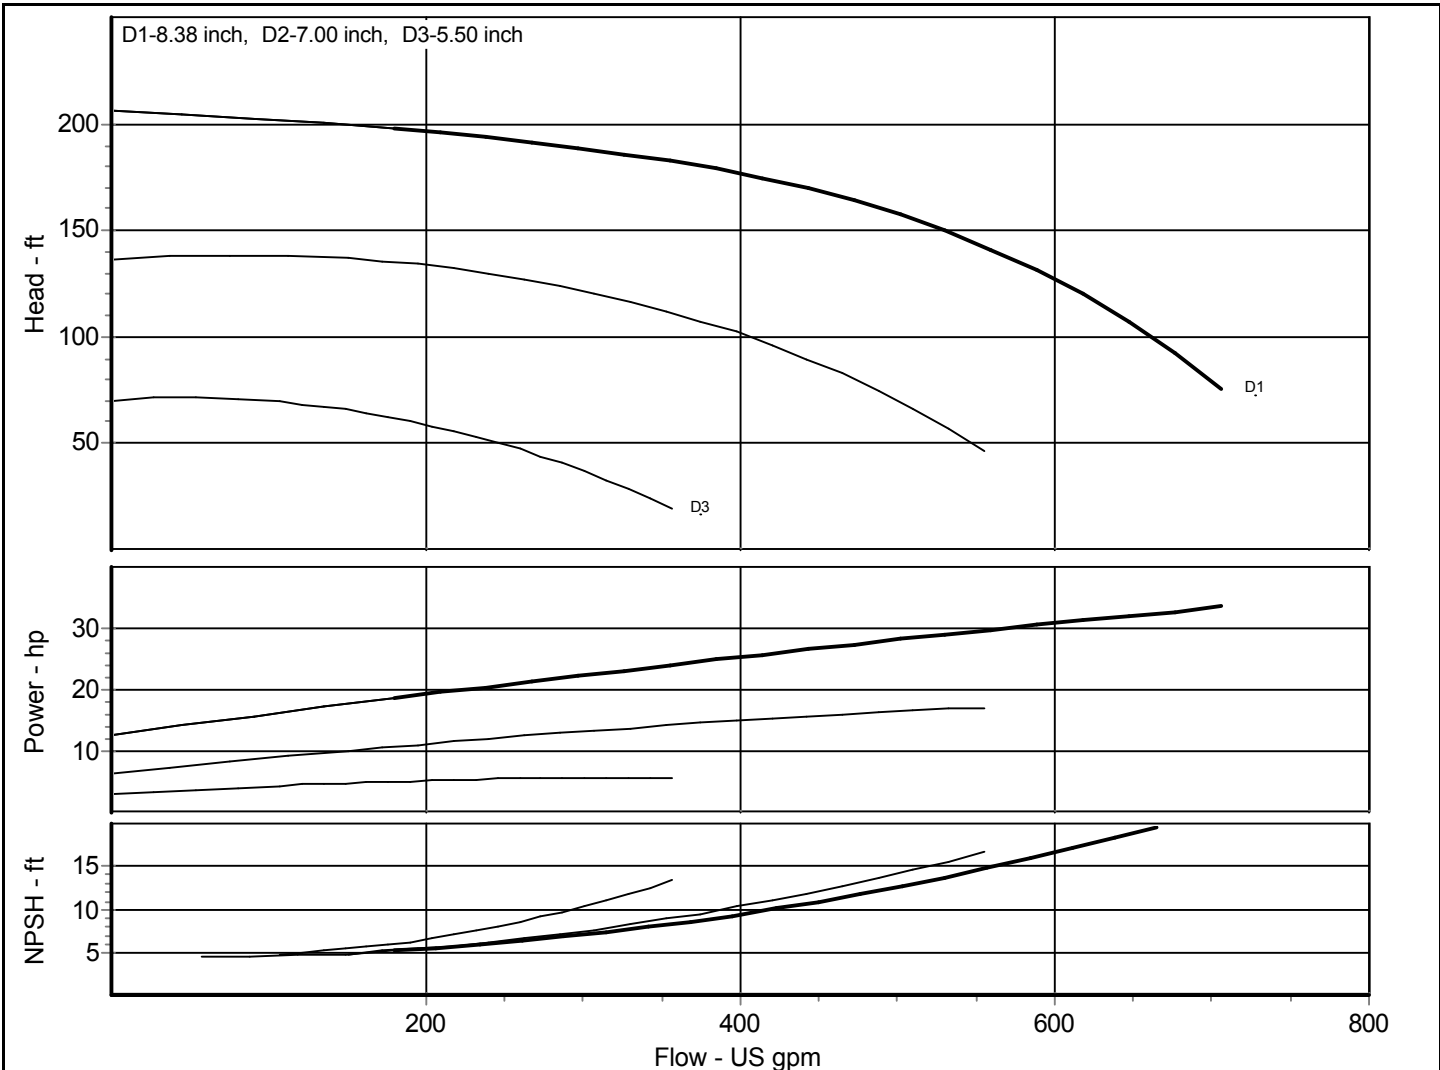

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 3x4-10 MTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz025	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	54.96 hp
Item : 1		Closed Valve Pressure	297.631 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

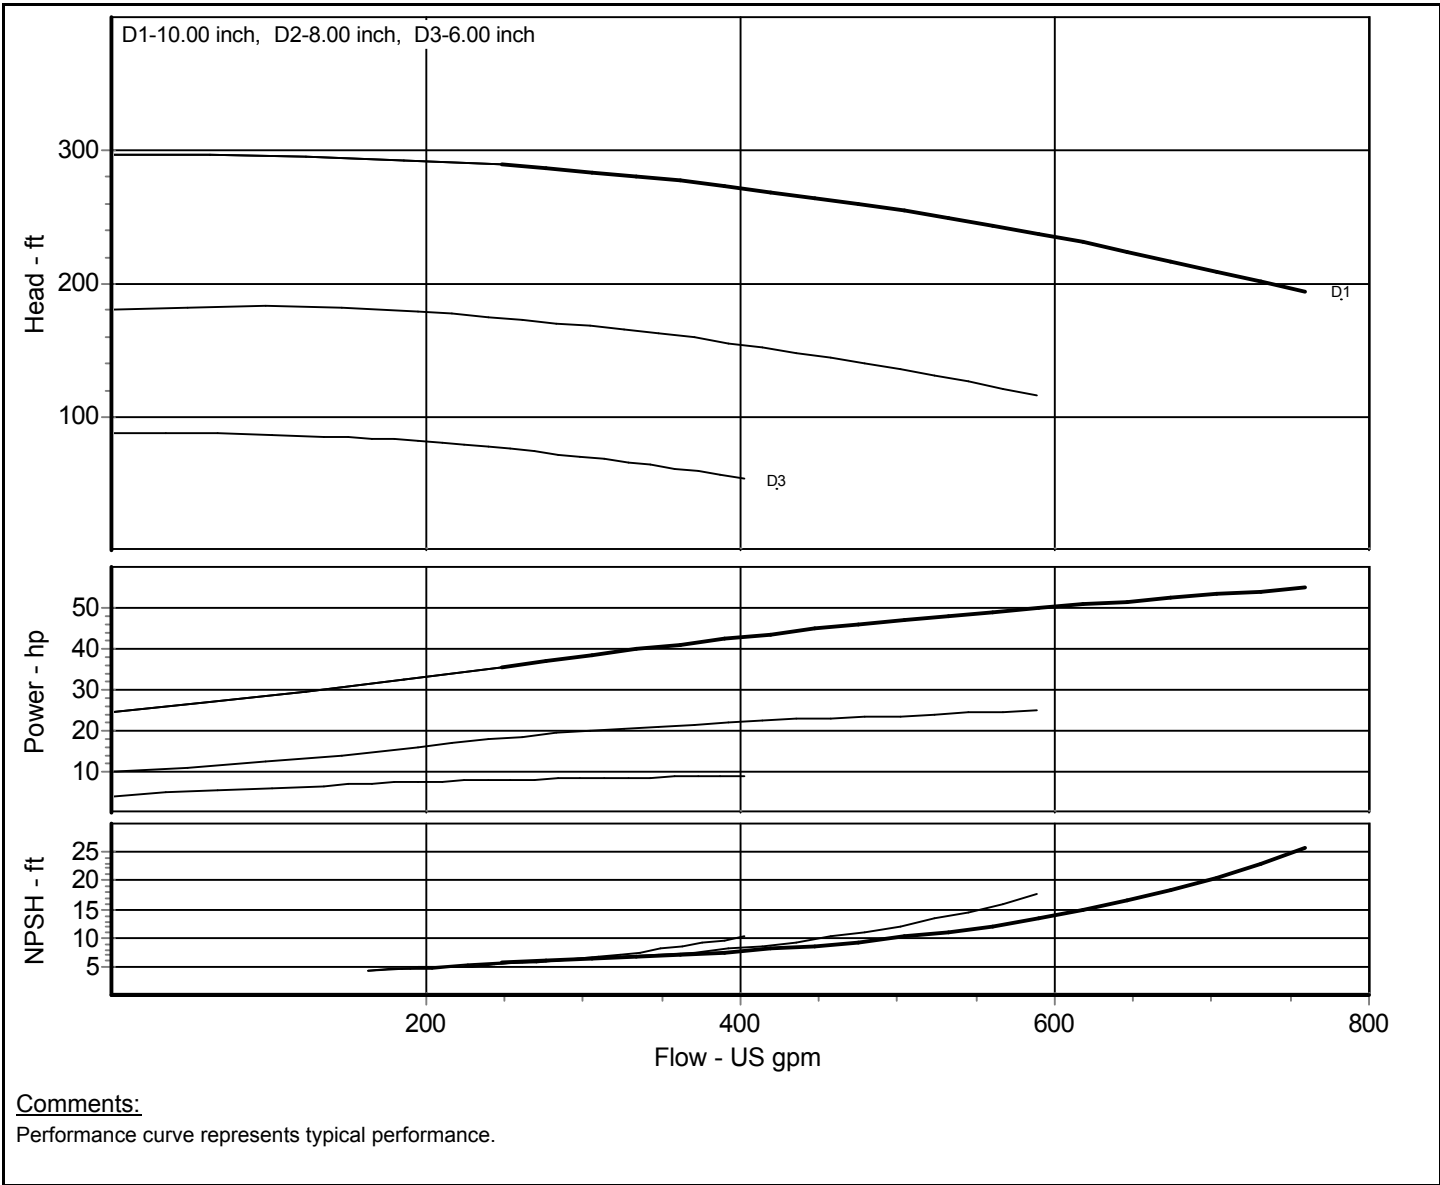




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 3x4-10 LTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz025	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	54.96 hp
Item : 1		Closed Valve Pressure	297.631 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

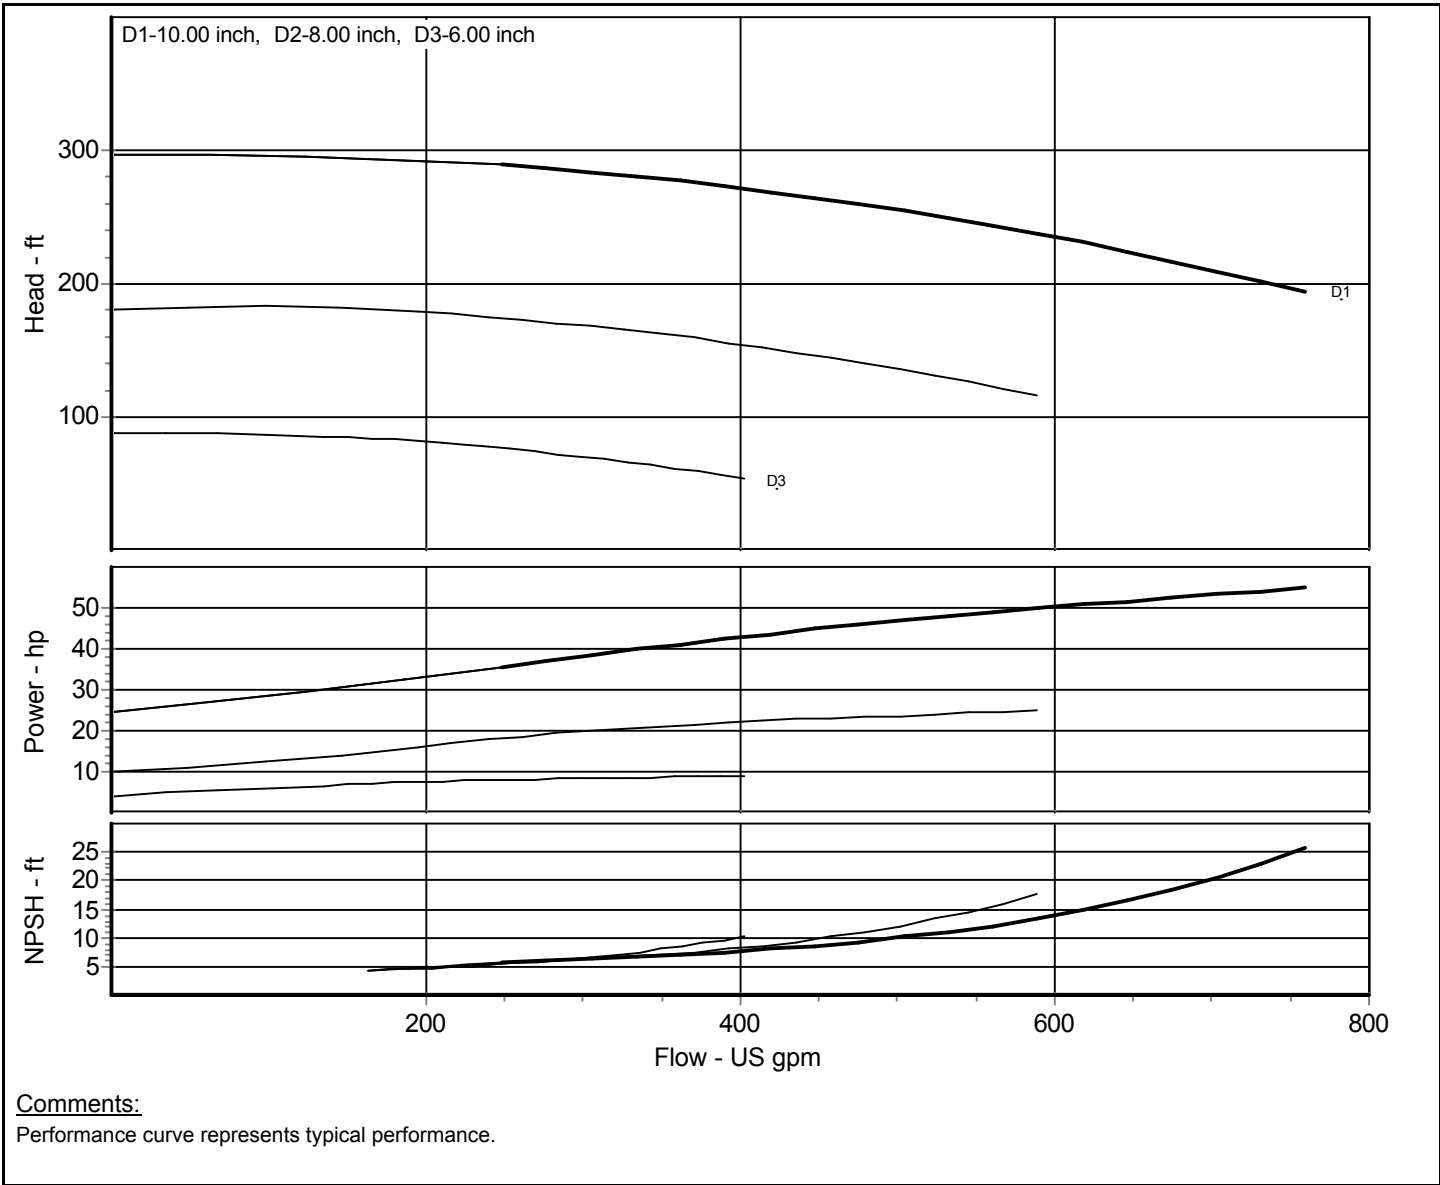




Customer :

Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-13 5V MTP 8196** Nom. Speed: **2900** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **10/7** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Curve No.: **8196-50hz035** Sp. Gravity: **1.000** Peak Power: **73.84** hp
 Impeller No. Fluid: **Water** Closed Valve Pressure **282.275** ft
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

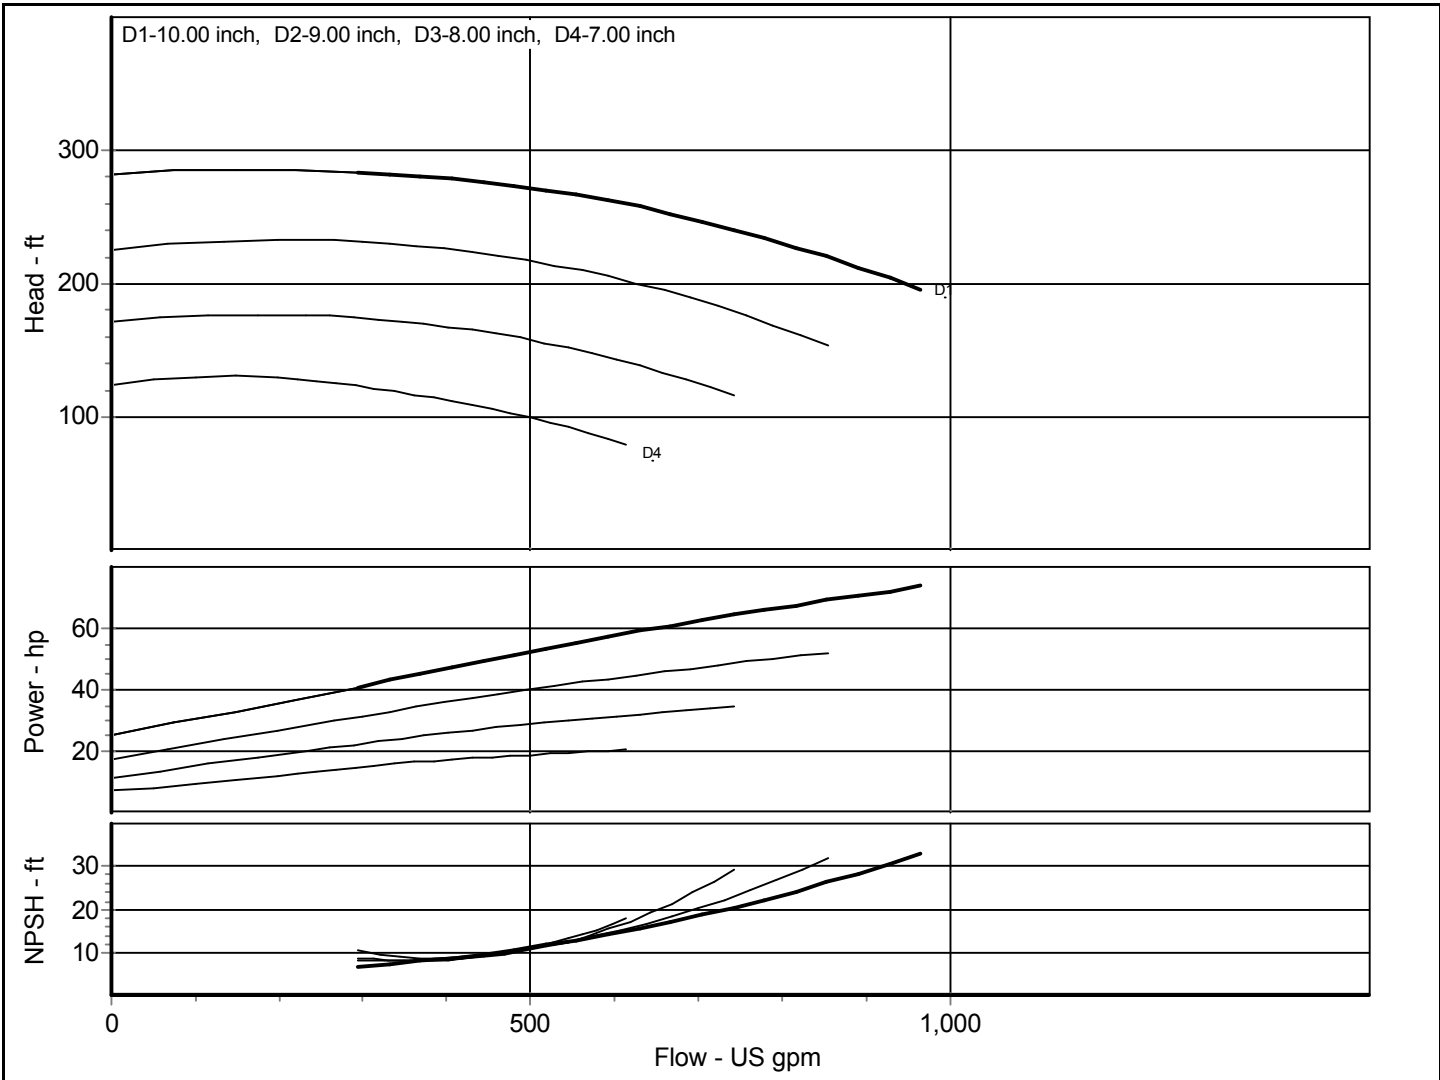

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 3x4-13 5V LTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/7 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz035	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	73.84 hp
Item : 1		Closed Valve Pressure	282.275 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

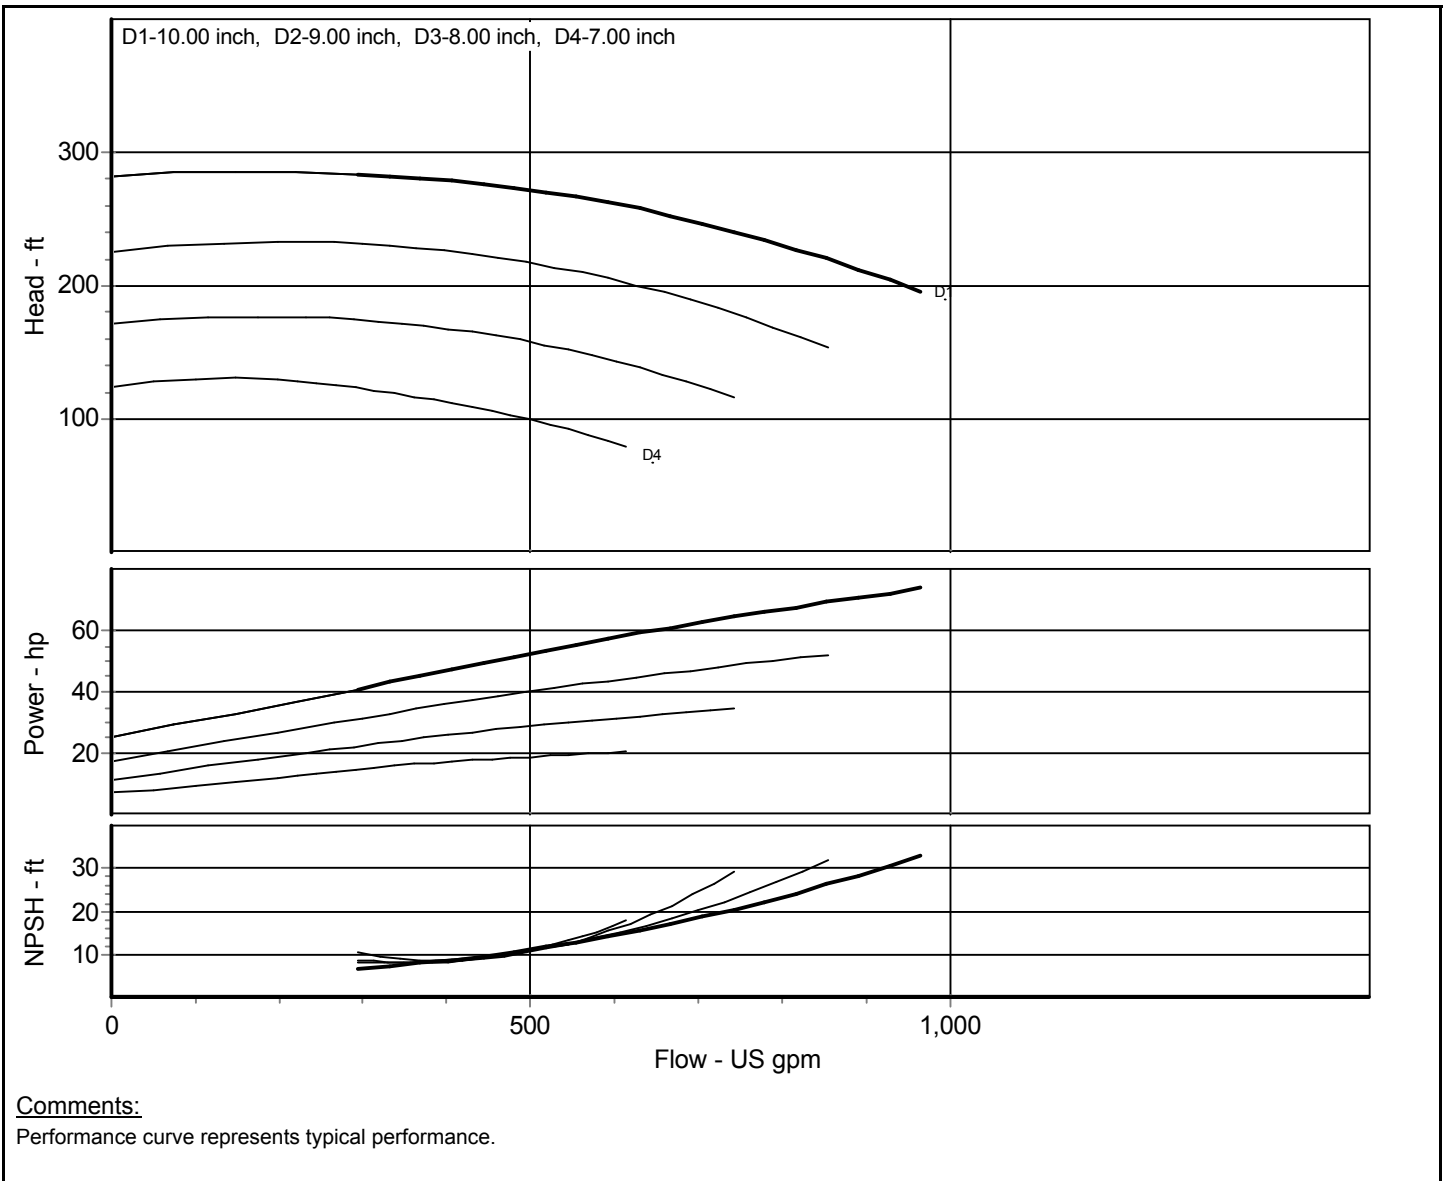




Customer :

Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Project : Page No. : Contact : Fax :
 Quote No. : Date : Phone :

Pump Model:	Peerless - 3x4-13 6V MTP 8196	Nom. Speed:	2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type:	8196 - ANSI Standard End Suction	Impeller Dia.:	10/7 inch	Duty Head :	ft
		Temperature:	68 °F	Efficiency :	%
		Viscosity:	1.009 cP	Power Required :	hp
Curve No.:	8196-50hz038	Sp. Gravity:	1.000	NPSH Required :	ft
Impeller No.		Fluid:	Water	Peak Power:	85.46 hp
Item :	1			Closed Valve Pressure	304.967 ft
Your Ref.:		Tolerance :	Hyd Inst-Peerless Std		

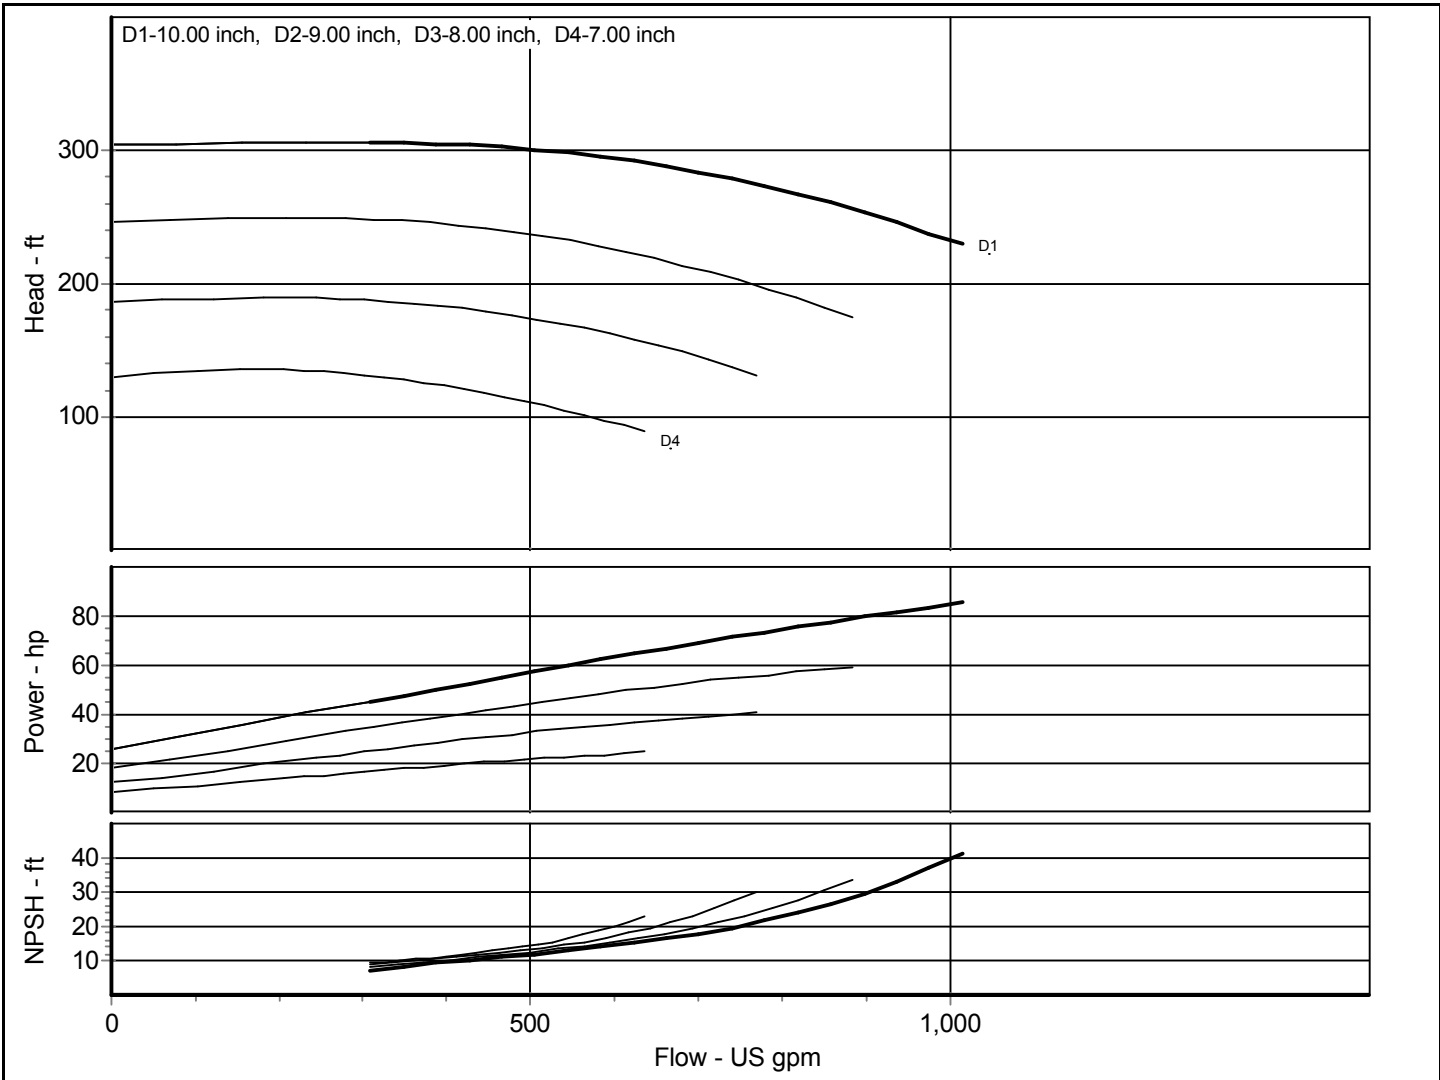

Comments:
 Performance curve represents typical performance.




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 3x4-13 6V LTP 8196	Nom. Speed: 2900 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/7 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz038	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	85.46 hp
Item : 1		Closed Valve Pressure	304.967 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

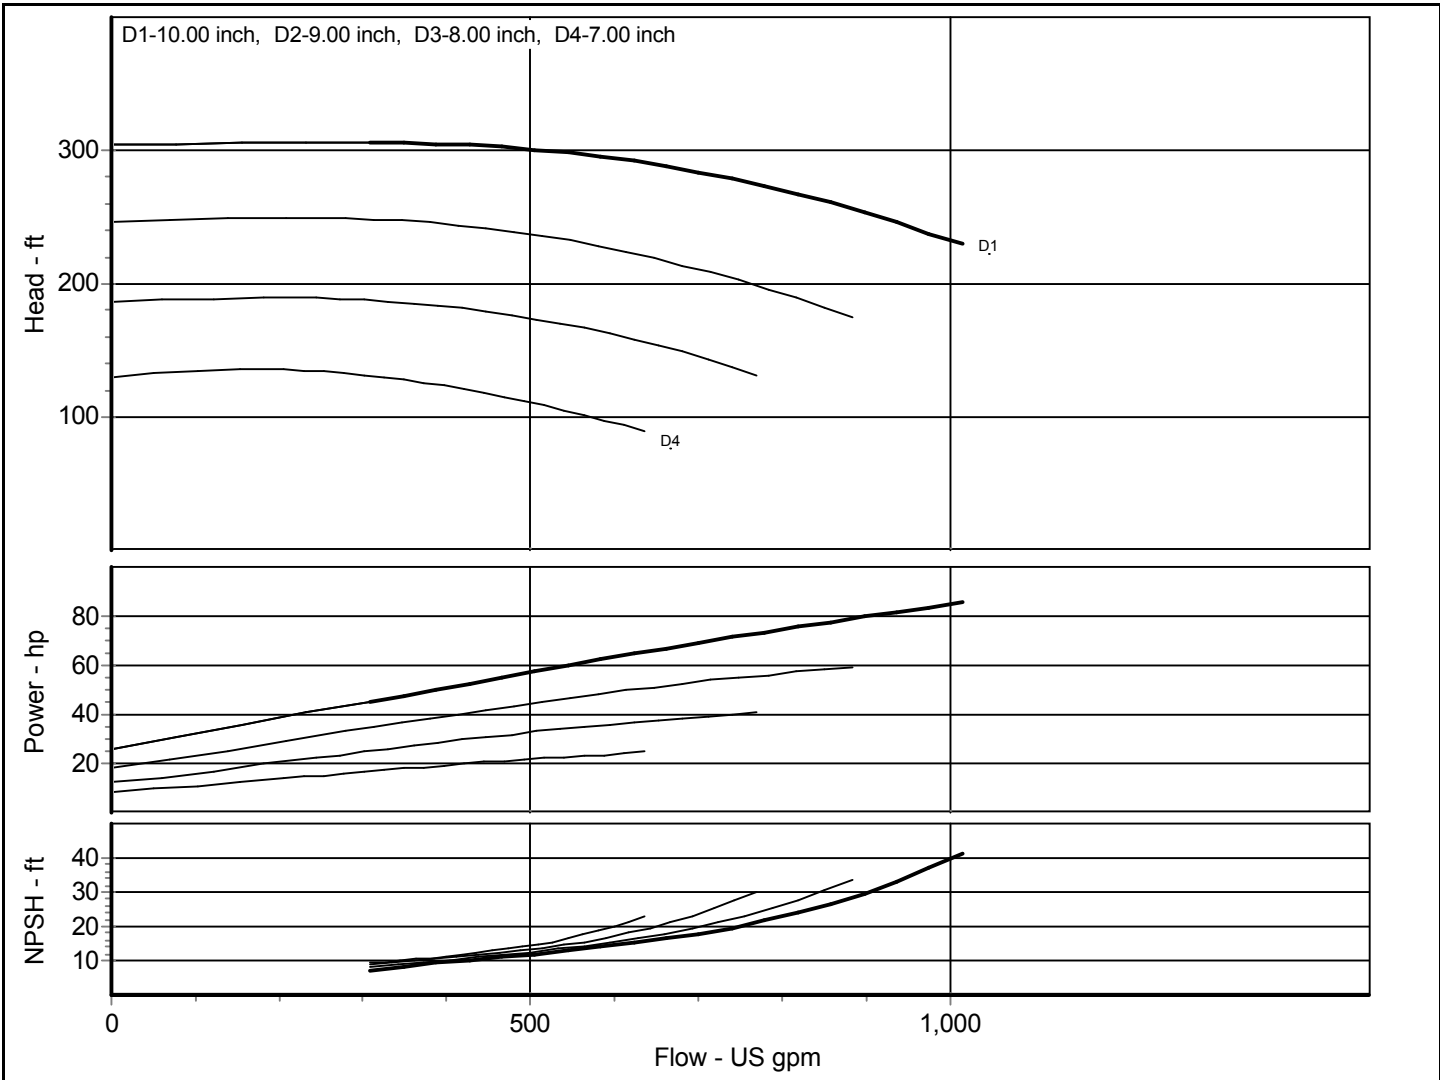

Comments:
Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1x1.5-6 STP 8196LF	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196LF-50hz002	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	0.41 hp
Item : 1		Closed Valve Pressure	26.306 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

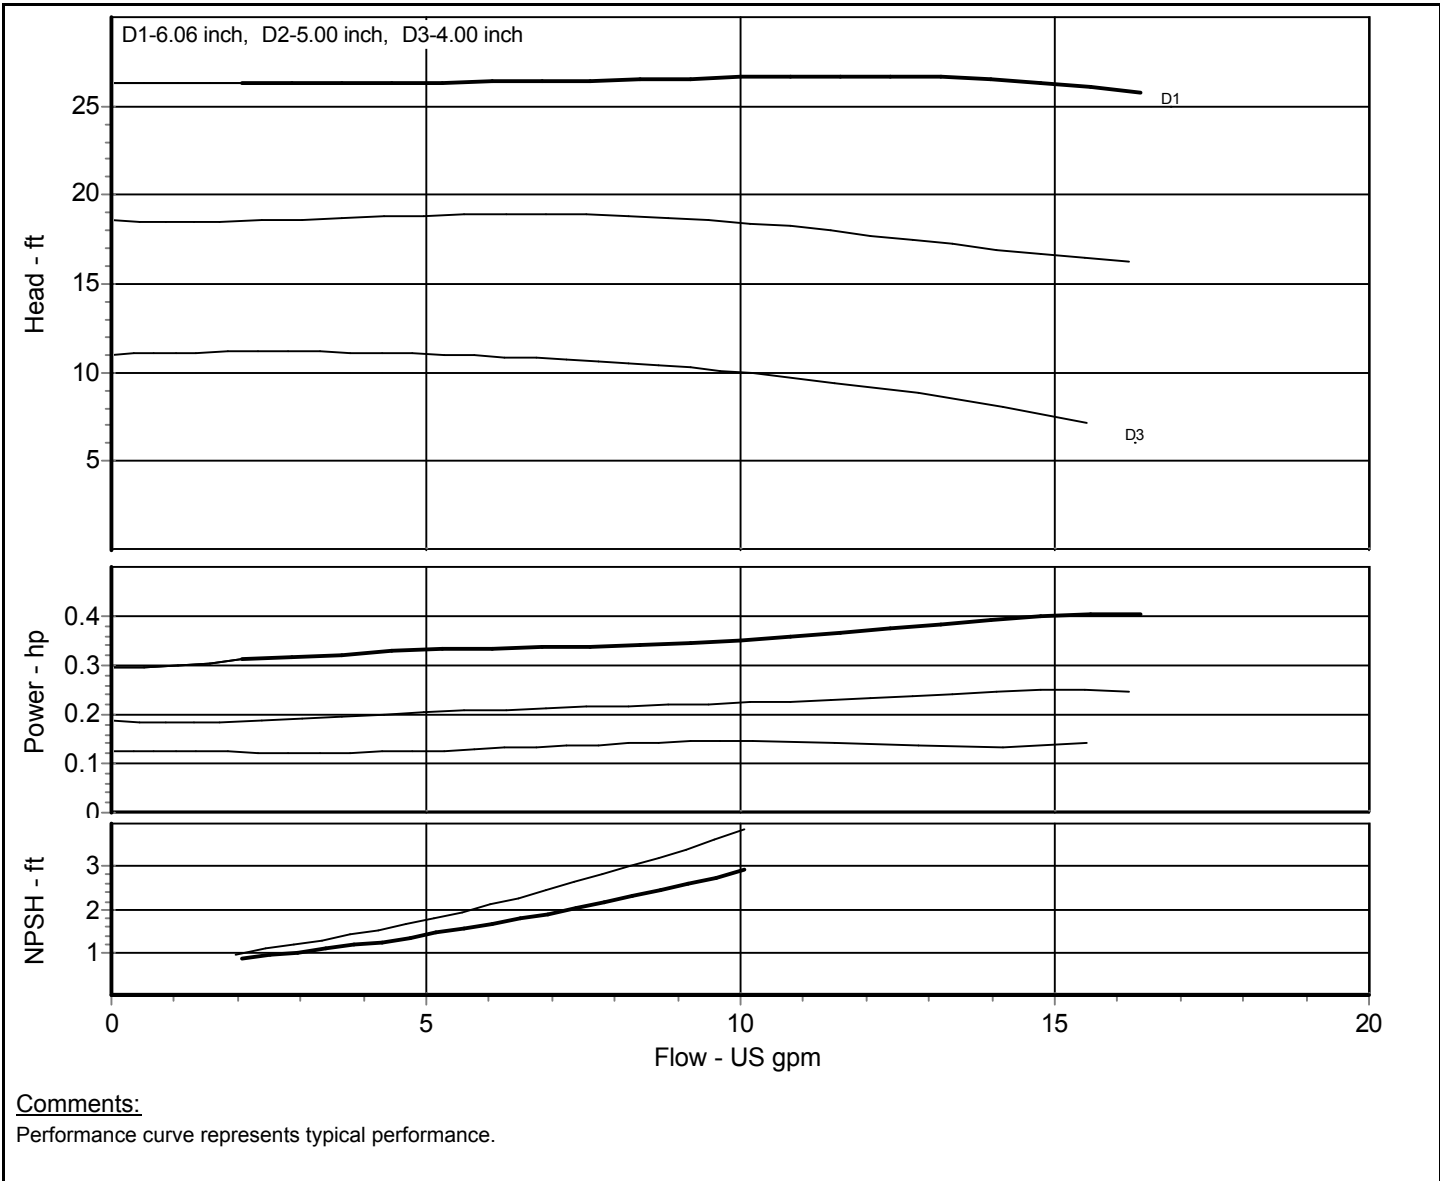




Customer :

Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 1x1.5- 6 STP 8196** Nom. Speed: **1450** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **6.06/3.5** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **0.57** hp
 Fluid: **Water** Closed Valve Pressure **25.833** ft
 Curve No.: **8196-50hz001**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

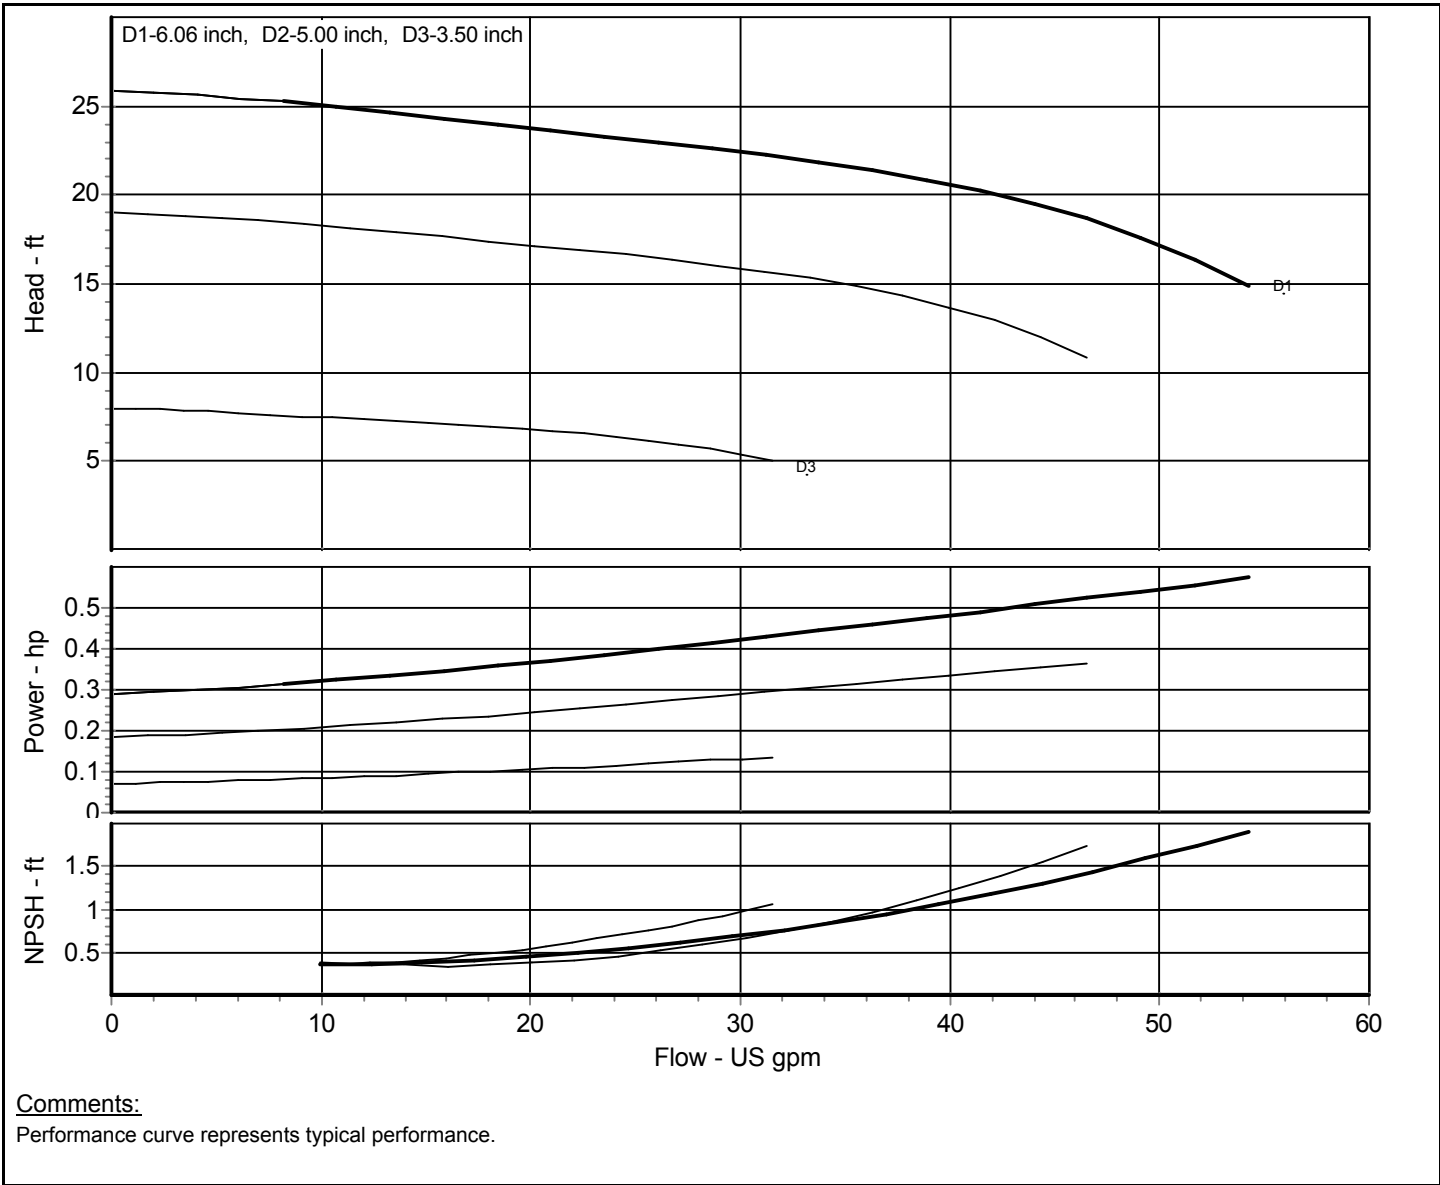

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 1x1.5-8 STP 8196LF** Nom. Speed: **1450** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **8/6** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Curve No.: **8196LF-50hz004** Sp. Gravity: **1.000** Peak Power: **0.89** hp
 Impeller No. Fluid: **Water** Closed Valve Pressure **43.264** ft
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

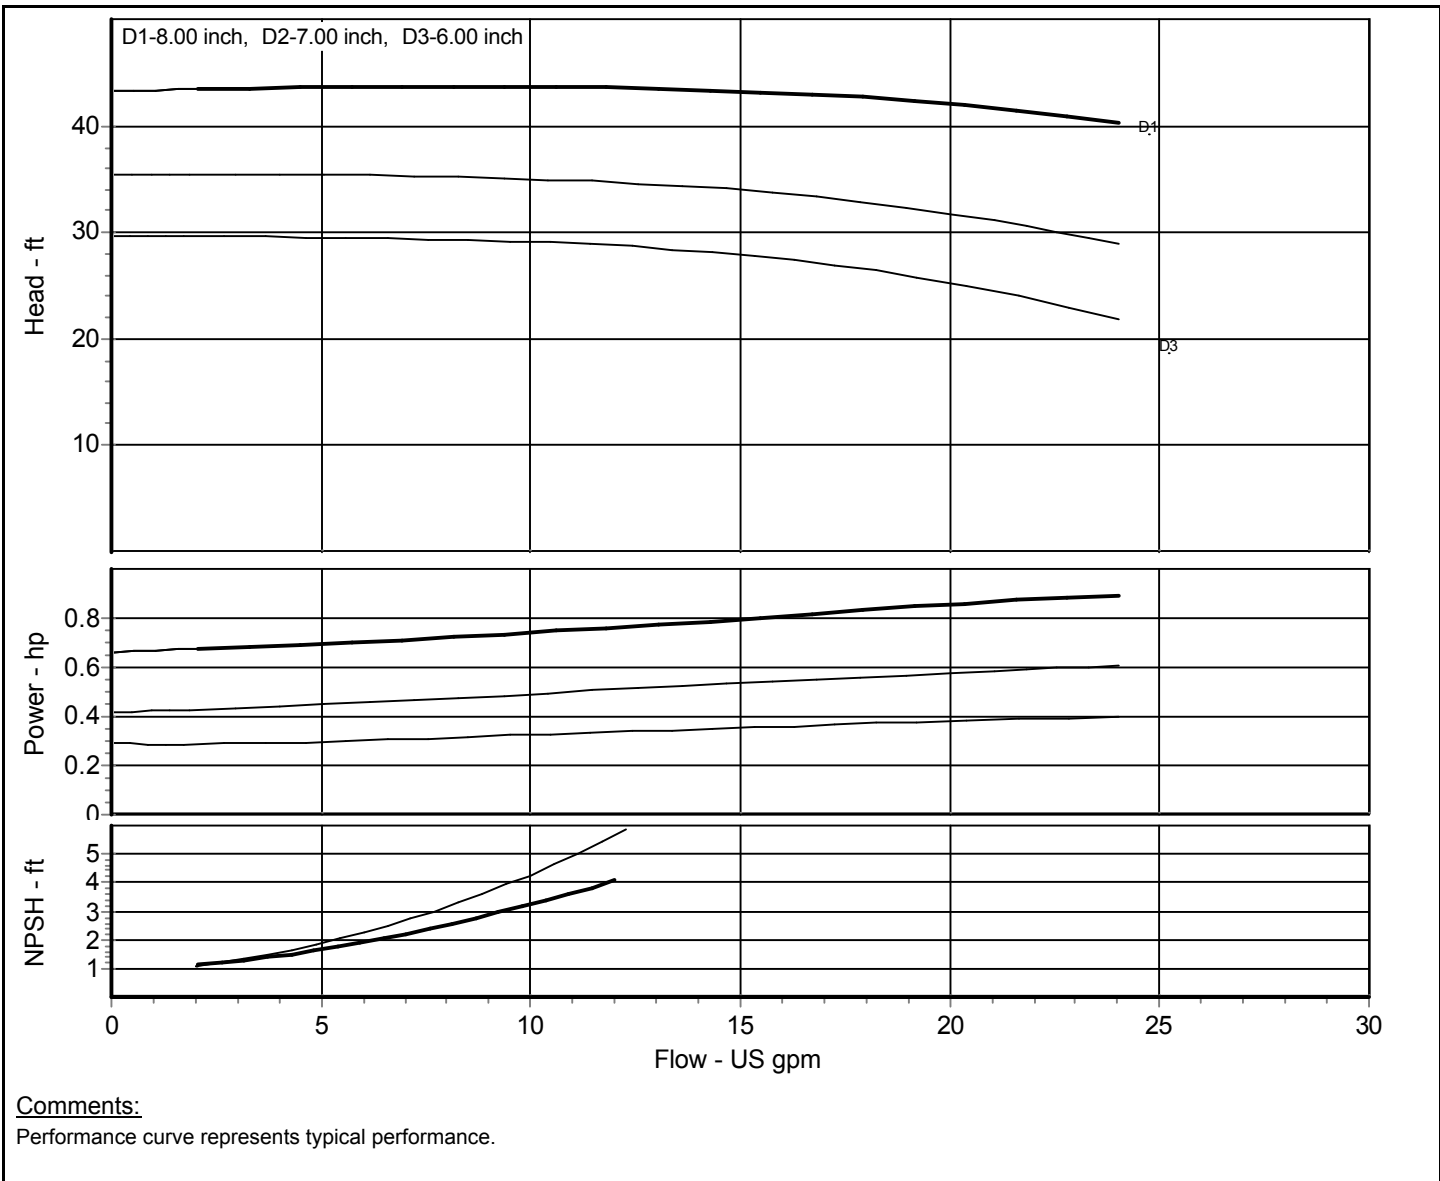



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 1x1.5-8 STP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1450** RPM, 50 Hz Electric
 Impeller Dia.: **8/5** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **1.38** hp
 Closed Valve Pressure **50.329** ft


Curve No.: **8196-50hz005**

Impeller No.:

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

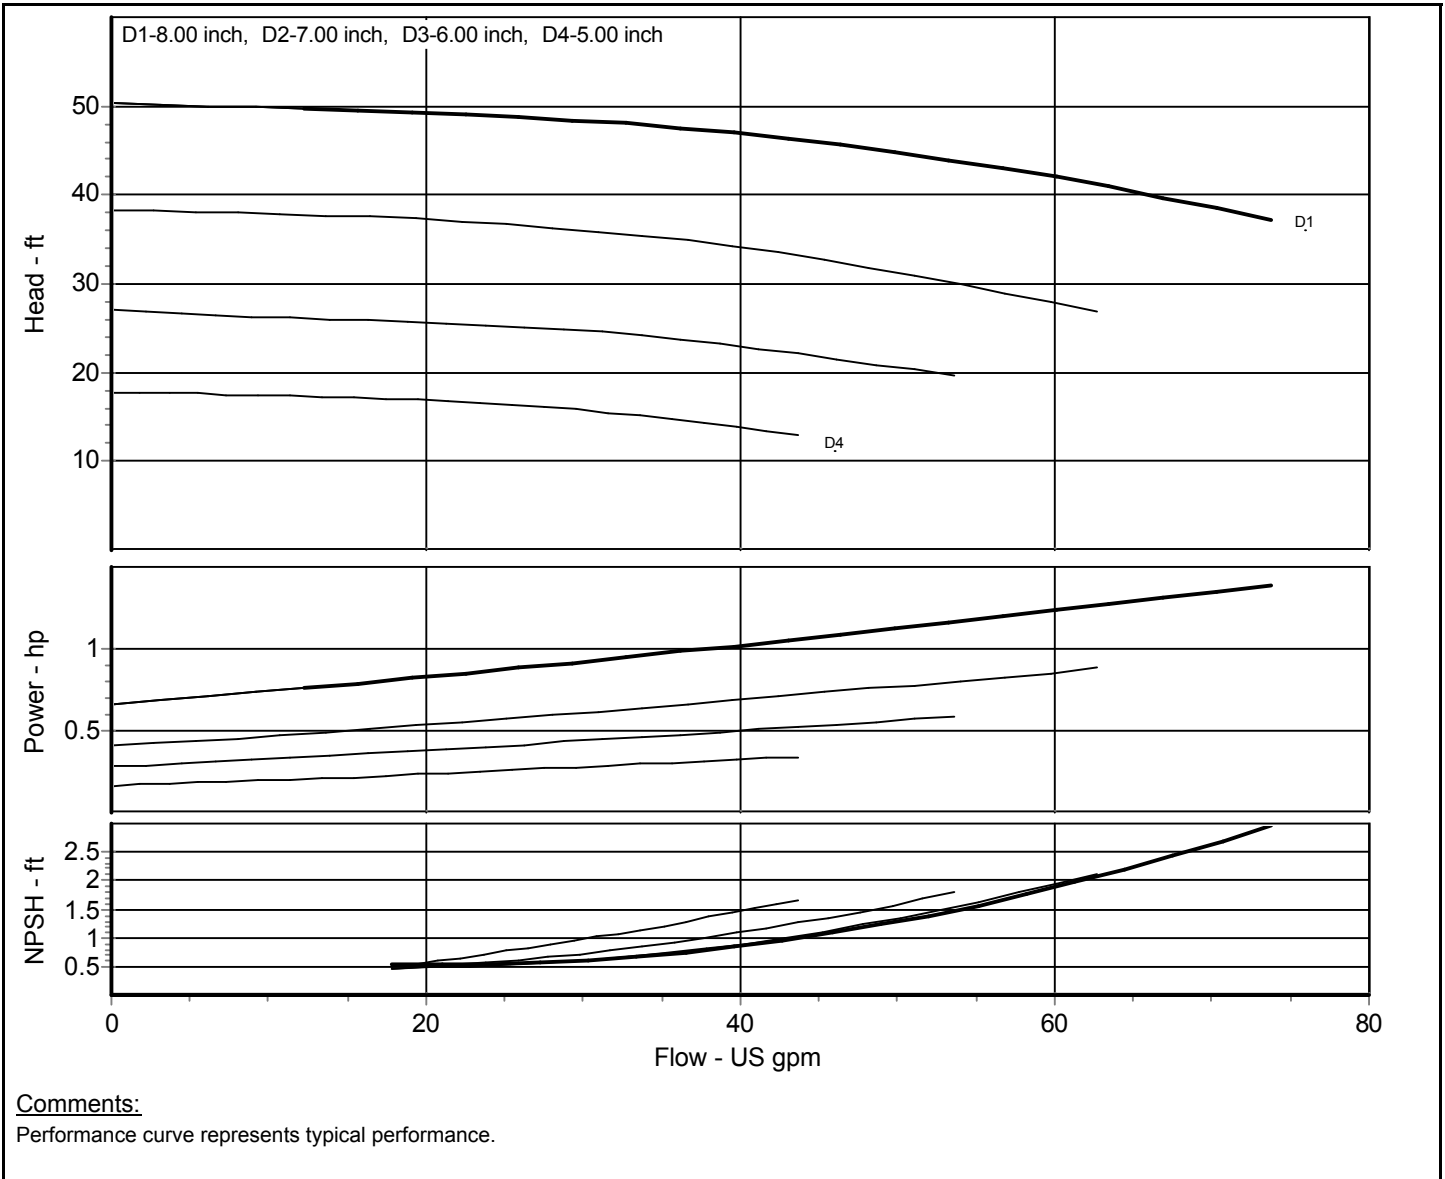



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 1x2-10 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1450 RPM, 50 Hz Electric**
 Impeller Dia.: **10/5 inch**

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68 °F**
 Viscosity: **1.009 cP**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-50hz020**

Sp. Gravity: **1.000**

Peak Power: **3.15 hp**

Impeller No.


Fluid: **Water**

Closed Valve Pressure **81.749 ft**

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

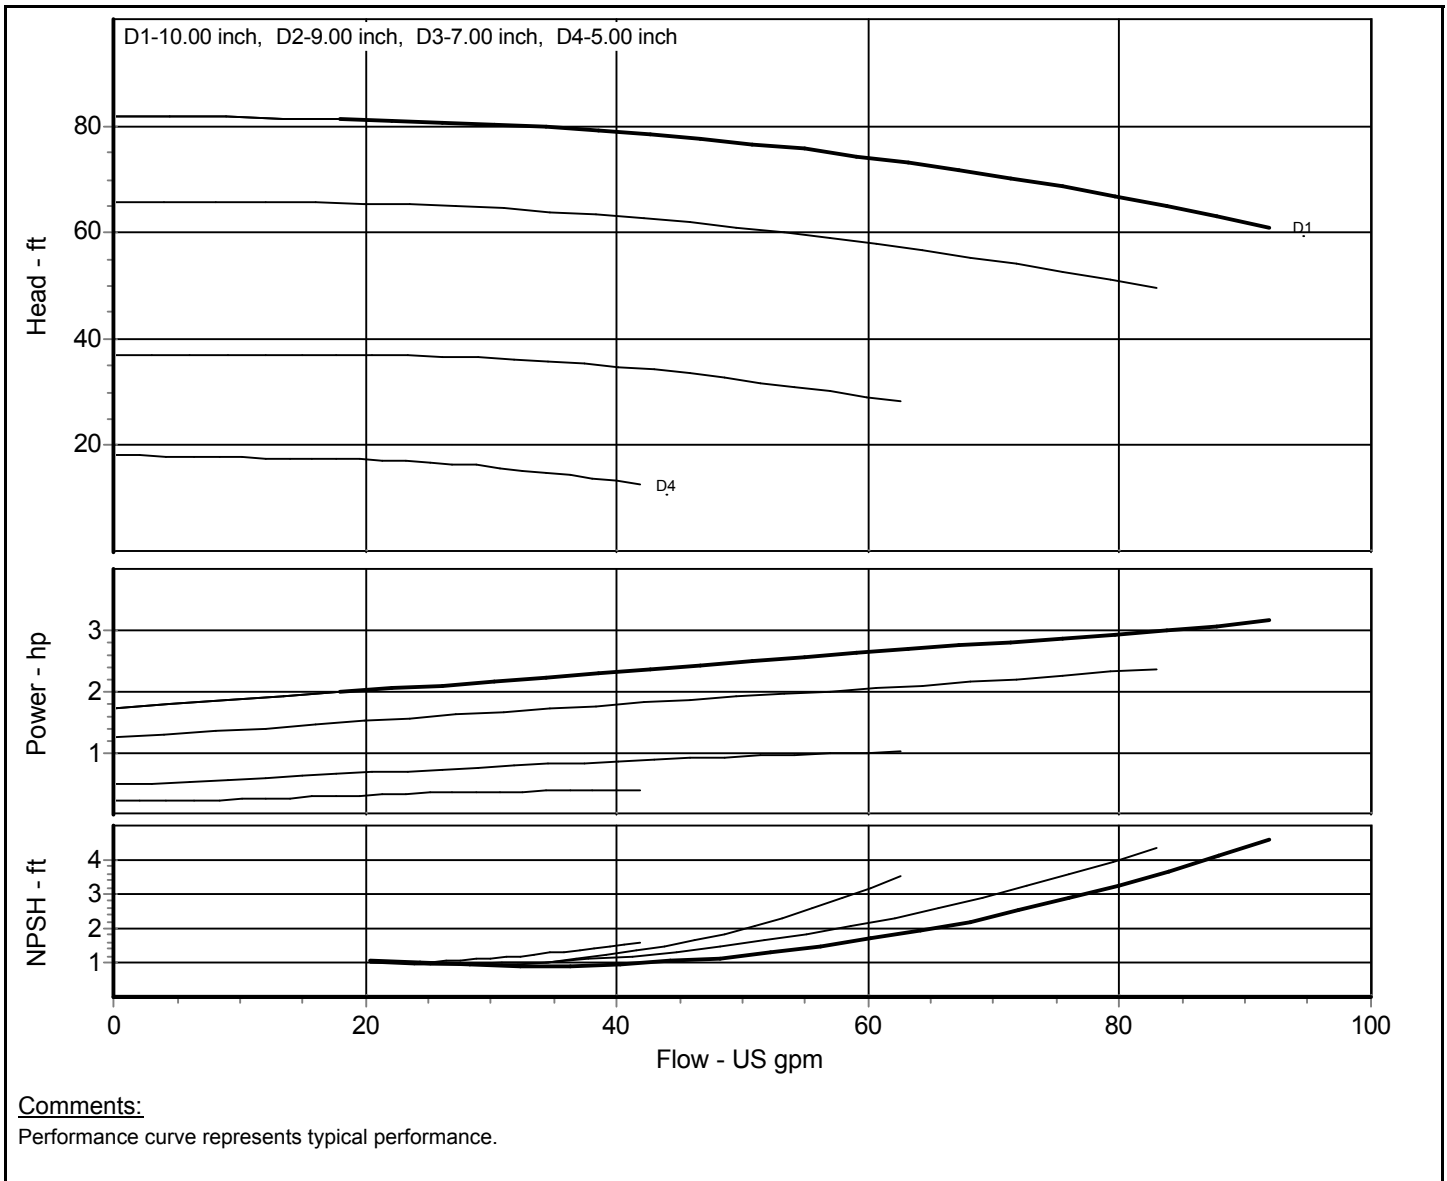




Customer :

Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Project :		Contact :	
Quote No. :	Page No. :	Phone :	Fax :
		Date	

Pump Model: Peerless - 1x2-10 LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz020	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	3.15 hp
Item : 1		Closed Valve Pressure	81.749 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

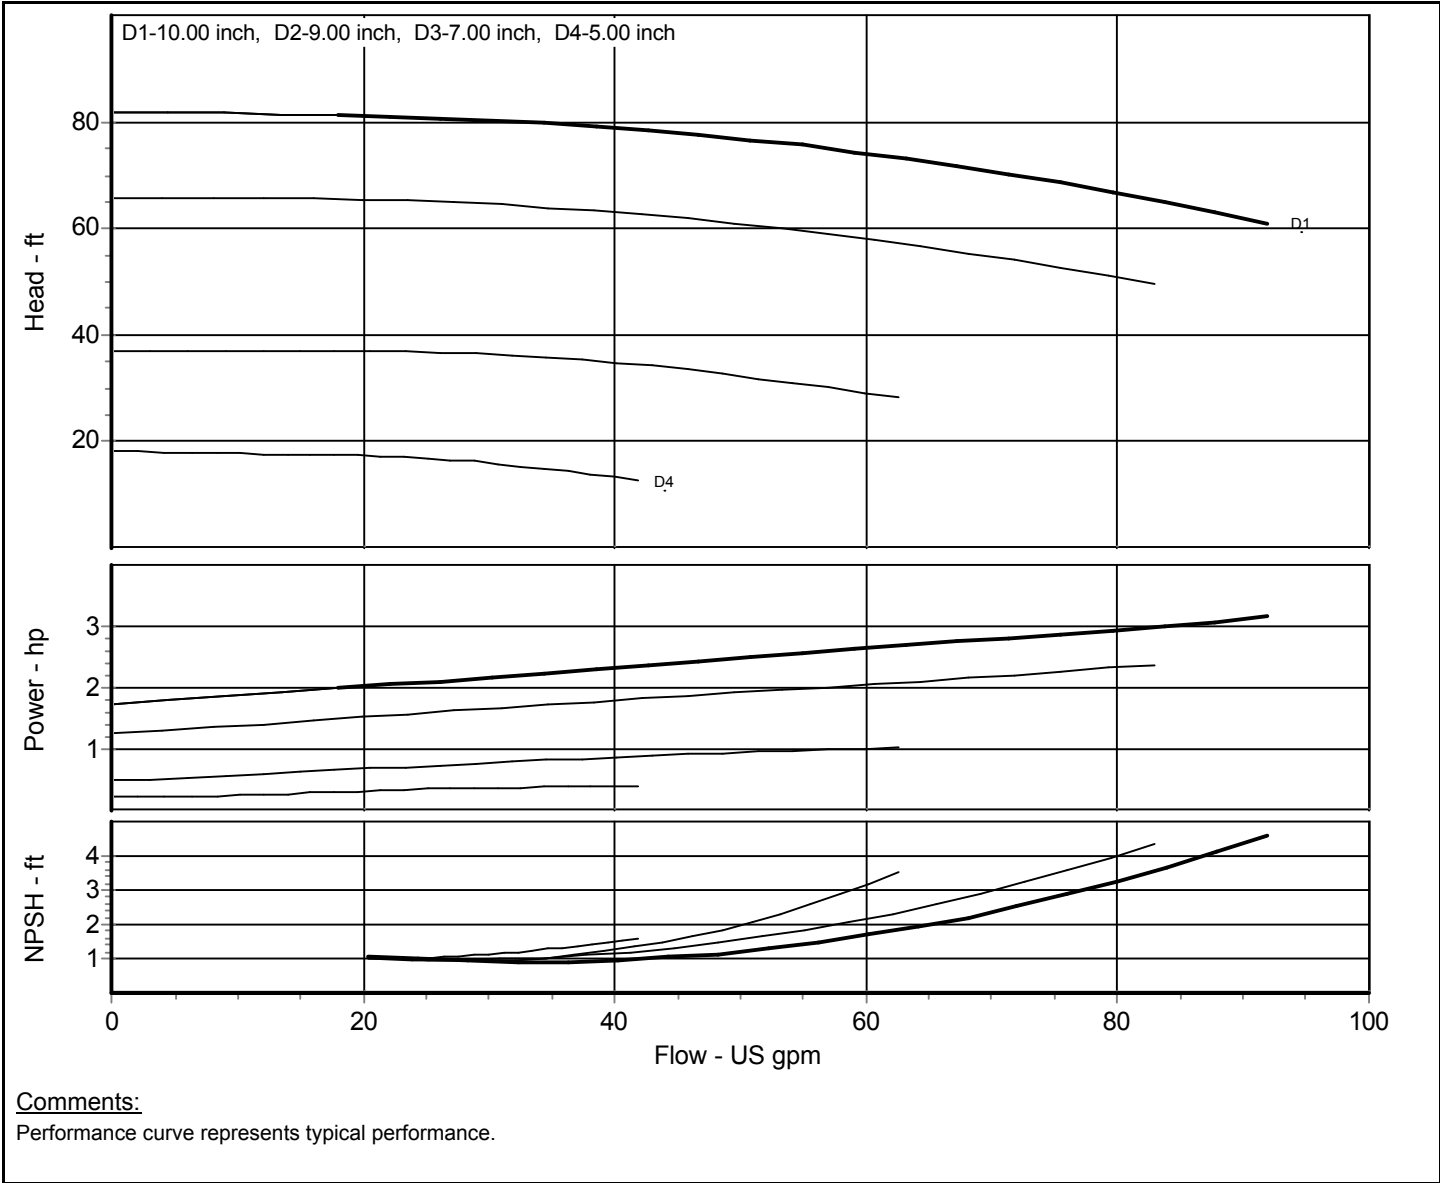

Comments:
 Performance curve represents typical performance.




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 1.5x3-6 STP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow : US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head : ft
	Temperature: 68 °F	Efficiency : %
	Viscosity: 1.009 cP	Power Required : hp
Curve No.: 8196-50hz003	Sp. Gravity: 1.000	NPSH Required : ft
Impeller No.	Fluid: Water	Peak Power: 0.92 hp
Item : 1		Closed Valve Pressure 25.84 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std	

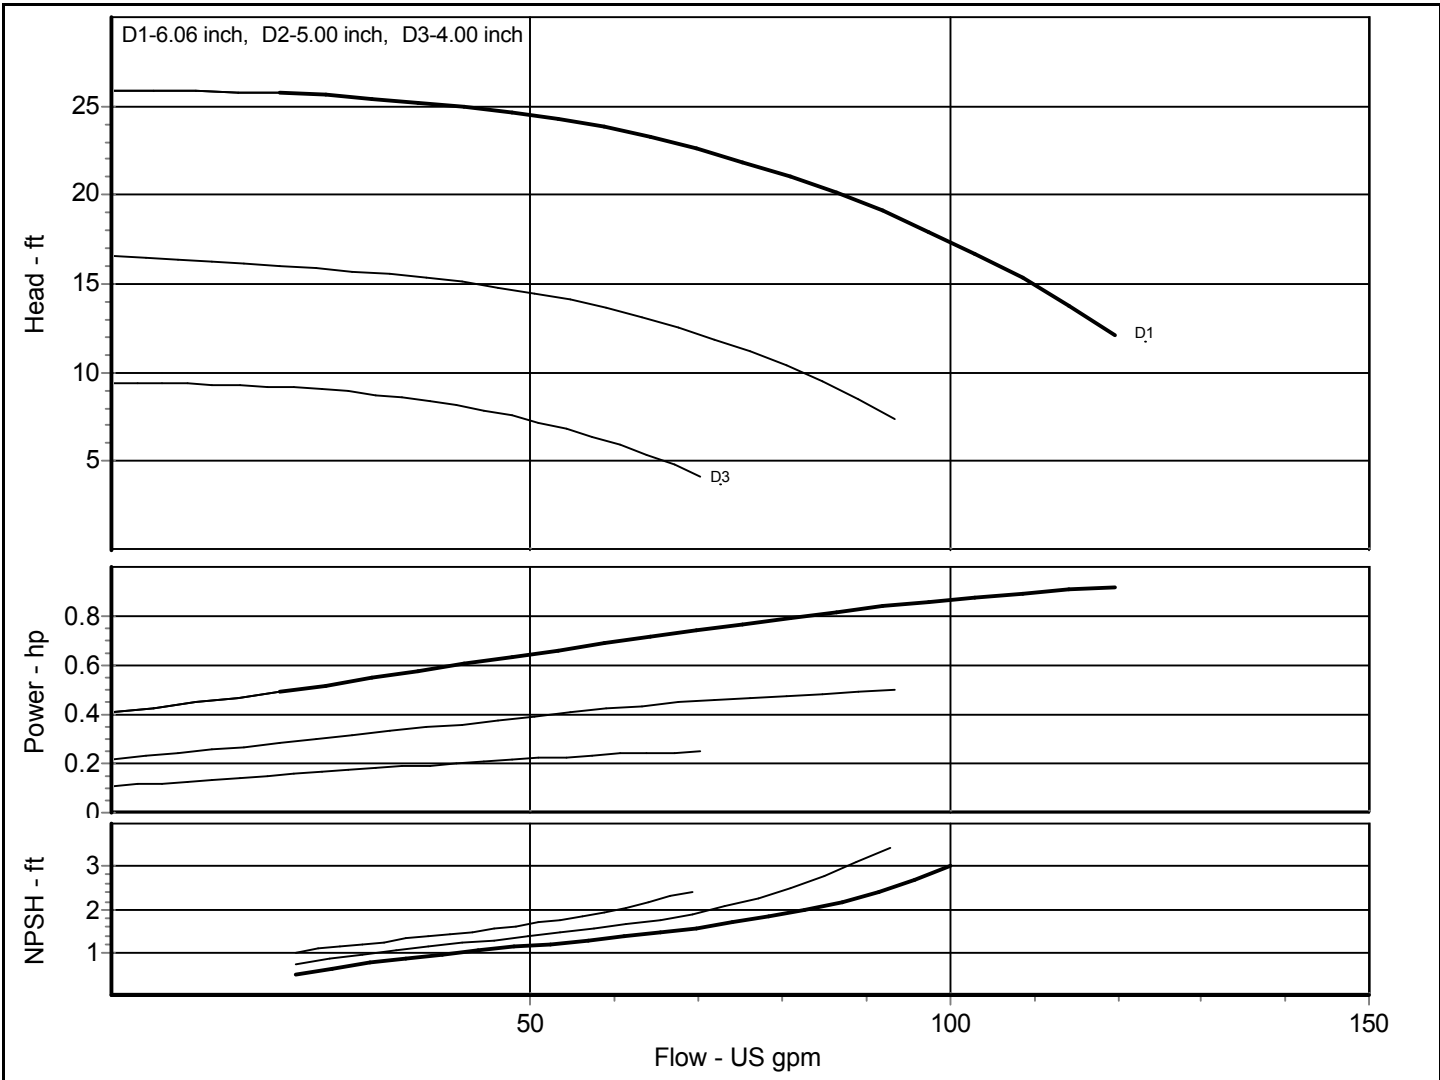

Comments:
Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1.5x3-8 STP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8/5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz007	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	1.9 hp
Item : 1		Closed Valve Pressure	48.357 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

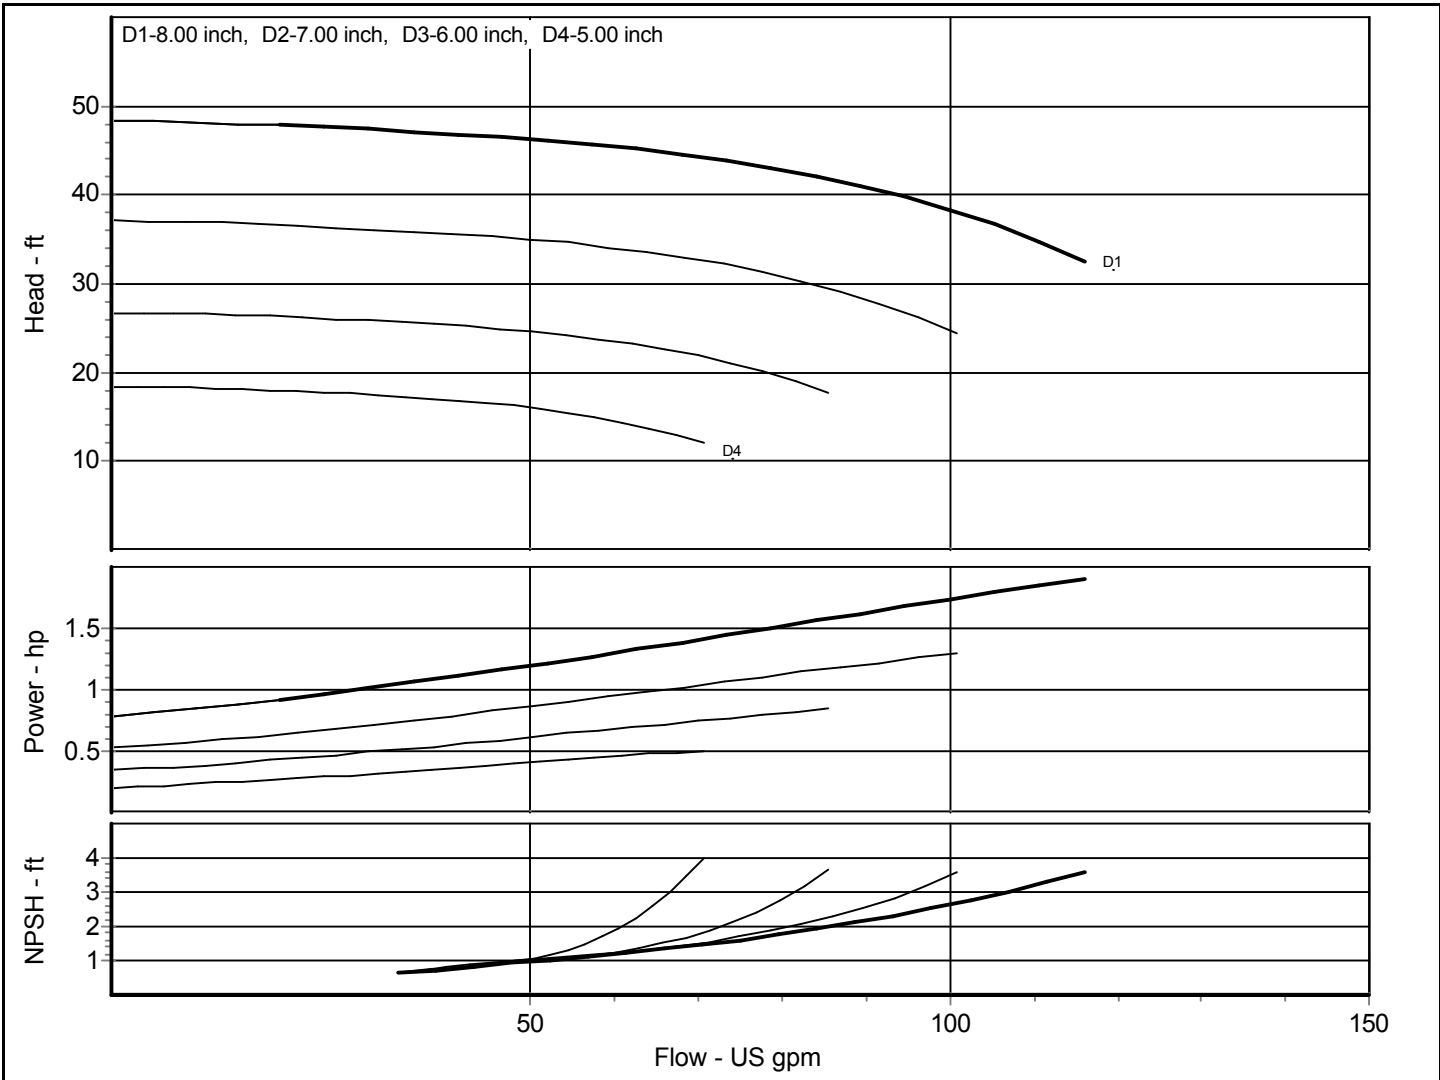

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. : 1

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 1.5x3-10 MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow : US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head : ft
	Temperature: 68 °F	Efficiency : %
	Viscosity: 1.009 cP	Power Required : hp
Curve No.: 8196-50hz022	Sp. Gravity: 1.000	NPSH Required : ft
Impeller No.	Fluid: Water	Peak Power: 3.7 hp
Item : 1		Closed Valve Pressure 73.442 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std	

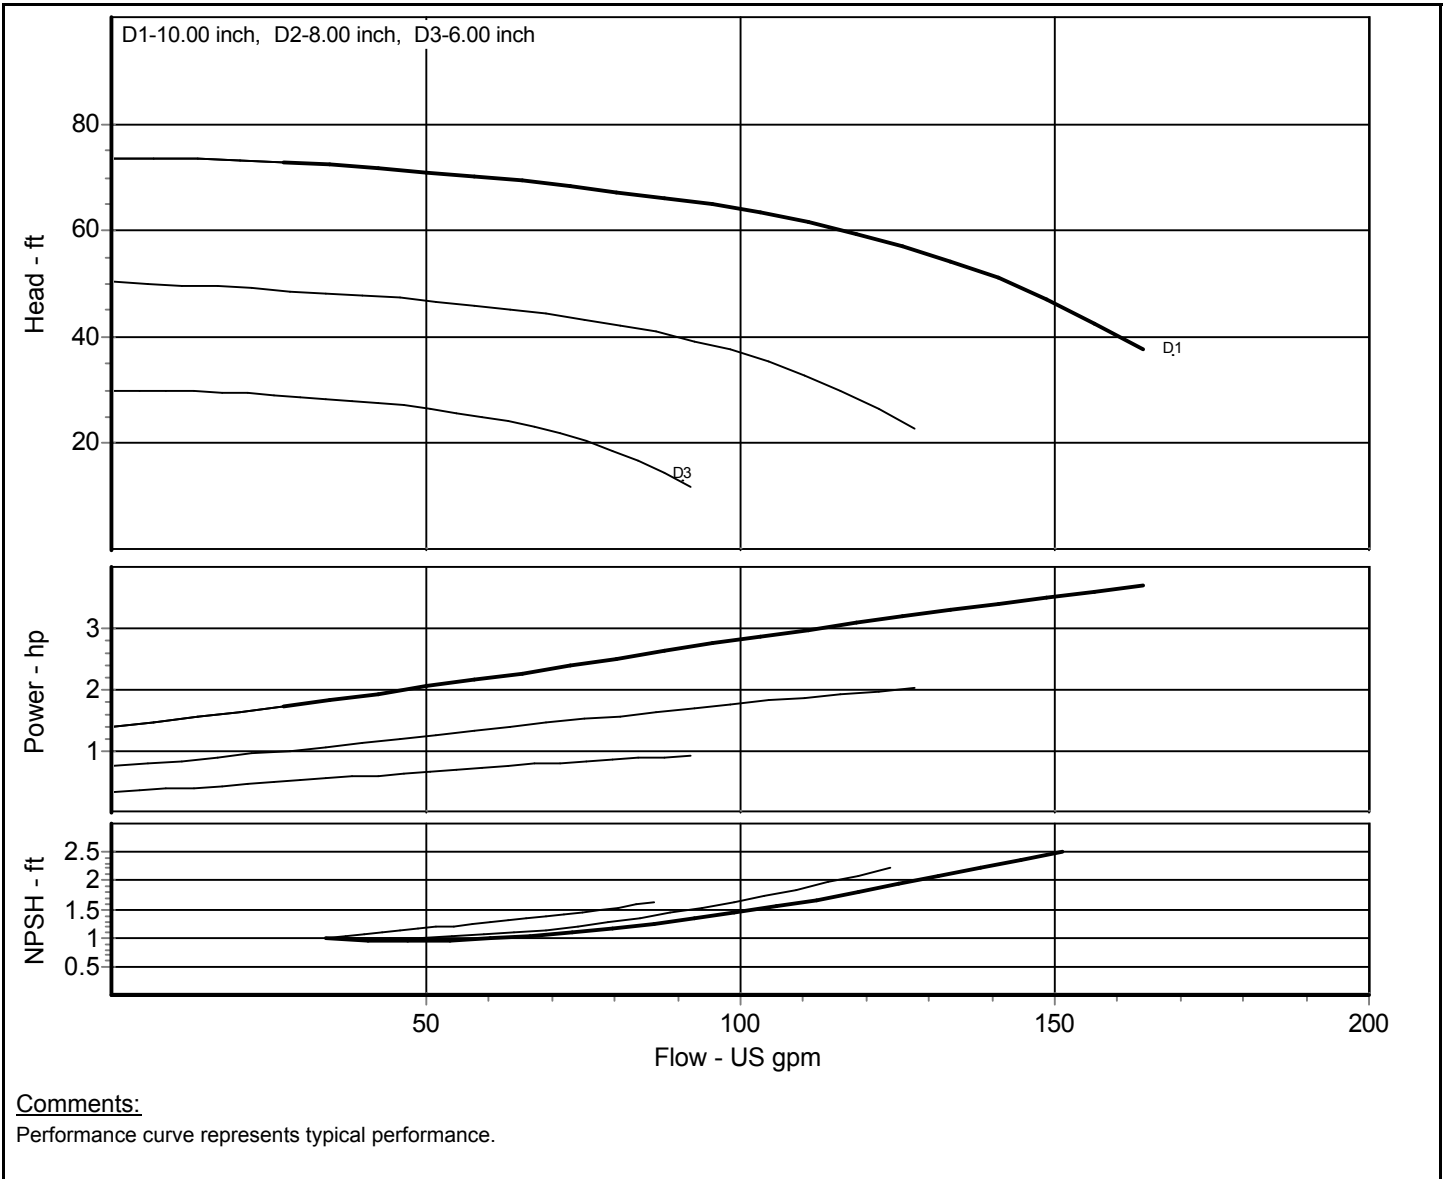



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 1.5x3-10 LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz022	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	3.7 hp
Item : 1		Closed Valve Pressure	73.442 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

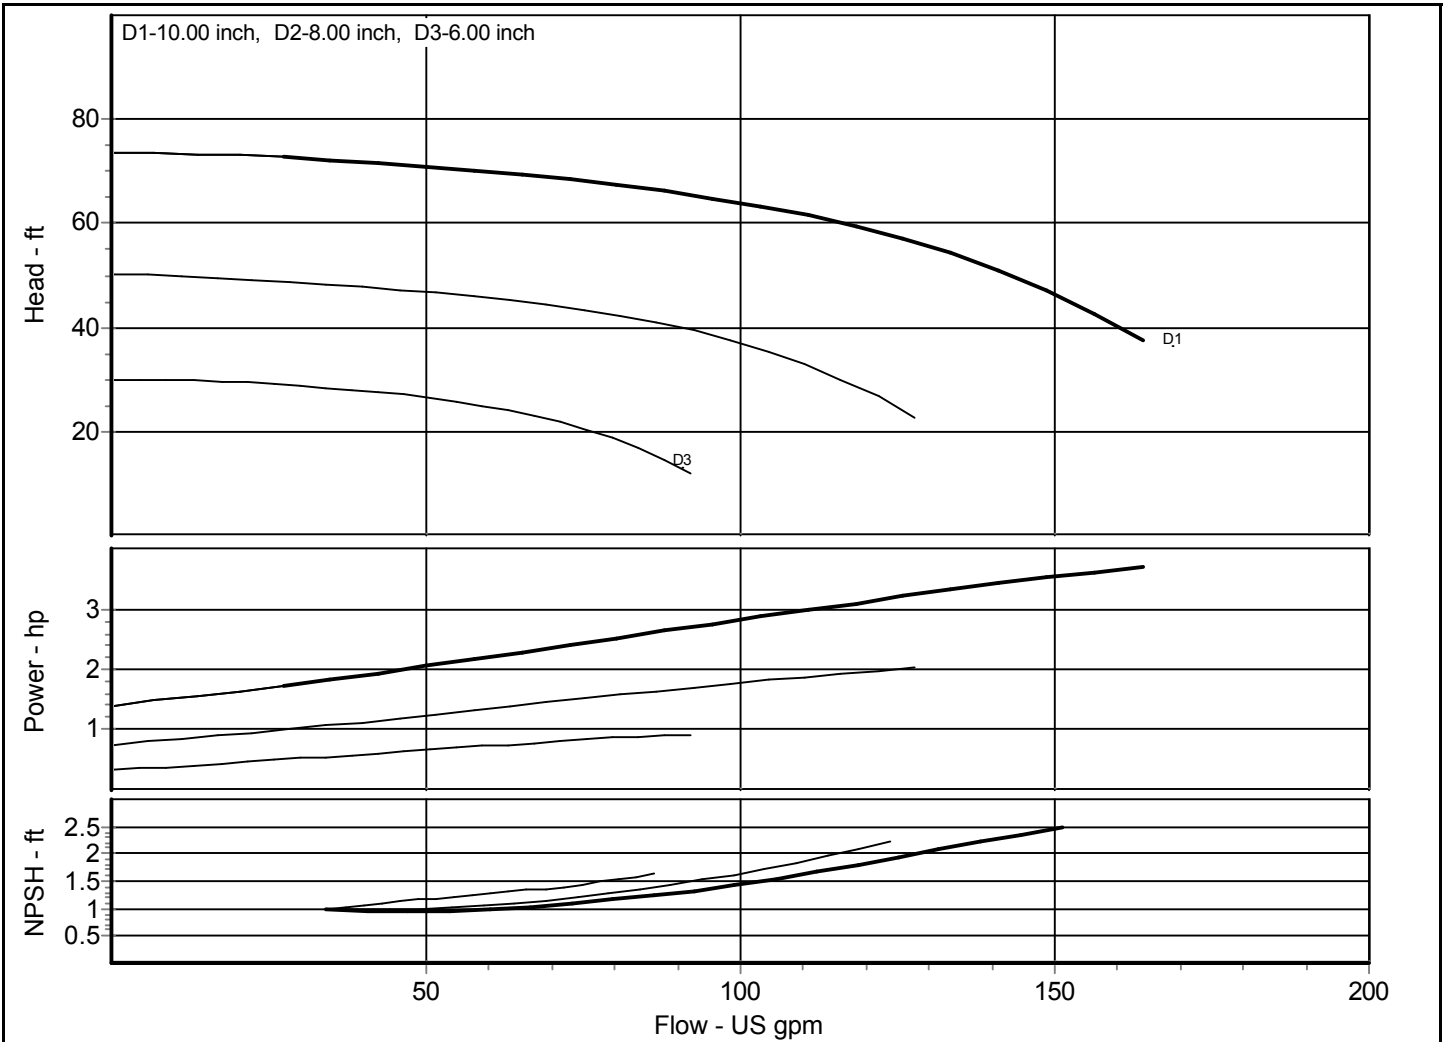

Comments:

Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 1.5x3-13 MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz030	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	8.27 hp
Item : 1		Closed Valve Pressure	108.431 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

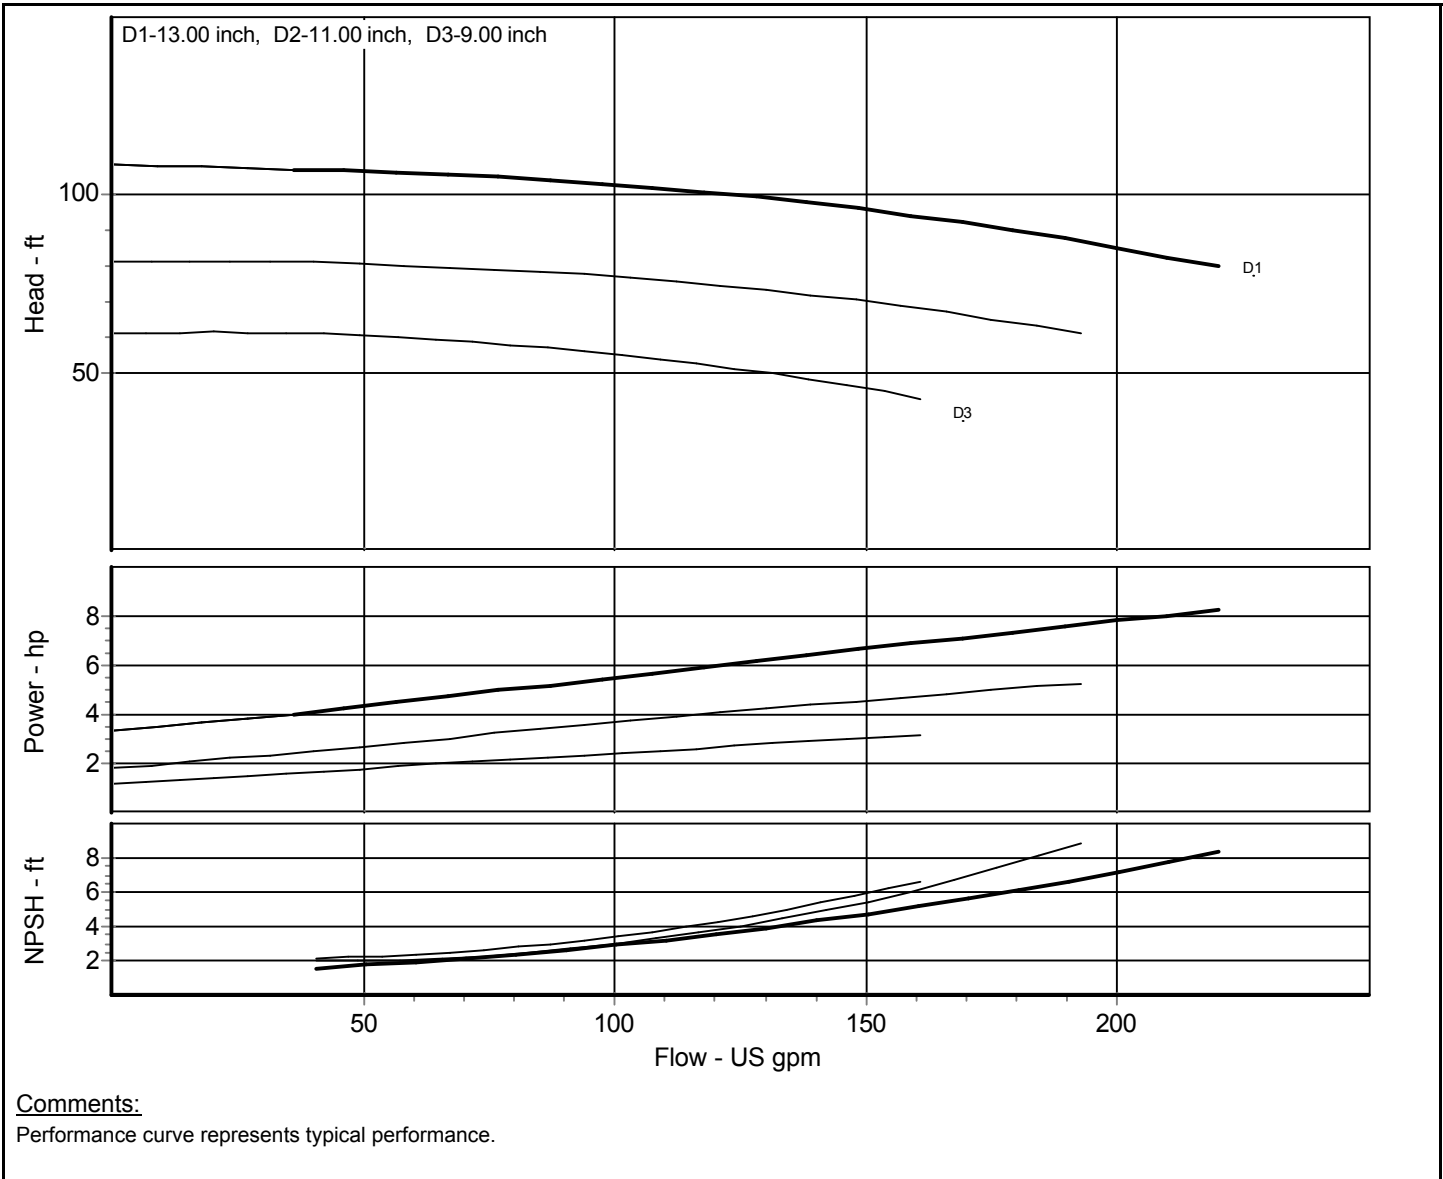



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 1.5x3-13 LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow : US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head : ft
	Temperature: 68 °F	Efficiency : %
	Viscosity: 1.009 cP	Power Required : hp
Curve No.: 8196-50hz030	Sp. Gravity: 1.000	NPSH Required : ft
Impeller No.	Fluid: Water	Peak Power: 8.27 hp
Item : 1		Closed Valve Pressure 108.431 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std	

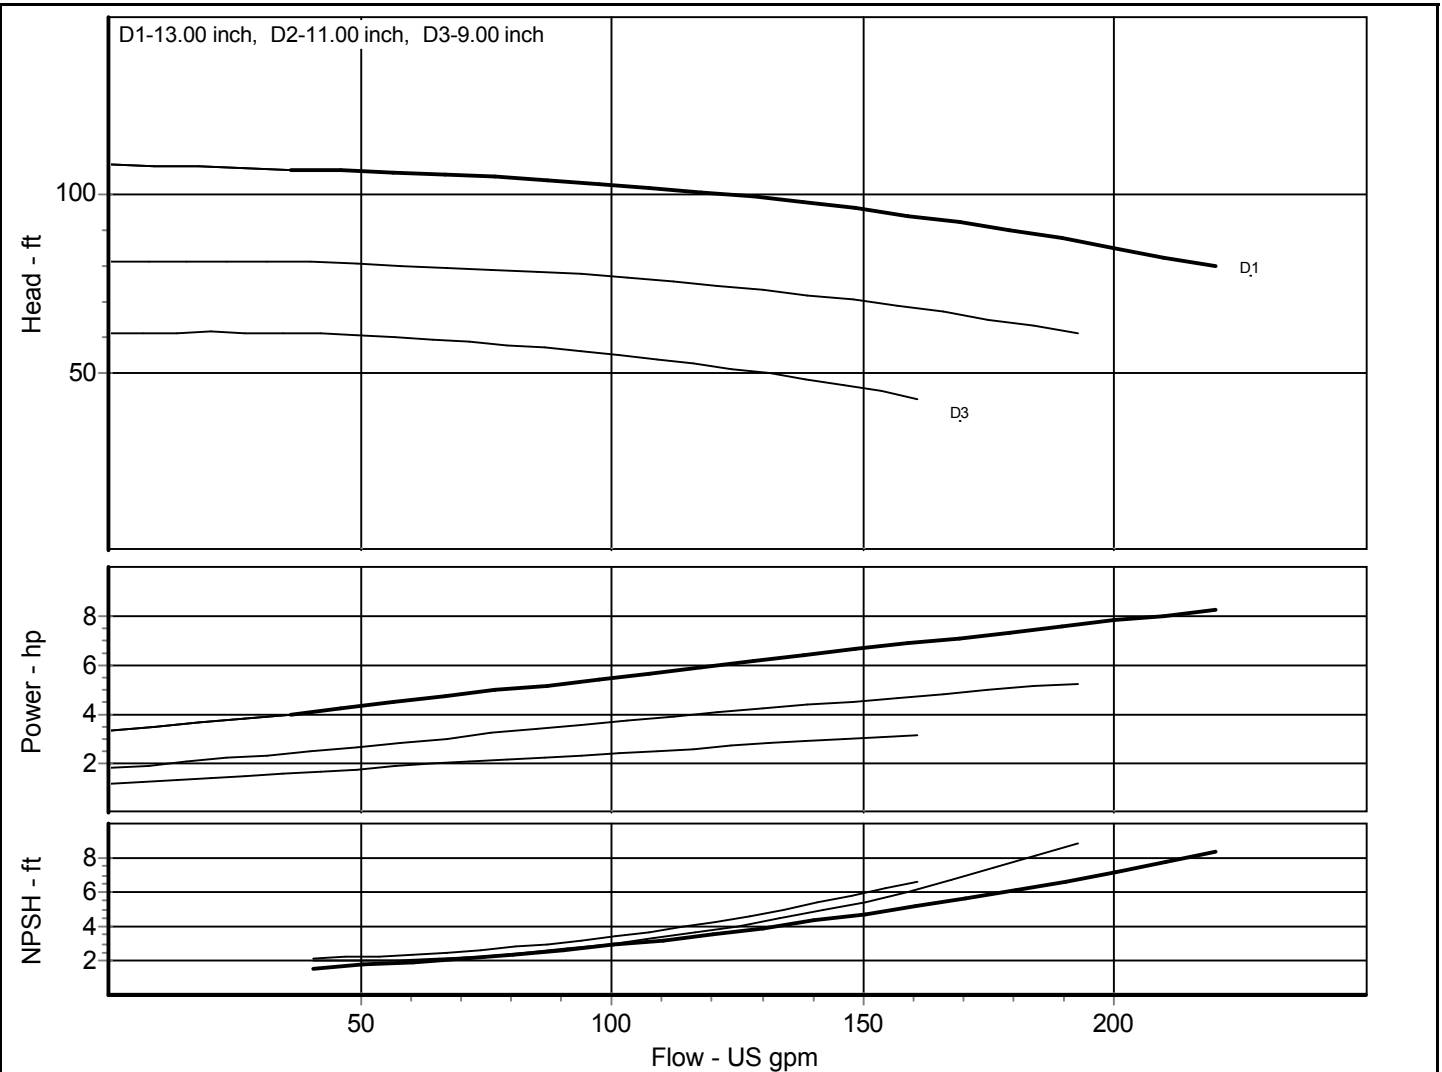

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-6 STP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 6.06/4 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz010	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	1.36 hp
Item : 1		Closed Valve Pressure	25.834 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

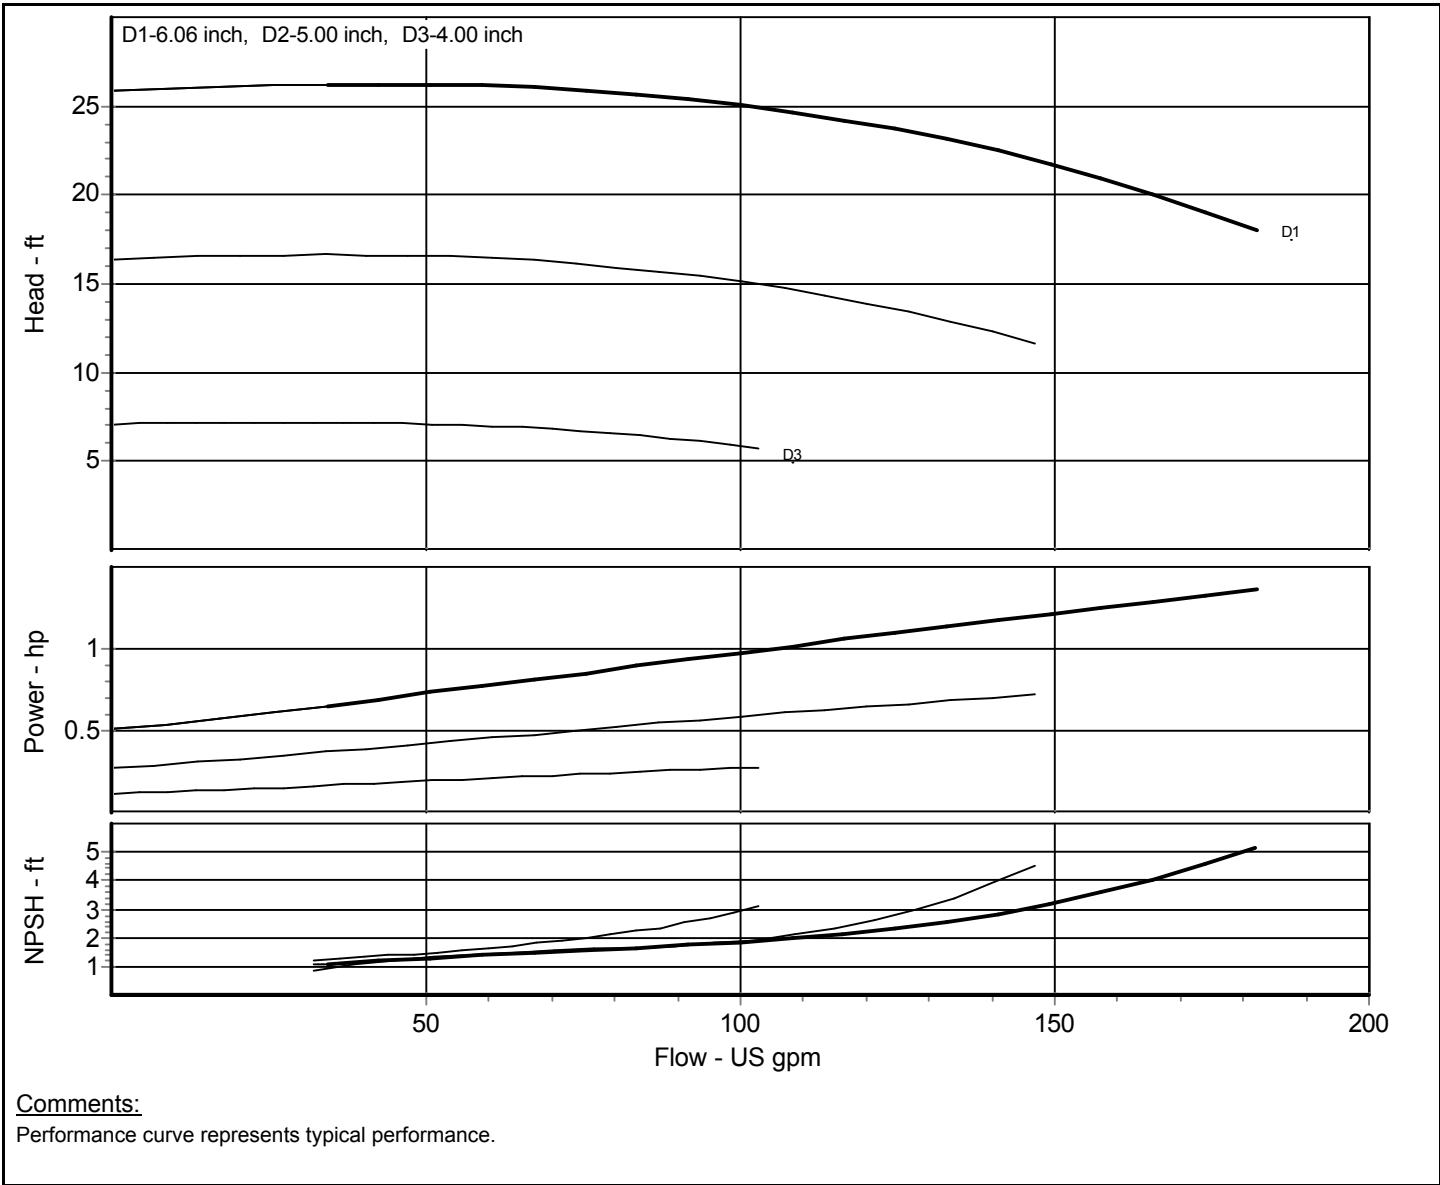



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 2x3-6 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1450 RPM, 50 Hz Electric**
 Impeller Dia.: **5.88/4 inch**

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68 °F**
 Viscosity: **1.009 cP**
 Sp. Gravity: **1.000**
 Fluid: **Water**

Power Required : hp
 NPSH Required : ft
 Peak Power: **1.35 hp**
 Closed Valve Pressure **28.01 ft**


Curve No.: **8196-50hz011**

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

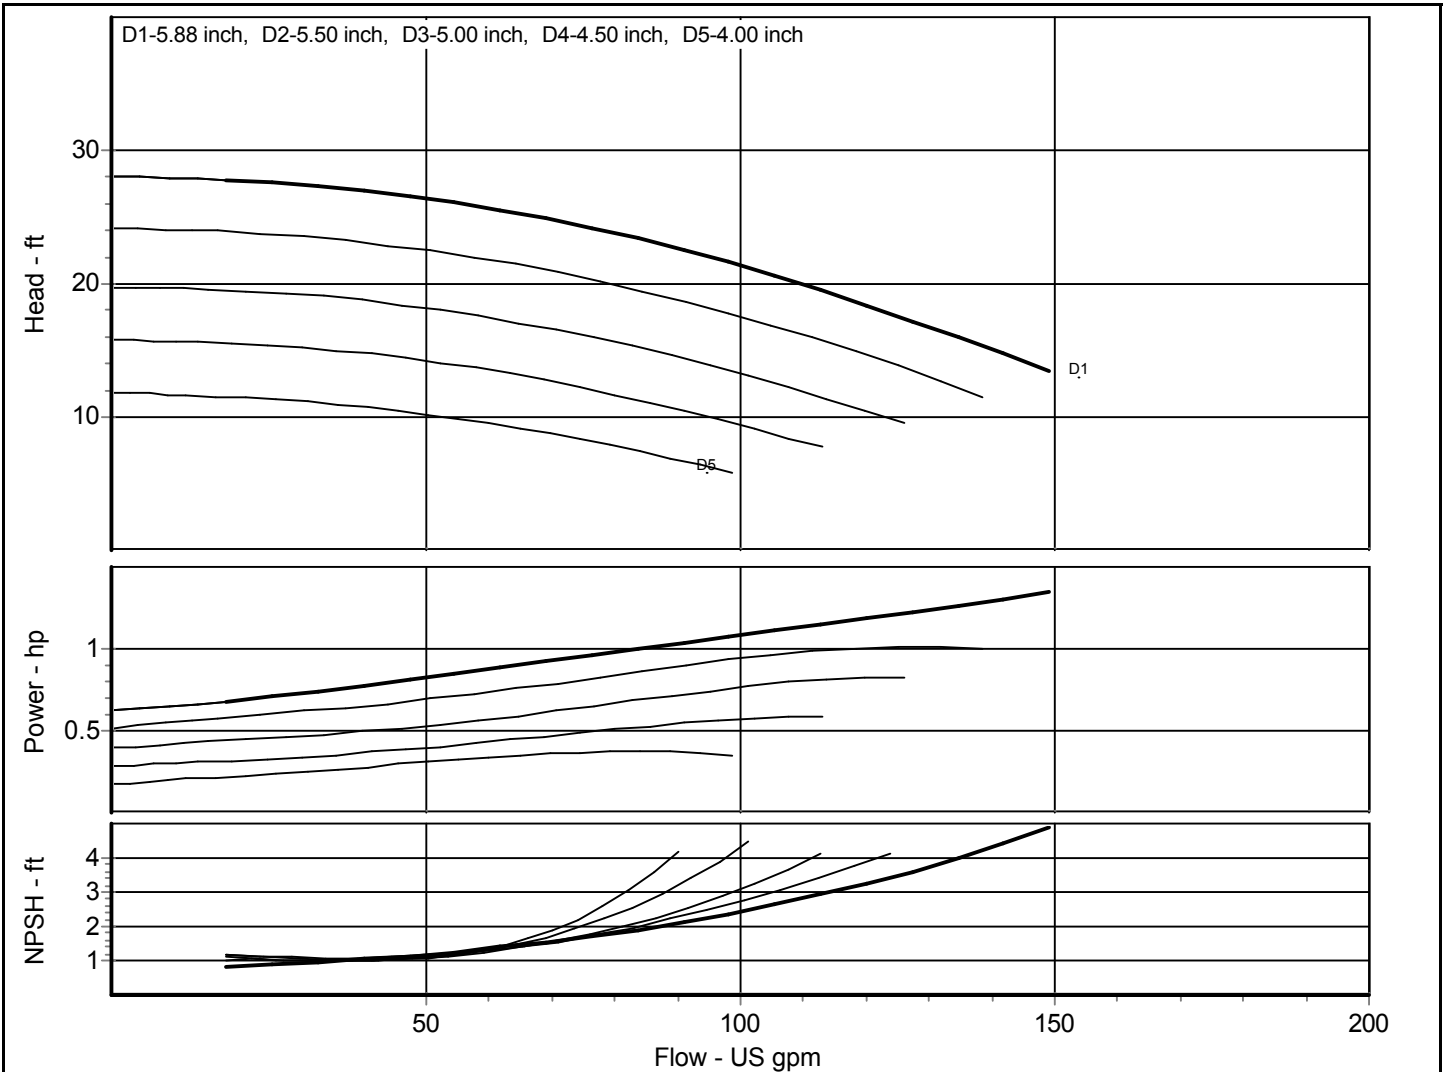

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. : Page No. : Contact :
 Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-8 MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/5.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz014	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	2.73 hp
Item : 1		Closed Valve Pressure	52.734 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

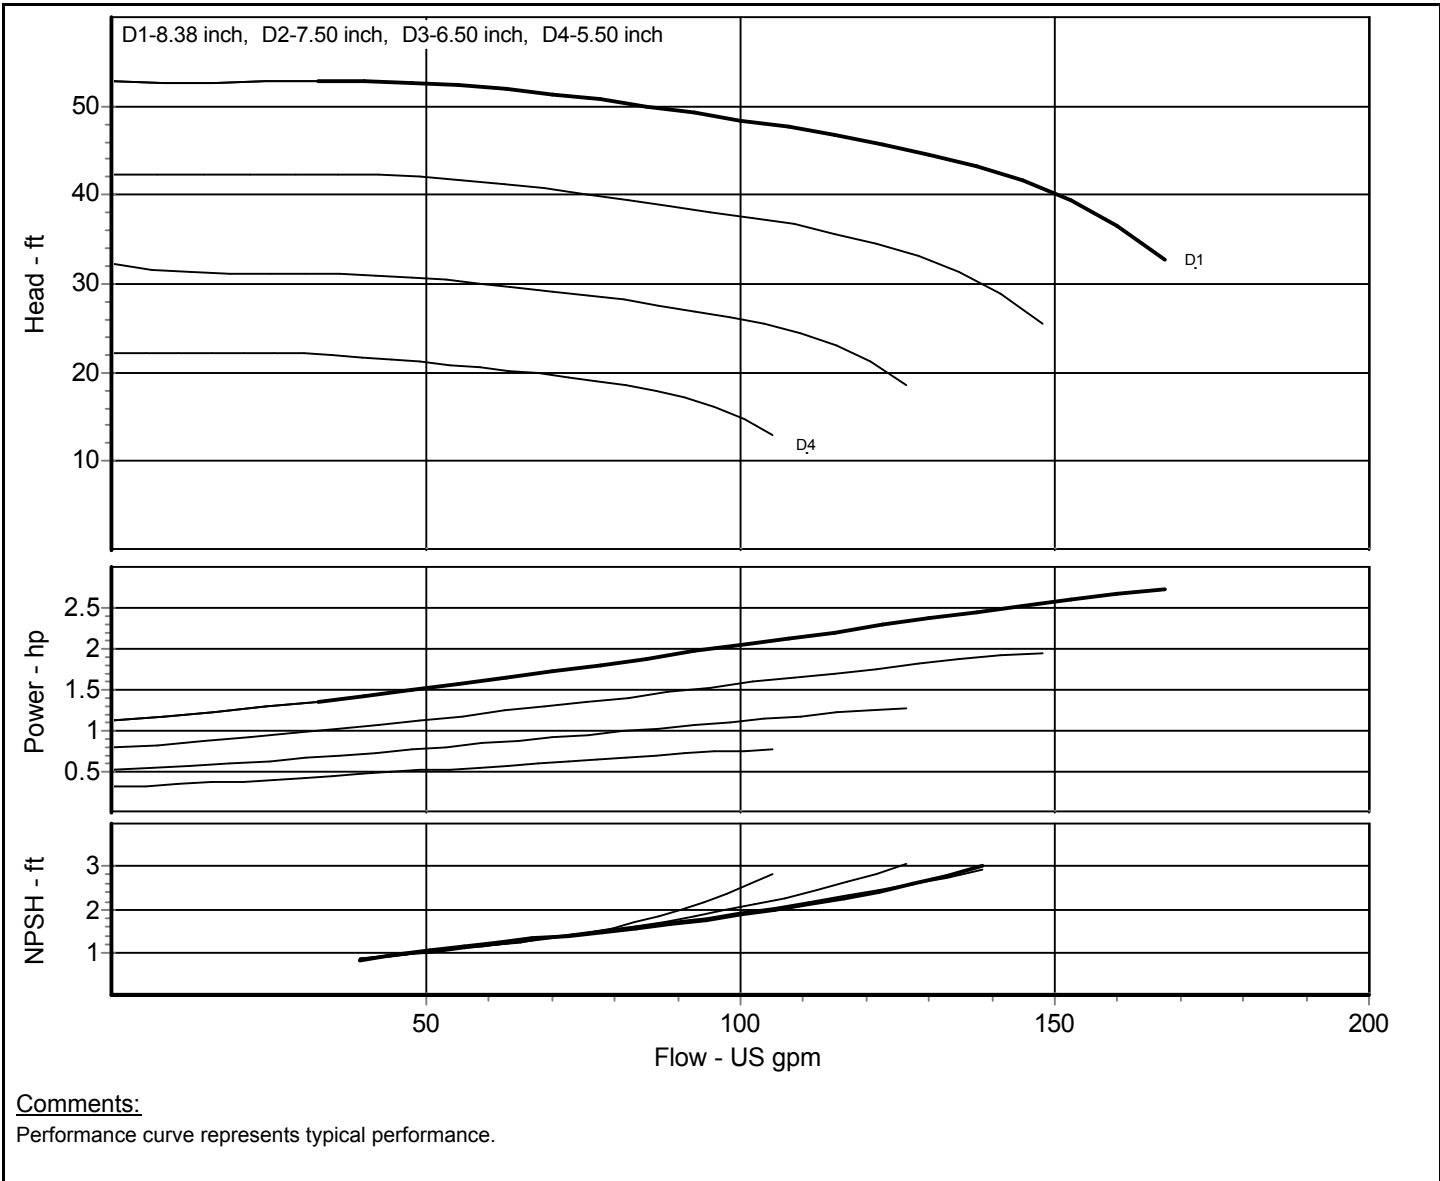




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-10 MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow : US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head : ft
	Temperature: 68 °F	Efficiency : %
	Viscosity: 1.009 cP	Power Required : hp
Curve No.: 8196-50hz024	Sp. Gravity: 1.000	NPSH Required : ft
Impeller No.	Fluid: Water	Peak Power: 5.82 hp
Item : 1		Closed Valve Pressure 75.893 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std	

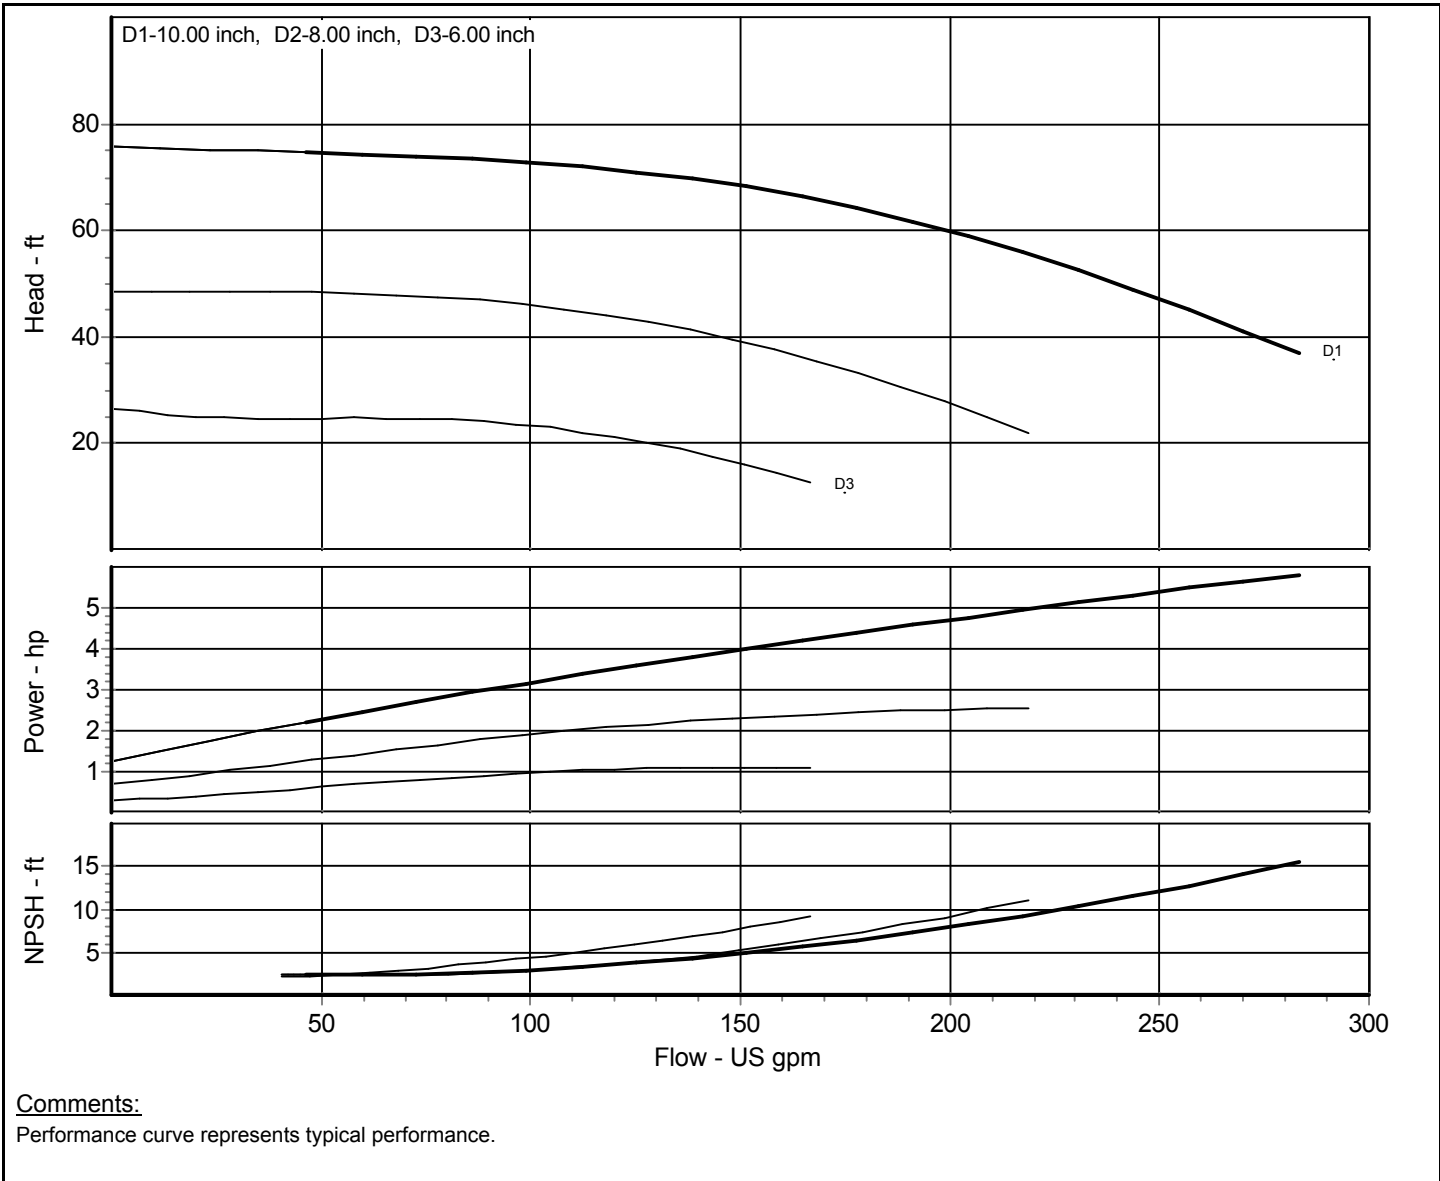




Customer :

Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Project :		Contact :	
Quote No. :	Page No. :	Phone :	Fax :
		Date :	

Pump Model: Peerless - 2x3-10 LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
		Efficiency :	%
	Temperature: 68 °F	Power Required :	hp
	Viscosity: 1.009 cP	NPSH Required :	ft
Curve No.: 8196-50hz024	Sp. Gravity: 1.000	Peak Power:	5.82 hp
Impeller No.	Fluid: Water	Closed Valve Pressure	75.893 ft
Item : 1			
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

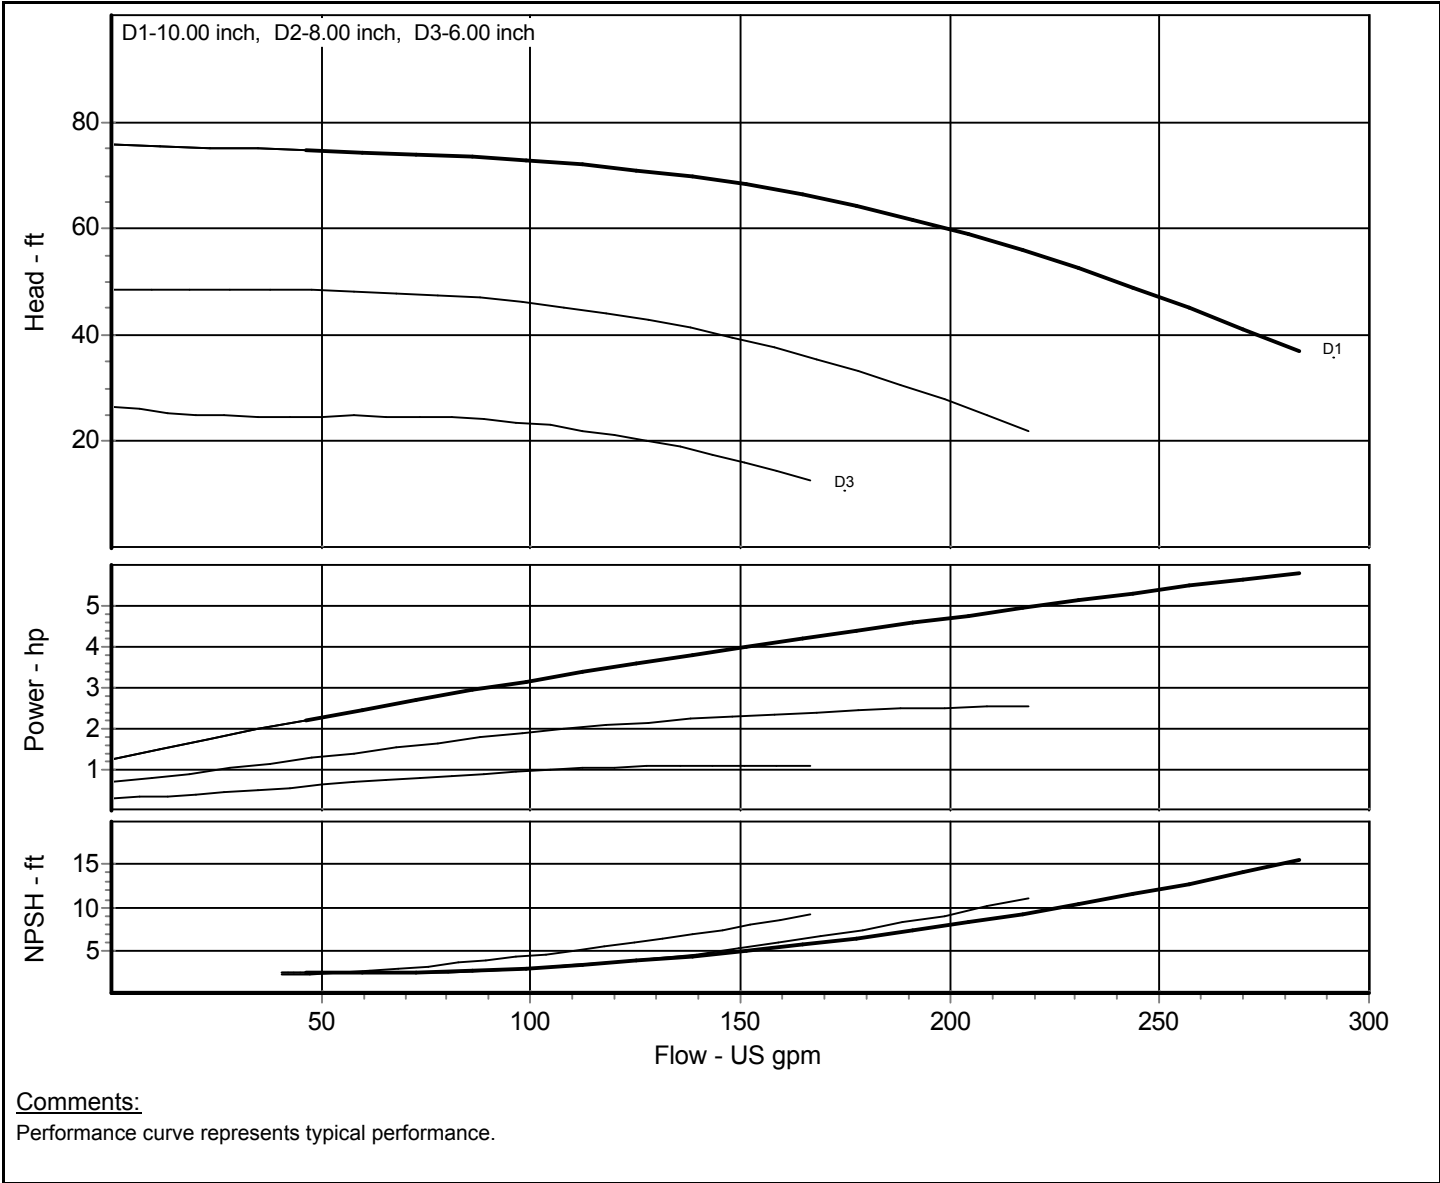




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-13 MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz033	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 12.48 hp	
Item : 1		Closed Valve Pressure 123.666 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

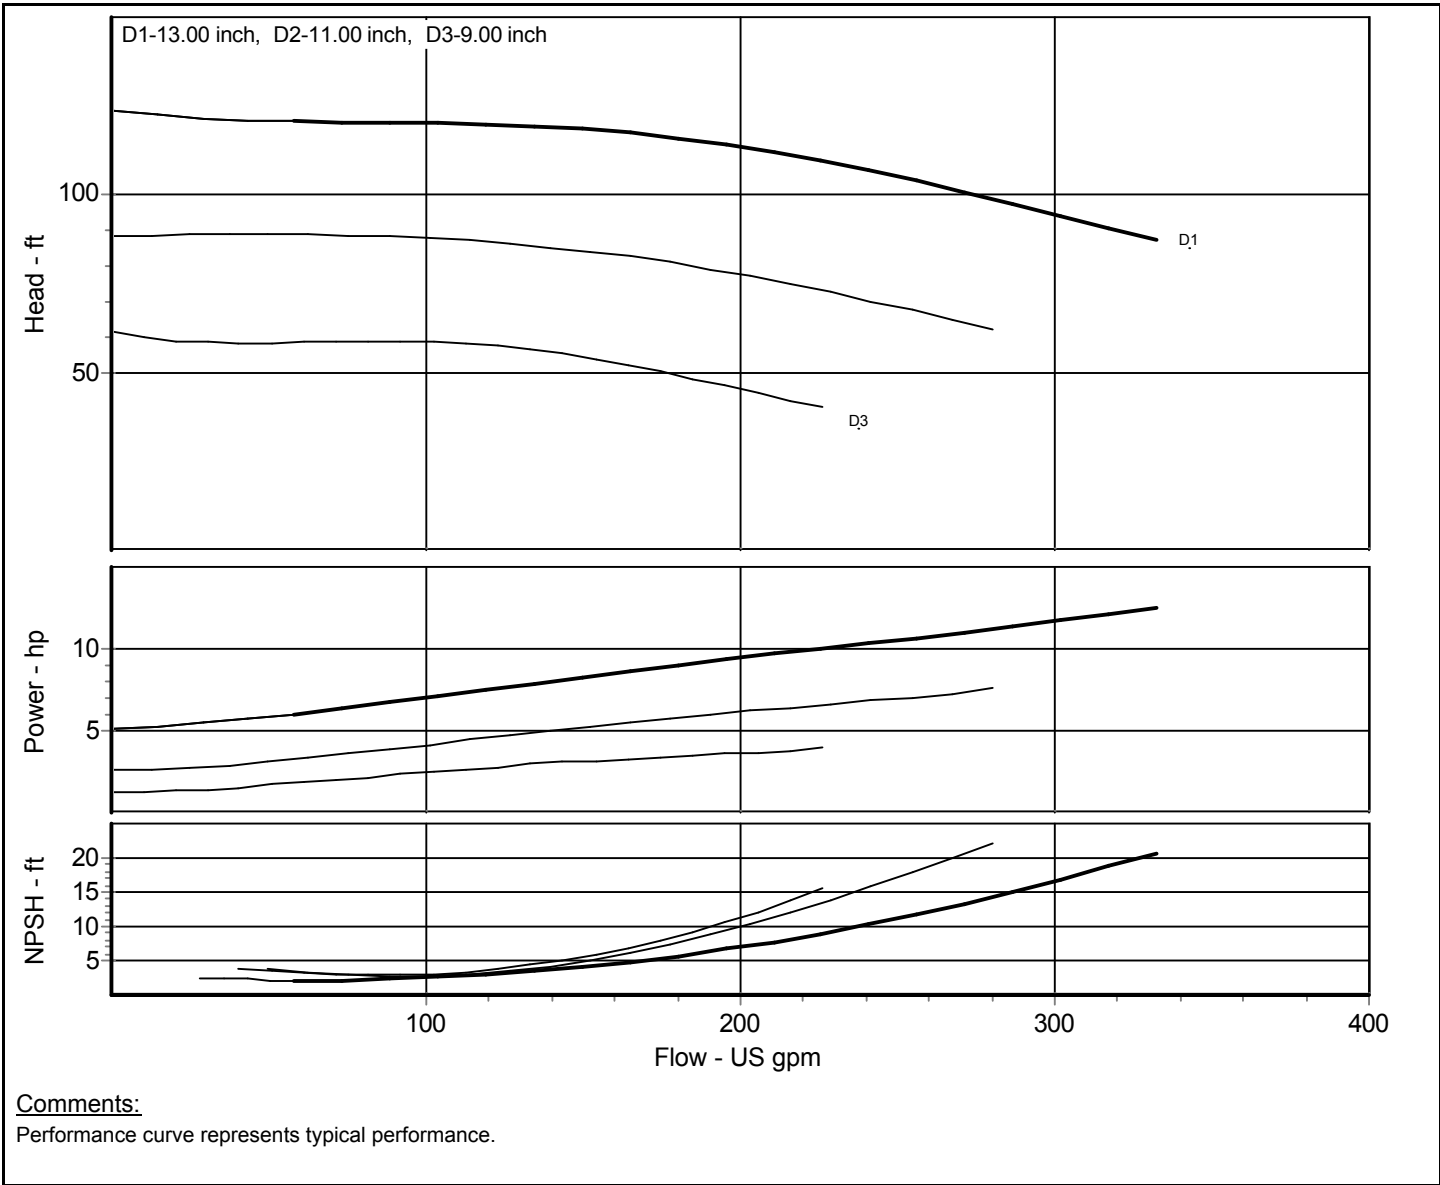




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 2x3-13 LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz033	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 12.48 hp	
Item : 1		Closed Valve Pressure 123.666 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

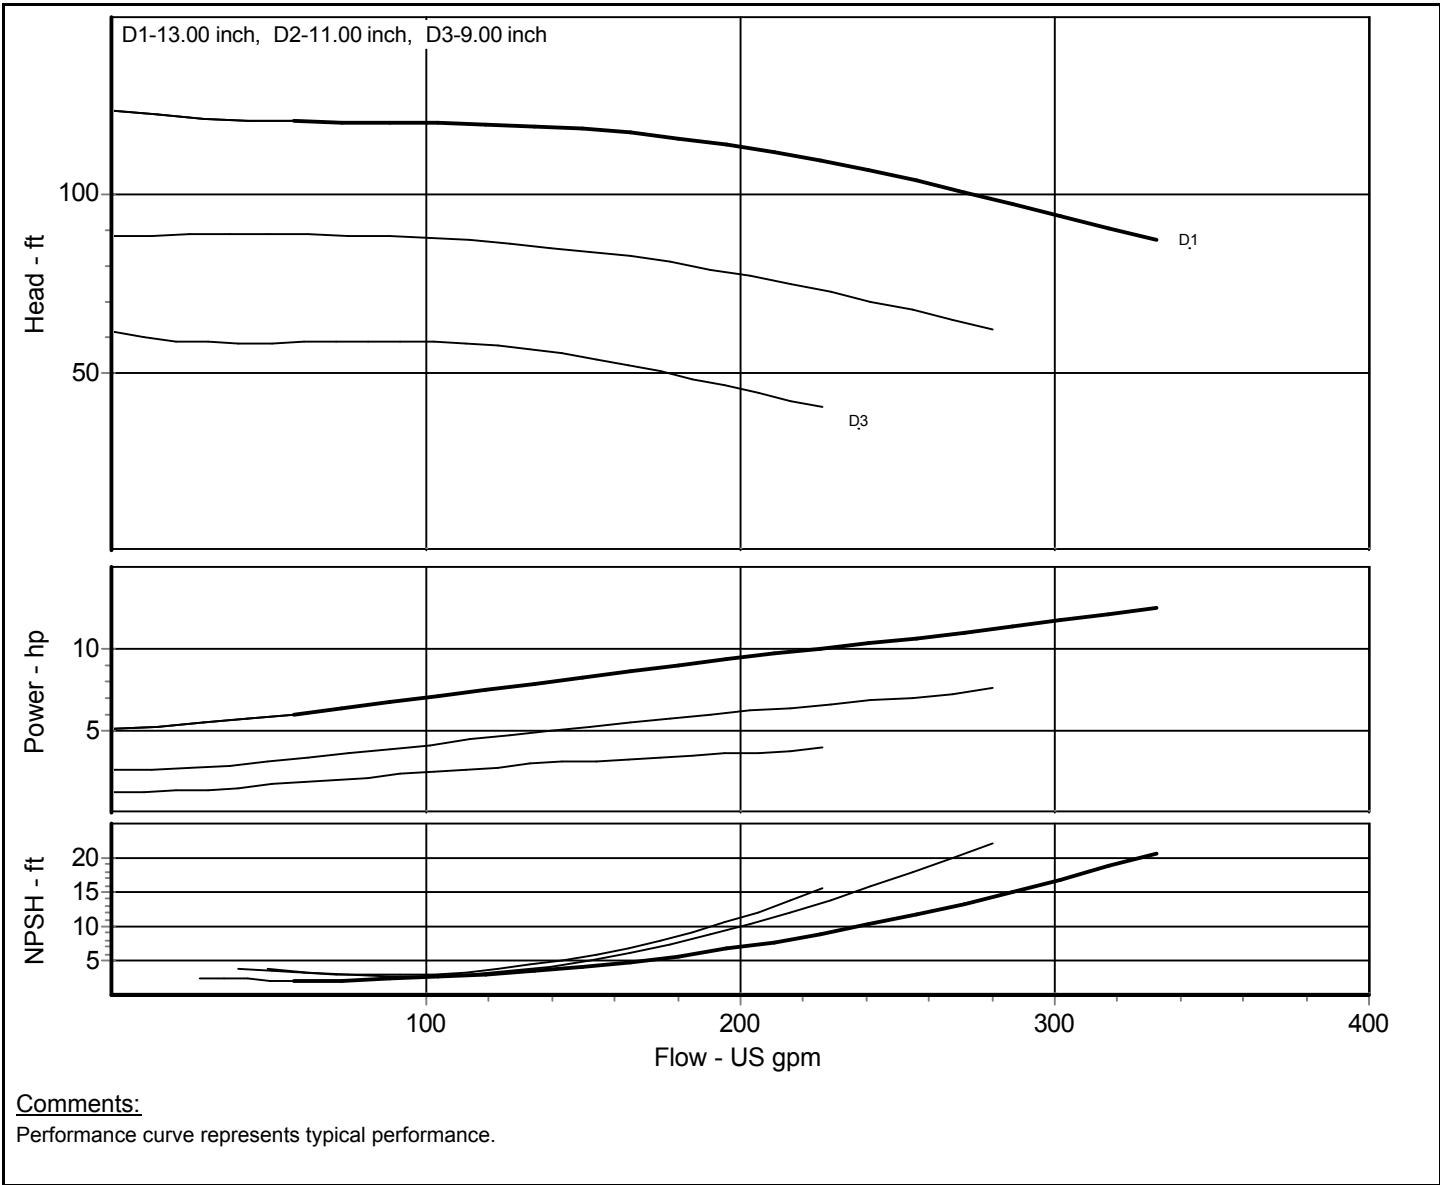




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 3x4-8 MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz015	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	6.41 hp
Item : 1		Closed Valve Pressure	52.861 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

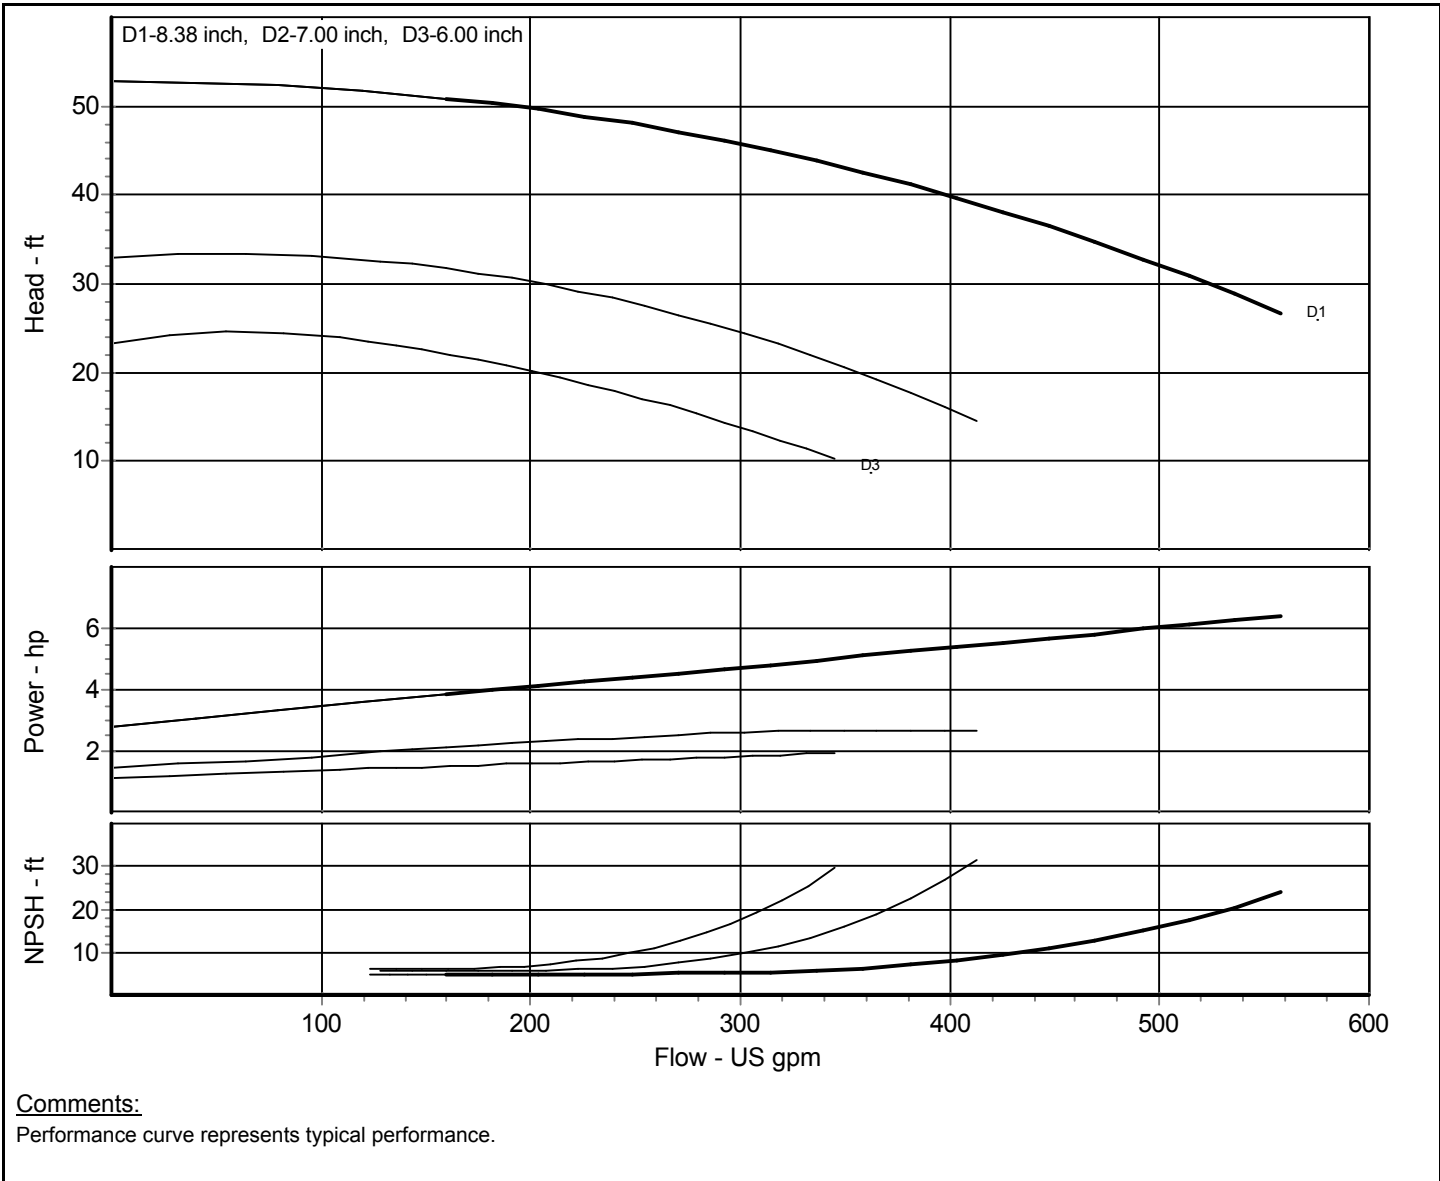




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 3x4-8G MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 8.38/5.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz018	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	4.19 hp
Item : 1		Closed Valve Pressure	51.503 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

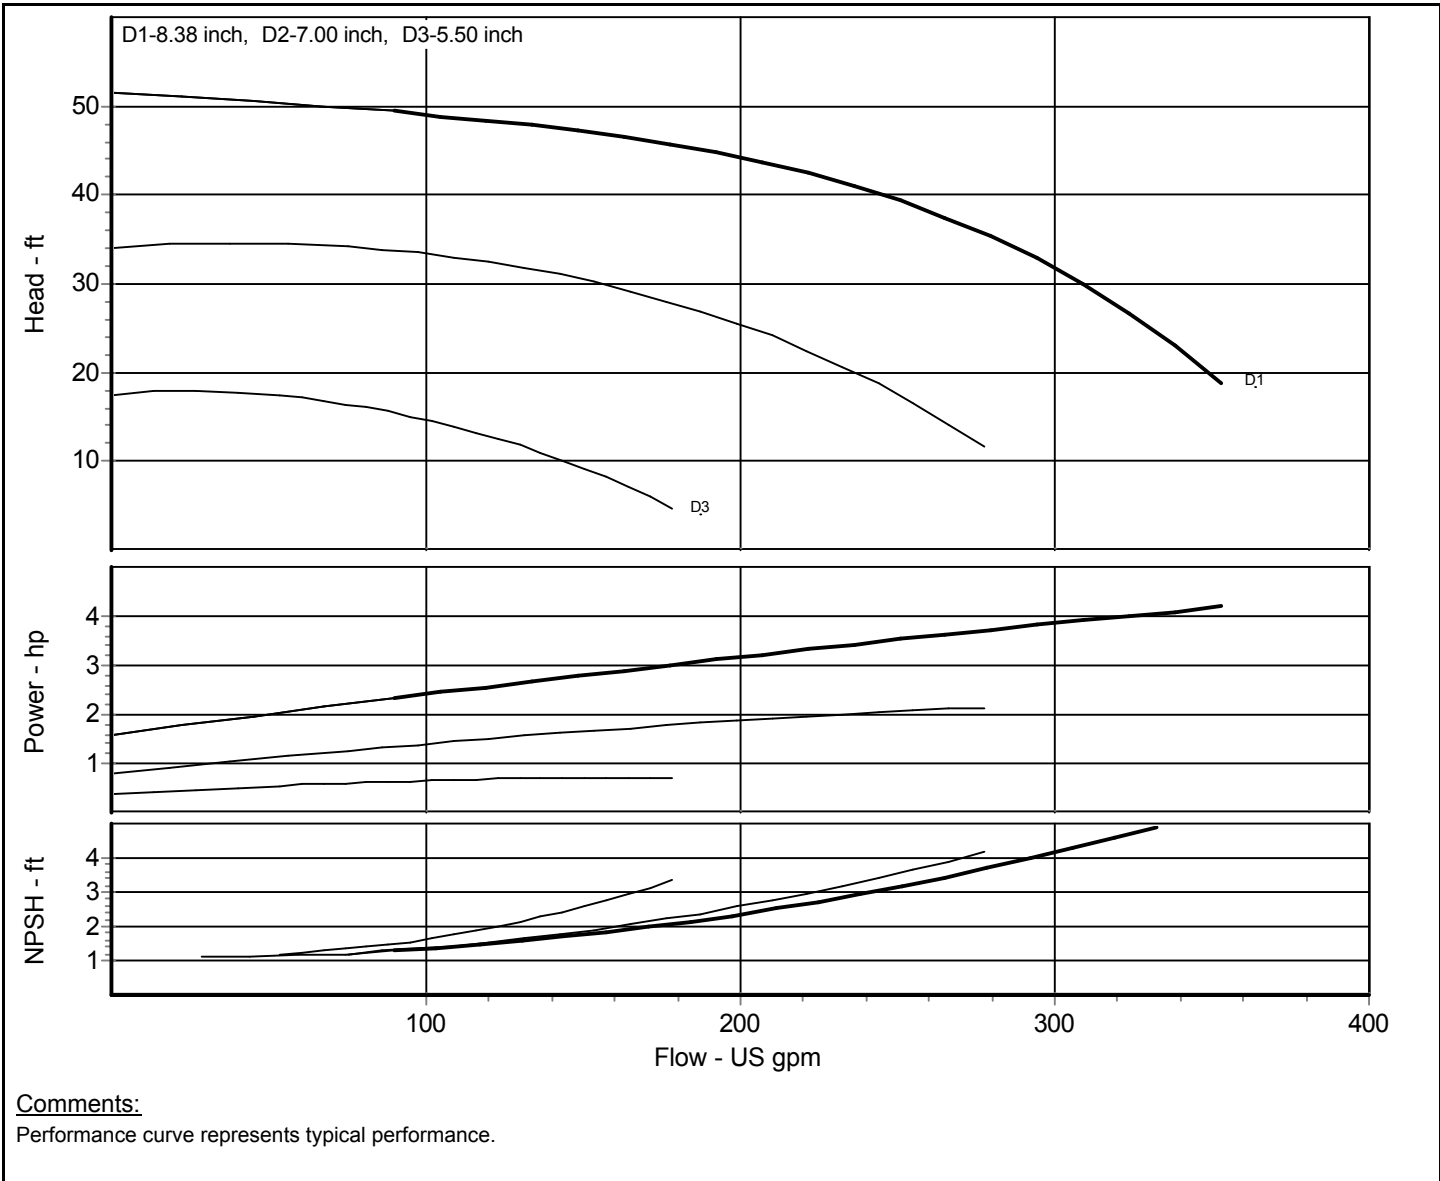




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 3x4-10 MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz026	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	6.95 hp
Item : 1		Closed Valve Pressure	74.408 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

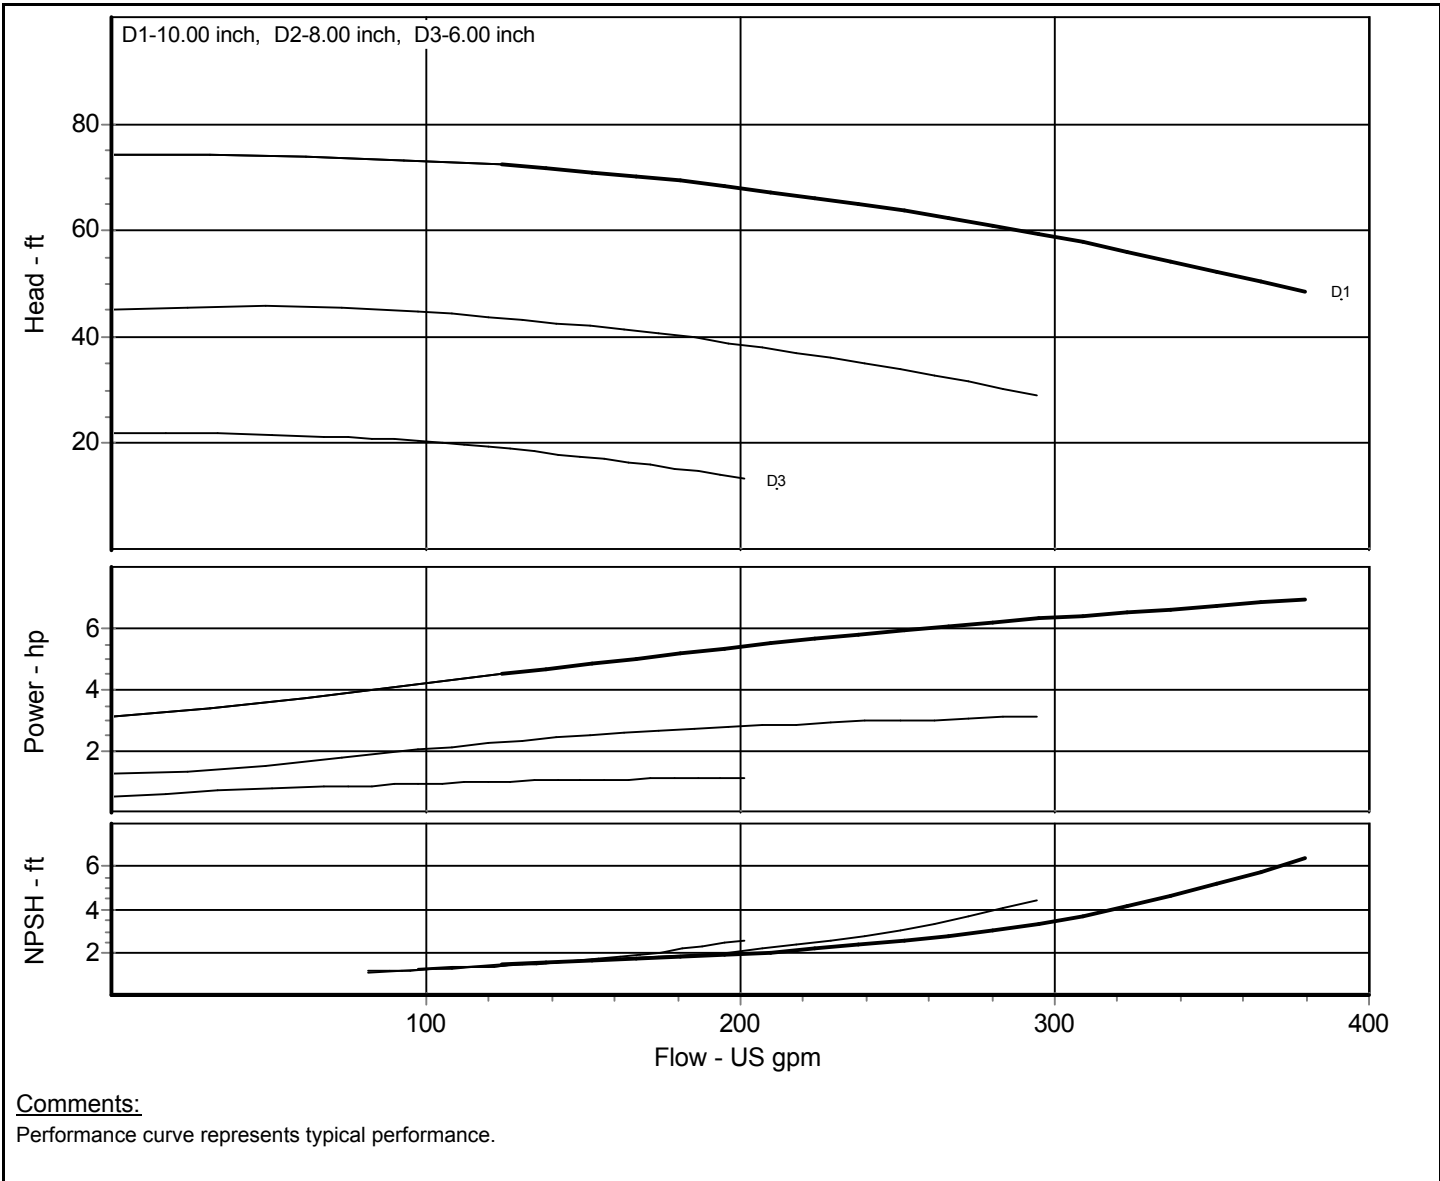




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 3x4-10 LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow : US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/6 inch	Duty Head : ft
	Temperature: 68 °F	Efficiency : %
	Viscosity: 1.009 cP	Power Required : hp
Curve No.: 8196-50hz026	Sp. Gravity: 1.000	NPSH Required : ft
Impeller No.	Fluid: Water	Peak Power: 6.95 hp
Item : 1		Closed Valve Pressure 74.408 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std	

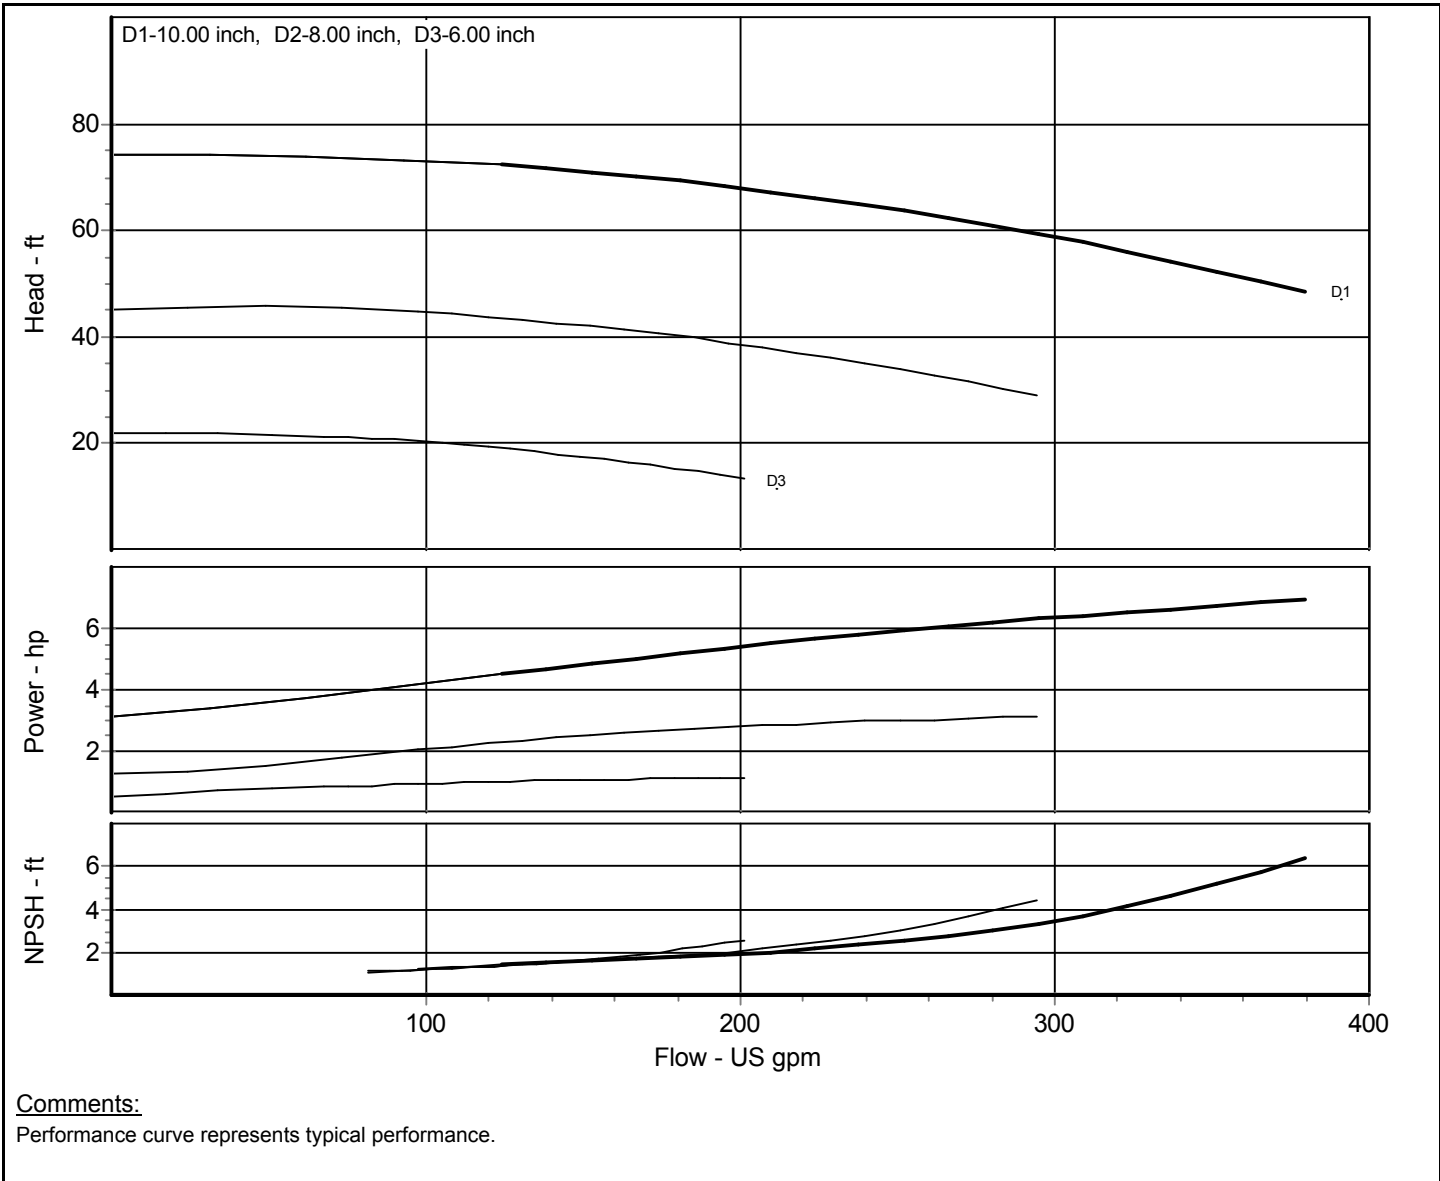




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-13 5V MTP 8196** Nom. Speed: **1450** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **22.8** hp
 Fluid: **Water** Closed Valve Pressure **123.57** ft
 Curve No.: **8196-50hz036**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

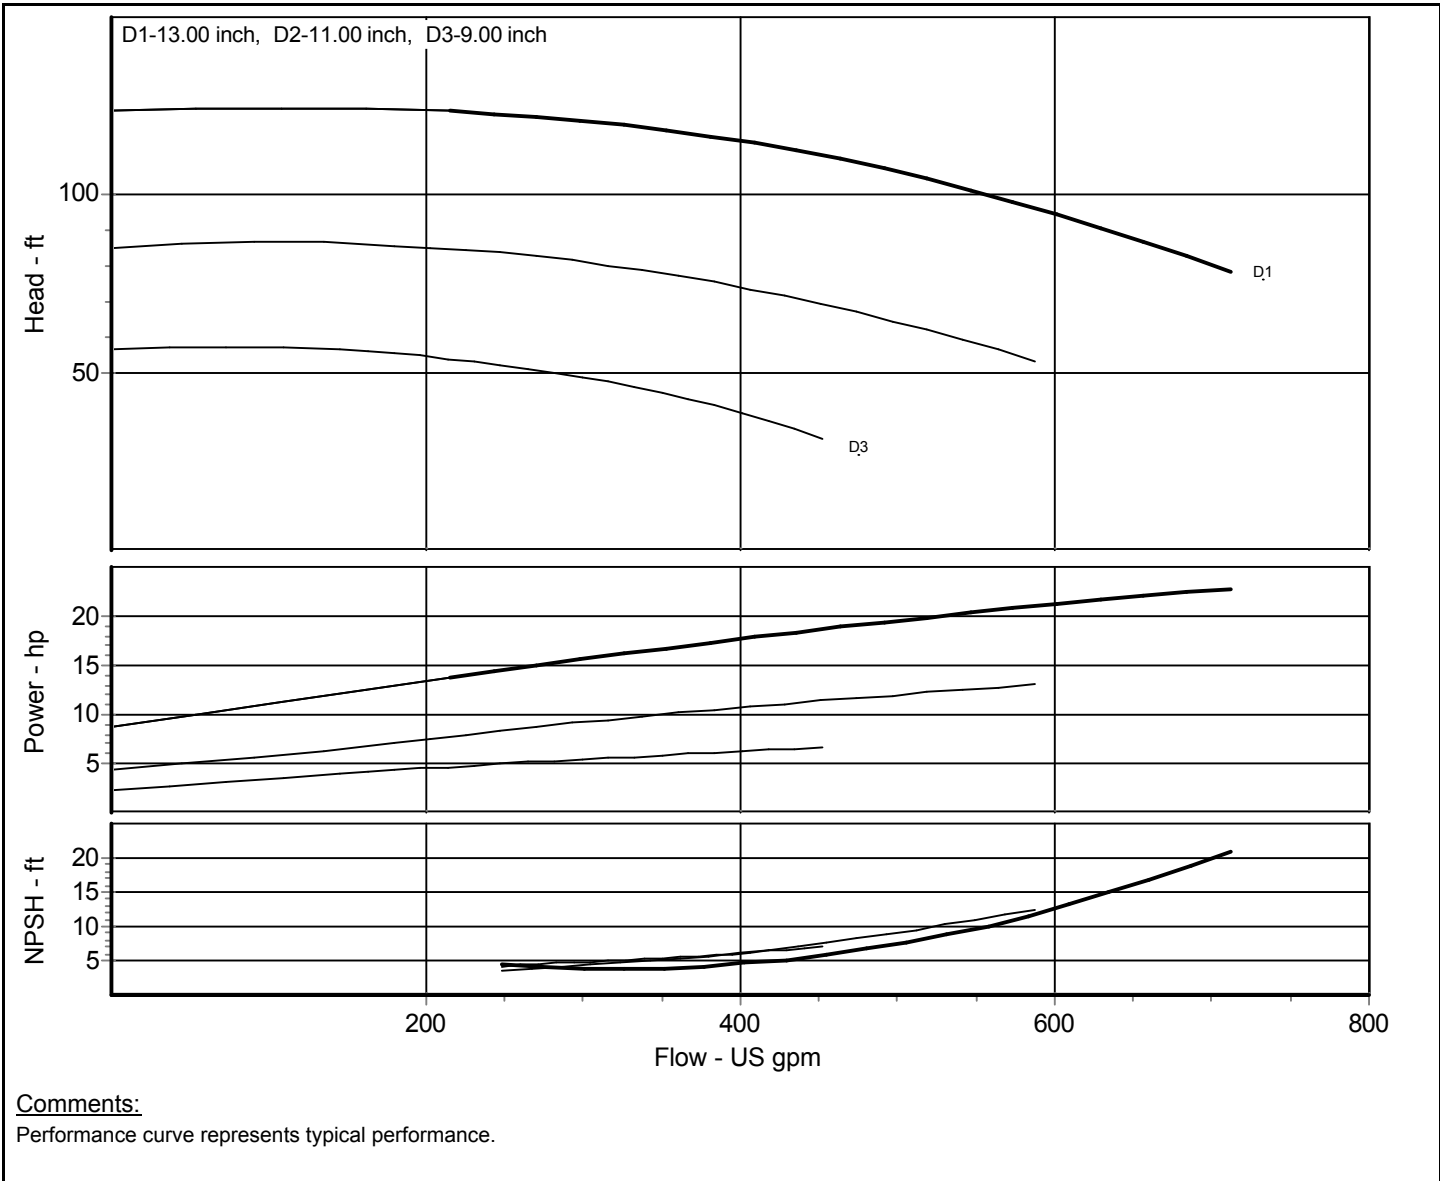




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-13 5V LTP 8196** Nom. Speed: **1450** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Curve No.: **8196-50hz036** Sp. Gravity: **1.000** Peak Power: **22.8** hp
 Impeller No. Fluid: **Water** Closed Valve Pressure **123.57** ft
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

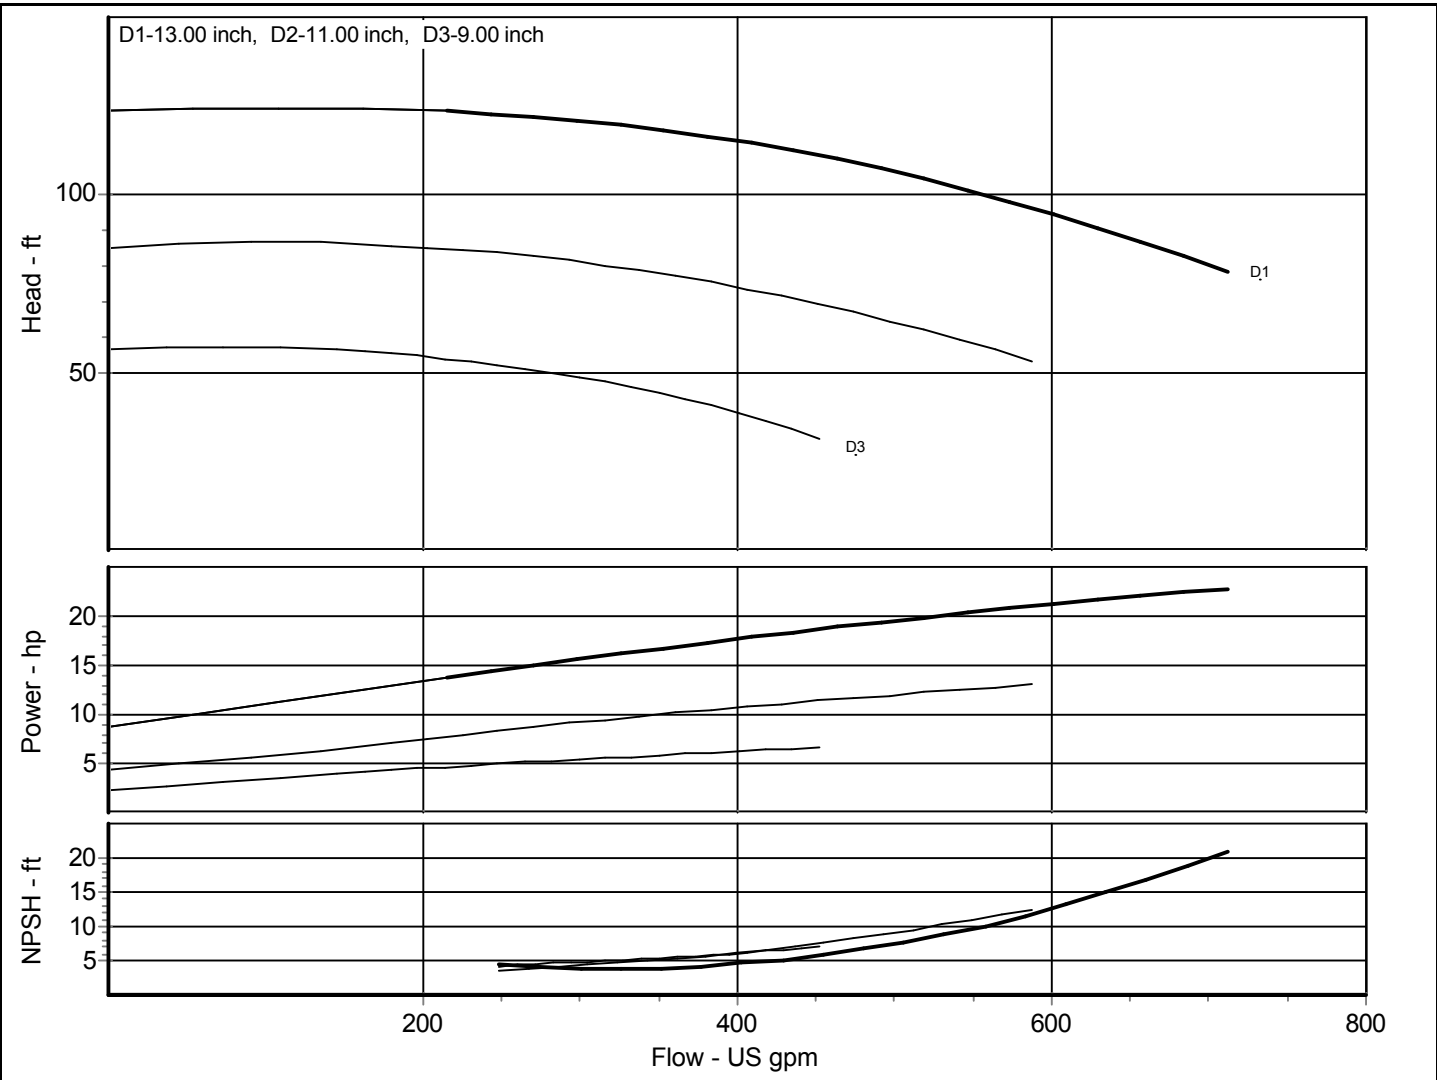

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 3x4-13 6V MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz039	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	28.3 hp
Item : 1		Closed Valve Pressure	126.304 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

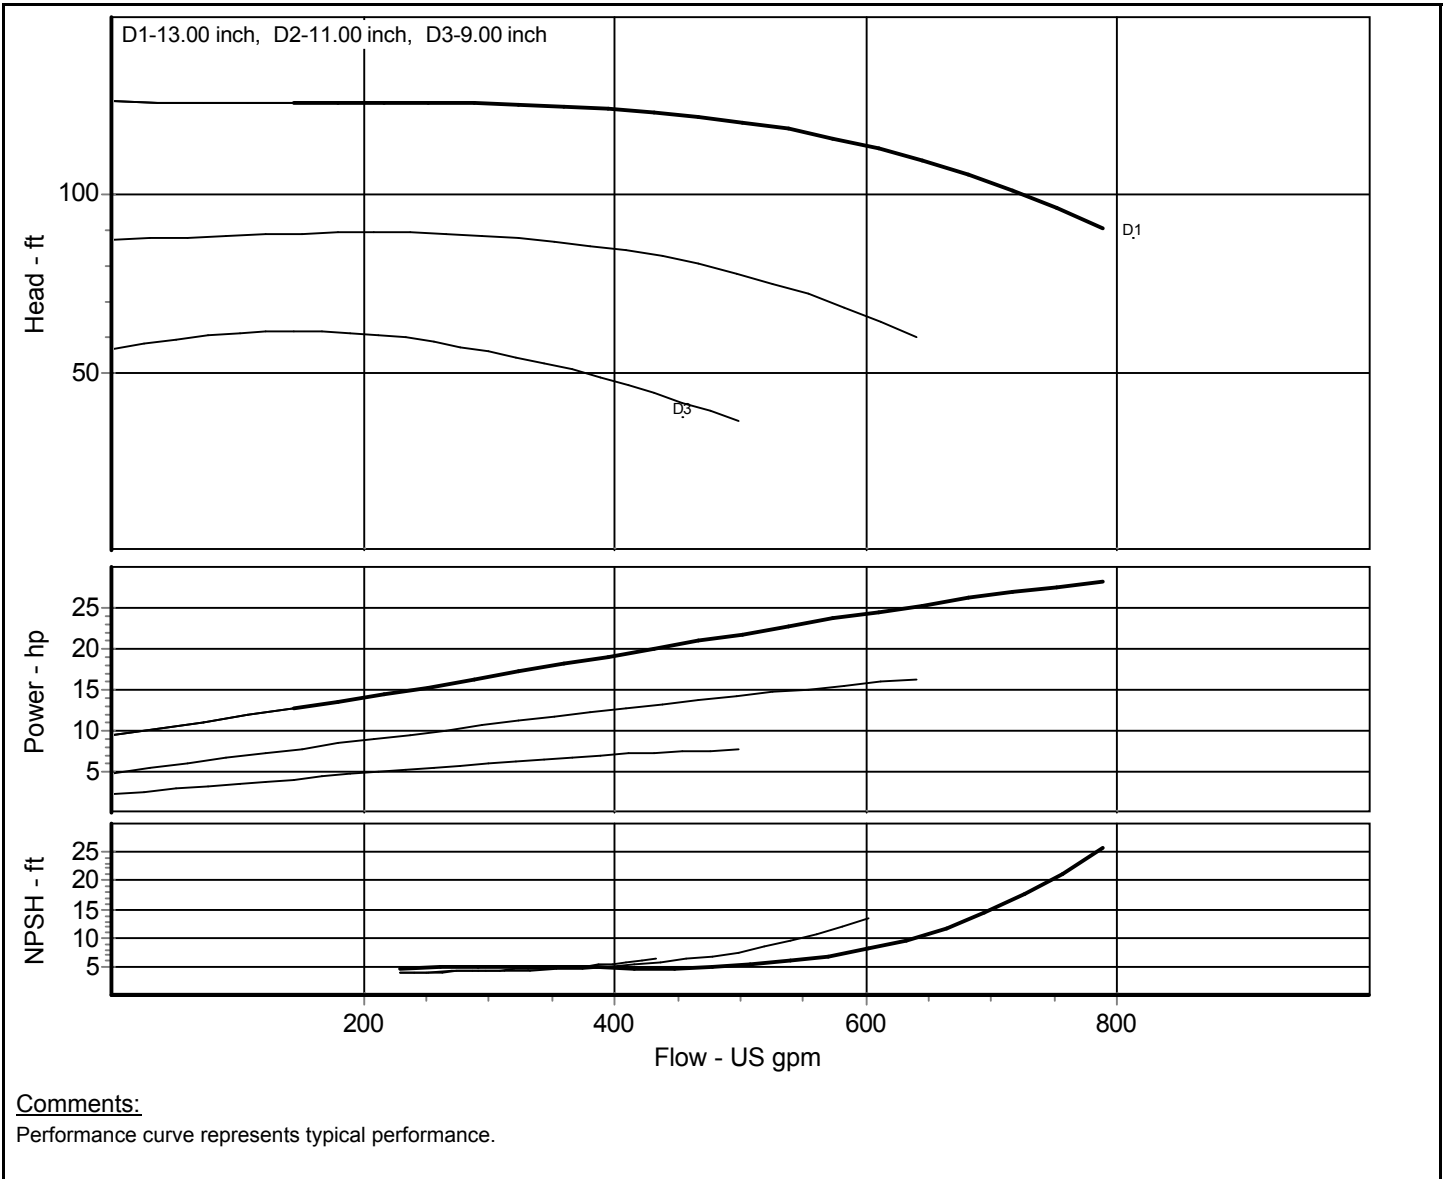




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 3x4-13 6V LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz039	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	28.11 hp
Item : 1		Closed Valve Pressure	126.304 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

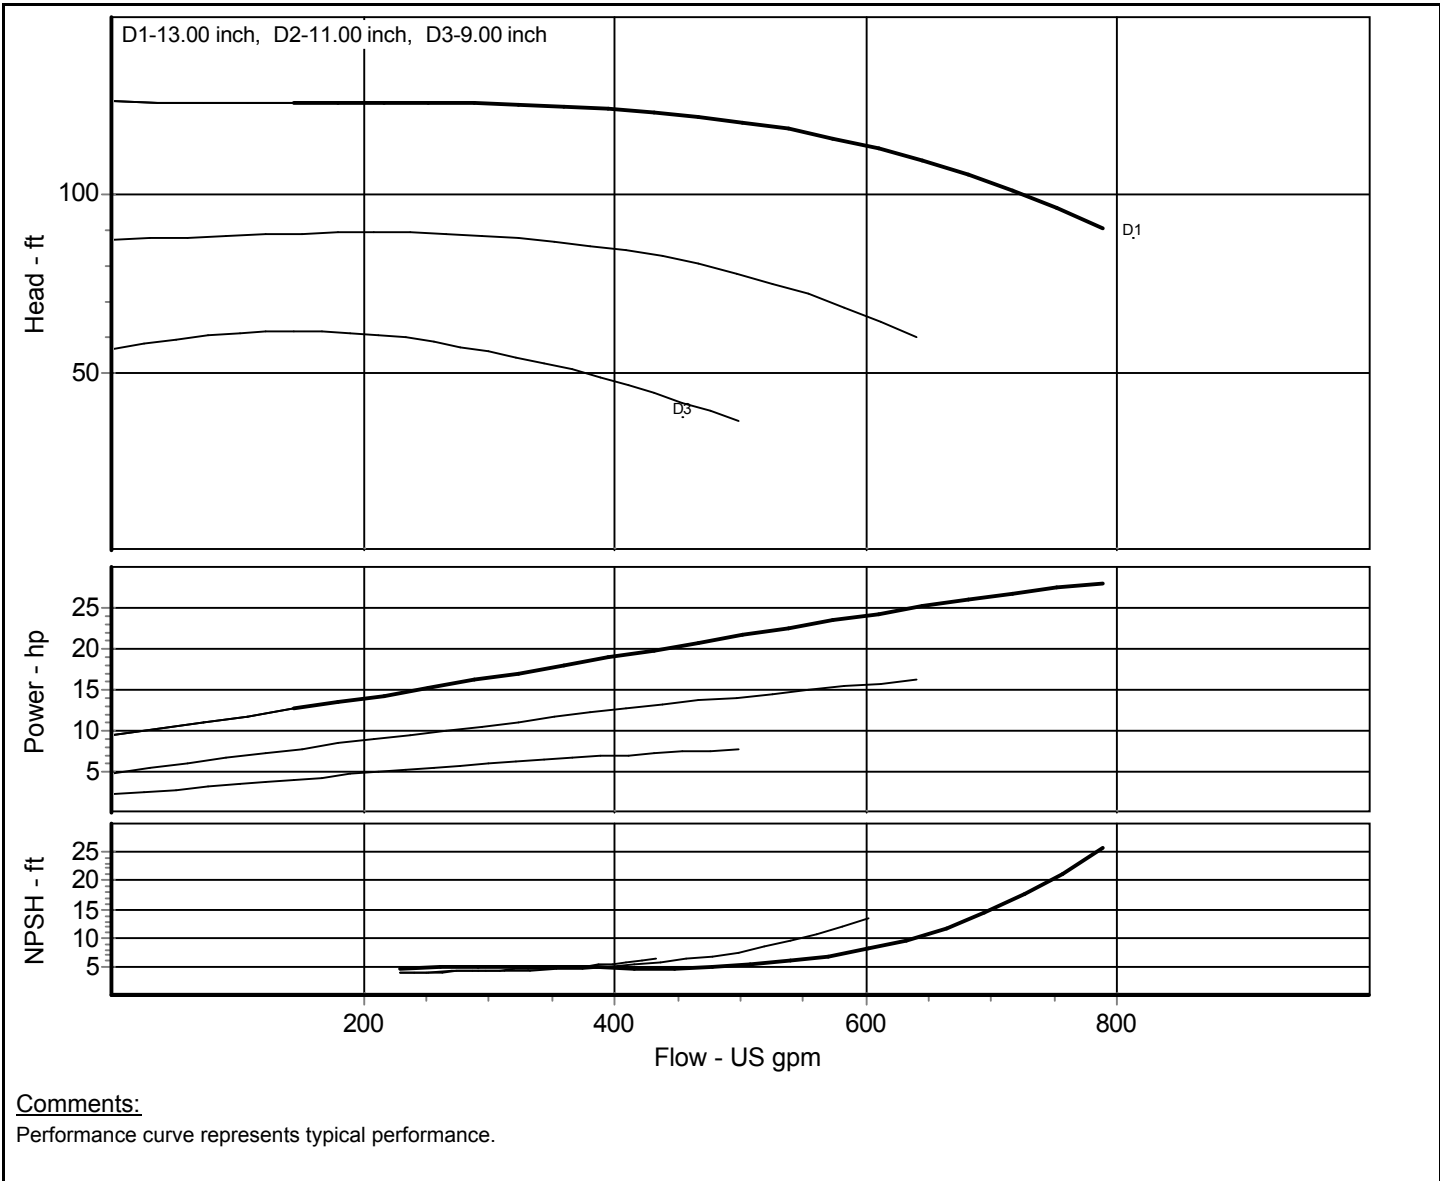




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :		Contact :	
Quote No. :	Page No. :	Phone :	Fax :
		Date :	

Pump Model: Peerless - 4x6-10 MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head :	ft
		Efficiency :	%
	Temperature: 68 °F	Power Required :	hp
	Viscosity: 1.009 cP	NPSH Required :	ft
Curve No.: 8196-50hz027	Sp. Gravity: 1.000	Peak Power: 15.79 hp	
Impeller No.	Fluid: Water	Closed Valve Pressure 69.341 ft	
Item : 1			
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

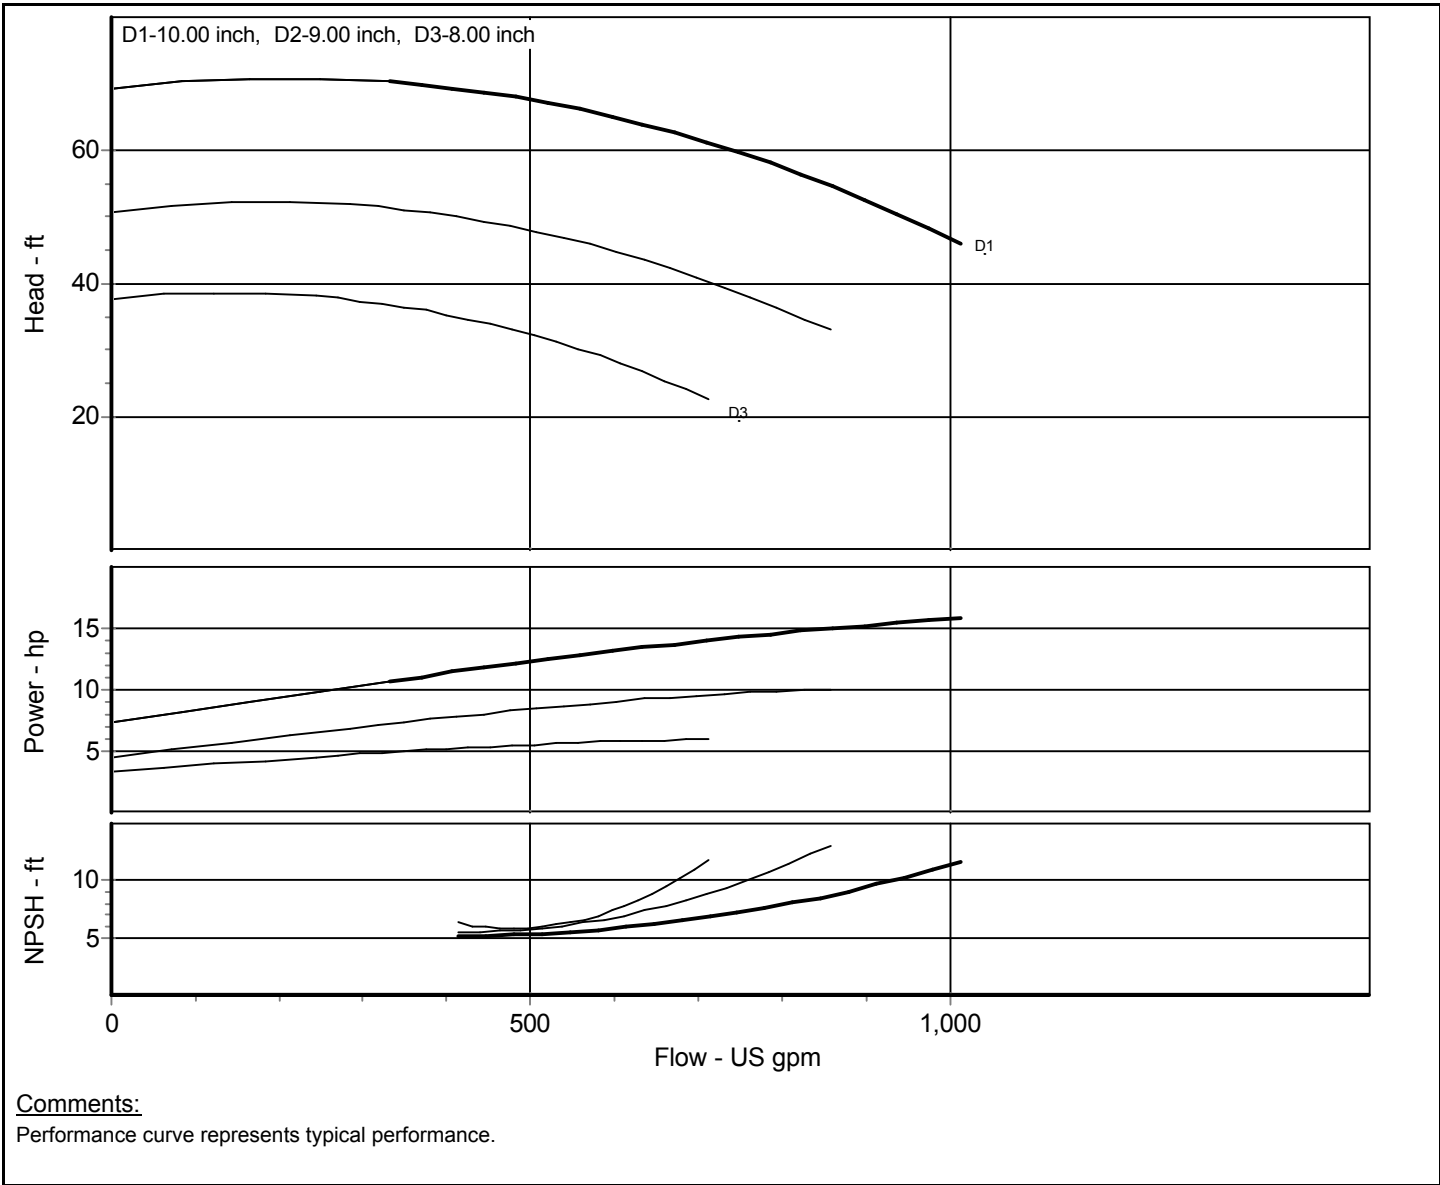




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 4x6-10 LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow : US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head : ft
	Temperature: 68 °F	Efficiency : %
	Viscosity: 1.009 cP	Power Required : hp
Curve No.: 8196-50hz027	Sp. Gravity: 1.000	NPSH Required : ft
Impeller No.	Fluid: Water	Peak Power: 15.79 hp
Item : 1		Closed Valve Pressure 69.341 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std	

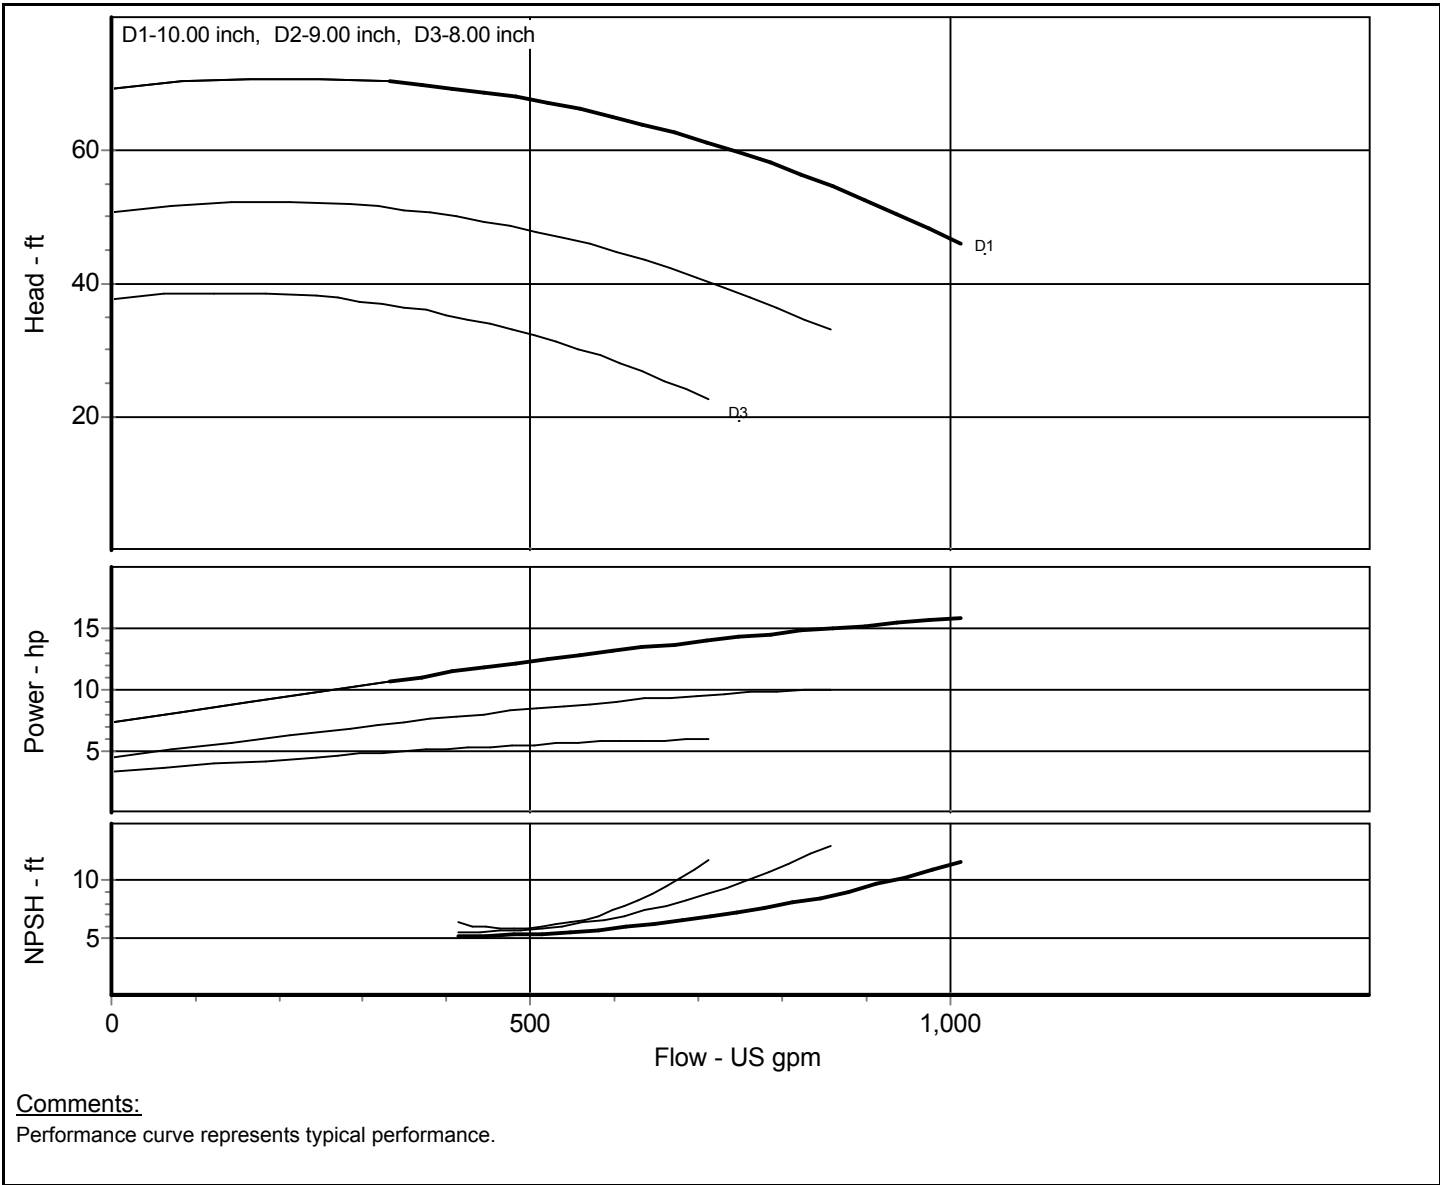




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 4x6-10 LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz027	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	15.79 hp
Item : 1		Closed Valve Pressure	69.341 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

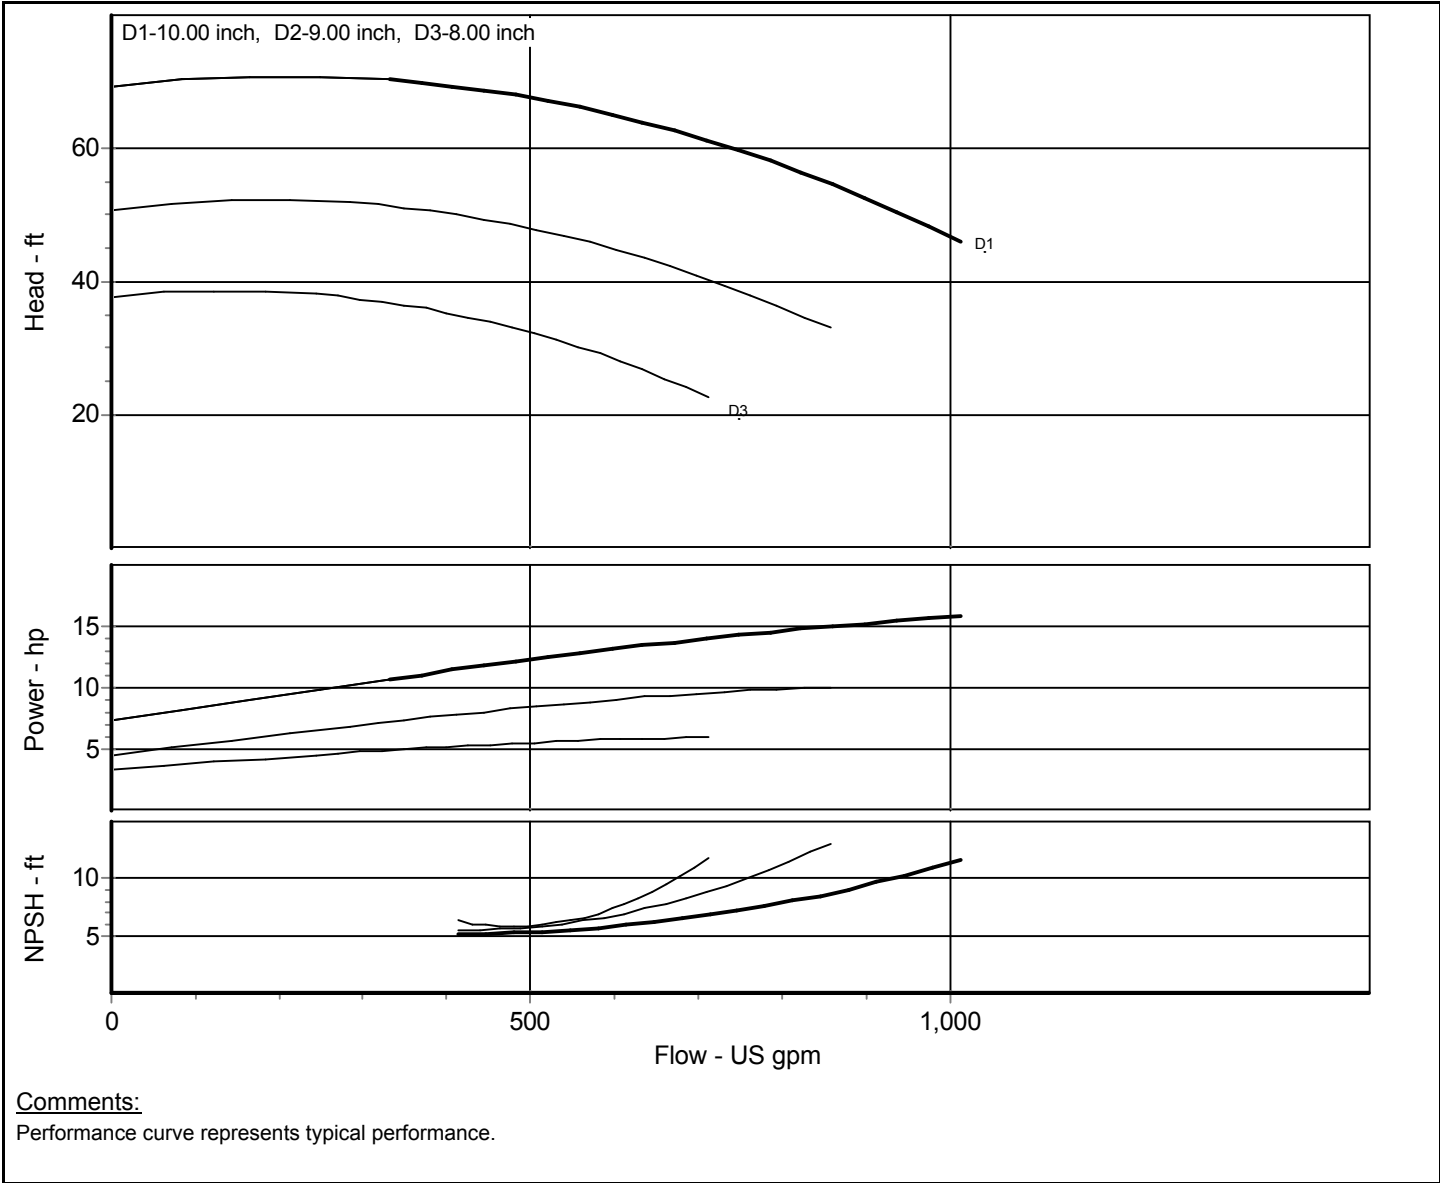




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :		Contact :	
Quote No. :	Page No. :	Phone :	Fax :
Item :	Date :		

Pump Model: Peerless - 4x6-13 MTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz041	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	35.9 hp
Item : 1		Closed Valve Pressure	119.455 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

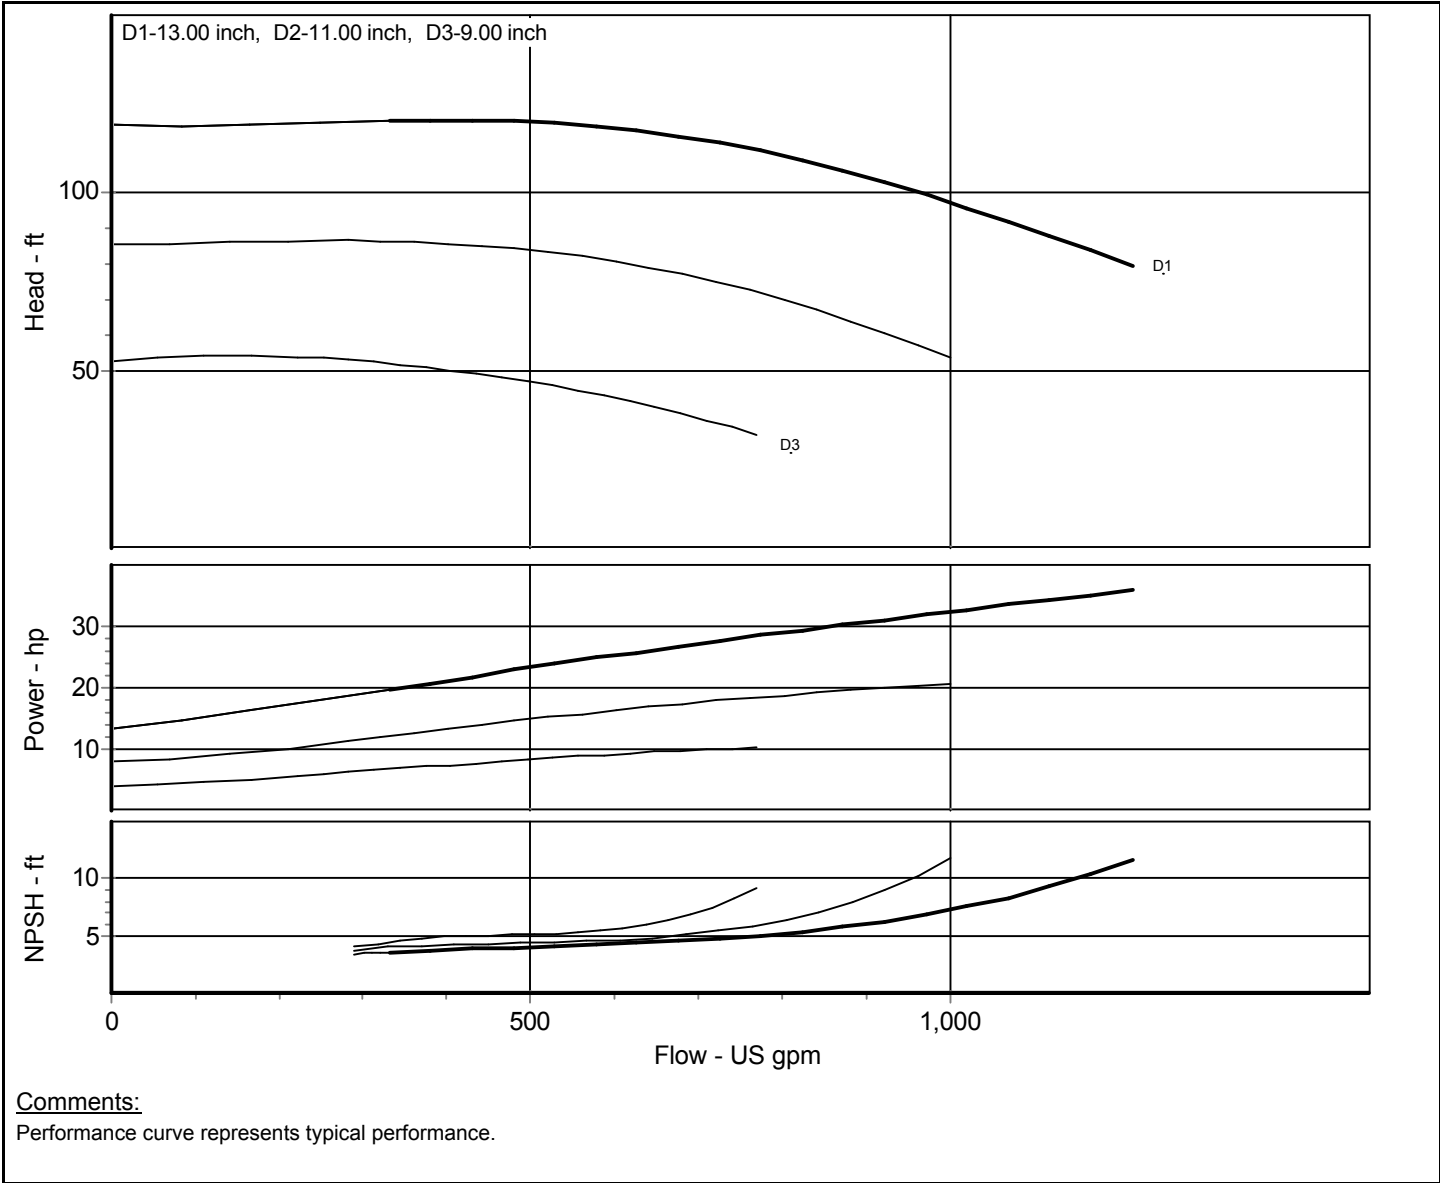

Comments:
Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 4x6-13 LTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz041	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	35.9 hp
Item : 1		Closed Valve Pressure	119.455 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

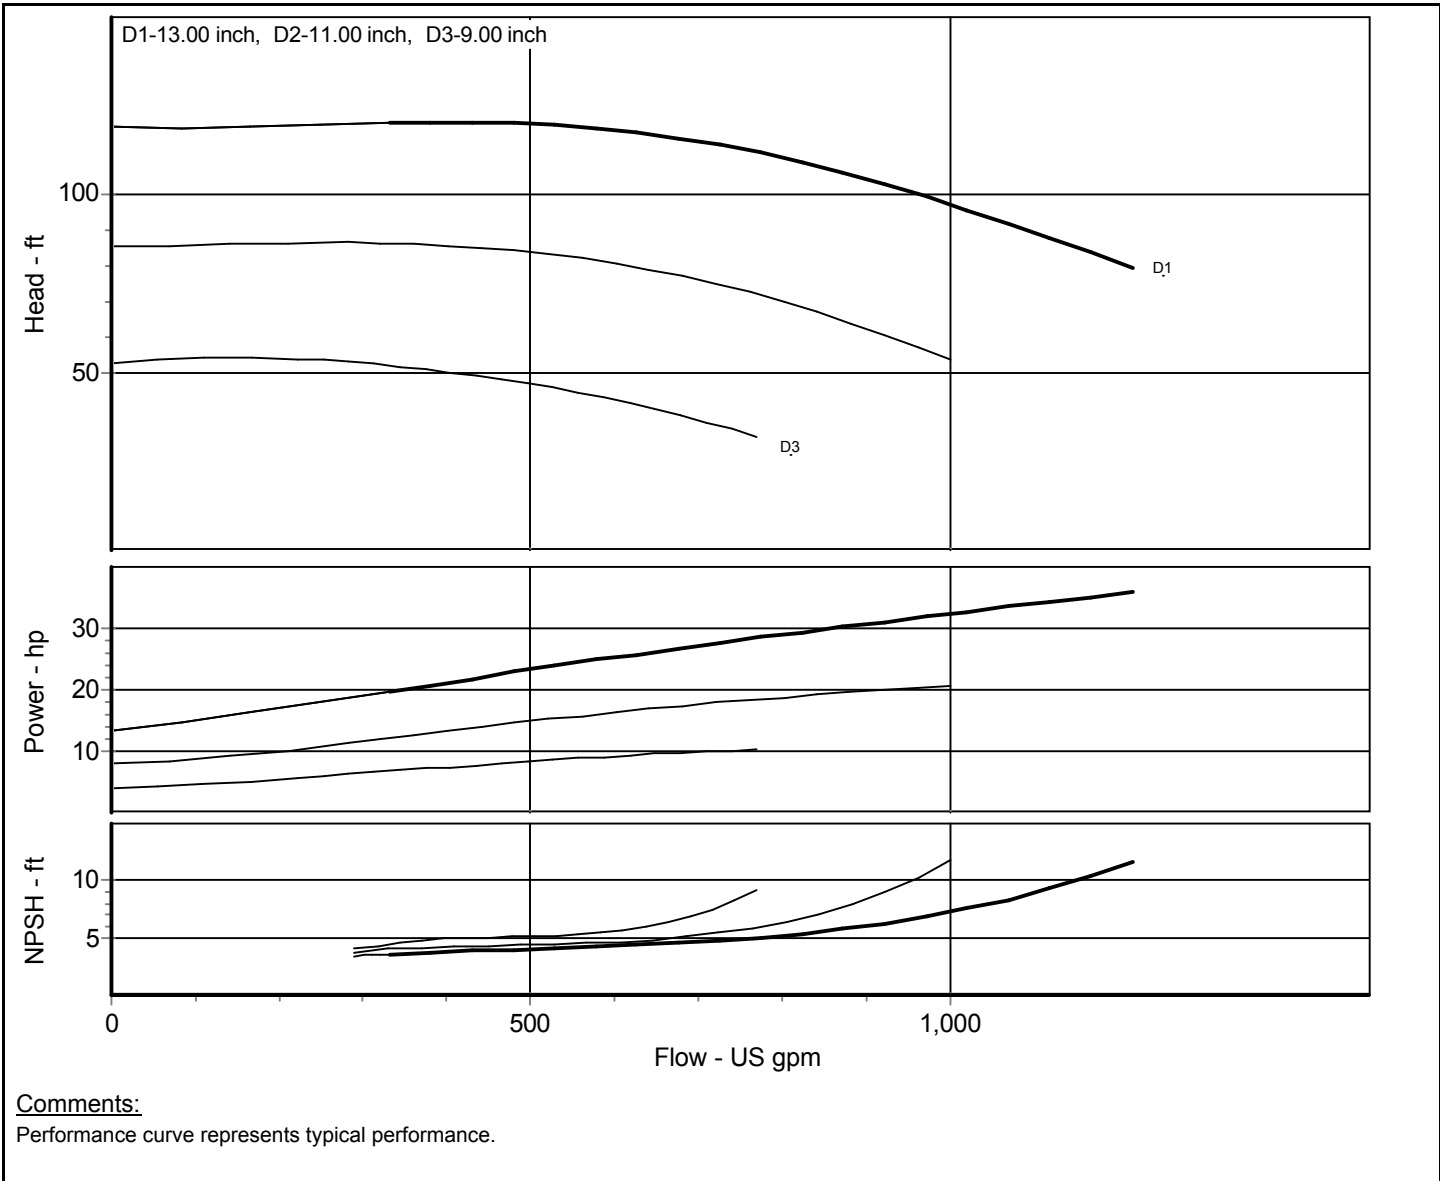



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 6x8-13 XLTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **1450 RPM, 50 Hz Electric**
 Impeller Dia.: **13/10 inch**

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68 °F**
 Viscosity: **1.009 cP**
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft

Curve No.: **8196-50hz043**

Fluid: **Water**


Peak Power: **57.63 hp**
 Closed Valve Pressure **134.56 ft**

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

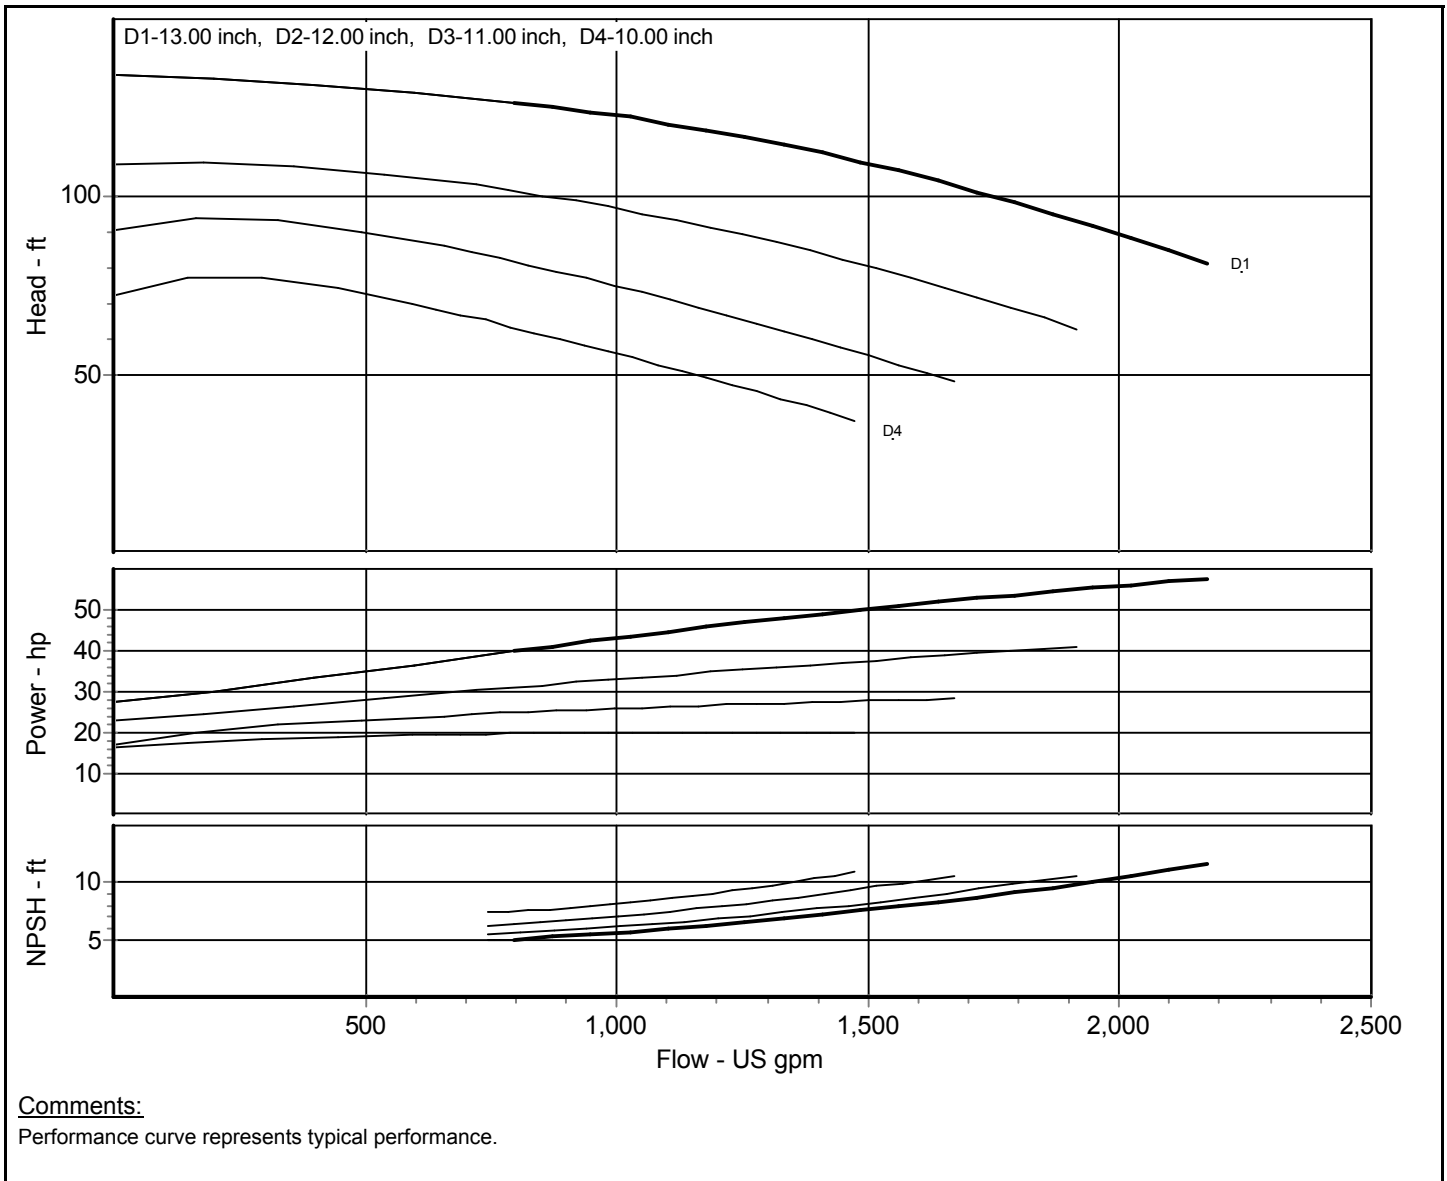




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 8x10-13 XLTP 8196** Nom. Speed: **1450** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/10.5** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **80.57** hp
 Fluid: **Water** Closed Valve Pressure **124.948** ft
 Curve No.: **8196-50hz045**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

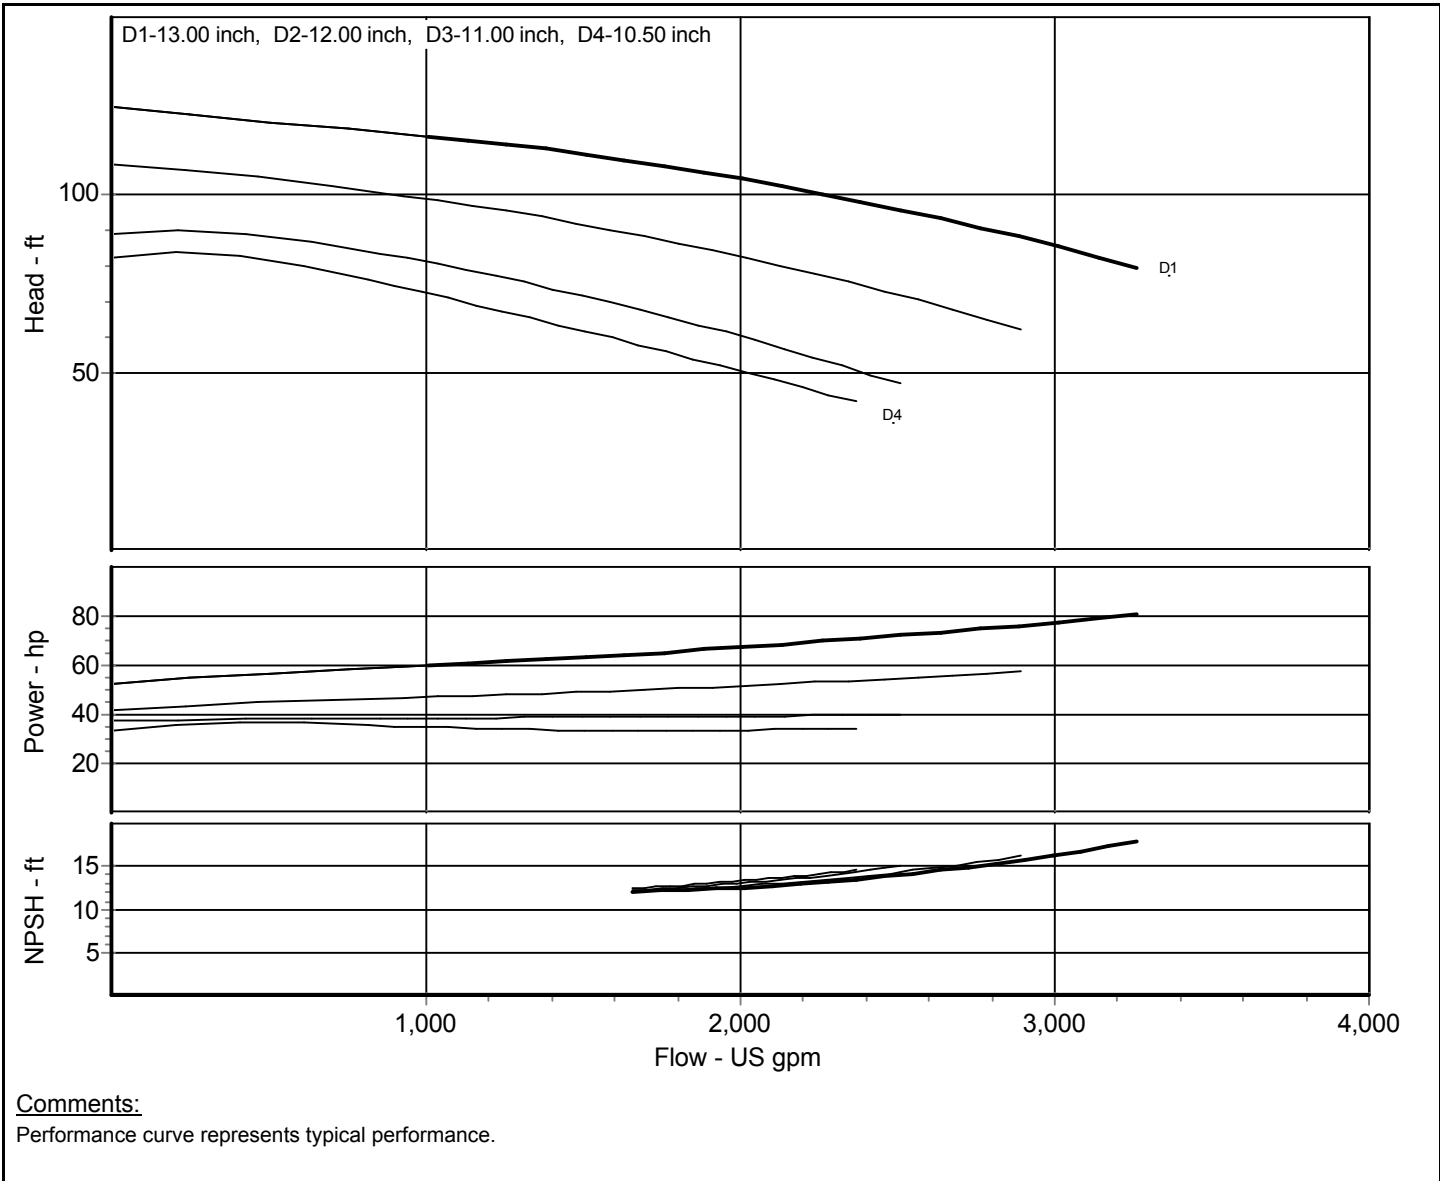

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 8x10-15 XLTP 8196	Nom. Speed: 1450 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 15/12.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz049A	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 162.36 hp	
Item : 1		Closed Valve Pressure 141.939 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

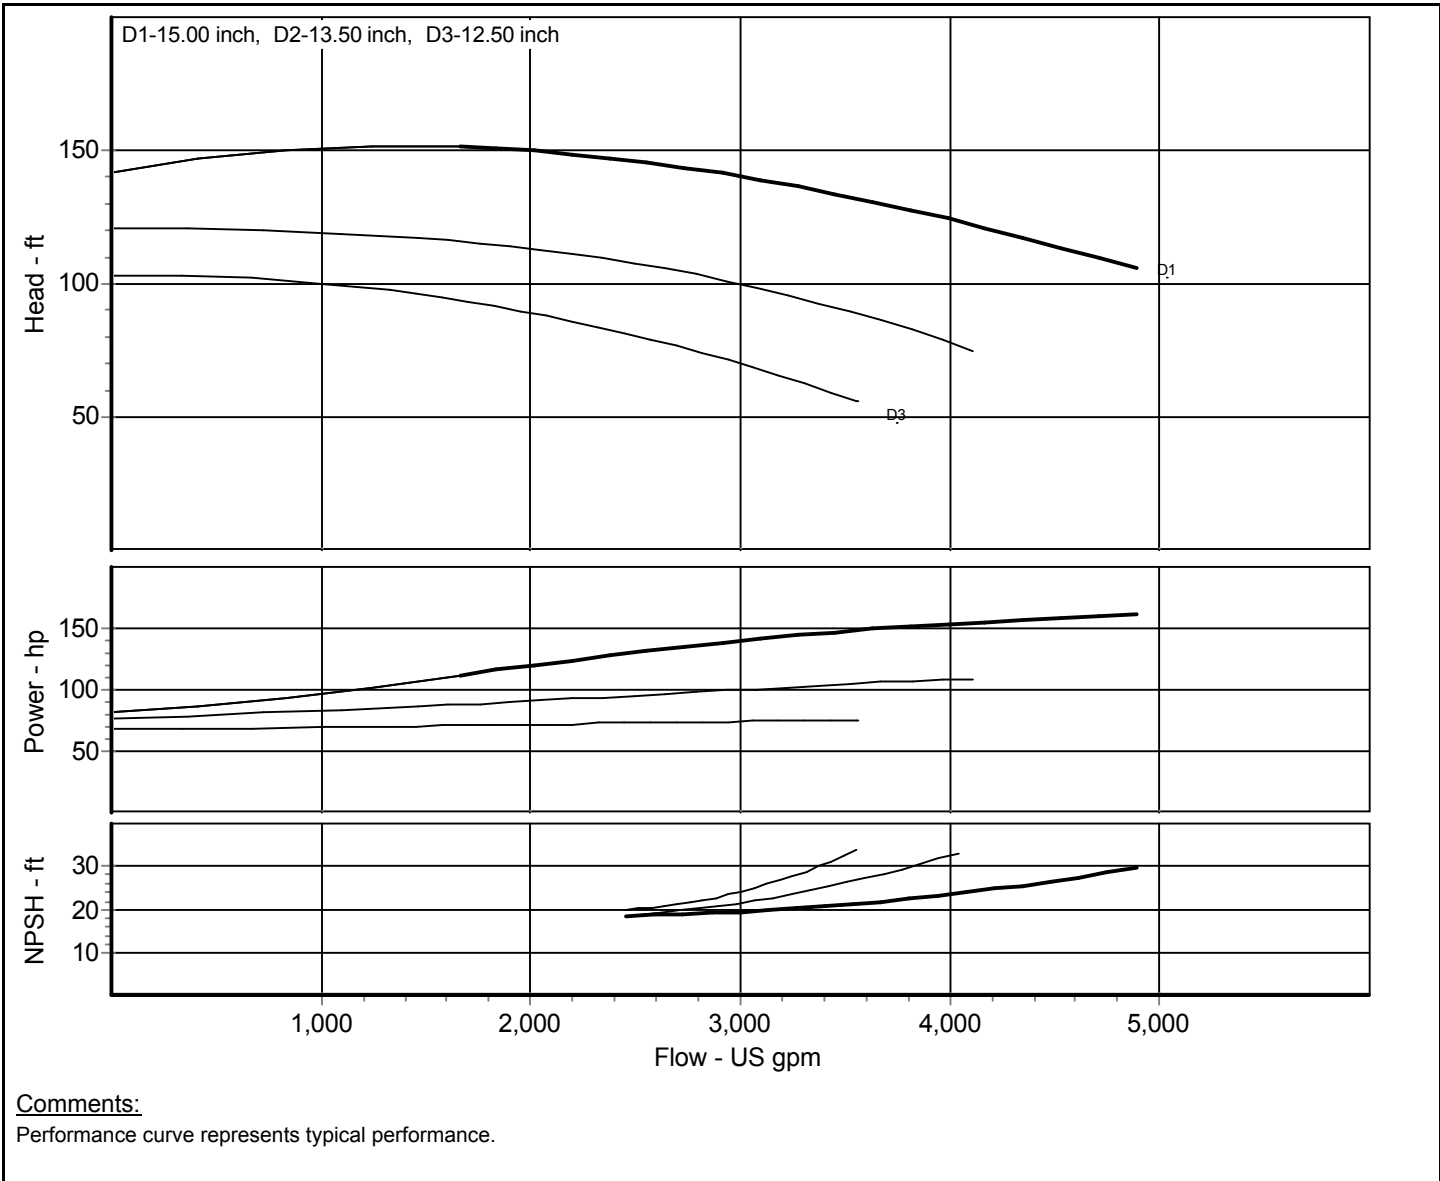




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :		Contact :	
Quote No. :	Page No. :	Phone :	Fax :
		Date :	

Pump Model: Peerless - 1.5x3-13 MTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz031	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	2.4 hp
Item : 1		Closed Valve Pressure	47.529 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

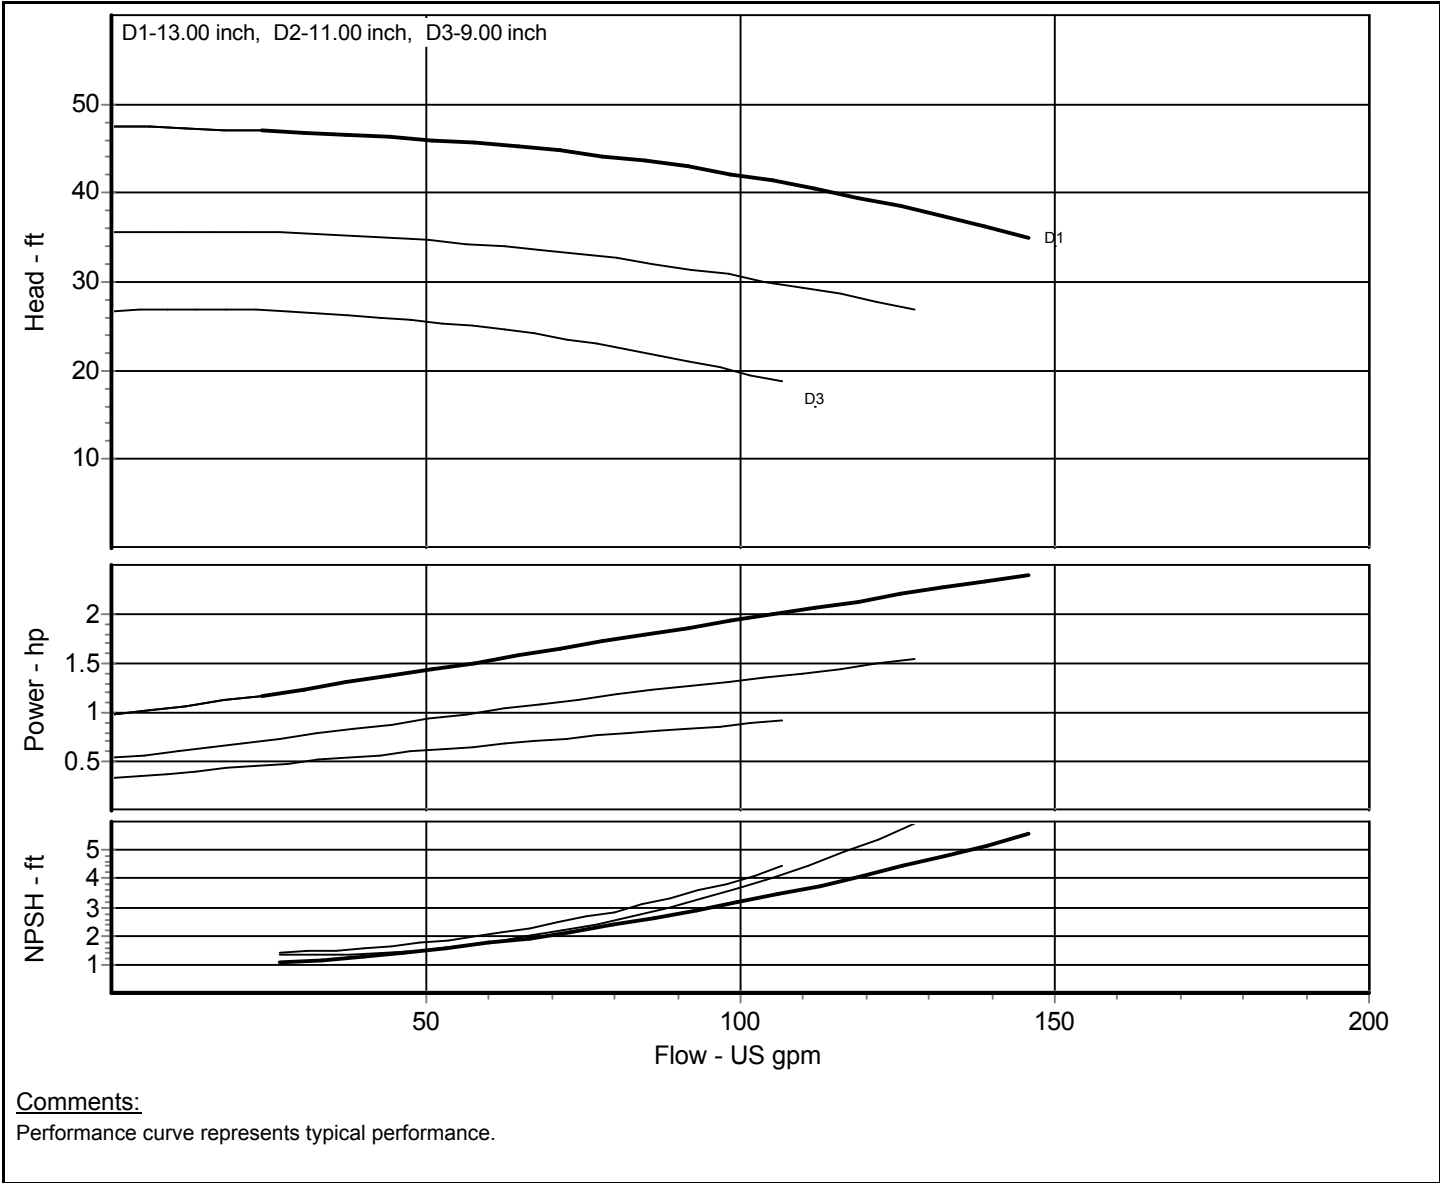




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 1.5x3-13 LTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz031	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	2.4 hp
Item : 1		Closed Valve Pressure	47.529 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

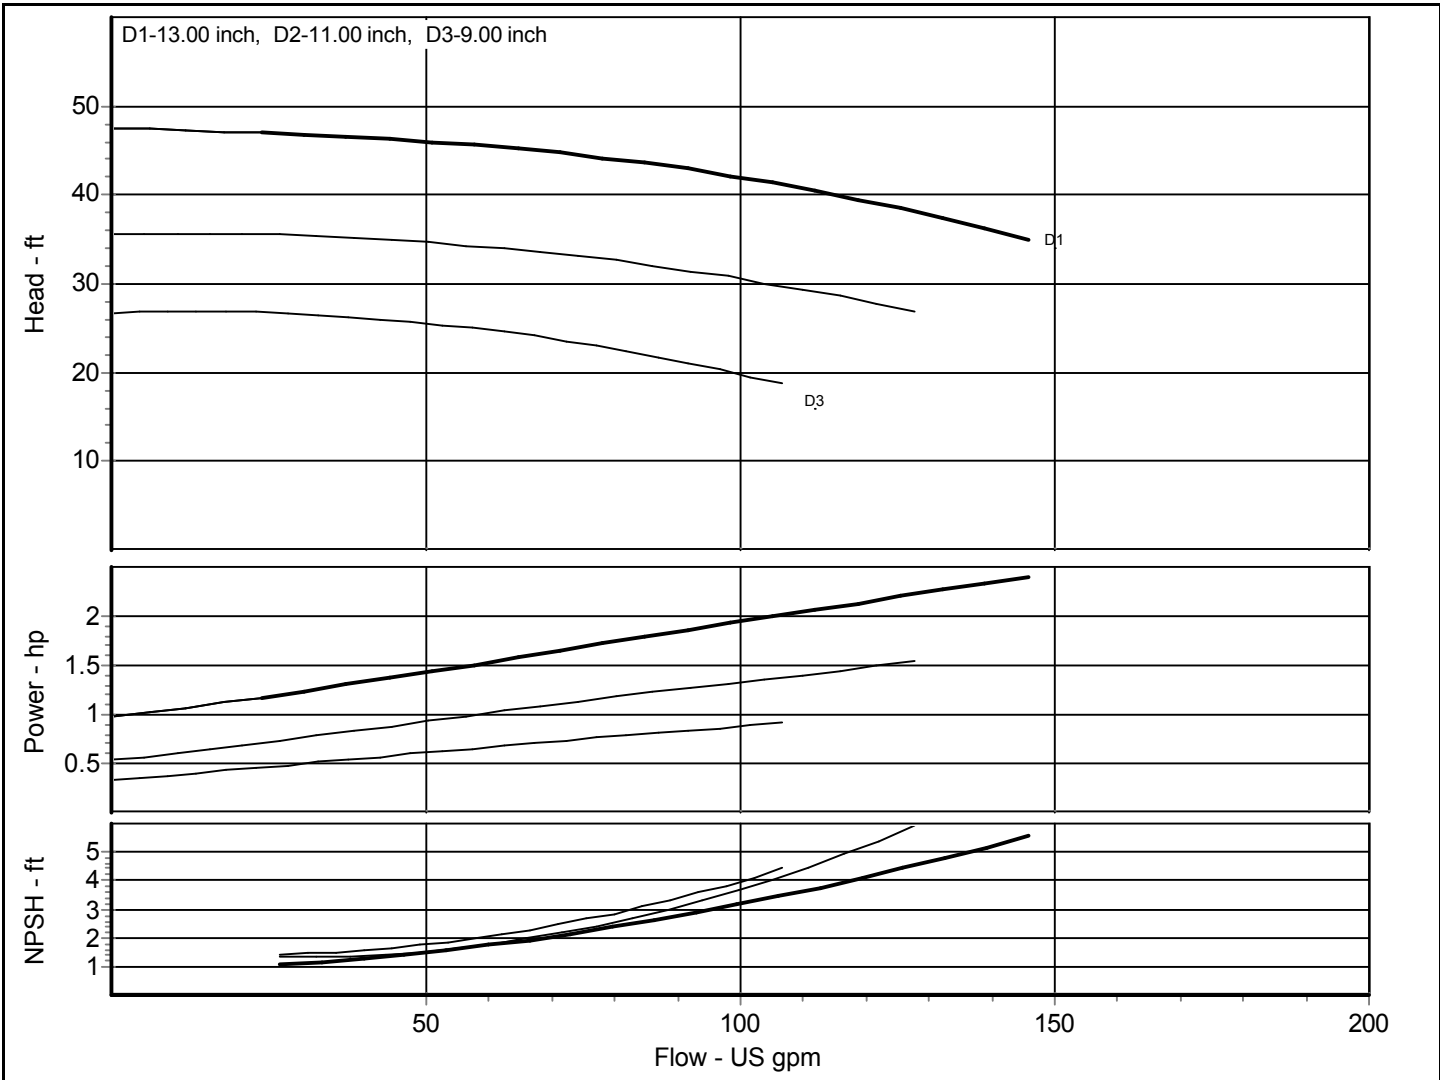

Comments:
 Performance curve represents typical performance.



Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Customer :


Project :
Quote No. :

Page No. :

Contact :
Phone :
Date :

Fax :

Pump Model:	Peerless - 1.5x3-13 MTP 8196	Nom. Speed:	960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type:	8196 - ANSI Standard End Suction	Impeller Dia.:	13/9 inch	Duty Head :	ft
		Temperature:	68 °F	Efficiency :	%
		Viscosity:	1.009 cP	Power Required :	hp
Curve No.:	8196-50hz031	Sp. Gravity:	1.000	NPSH Required :	ft
Impeller No.		Fluid:	Water	Peak Power:	2.4 hp
Item :	1			Closed Valve Pressure	47.529 ft
Your Ref.:		Tolerance :	Hyd Inst-Peerless Std		

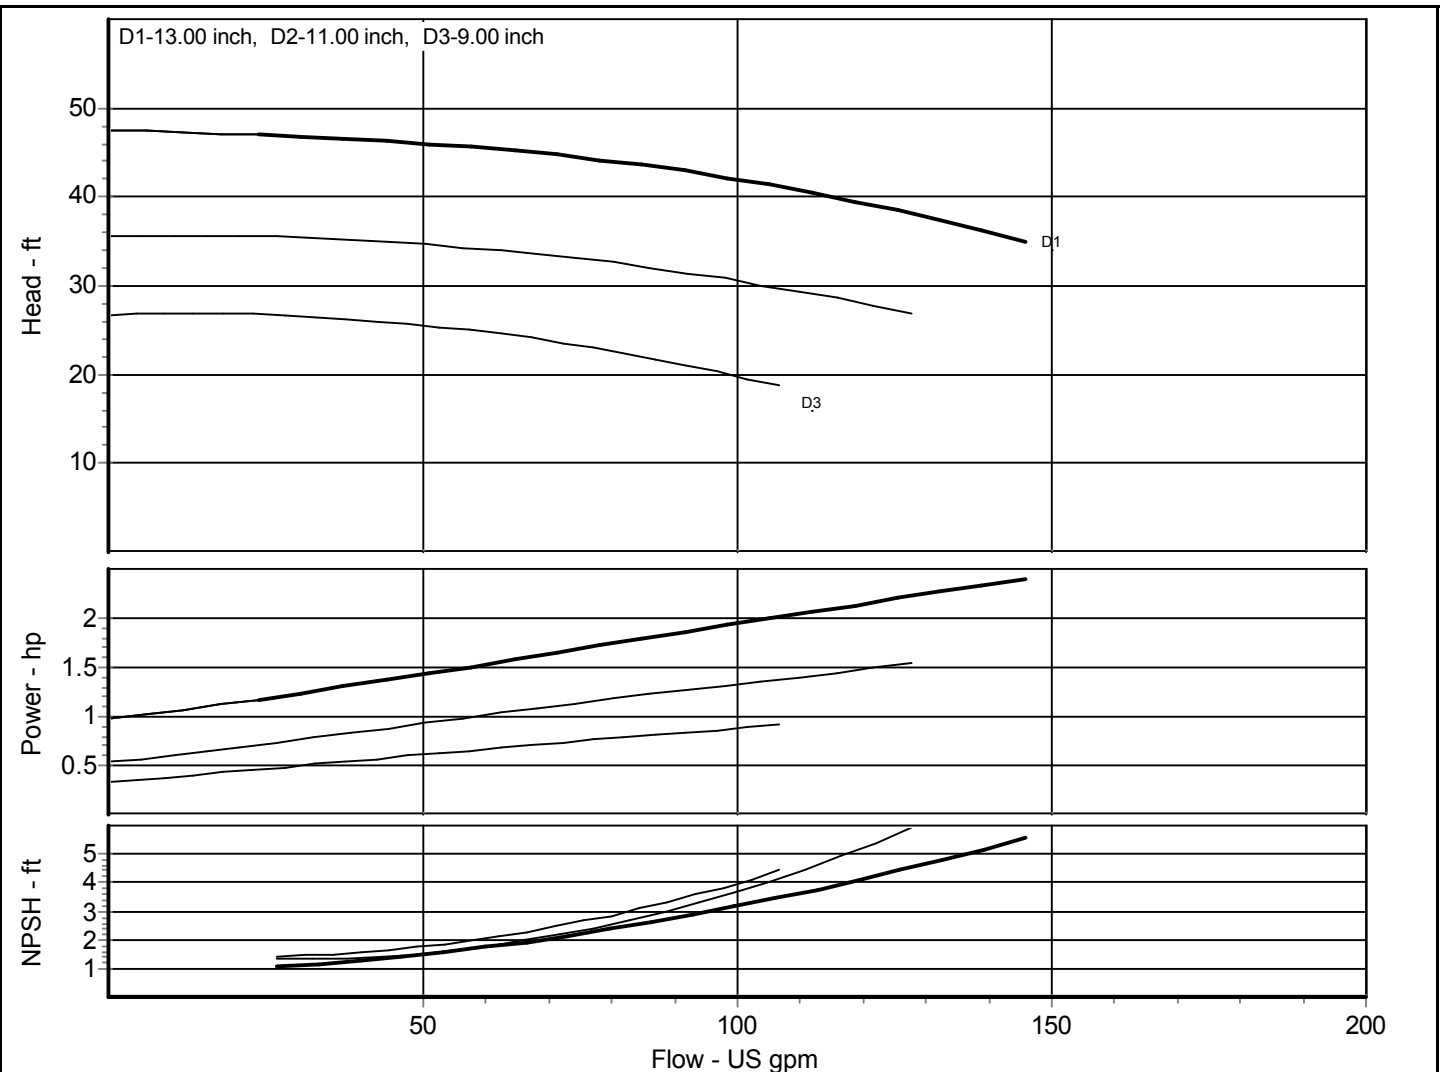

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 1.5x3-13 LTP 8196** Nom. Speed: **960** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Curve No.: **8196-50hz031** Sp. Gravity: **1.000** Peak Power: **2.4** hp
 Impeller No. Fluid: **Water** Closed Valve Pressure **47.529** ft
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

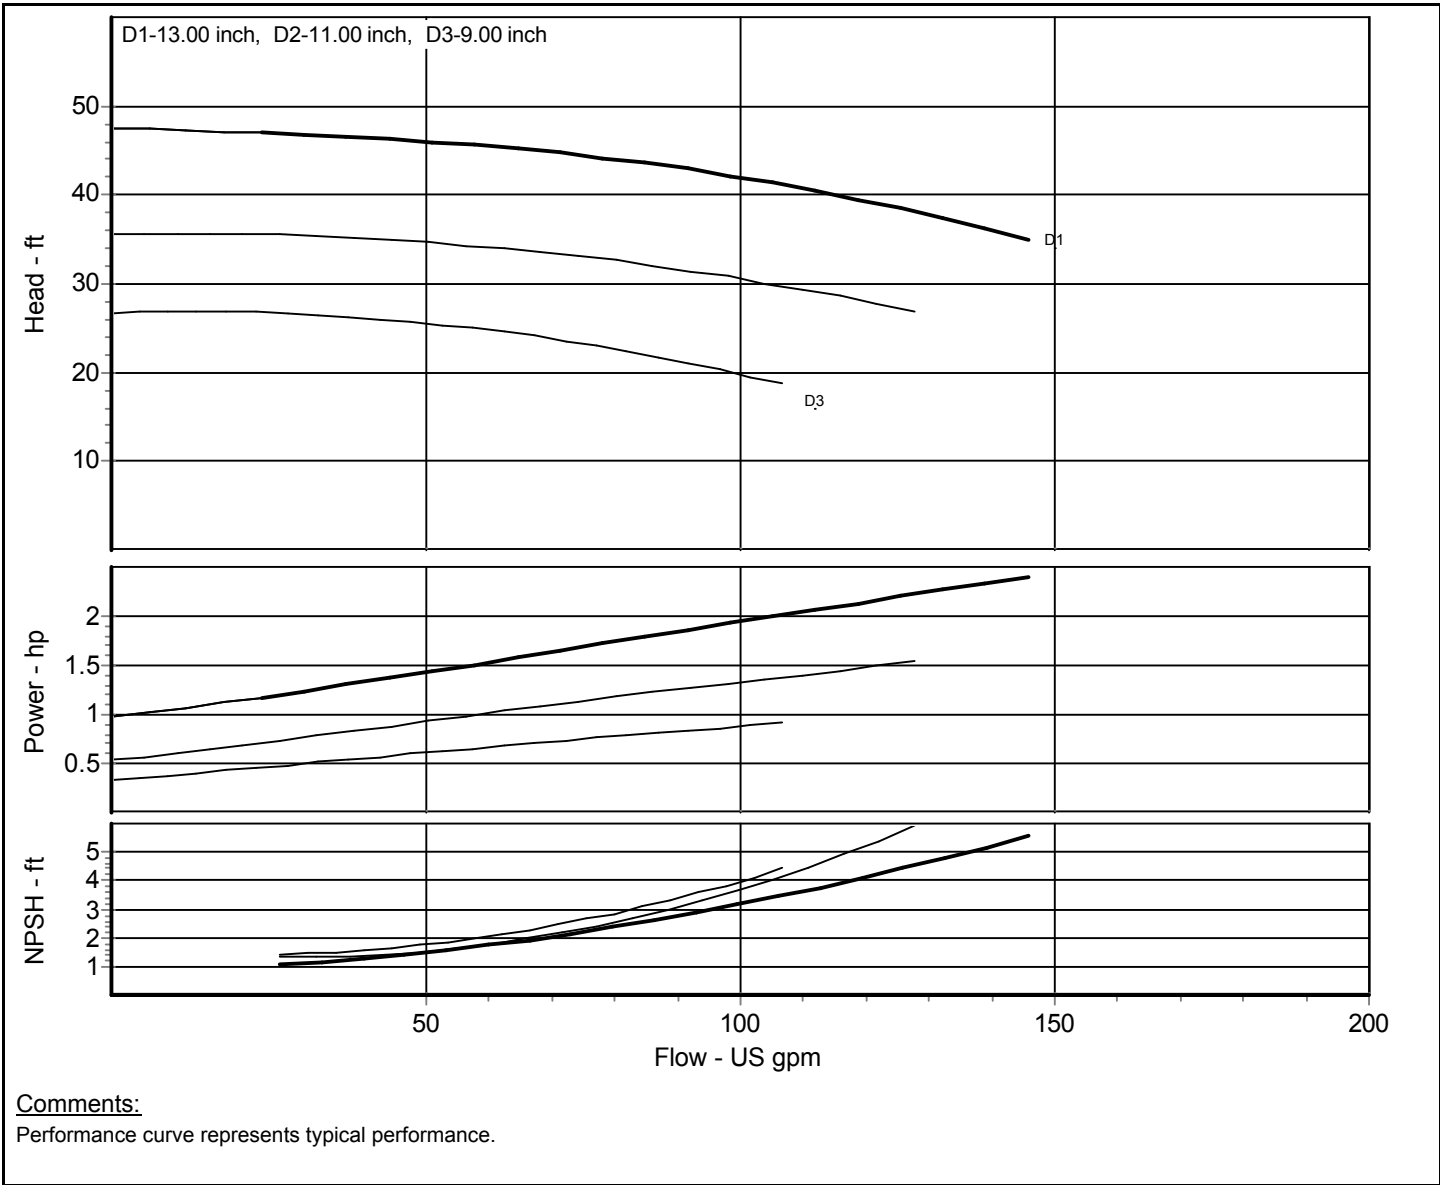




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :	Contact :		
Quote No. :	Page No. :	Phone :	Fax :
		Date :	

Pump Model: Peerless - 2x3-13 MTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz034	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	3.62 hp
Item : 1		Closed Valve Pressure	54.207 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

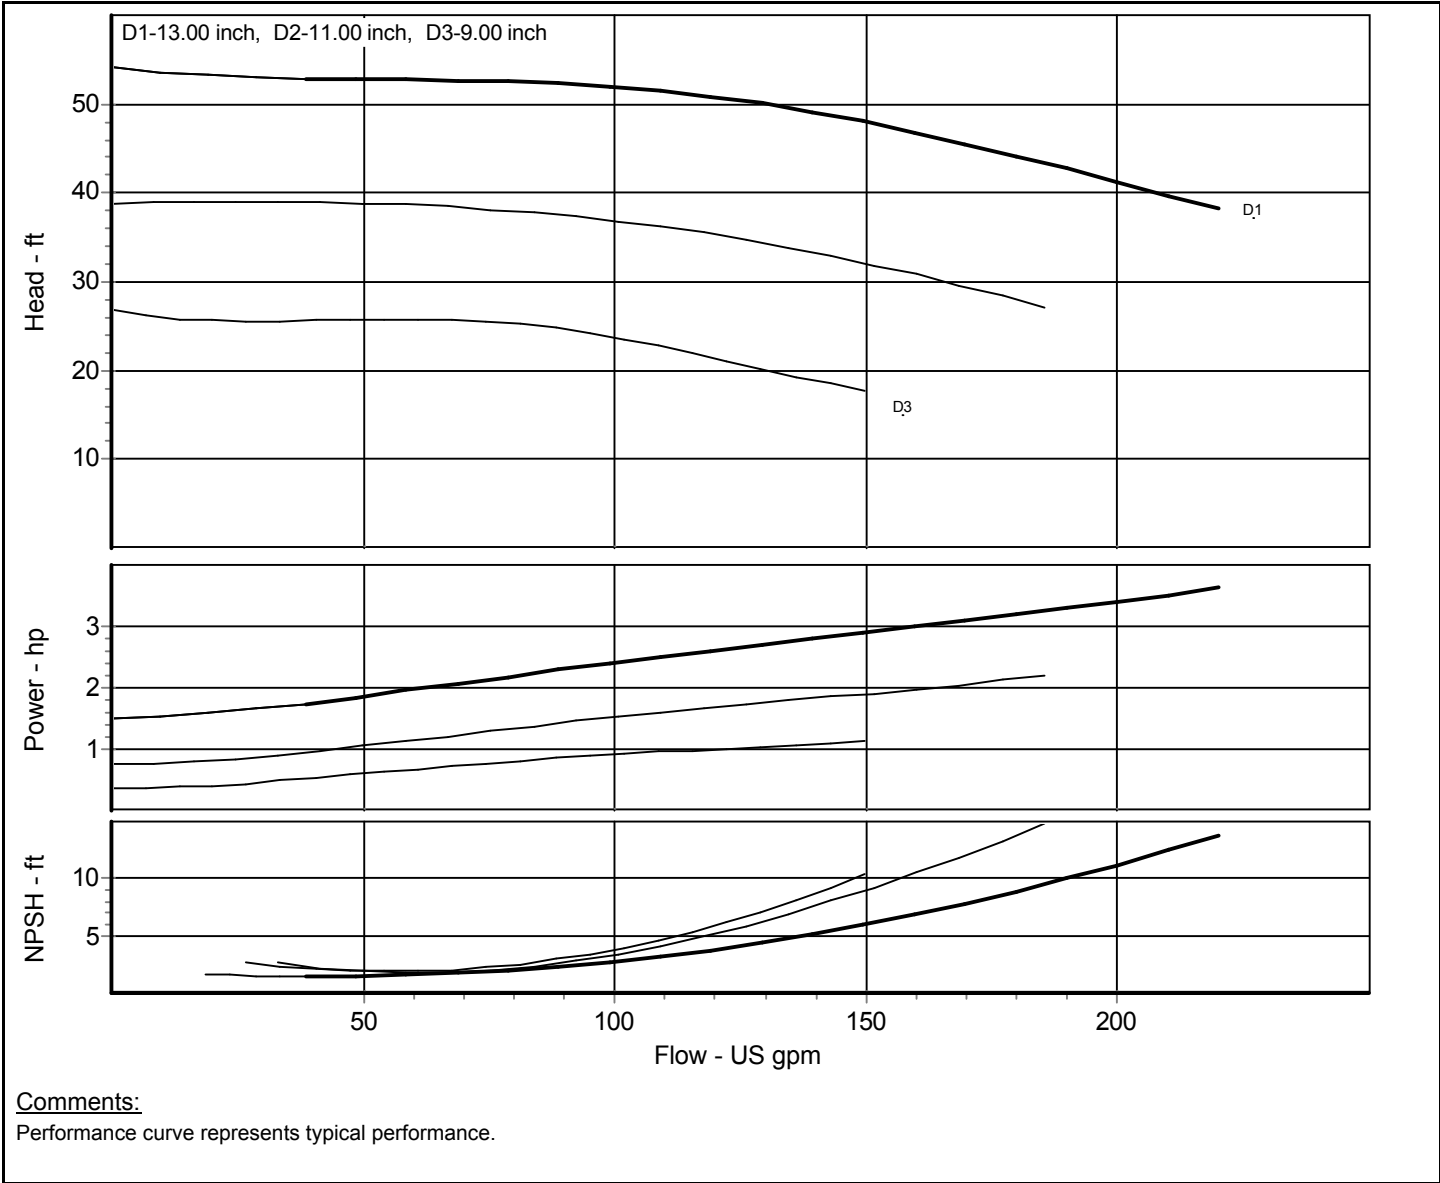

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : _____ **Contact :** _____
Quote No. : _____ **Page No. :** _____ **Phone :** _____ **Fax :** _____
Date : _____

Pump Model: Peerless - 2x3-13 LTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz034	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.:	Fluid: Water	Peak Power:	3.62 hp
Item : 1		Closed Valve Pressure	54.207 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

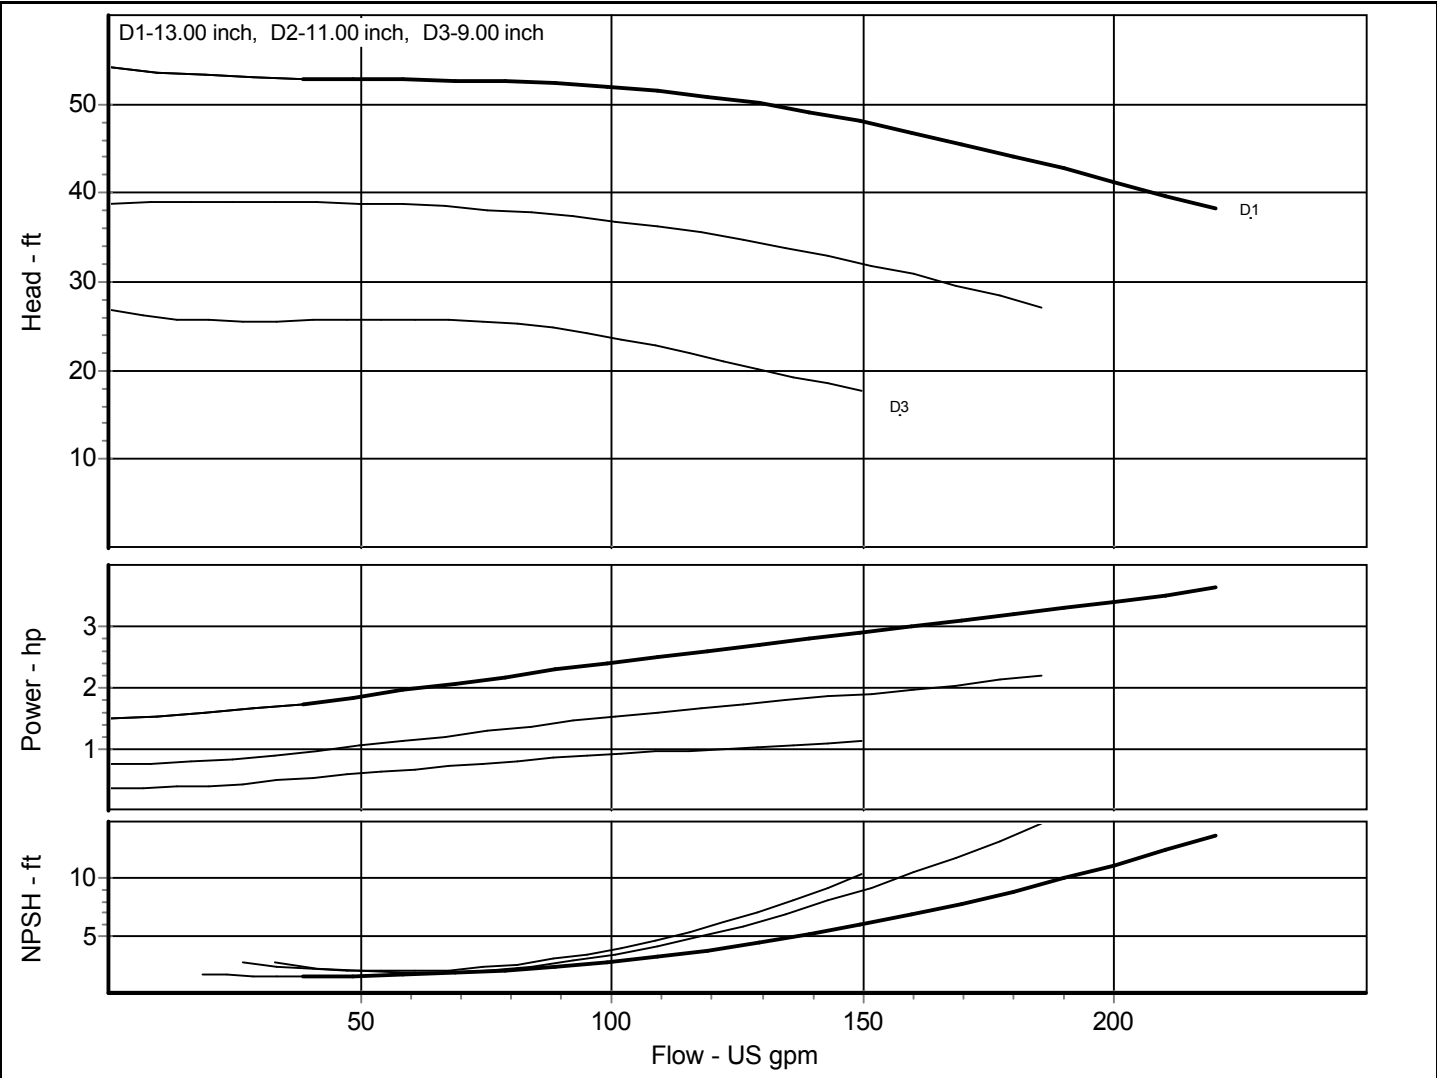

Comments:
 Performance curve represents typical performance.




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 3x4-13 5V MTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz037	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	6.72 hp
Item : 1		Closed Valve Pressure	54.165 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

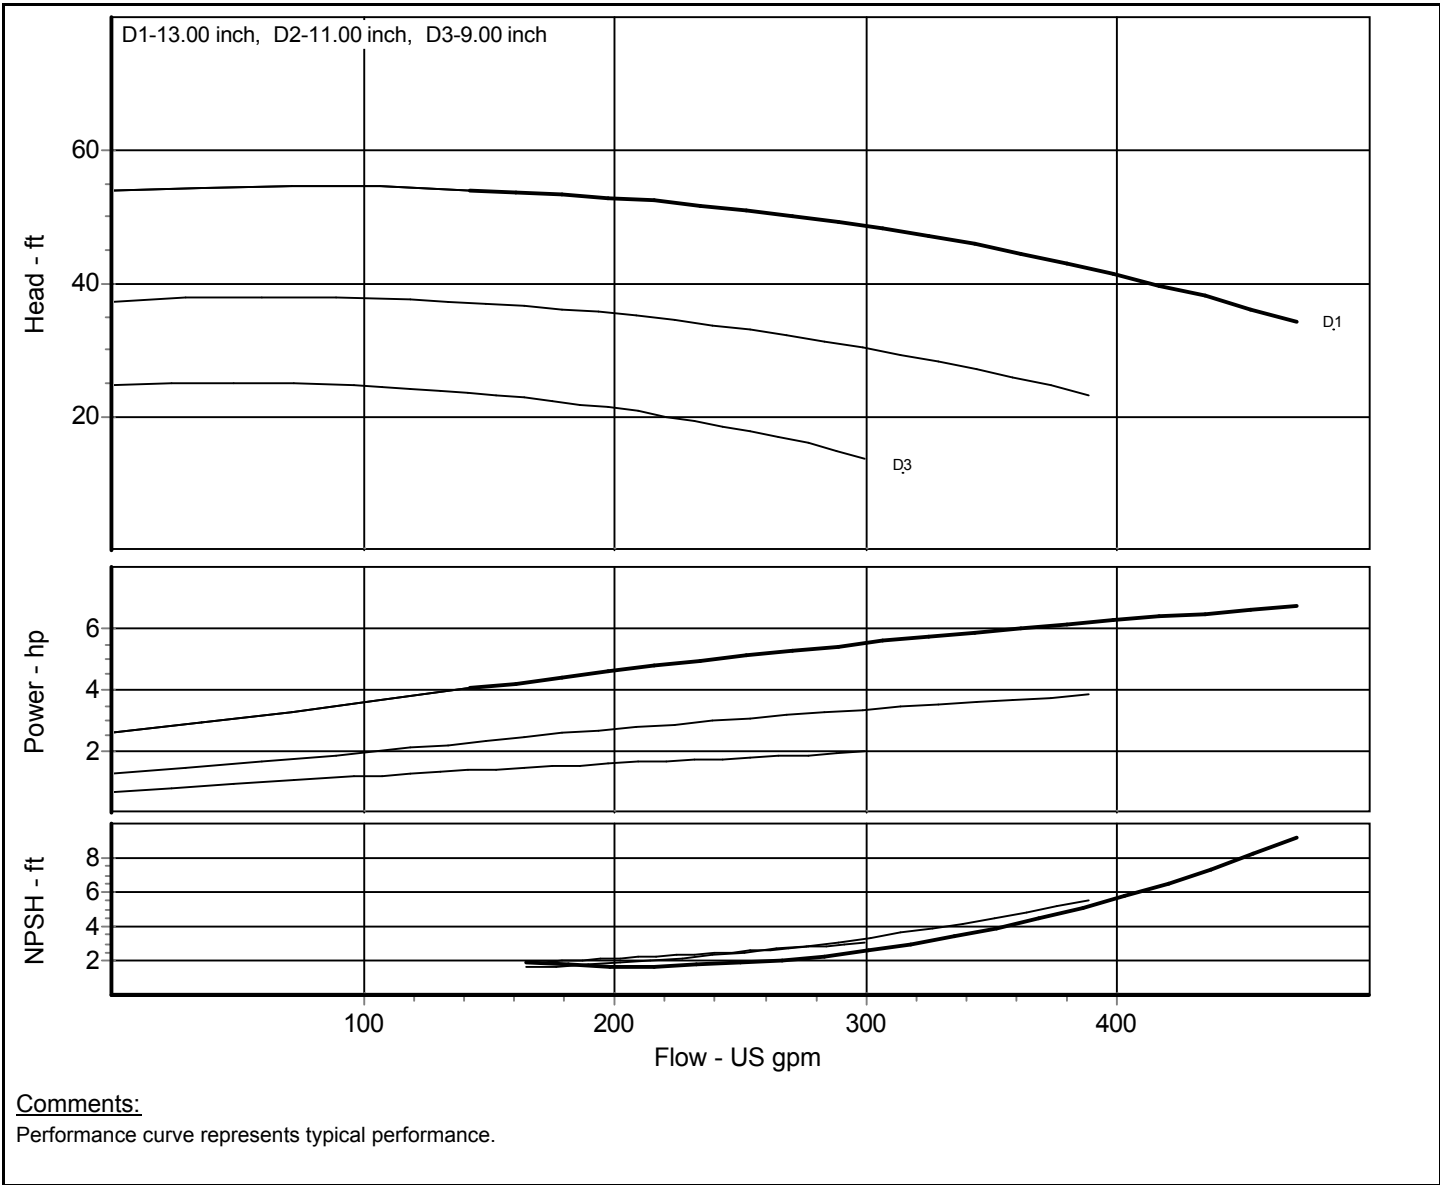




Customer :

Peerless Pump Company, LLC
Indianapolis, Indiana 46207-7026

Project :	Contact :	Phone :	Fax :
Quote No. :	Page No. :	Date :	

Pump Model: Peerless - 3x4-13 5V LTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz037	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	6.72 hp
Item : 1		Closed Valve Pressure	54.165 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

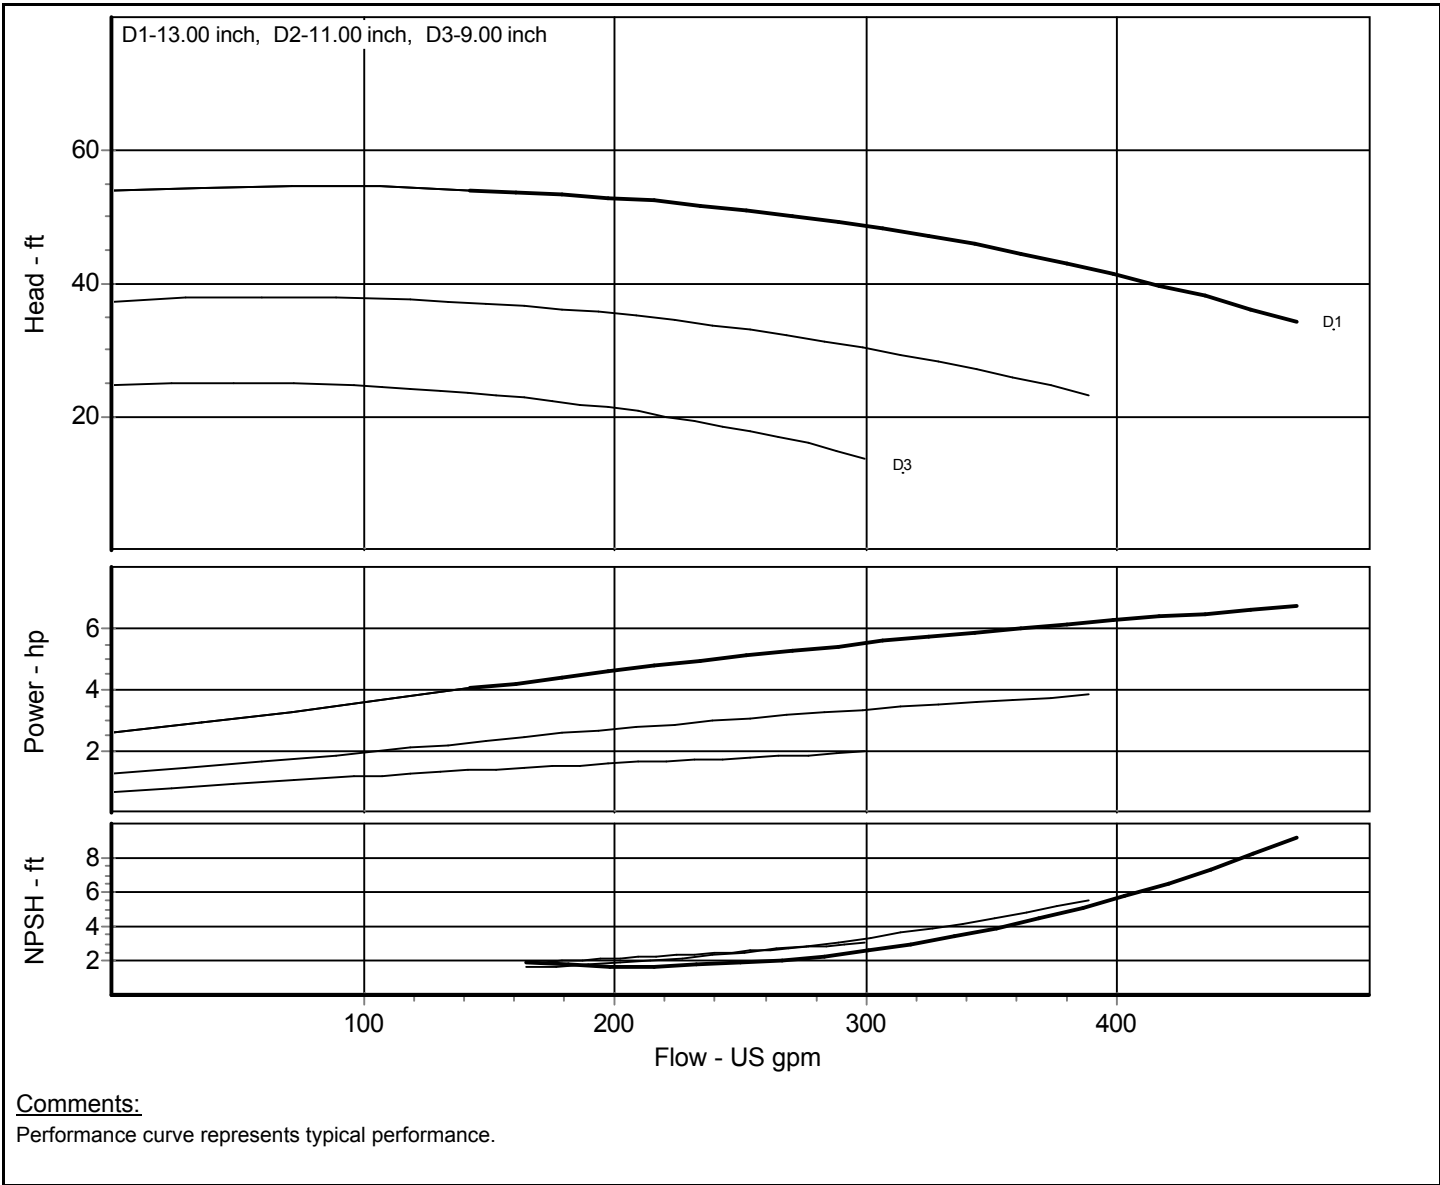




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 3x4-13 6V MTP 8196** Nom. Speed: **960** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **13/9** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **8.31** hp
 Fluid: **Water** Closed Valve Pressure **55.364** ft
 Curve No.: **8196-50hz040**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

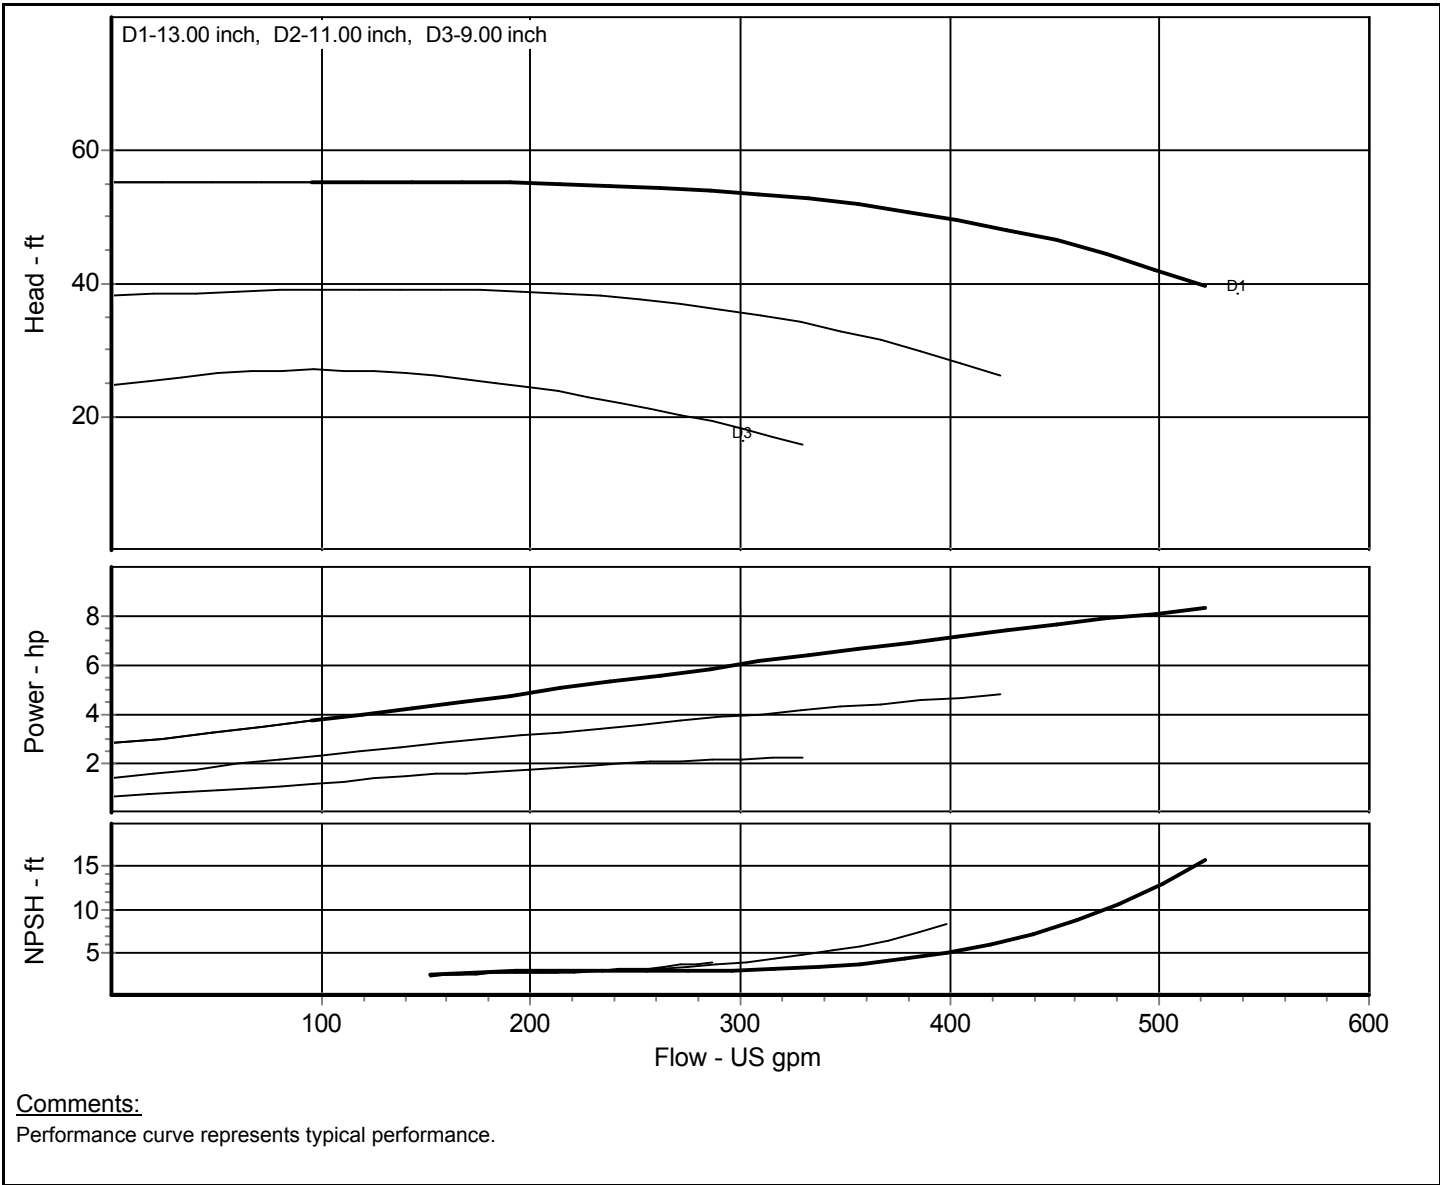




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 3x4-13 6V LTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz040	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	8.31 hp
Item : 1		Closed Valve Pressure	55.364 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

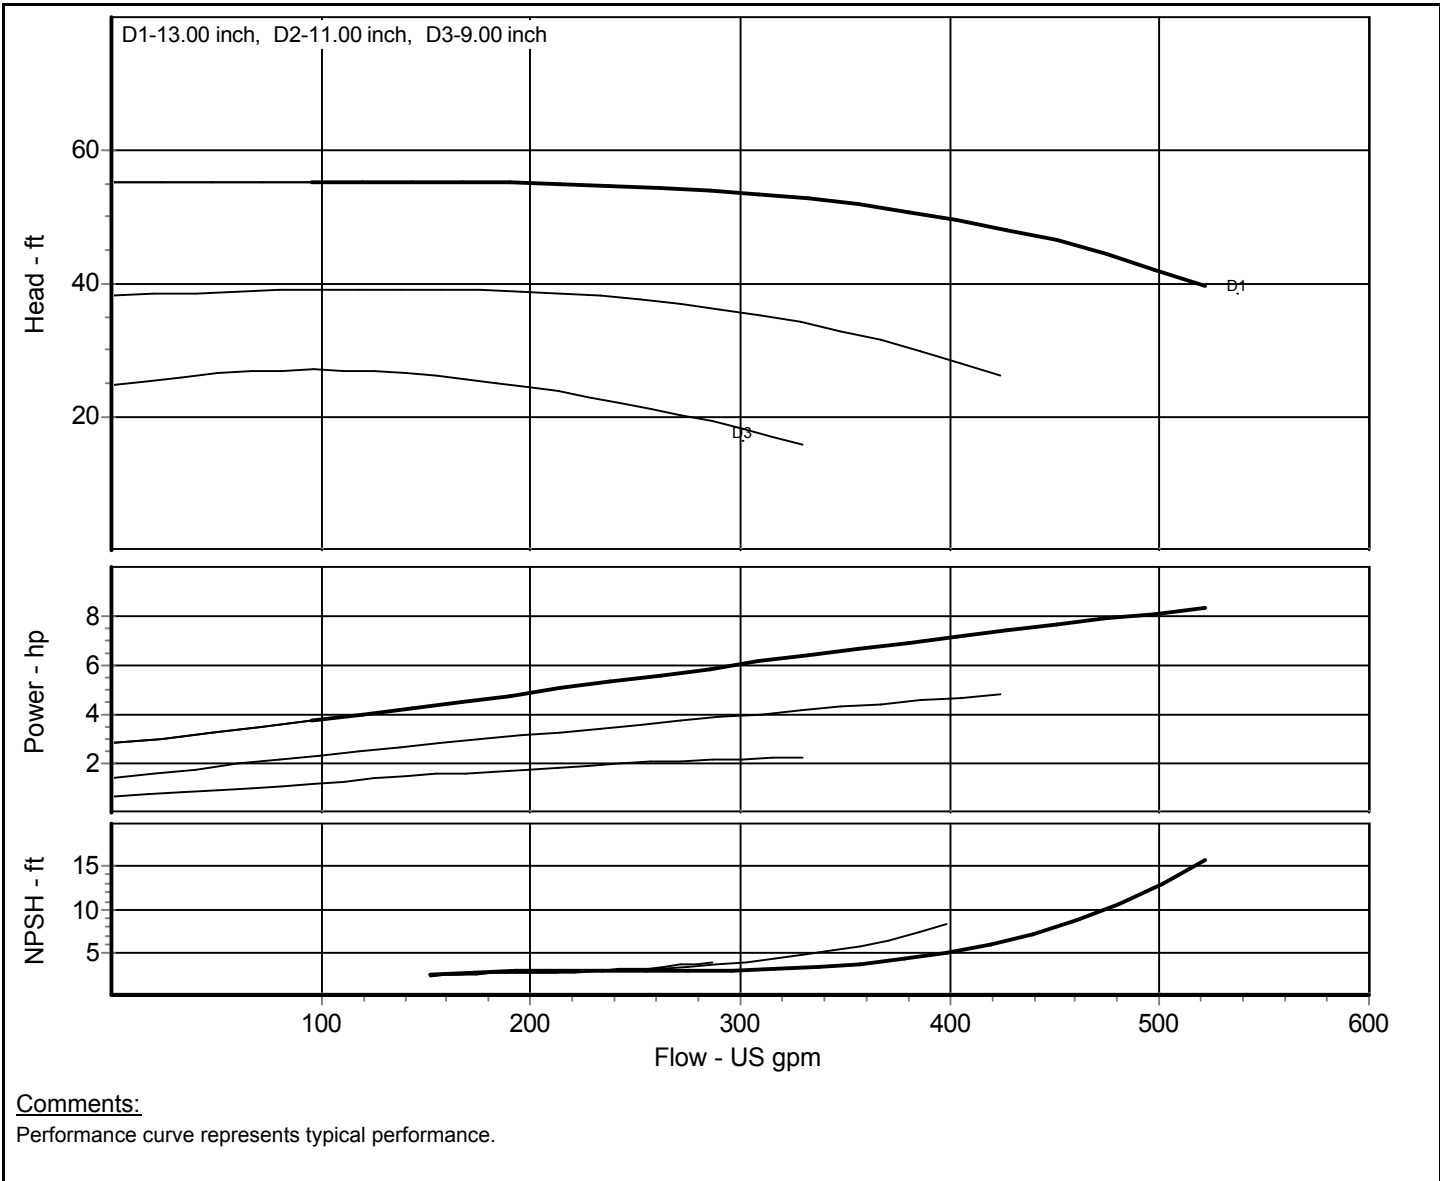




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 4x6-10 MTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz028	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	4.63 hp
Item : 1		Closed Valve Pressure	30.395 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

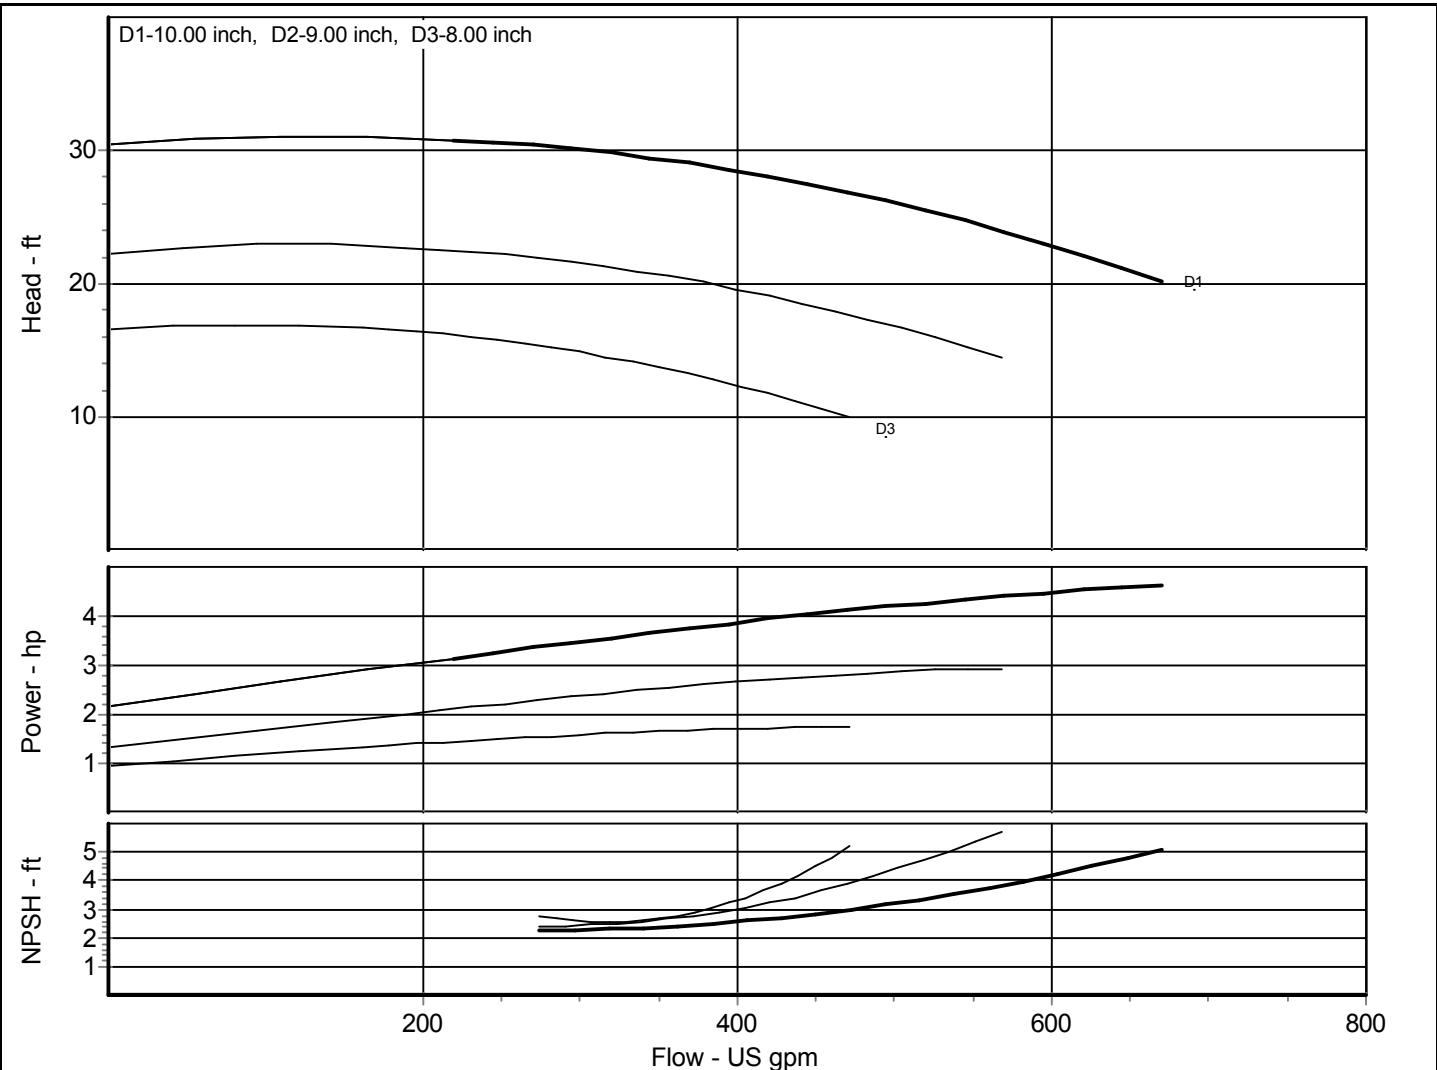

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 4x6-10 LTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 10/8 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz028	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	4.63 hp
Item : 1		Closed Valve Pressure	30.395 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

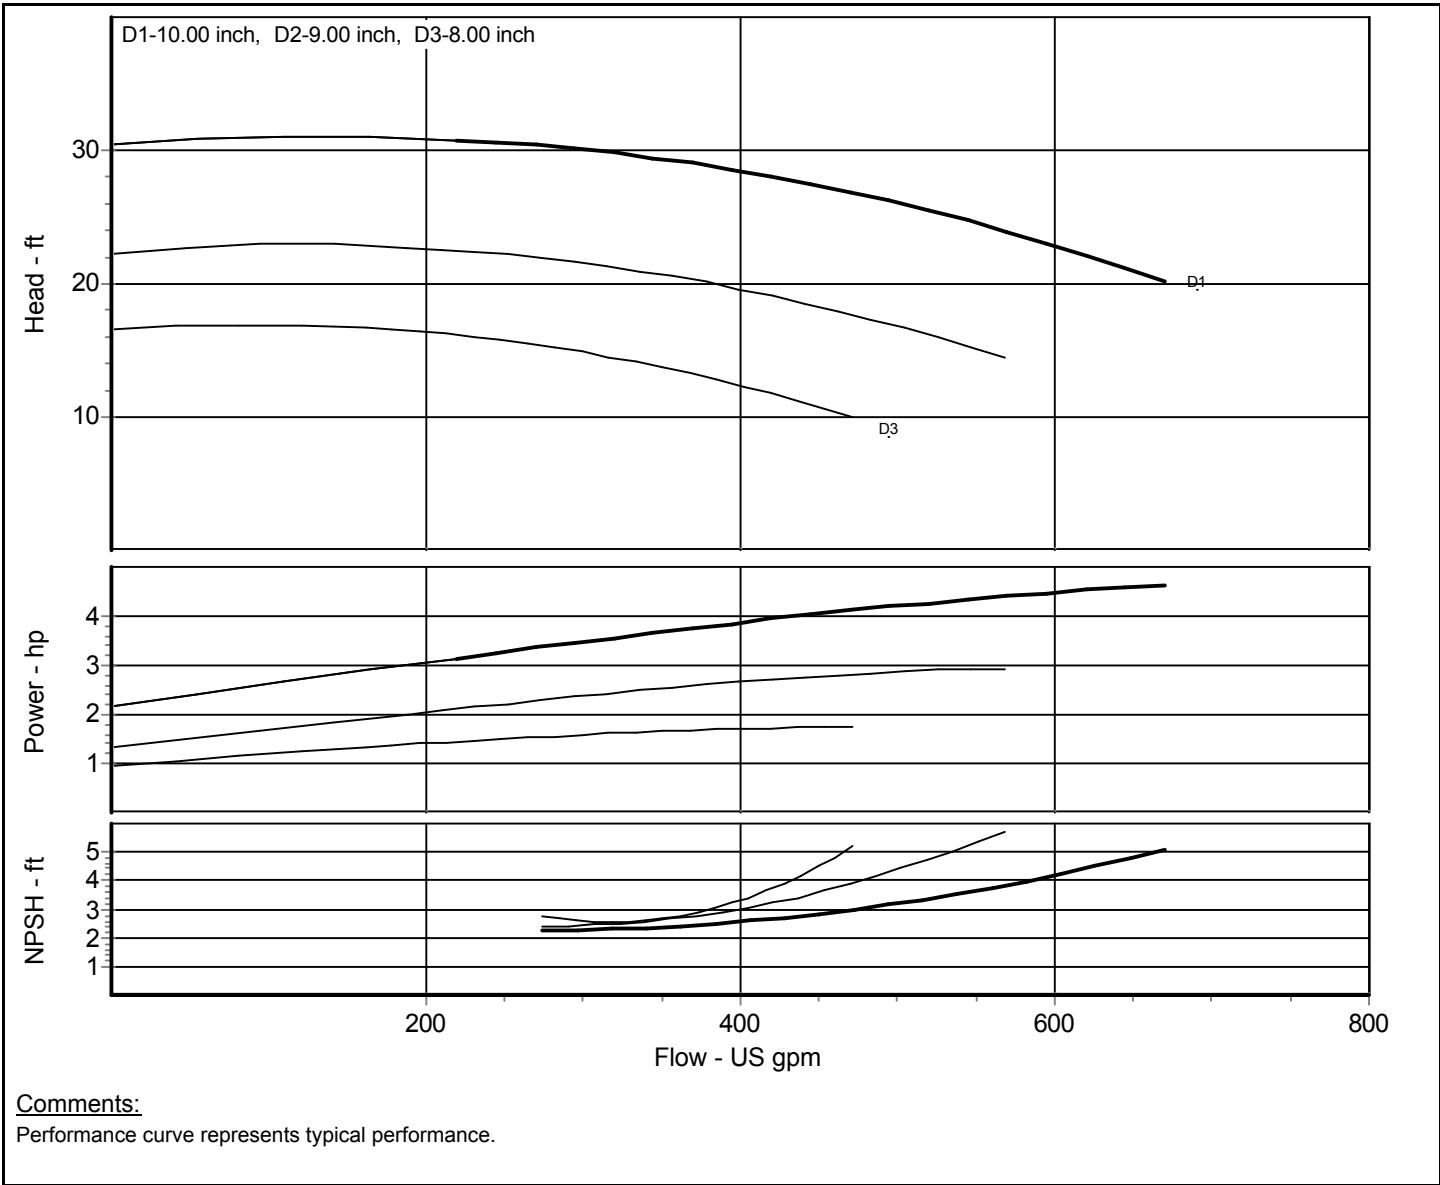



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: **Peerless - 4x6-13 MTP 8196**
 Type: **8196 - ANSI Standard End Suction**

Nom. Speed: **960** RPM, 50 Hz Electric
 Impeller Dia.: **13/9** inch

Duty Flow : US gpm
 Duty Head : ft
 Efficiency : %

Temperature: **68** °F
 Viscosity: **1.009** cP
 Sp. Gravity: **1.000**

Power Required : hp
 NPSH Required : ft
 Peak Power: **10.53** hp
 Closed Valve Pressure **52.361** ft


Curve No.: **8196-50hz042**

Impeller No.

Item : **1**

Your Ref.:

Tolerance : **Hyd Inst-Peerless Std**

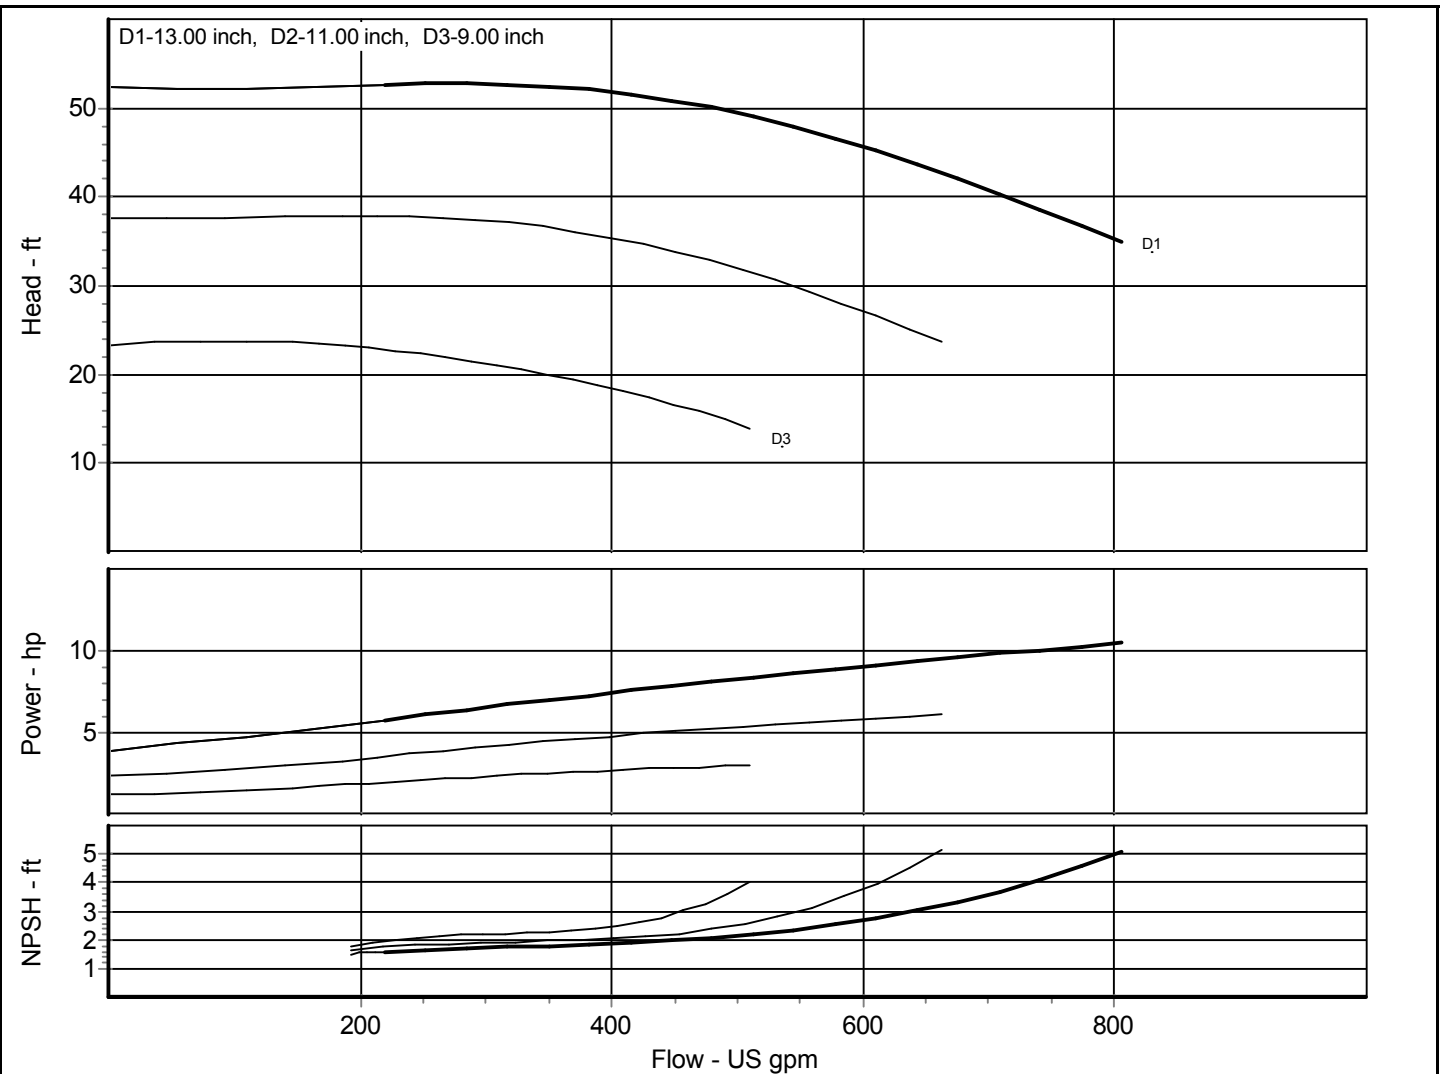

Comments:

Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 4x6-13 LTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/9 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz042	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	10.53 hp
Item : 1		Closed Valve Pressure	52.361 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

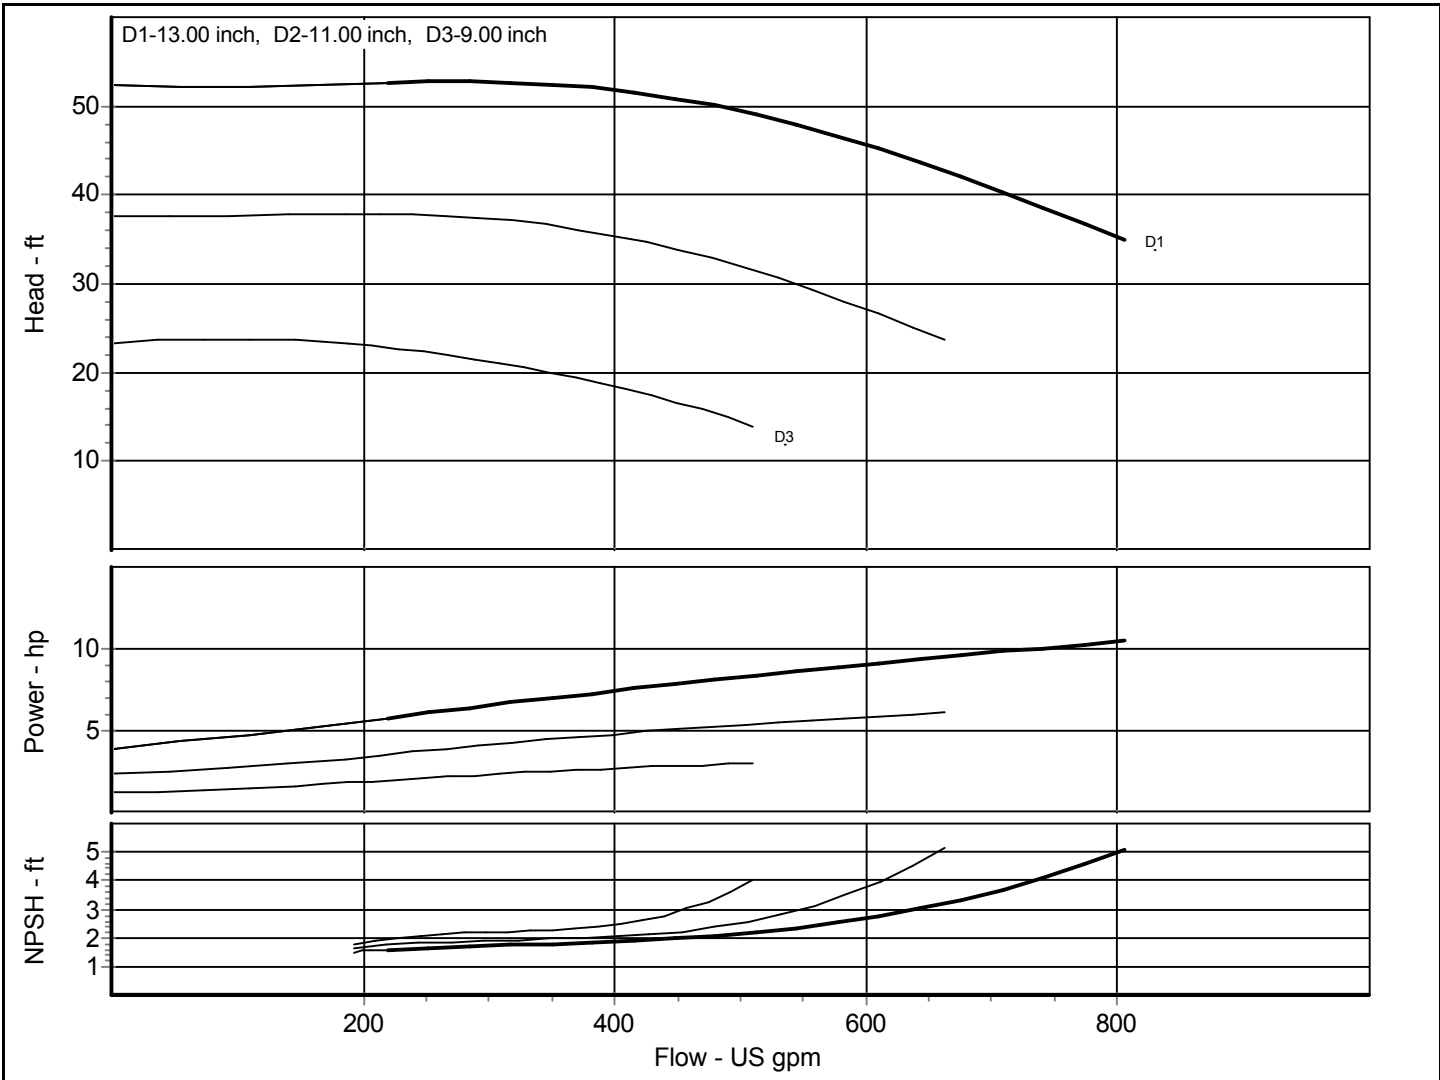

Comments:
 Performance curve represents typical performance.




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 6x8-13 XLTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/10 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz044	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power: 16.84 hp	
Item : 1		Closed Valve Pressure 58.982 ft	
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

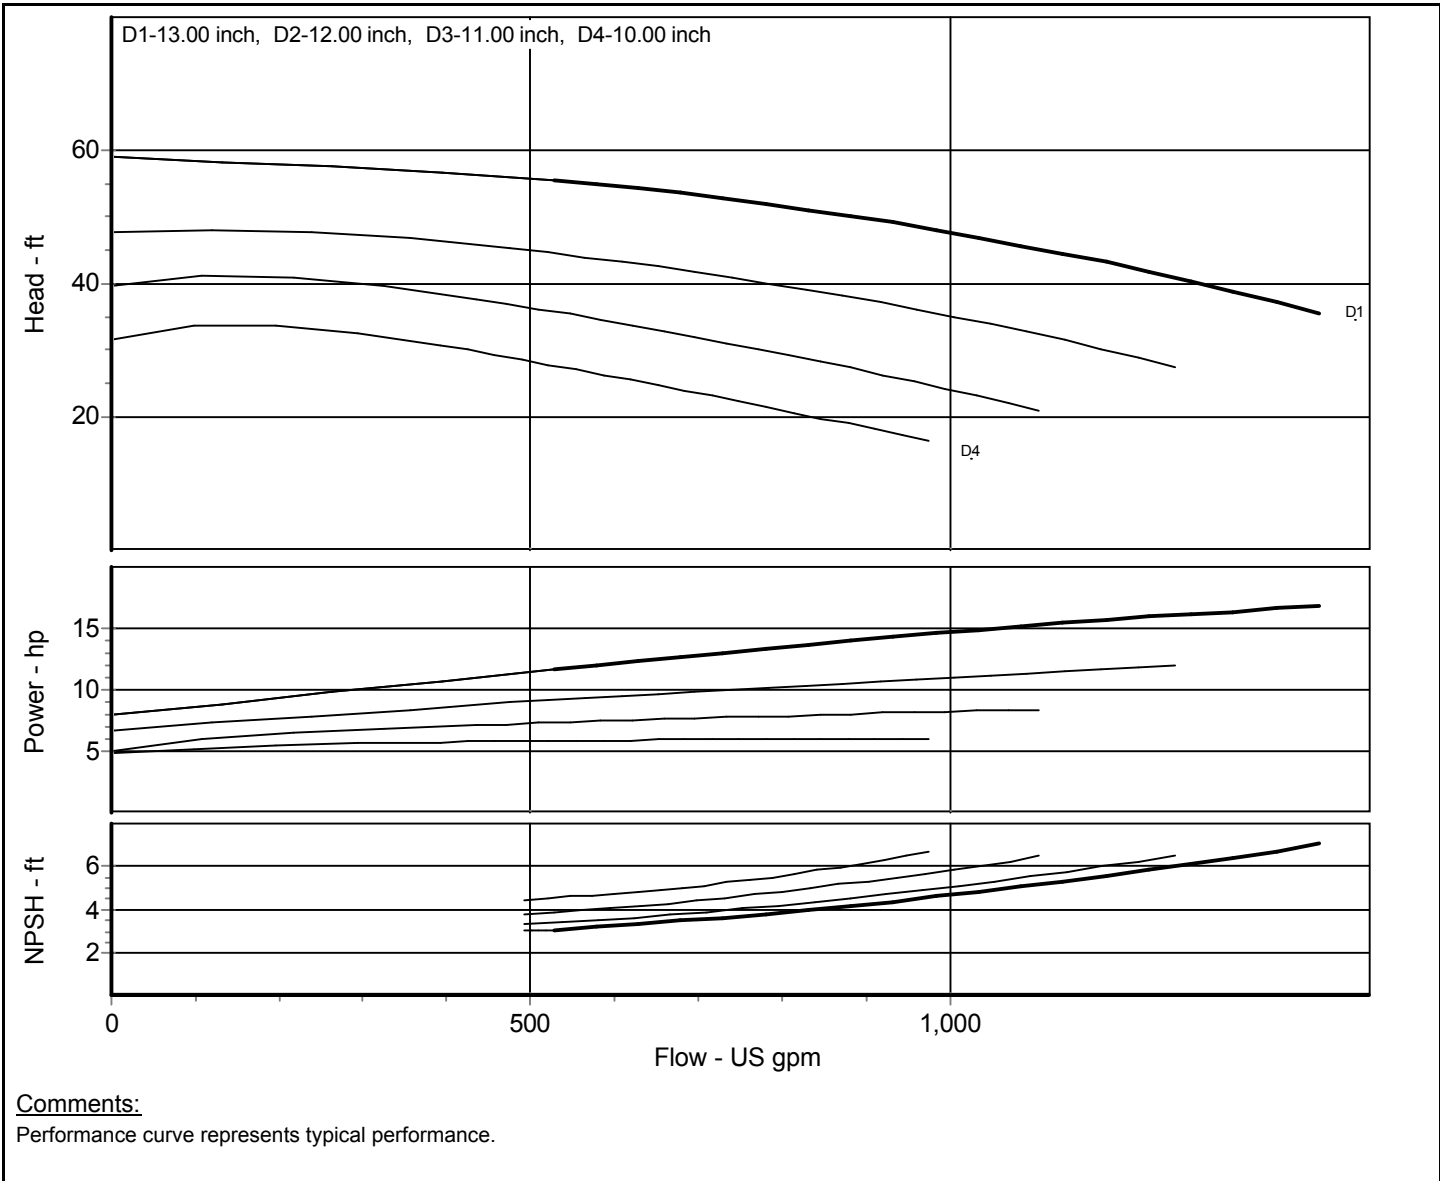



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :


Project :
 Quote No. :

Page No. :

Contact :
 Phone :
 Date :

Fax :

Pump Model: Peerless - 8x10-13 XLTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 13/10.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz046	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	22.95 hp
Item : 1		Closed Valve Pressure	54.769 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

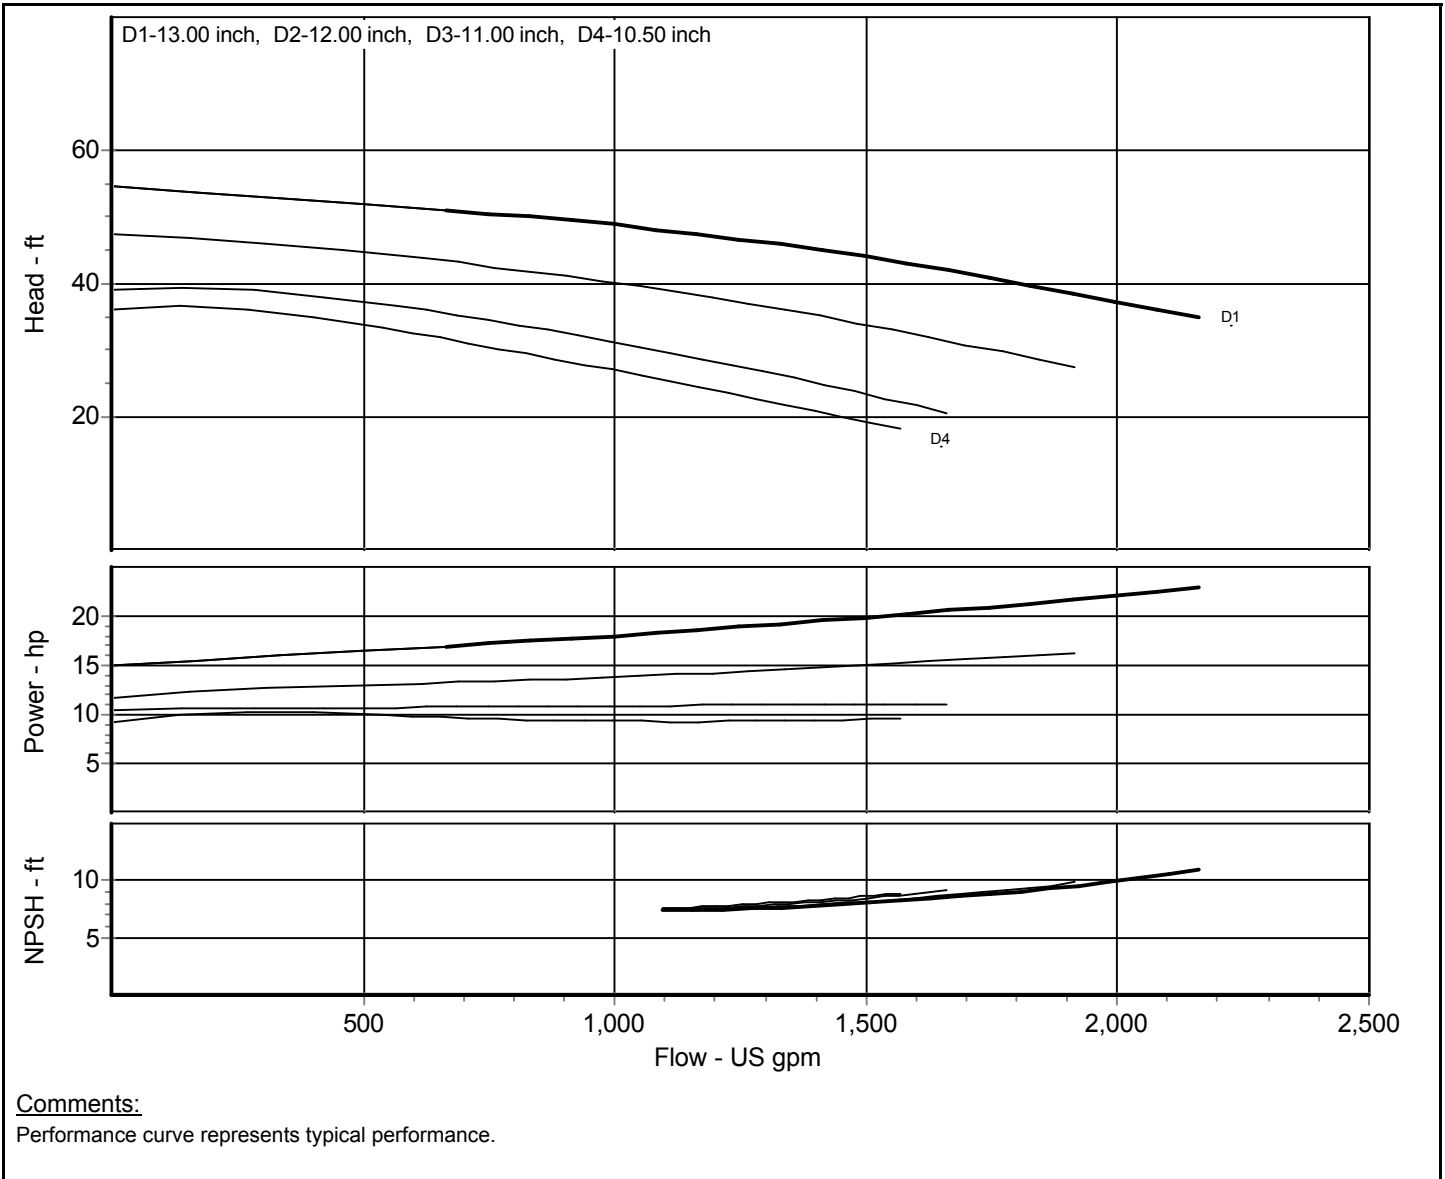




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: Peerless - 8x10-15 XLTP 8196	Nom. Speed: 960 RPM, 50 Hz Electric	Duty Flow :	US gpm
Type: 8196 - ANSI Standard End Suction	Impeller Dia.: 15/12.5 inch	Duty Head :	ft
	Temperature: 68 °F	Efficiency :	%
	Viscosity: 1.009 cP	Power Required :	hp
Curve No.: 8196-50hz049	Sp. Gravity: 1.000	NPSH Required :	ft
Impeller No.	Fluid: Water	Peak Power:	47.09 hp
Item : 1		Closed Valve Pressure	62.217 ft
Your Ref.:	Tolerance : Hyd Inst-Peerless Std		

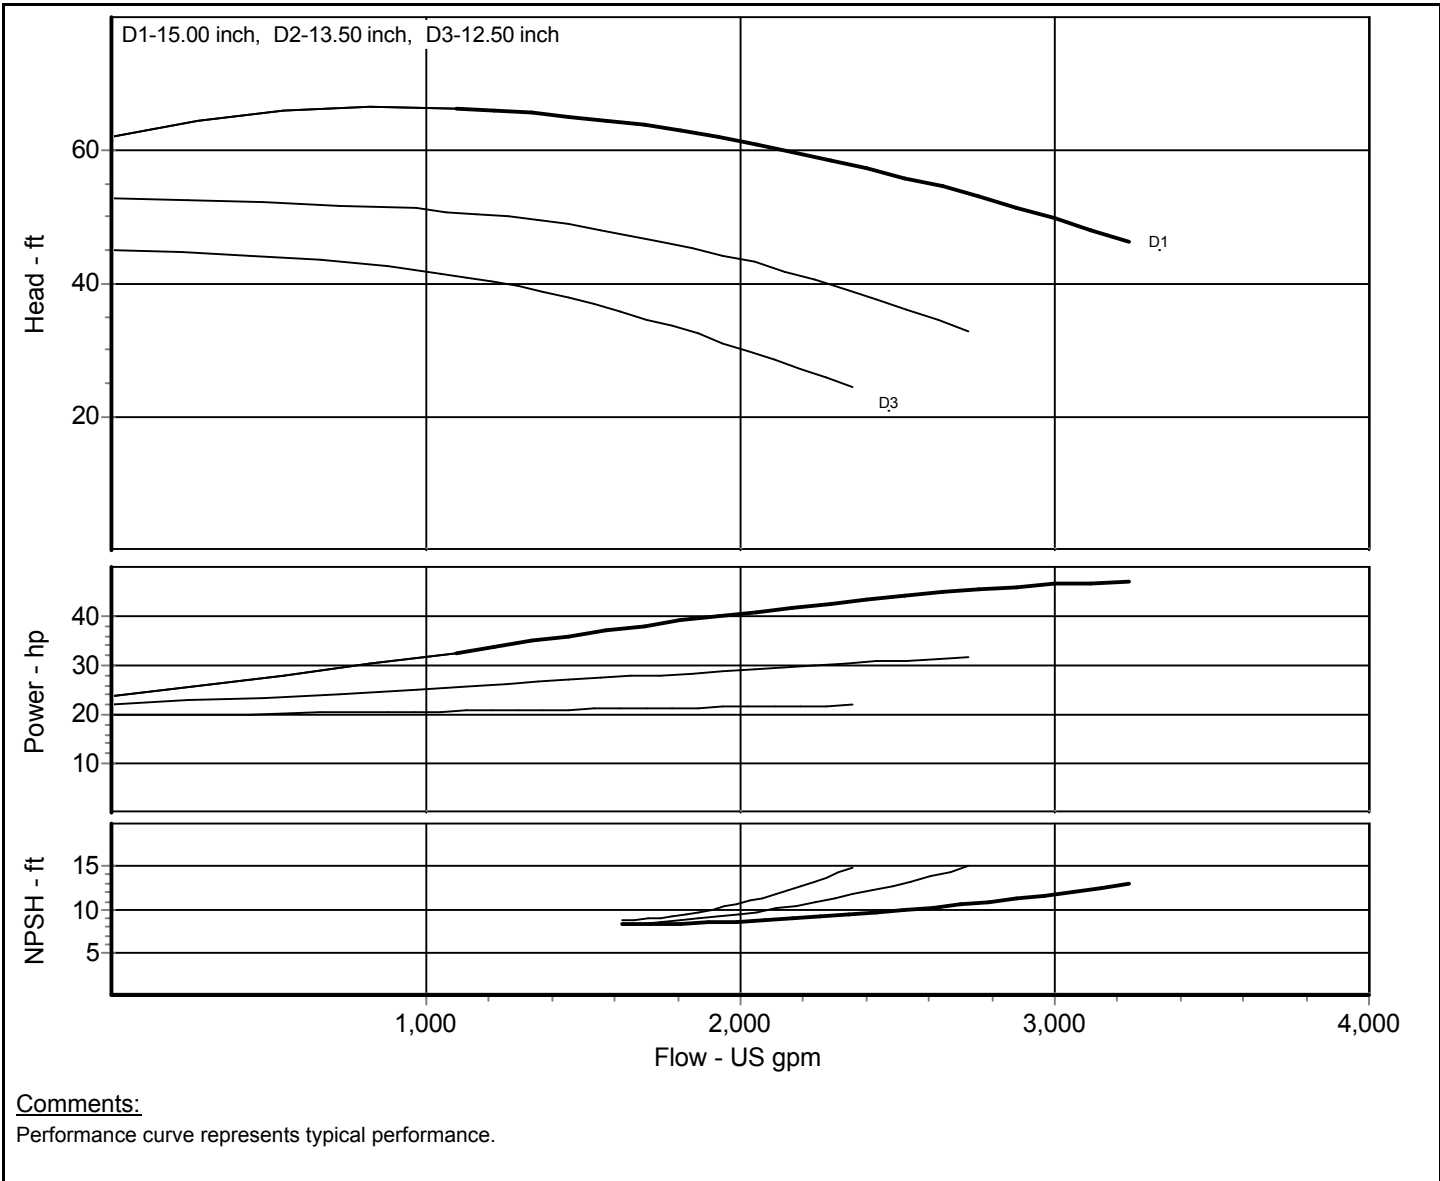




Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 8x10-15G XLTP 8196** Nom. Speed: **960** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **15/12** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **36.25** hp
 Fluid: **Water** Closed Valve Pressure **67.709** ft
 Curve No.: **8196-50hz052**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

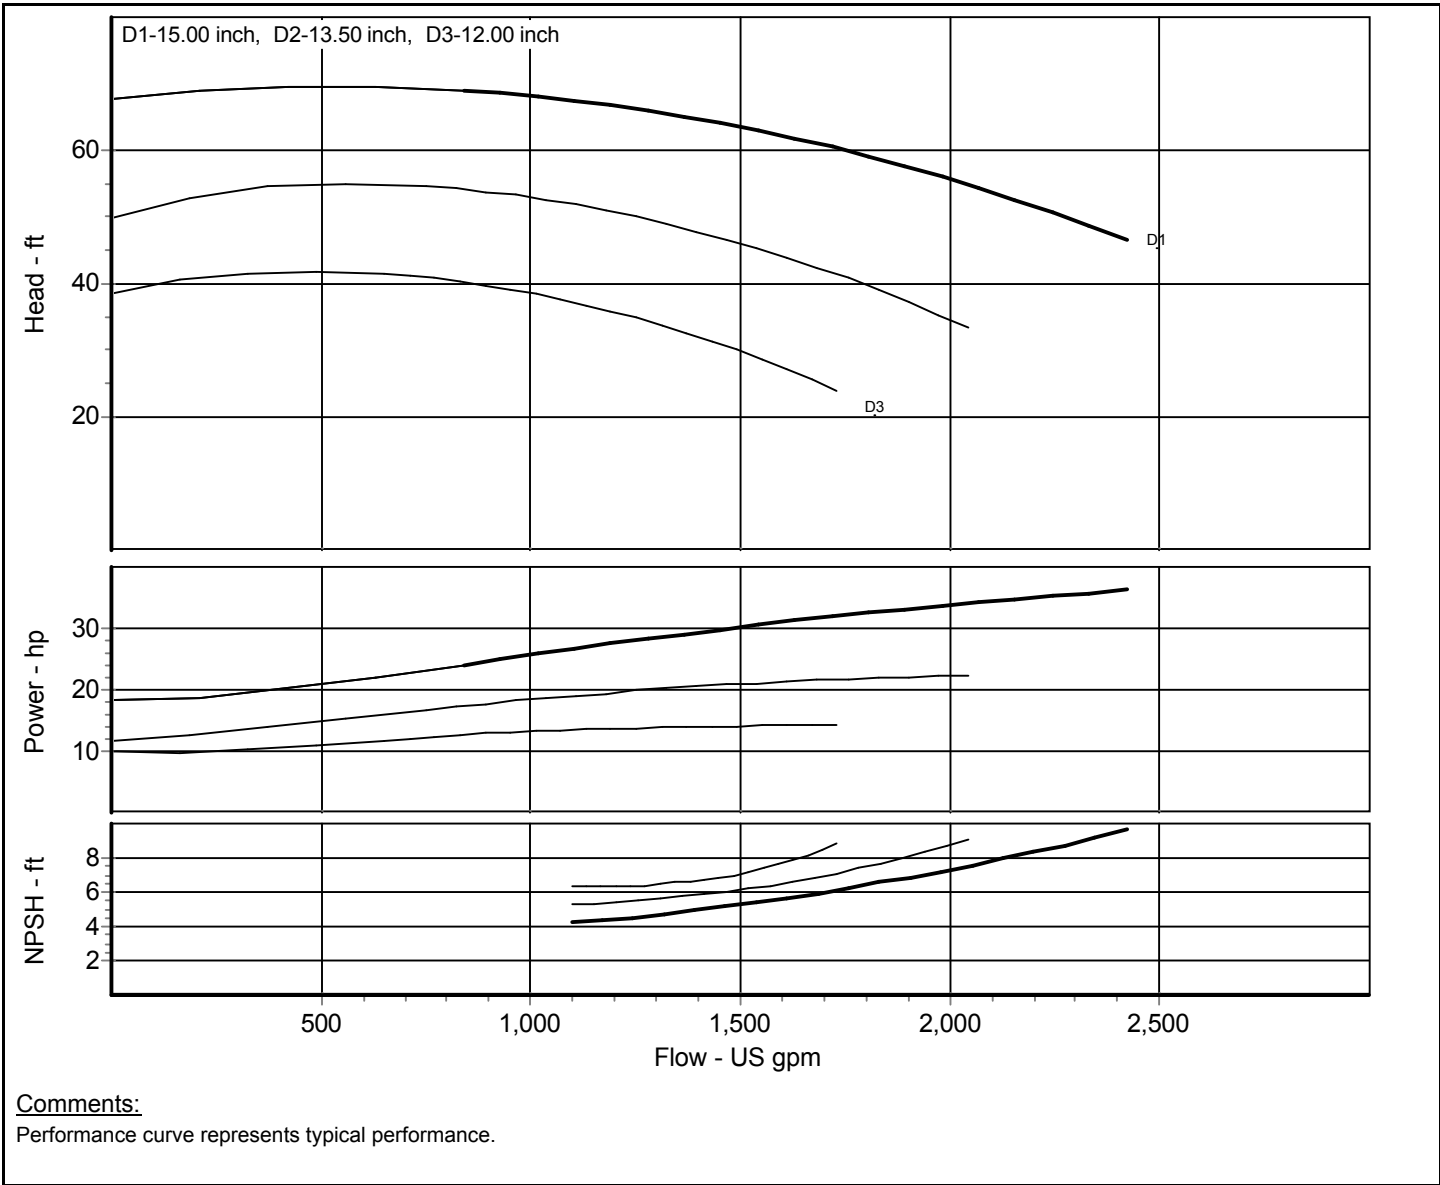



Peerless Pump Company, LLC
 Indianapolis, Indiana 46207-7026

Customer :

Project : Contact :
 Quote No. : Page No. : Phone : Fax :
 Date :

Pump Model: **Peerless - 8x10-15 XLTP 8196** Nom. Speed: **730** RPM, 50 Hz Electric Duty Flow : US gpm
 Type: **8196 - ANSI Standard End Suction** Impeller Dia.: **15/12.5** inch Duty Head : ft
 Efficiency : %
 Temperature: **68** °F Power Required : hp
 Viscosity: **1.009** cP NPSH Required : ft
 Sp. Gravity: **1.000** Peak Power: **20.92** hp
 Fluid: **Water** Closed Valve Pressure **35.976** ft
 Curve No.: **8196-50hz050**
 Impeller No.
 Item : **1**
 Your Ref.: Tolerance : **Hyd Inst-Peerless Std**

